

FCC ID : ICUVGA-GW820
TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

ISSUED DATE : Jan. 15, 1999
PAGE NUMBER : 1 OF 32

SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

- Without the written authorization of the test lab., the Test Report may not be copied.
- The test result refers exclusively to the test presented test model / sample.

APPLICANT : GAINWARD CO., LTD.
12F, #96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

FILING TYPE : ORIGINAL CERTIFICATION

FCC ID : ICUVGA-GW820

MODEL NO. : 9820-01A

EQUIPMENT : CARDDEXpet TNT

PART 15, SUBPART B CLASS B

for

FCC TEST REPORT

REPORT NO. : F8D3102

FCC TEST REPORT

TABLE OF CONTENT

SECTION TITLE	PAGE
CERTIFICATE OF COMPLIANCE	4
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.1. APPLICANT	5
1.2. MANUFACTURER	5
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.4. FEATURE OF EQUIPMENT UNDER TEST	5
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	6
2.1. TEST MANNER	6
2.2. DESCRIPTION OF TEST SYSTEM	6
2.3. CONNECTION DIAGRAM OF TEST SYSTEM	9
3. TEST SOFTWARE	11
4. GENERAL INFORMATION OF TEST	12
4.1. TEST FACILITY	12
4.2. STANDARD FOR METHODS OF MEASUREMENT	12
4.3. TEST IN COMPLIANCE WITH	12
4.4. FREQUENCY RANGE INVESTIGATED	12
4.5. TEST DISTANCE	12
5. TEST OF CONDUCTED POWERLINE	13
5.1. MAJOR MEASURING INSTRUMENTS	13
5.2. TEST PROCEDURES	14
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE	15
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION	16
5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION	17
5.4.2. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION	18
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION	19
5.5.1. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION	21
6. TEST OF RADIATED EMISSION	23
6.1. MAJOR MEASURING INSTRUMENTS	23
6.2. TEST PROCEDURES	24
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION	25
6.4. TEST RESULT OF RADIATED EMISSION	26
6.4.1. TEST RESULT OF RADIATED EMISSION	27
6.4.2. TEST RESULT OF RADIATED EMISSION	28
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION	29
6.5.1. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION	30

FCC TEST REPORT**REPORT NO. : F8D3102**

7. ANTENNA FACTOR AND CABLE LOSS	31
8. LIST OF MEASURING EQUIPMENT USED.....	32

**CERTIFICATE OF COMPLIANCE**

for
FCC PART 15, SUBPART B CLASS B

EQUIPMENT : CARDEXpert TNT

MODEL NO. : 9820-01A

F C C I D : ICUVGA-GW820

APPLICANT : **GAINWARD CO., LTD.**
12F, #96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions **Class B** limits. Testing was carried out on **Jan. 07, 1999** at **SPORTON International Inc. LAB.**


W. L. Huang
General Manager

SPORTON INTERNATIONAL INC.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**1.1. APPLICANT**

GAINWARD CO., LTD.

12F, #96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

1.2. MANUFACTURER

Same as 1.1.

1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

EQUIPMENT : CARDEXpert TNT

MODEL NO. : 9820-01A

FCC ID : ICUVGA-GW820

TRADE NAME : CARDEXpert

VGA CABLE : Shielded

S-VIDEO DATA CABLE : Non-shielded, 1.6m

AV-VIDEO DATA CABLE : Non-shielded, 1.8m

POWER SUPPLY TYPE : N/A

POWER CORD : N/A

1.4. FEATURE OF EQUIPMENT UNDER TEST

- NVIDIA RIVA TNT TwiN-Texel 32-bit Graphics Engine.
 - 2 Texture-mapped, Lit Pixels per Clock
 - Single Pass Multi-texture Rendering
- 24-bit Z-buffer, 8-bit Stencil Buffer
- High Performance 128-bit 2D/GUI/DirectDrew Acceleration
- 128-bit Wide Framebuffer Interface Supports up to 16 MB SGRAM/SDRAM
- 250 MHz Palette-DAC Supports up to 1920x1200 @ 75Hz
- NTSC and PAL Digital Output Port External Digital TV Encoders Support (optional)
- 66 MHz AGP clock rate and AGP 2X mode
- Digital TV Output
 - Digital TV-Out Port Interfaces
 - Dual Independent TV and 16bpp Monitor Display

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST**2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI monitor, PS/2 DELL keyboard, PS/2 GENIUS mouse, HP printer, ACEEX modem, SONY TV and EUT were connected to the F.I.C. P.C. for EMI test.
- c. The following display resolution were investigated during the compliance test :
 1. Horizontal frequency (640×480 to 1920×1200, 31.5KHz to 107KHz)
 2. Vertical frequency (60Hz to 85Hz)
 3. TV Mode (AV, S/TV OUT 800×600)
- d. According to the above tests, we listed the flowing display modes as the worst cases :
 1. 1920×1200 (non-interlaced 94KHz), refresh rate 75Hz.
 2. 1600×1200 (non-interlaced 107KHz), refresh rate 85Hz.
 3. TV Mode (AV, S/TV OUT 800×600)
- e. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 2000 MHz.

2.2. DESCRIPTION OF TEST SYSTEM

Support Device 1. --- P.C. (FIC)

FCC ID	: N/A
Model No.	: P2L97
Serial No.	: SP1005
Data Cable	: Shielded
Power Cord	: Non-shielded
Power Supply Type	: Switching

(Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

Support Device 2. --- MONITOR (HITACHI)

FCC ID : N/A
Model No. : CM814U
Serial No. : SP1011
Data Cable : Shielded, 360 degree via metal backshells, 2.0m
Power Supply Type : Switching
Power Cord : Non-shielded

Support Device 3. --- PS/2 KEYBOARD (DELL)

FCC ID : GYUM90SK
Model No. : AT101 W
Serial No. : SP1022
Data Cable : Shielded, 360 degree via metal backshells, 2.0m

Support Device 4. --- PS/2 MOUSE (GENIUS)

FCC ID : FSUGMZFC
Model No. : NETMOUSE
Serial No. : SP1033
Data Cable : Non-shielded, 1.75m

Support Device 5. --- PRINTER (HP)


FCC ID : DSI6XU2225
Model No. : 2225C
Serial No. : SP1041
Data Cable : Shielded, 360 degree via metal backshells, 1.2m
Power Supply Type : Linear, Adapter
Power Cord : Non-shielded

Support Device 6. -- MODEM (ACEEX)


FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear, AC Adapter
Power Cord : Non-shielded
Serial No. : SP1045
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

Support Device 7. -- TELVEISION (SONY)

Model No. : PVM-14N2E
Serial No. : SP1078
S-Video Data Cable : Non-shielded, 1.6m
AV-Video Data Cable : Non-shielded, 1.8m

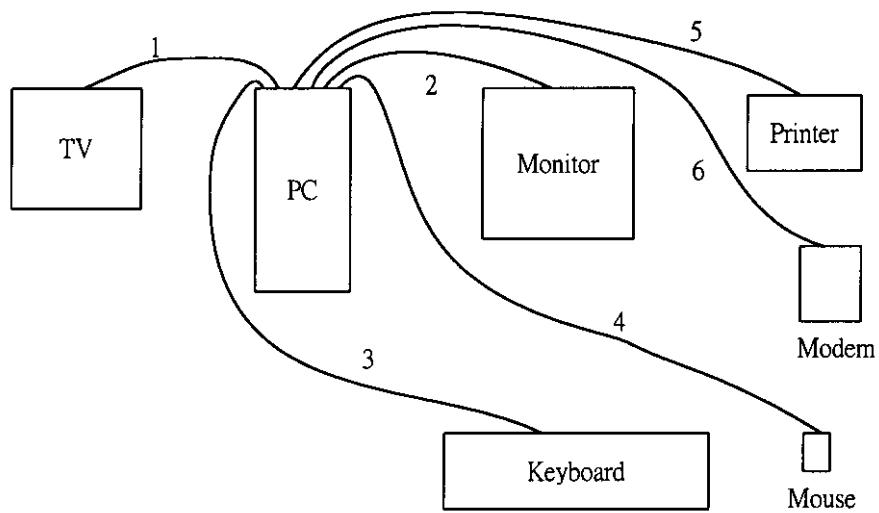2.3. CONNECTION DIAGRAM OF TEST SYSTEM**2.3.1. VGA MODE**

1. The I/O cable is connected from the EUT to the support device 7.
2. The I/O cable is connected from the EUT to the support device 2.
3. The I/O cable is connected from the PC to the support device 3.
4. The I/O cable is connected from the PC to the support device 4.
5. The I/O cable is connected from the PC to the support device 5.
6. The I/O cable is connected from the PC to the support device 6.

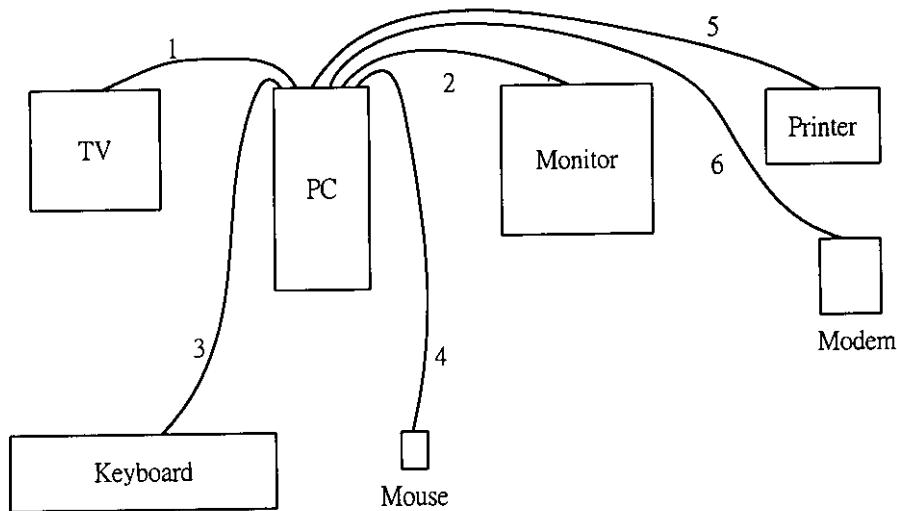2.3.2. TV MODE

1. The I/O cable is connected from the EUT to the support device 7.
2. The I/O cable is connected from the EUT to the support device 2.
3. The I/O cable is connected from the PC to the support device 3.
4. The I/O cable is connected from the PC to the support device 4.
5. The I/O cable is connected from the PC to the support device 5.
6. The I/O cable is connected from the PC to the support device 6.

3. TEST SOFTWARE

An executive program, WINFCC.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. GENERAL INFORMATION OF TEST**4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

4.2. STANDARD FOR METHODS OF MEASUREMENT

ANSI C63.4-1992

4.3 .TEST IN COMPLIANCE WITH

FCC PART 15, SUBPART B CLASS B

4.4. FREQUENCY RANGE INVESTIGATED

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 2000 MHz.

4.5. TEST DISTANCE

The test distance of radiated emission from antenna to EUT is 3M.

5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. MAJOR MEASURING INSTRUMENTS

• Test Receiver	(R&S ESH3)
Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

5.2. TEST PROCEDURES

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

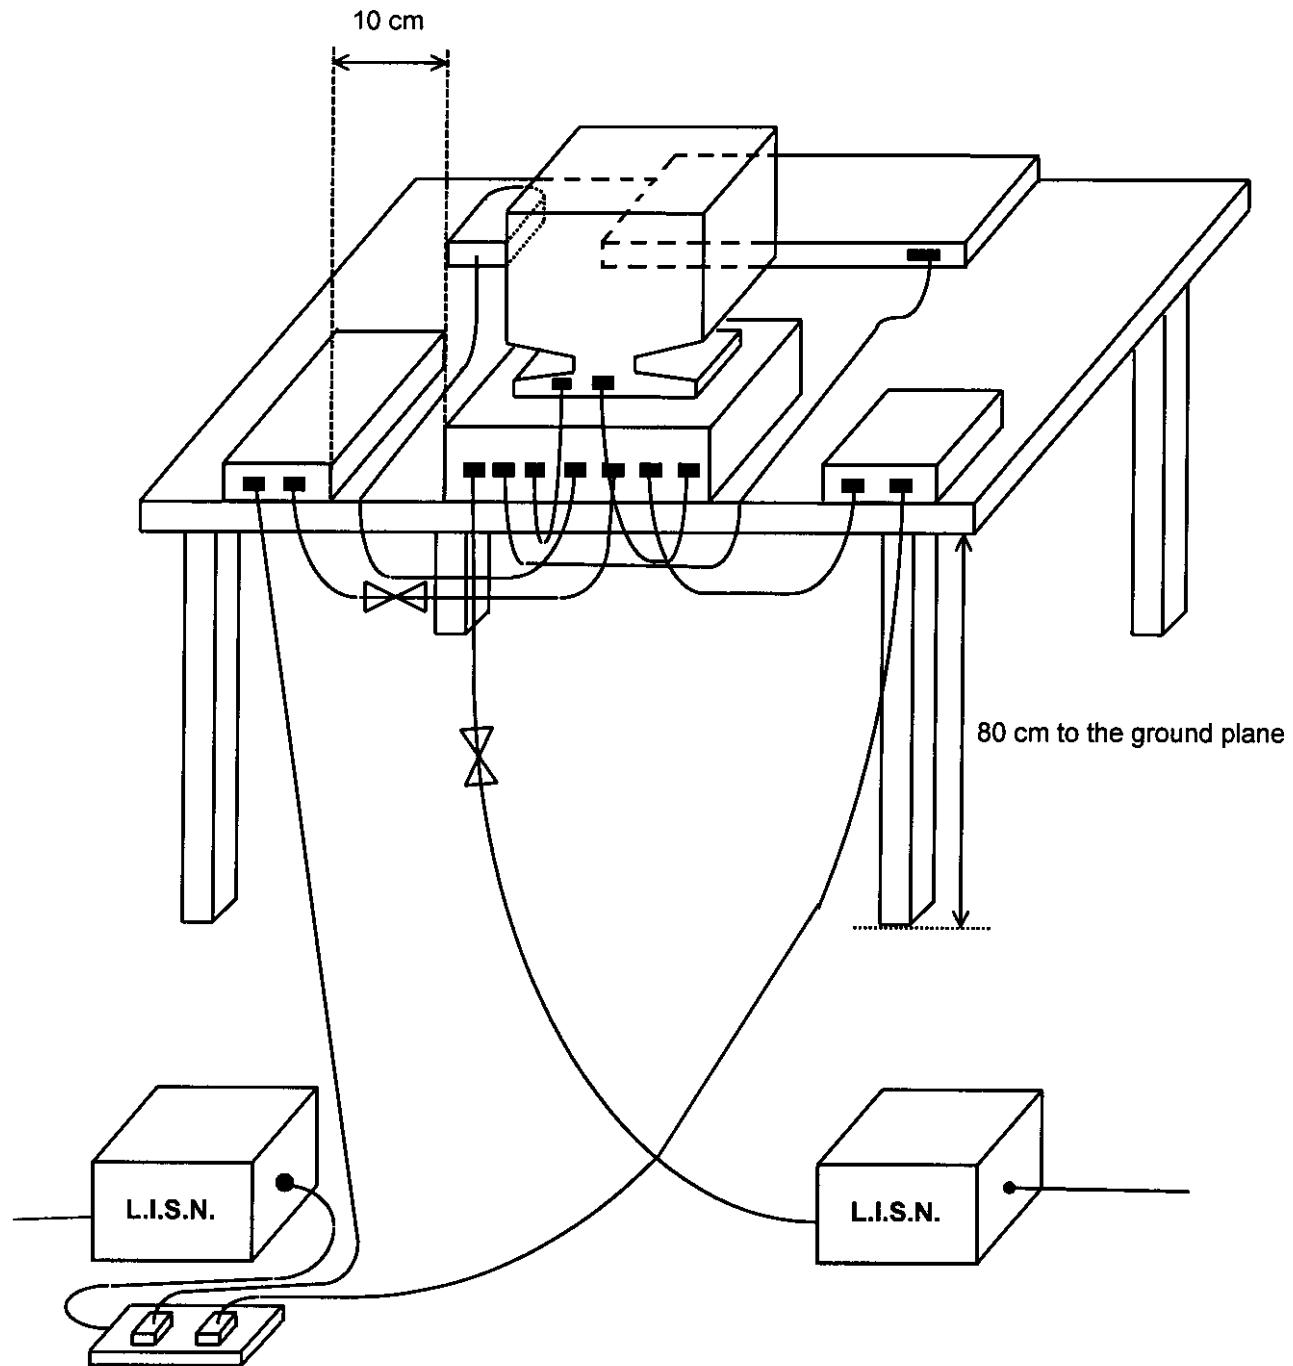

5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 20°C
- Relative Humidity : 68% RH
- Test Mode : 1920×1200 75Hz / 94K
- Test Date : Jan. 07, 1999

The Conducted Emission test was passed at Line 0.49 MHz/ 39.20 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading (dBuV)	(uV)	Limits (dBuV)	(uV)	Margin (dB)
0.49	L	39.20	91.20	48.00	251.19	-8.80
7.29	L	38.30	82.22	48.00	251.19	-9.70
18.54	L	31.00	35.48	48.00	251.19	-17.00
0.49	N	39.10	90.16	48.00	251.19	-8.90
7.28	N	38.50	84.14	48.00	251.19	-9.50
18.50	N	32.30	41.21	48.00	251.19	-15.70

Test Engineer : Benson Tsai
Benson Tsai

5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 20°C
- Relative Humidity : 68% RH
- Test Mode : 1600×1200 85Hz / 107K
- Test Date : Jan. 07, 1999

The Conducted Emission test was passed at Line 0.48 MHz/ 39.00 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
0.48	L	39.00	89.13	48.00	251.19	-9.00
7.27	L	38.50	84.14	48.00	251.19	-9.50
18.45	L	30.90	35.08	48.00	251.19	-17.10
0.48	N	38.50	84.14	48.00	251.19	-9.50
7.29	N	38.10	80.35	48.00	251.19	-9.90
18.65	N	29.20	28.84	48.00	251.19	-18.80

Test Engineer : Benson Tsai

Benson Tsai

6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. MAJOR MEASURING INSTRUMENTS

- Amplifier (HP 87405A)
Attenuation 0 dB
RF Gain 20 dB
Signal Input 10 MHz to 3 GHz


- Spectrum Analyzer (HP 8594A)
Attenuation 0 dB
Start Frequency 30 MHz
Stop Frequency 2000 MHz
Resolution Bandwidth 1 MHz
Video Bandwidth 1 MHz
Signal Input 9 KHz to 2.9 GHz

- Spectrum Analyzer (HP 8594A)
Resolution Bandwidth 120 KHz
Frequency Band 30 MHz to 1 GHz
Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. TEST PROCEDURES

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

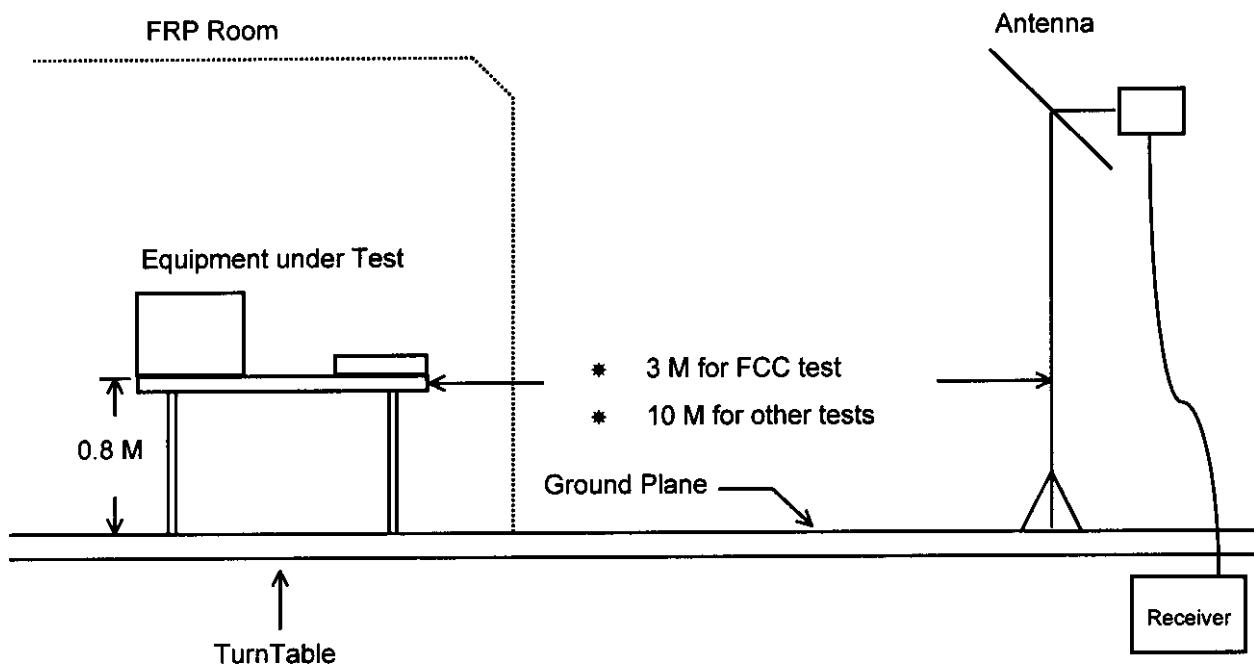

FCC TEST REPORT

REPORT NO. : F8D3102

7. ANTENNA FACTOR AND CABLE LOSS

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	-1.91	0.90
35	-0.50	0.92
40	0.61	1.04
45	1.40	1.28
50	2.39	1.10
55	3.54	
60	4.40	1.11
65	4.84	1.30
70	5.59	1.40
75	6.21	1.37
80	7.60	1.24
85	7.73	1.51
90	8.22	1.60
95	8.90	1.60
100	9.36	1.70
110	10.01	1.70
120	10.41	
130	10.84	1.90
140	11.42	1.90
150	11.91	1.91
160	12.25	2.01
170	12.72	2.11
180	13.02	2.21
190	13.50	2.30
200	14.05	2.30
220	15.11	2.40
240	16.81	2.50
260	17.51	2.60
280	17.70	2.71
300	17.89	2.90
320	18.00	2.91
340	18.33	3.10
360	19.44	3.20
380	20.31	3.30
400	21.19	3.40
450	21.10	3.50
500	22.21	
550	23.42	4.10
600	24.01	4.30
650	25.11	4.50
700	26.00	4.70
750	26.41	4.90
800	27.10	5.11
850	27.51	5.50
900	27.90	5.60
950	28.01	5.80
1000	28.11	5.90
2000	28.22	6.00
		6.10

8. LIST OF MEASURING EQUIPMENT USED

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30MHz	Apr. 13, 1998	Conduction
Test Receiver	R&S	ESVP	893610/003	20MHz - 1.3 GHz	Apr. 13, 1998	Conduction
LISN	TELEMETER	NNB-2/16Z	98007	50 ohm / 50 μ H	Jan. 29, 1998	Conduction
LISN	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 μ H	Nov. 10, 1998	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Spectrum Monitor	R & S	EZM	894987/011	N/A	Apr. 13, 1998	Conduction
Amplifier (Site 1)	HP	87405A	3207A01437	10MHz - 3.0GHz	Jun. 26, 1998	Radiation
Spectrum Analyzer (site 1)	HP	8594A	3051A00172	9KHz - 2.9GHz	Apr. 17, 1998	Radiation
Bilog Antenna (site 1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 27, 1998	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	8912-496	20MHz - 1GHz	Aug. 12, 1998	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	1051-1.2	9502-1868	1 m - 4 m	N/A	Radiation

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.