

# **FCC TEST REPORT**

for

**CISPR PUB. 22 Class B**

Equipment : CARDEXpert SG4  
Model No. : 9905-81  
FCC ID : ICUVGA-GW905G  
Filing Type : Original Grant  
Applicant : **GAINWARD CO., LTD.**  
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,  
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. General Description of Equipment under Test .....</b>	<b>4</b>
1.1. Applicant .....	4
1.2. Manufacturer .....	4
1.3. Basic Description of Equipment under Test .....	4
1.4. Feature of Equipment under Test .....	4
<b>2. Test Configuration of Equipment under Test .....</b>	<b>5</b>
2.1. Test Manner .....	5
2.2. Description of Test System .....	5
2.3. Connection Diagram of Test System .....	7
<b>3. Test Software .....</b>	<b>8</b>
<b>4. General Information of Test .....</b>	<b>9</b>
4.1. Test Facility .....	9
4.2. Standard for Methods of Measurement .....	9
4.3. Test in Compliance with .....	9
4.4. Frequency Range Investigated .....	9
4.5. Test Distance .....	9
<b>5. Test of Conducted Powerline .....</b>	<b>10</b>
5.1. Major Measuring Instruments .....	10
5.2. Test Procedures .....	11
5.3. Typical Test Setup Layout of Conducted Powerline .....	12
5.4. Test Result of AC Powerline Conducted Emission .....	13
5.5. Photographs of Couducted Powerline Test Configuration .....	17
<b>6. Test of Radiated Emission .....</b>	<b>23</b>
6.1. Major Measuring Instruments .....	23
6.2. Test Procedures .....	24
6.3. Typical Test Setup Layout of Radiated Emission .....	25
6.4. Test Result of Radiated Emission .....	26
6.5. Photographs of Radiated Emission Test Configuration .....	30
<b>7. Antenna Factor &amp; Cable Loss .....</b>	<b>33</b>
<b>8. List of Measuring Equipment Used .....</b>	<b>34</b>

# **CERTIFICATE OF COMPLIANCE**

**for**

## **CISPR PUB. 22 Class B**

Equipment : CARDEXpert SG4  
Model No. : 9905-81  
FCC ID : ICUVGA-GW905G  
Applicant : **GAINWARD CO., LTD.**  
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,  
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

**I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was *passed* **CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Jan. 26, 2000 at **SPORTON International Inc.** LAB. in Lin Kou.

---

Lenore Chang  
President

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. General Description of Equipment under Test**

### **1.1. Applicant**

GAINWARD CO., LTD.  
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,  
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

### **1.2. Manufacturer**

Same as 1.1.

### **1.3. Basic Description of Equipment under Test**

Equipment : CARDEXpert SG4  
Model No. : 9905-81  
Trade Name : CARDEXpert  
VGA Cable : Shielded, 1.15m  
LCD Cable : Shielded, 1.75m  
TV Cable : Non-Shielded, 1.85m  
Power Supply Type : From PC  
Power Cord : N/A

### **1.4. Feature of Equipment under Test**

- 128-bit S3 Savage4 3D/2D/Video Graphics Accelerator
- 8/16/32 MB SDRAM Display Memory
- Flat Panel Desktop Monitor Support (Flat Panel monitor dependent), 1024\*768,60Hz,48KHz
- Integrated 300MHz RAMDAC with Gamma Correction
- NTSC/PAL TV Output Support
- VGA resolution support up to 1600\*1200, 85Hz, 106KHz

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem, VIEWSONIC LCD Monitor, PANASONIC TV and EUT were connected to the FIC PC for EMI test.
- c. The Following display resolution were investigated during the compliance test:
  - 1. Horizontal frequency (640x480 to 1,600x1,200, 31.5 KHz to 106 KHz)
  - 2. Vertical frequency (60 Hz to 85 Hz)
- d. According to the above tests, we listed the following display modes as the worst cases:
  - 1. 1,600x1,200 (non-interlanced 106 KHz), refresh rate 85 Hz, CRT mode.
  - 2. 1,280x1,024 (non-interlanced 91 KHz), refresh rate 85 Hz, CRT mode.
  - 3. 1,024x768, LCD+CRT mode.
  - 4. 640x480, AV+CRT mode.
- e. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 2,000 MHz.

### **2.2. Description of Test System**

#### Support Unit 1. -- Monitor (HITACHI)

FCC ID	: N/A
Model No.	: CM814U
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0033
Data Cable	: Shielded, 1.15m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

#### Support Unit 2. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Serial No.	: SP0054
Data Cable	: Shielded, 1.9m

#### Support Unit 3. -- PS/2 Mouse (PRIMAX)

FCC ID	: EMJMUJQ
Model No.	: MUS9J
Serial No.	: SP0045
Data Cable	: Shielded, 1.7m

## Support Unit 4. -- Printer (HP)

FCC ID : B94C2642X  
Model No. : DeskJet 400  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0048  
Data Cable : Braided-Shielded, 1.35m

## Support Unit 5. -- Modem (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 1.15m

## Support Unit 6. -- LCD Monitor (ViewSonic)

FCC ID : N/A  
Model No. : VPD150  
Serial No. : SP0201  
Data Cable : Shielded, 1.75m  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


## Support Unit 7. -- TV (Panasonic)

FCC ID : N/A  
Model No. : WV-CM1450  
Serial No. : SP0114  
Data Cable : Non-Shielded, 1.85m  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

## Support Unit 8. -- Personal Computer (FIC)

FCC ID : N/A  
Model No. : P2L97  
Power Supply Type : Switching  
Power Cord : Non-Shielded  
Serial No. : SP0037  
Data Cable : Shielded  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

**2.3. Connection Diagram of Test System**

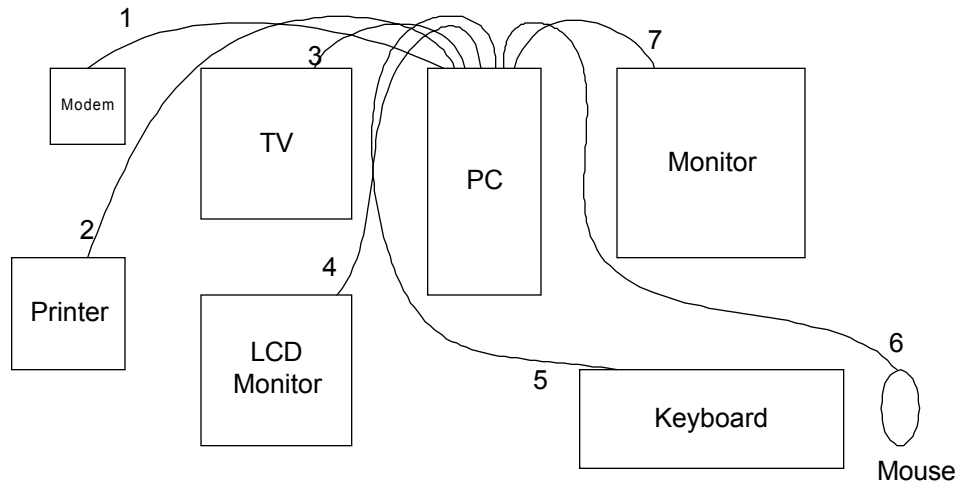

1. The I/O cable is connected to the support unit 5.
2. The I/O cable is connected to the support unit 4.
3. The I/O cable is connected from EUT to the support unit 7.
4. The I/O cable is connected from EUT to the support unit 6.
5. The I/O cable is connected to the support unit 2.
6. The I/O cable is connected to the support unit 3.
7. The I/O cable is connected from EUT to the support unit 1.

### **3. Test Software**

An executive program, WINFCC.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.



## **4. General Information of Test**

### **4.1. Test Facility**

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-1992

### **4.3. Test in Compliance with**

CISPR PUB. 22 Class B

### **4.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 2,000 MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 10 M.

## 5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### 5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

**5.2. Test Procedures**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

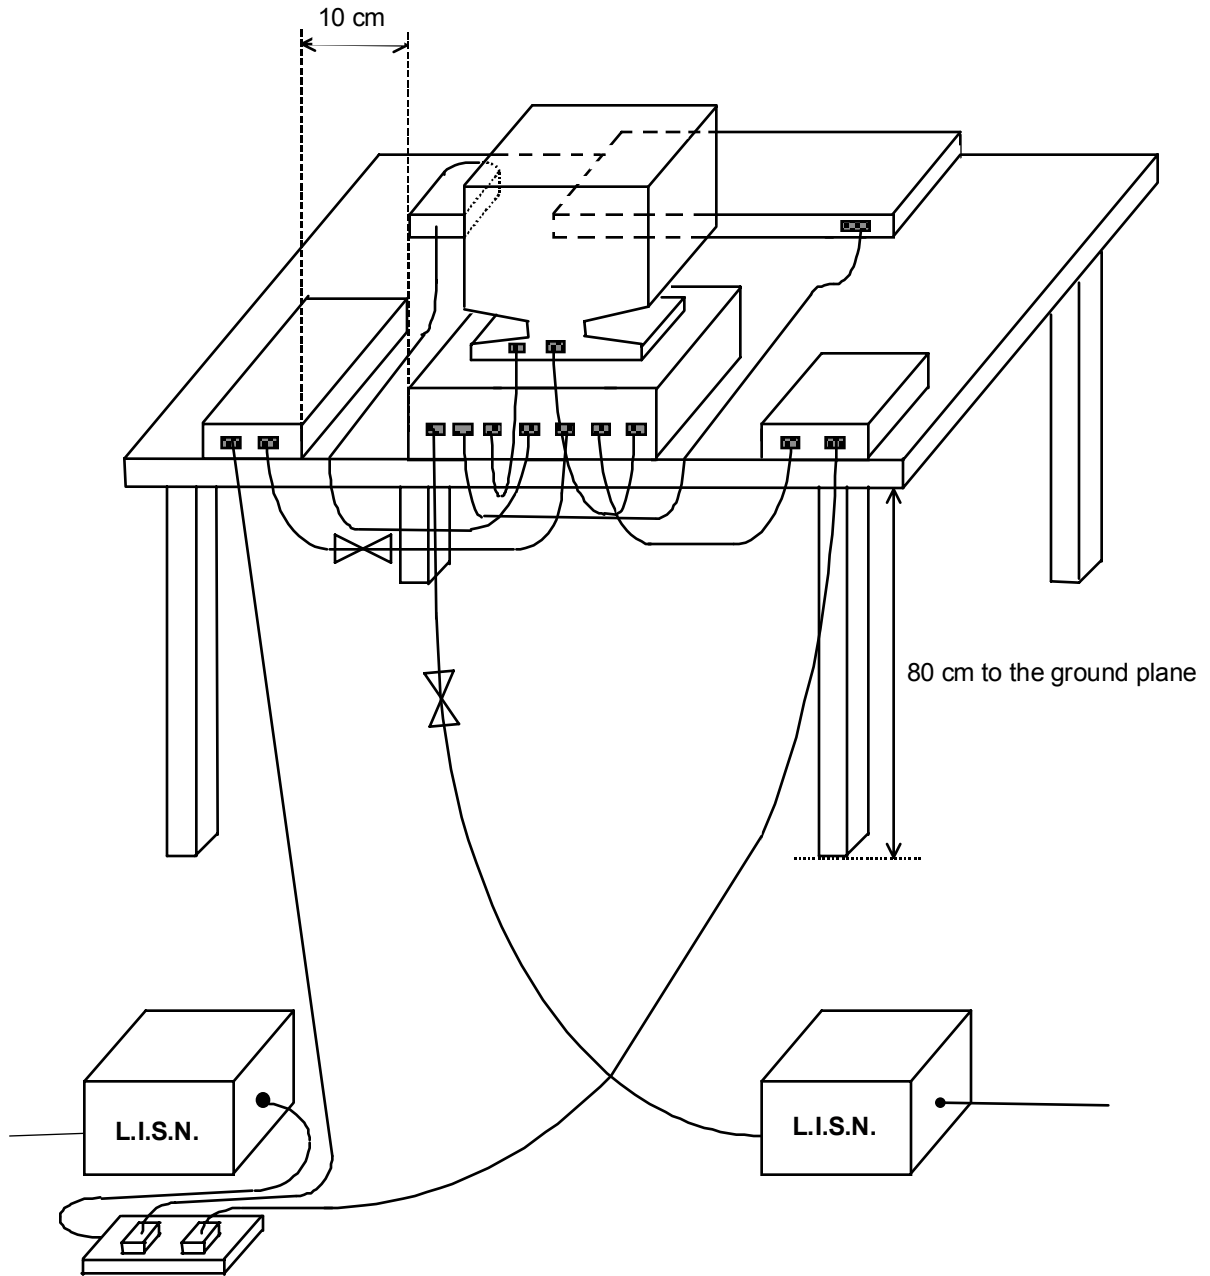

**5.4. Test Result of AC Powerline Conducted Emission**

5.4.1. Test mode : 1600\*1200/85Hz/106K

- Temperature : 18°C
- Relative Humidity : 56 %
- Test Date : Jan. 26, 2000

**The Conducted Emission test was passed at minimum margin**

**NEUTRAL 0.274 MHz / 46.40 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.272	L	49.20	46.20	288.40	204.17	61.05	51.05	1128.15	356.75	-11.8	-4.8
0.863	L	16.90	10.80	7.00	3.47	56.00	46.00	630.96	199.53	-39.1	-35.2
15.999	L	28.20	15.60	25.70	6.03	60.00	50.00	1000.00	316.23	-31.8	-34.4
0.274	N	49.00	46.40	281.84	208.93	61.01	51.01	1123.26	355.21	-12.0	-4.6
0.790	N	20.80	16.20	10.96	6.46	56.00	46.00	630.96	199.53	-35.2	-29.8
7.489	N	23.10	17.20	14.29	7.24	60.00	50.00	1000.00	316.23	-36.9	-32.8

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG

5.4.2. Test mode : 1280\*1024/85Hz/91K

- Temperature : 18°C
- Relative Humidity : 56 %
- Test Date : Jan. 26, 2000

**The Conducted Emission test was passed at minimum margin**

**LINE 0.273 MHz / 46.70 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.273	L	49.60	46.70	302.00	216.27	61.03	51.03	1125.30	355.85	-11.4	-4.3
0.837	L	17.00	10.90	7.08	3.51	56.00	46.00	630.96	199.53	-39.0	-35.1
8.016	L	25.10	21.30	17.99	11.61	60.00	50.00	1000.00	316.23	-34.9	-28.7
27.077	L	22.60	17.30	13.49	7.33	60.00	50.00	1000.00	316.23	-37.4	-32.7
0.274	N	49.10	46.50	285.10	211.35	61.00	51.00	1122.58	354.99	-11.9	-4.5
8.015	N	26.80	23.40	21.88	14.79	60.00	50.00	1000.00	316.23	-33.2	-26.6

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG

5.4.3. Test mode : 1024\*768/60Hz/48K (LCD+CRT)

- Temperature : 18°C
- Relative Humidity : 56 %
- Test Date : Jan. 26, 2000

**The Conducted Emission test was passed at minimum margin**

**LINE 0.274 MHz / 46.80 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.274	L	49.50	46.80	298.54	218.78	61.00	51.00	1122.11	354.84	-11.5	-4.2
0.273	N	49.10	46.20	285.10	204.17	61.03	51.03	1125.74	355.99	-11.9	-4.8
0.517	N	27.90	26.00	24.83	19.95	56.00	46.00	630.96	199.53	-28.1	-20.0
3.963	N	21.40	16.40	11.75	6.61	56.00	46.00	630.96	199.53	-34.6	-29.6
7.782	N	25.80	20.60	19.50	10.72	60.00	50.00	1000.00	316.23	-34.2	-29.4
18.806	N	26.30	23.30	20.65	14.62	60.00	50.00	1000.00	316.23	-33.7	-26.7

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG

5.4.4. Test mode : 640\*480/60Hz/31K (AV+CRT)

- Temperature : 18°C
- Relative Humidity : 56 %
- Test Date : Jan. 26, 2000

**The Conducted Emission test was passed at minimum margin**

**LINE 0.273 MHz / 46.60 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.273	L	49.50	46.60	298.54	213.80	61.02	51.02	1125.09	355.79	-11.5	-4.4
18.808	L	26.80	24.60	21.88	16.98	60.00	50.00	1000.00	316.23	-33.2	-25.4
0.273	N	49.00	46.20	281.84	204.17	61.03	51.03	1125.60	355.95	-12.0	-4.8
0.671	N	20.60	16.10	10.72	6.38	56.00	46.00	630.96	199.53	-35.4	-29.9
3.524	N	35.80	29.20	61.66	28.84	56.00	46.00	630.96	199.53	-20.2	-16.8
8.539	N	24.10	19.10	16.03	9.02	60.00	50.00	1000.00	316.23	-35.9	-30.9

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG



**5.5. Photographs of Conducted Powerline Test Configuration**

- The photographs show the configuration that generates the maximum emission.

CRT ONLY

FRONT VIEW



REAR VIEW



SIDE VIEW



LCD+CRT

FRONT VIEW



REAR VIEW



SIDE VIEW



AV+CRT

FRONT VIEW



REAR VIEW



SIDE VIEW



## 6. Test of Radiated Emission

Radiated emissions from 30 MHz to 2,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

### 6.1. Major Measuring Instruments


- Amplifier (HP 87405A)
  - Attenuation 0 dB
  - RF Gain 20 dB
  - Signal Input 10 MHz to 3 GHz
  
- Spectrum Analyzer ( HP 8594A )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 2000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 9 KHz to 2.9 GHz

**6.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.



### 6.3. Typical Test Setup Layout of Radiated Emission

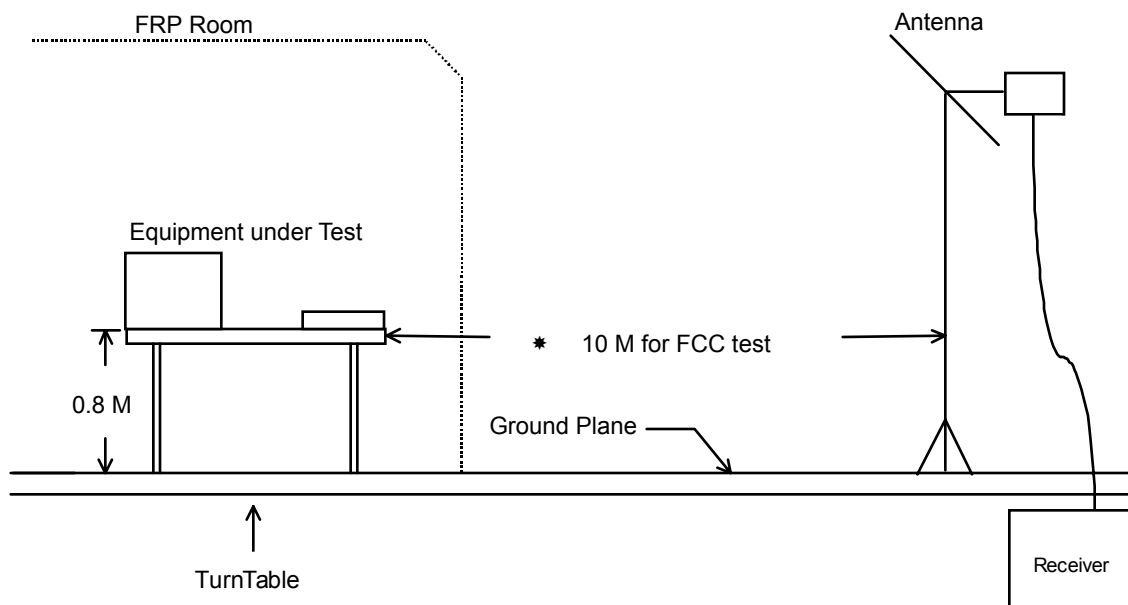

**6.4. Test Result of Radiated Emission**

6.4.1. Test mode : 1600\*1200/85Hz/106K

- Test Distance : 10 M
- Temperature : 19°C
- Relative Humidity : 53 %
- Test Date : Jan. 24, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**67.620 MHz / 24.17 dBuV (VERTICAL) Antenna Height 1.5 Meter, Turntable Degree 54 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
56.900	H	7.60	0.90	13.38	30.00	31.62	21.88	12.42	-8.12
224.000	H	10.93	1.62	9.38	30.00	31.62	21.93	12.49	-8.07
41.799	V	12.68	0.74	10.72	30.00	31.62	24.14	16.11	-5.86
57.018	V	7.60	0.90	15.28	30.00	31.62	23.78	15.45	-6.22
67.620	V	6.40	0.96	16.81	30.00	31.62	24.17	16.16	-5.83
151.410	V	11.21	1.49	8.98	30.00	31.62	21.68	12.13	-8.32

Test Engineer : \_\_\_\_\_  
 WILLIAM LEE

6.4.2. Test mode : 1280\*1024/85Hz/91K

- Test Distance : 10 M
- Temperature : 19°C
- Relative Humidity : 53 %
- Test Date : Jan. 24, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**224.000 MHz / 23.03 dBuV (HORIZONTAL) Antenna Height 4 Meter, Turntable Degree 300 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
45.640	H	12.40	0.80	5.84	30.00	31.62	19.04	8.95	-10.96
224.000	H	10.93	1.62	10.48	30.00	31.62	23.03	14.17	-6.97
39.010	V	13.34	0.70	6.02	30.00	31.62	20.06	10.07	-9.94
69.100	V	6.40	0.98	11.22	30.00	31.62	18.60	8.51	-11.40
190.000	V	9.48	1.60	10.58	30.00	31.62	21.66	12.11	-8.34
312.000	V	14.69	1.92	10.68	37.00	71.00	27.29	23.15	-9.71

Test Engineer : \_\_\_\_\_  
 WILLIAM LEE

6.4.3. Test mode : 1024\*768/60Hz/48K (LCD+CRT)

- Test Distance : 10 M
- Temperature : 19°C
- Relative Humidity : 53 %
- Test Date : Jan. 24, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**195.139 MHz / 28.49 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 16 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
209.600	H	9.95	1.60	14.15	30.00	31.62	25.70	19.28	-4.30
113.842	V	12.17	1.30	13.79	30.00	31.62	27.26	23.07	-2.74
195.139	V	9.40	1.60	17.49	30.00	31.62	28.49	26.58	-1.51
211.399	V	10.08	1.60	13.95	30.00	31.62	25.63	19.12	-4.37
227.660	V	11.20	1.64	15.48	30.00	31.62	28.32	26.06	-1.68
455.200	V	17.03	2.40	13.94	37.00	70.79	33.37	46.61	-3.63

Test Engineer : \_\_\_\_\_  
WILLIAM LEE

6.4.4. Test mode : 640\*480/60Hz/31K (AV+CRT)

- Test Distance : 10 M
- Temperature : 19°C
- Relative Humidity : 53 %
- Test Date : Jan. 25, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**41.560 MHz / 25.74 dBuV (VERTICAL) Antenna Height 1.5 Meter, Turntable Degree 22 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
44.022	H	12.76	0.78	6.53	30.00	31.62	20.07	10.08	-9.93
224.000	H	10.93	1.62	9.88	30.00	31.62	22.43	13.23	-7.57
534.400	H	18.12	2.50	6.45	37.00	70.79	27.07	22.57	-9.93
645.600	H	19.24	2.88	5.50	37.00	70.79	27.62	24.04	-9.38
41.560	V	12.68	0.74	12.32	30.00	31.62	25.74	19.36	-4.26
56.180	V	8.00	0.90	14.37	30.00	31.62	23.27	14.57	-6.73

Test Engineer : \_\_\_\_\_

WILLIAM LEE

**6.5. Photographs of Radiated Emission Test Configuration**


- The photographs show the configuration that generates the maximum emission.

CRT ONLY

FRONT VIEW



REAR VIEW

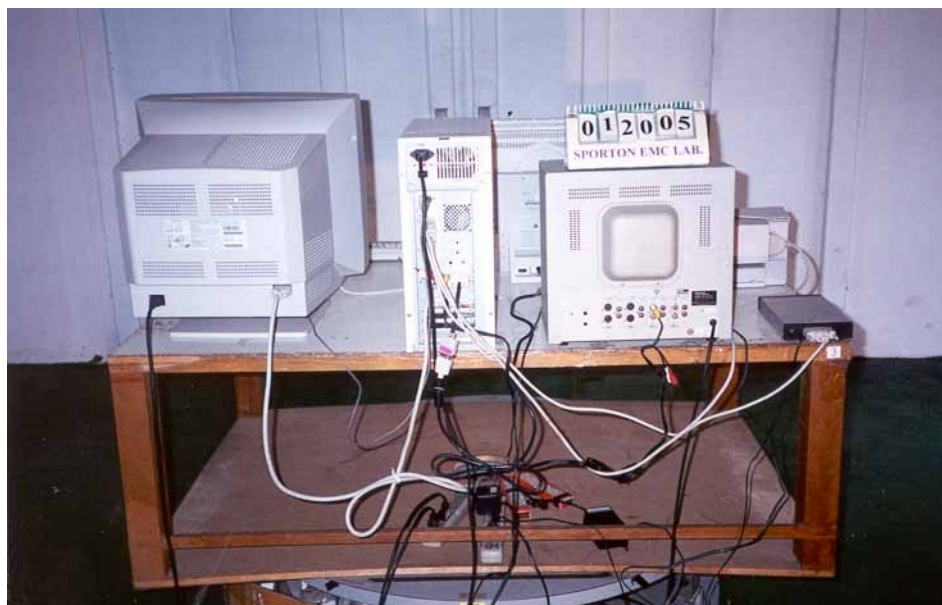


LCD+CRT

FRONT VIEW



REAR VIEW

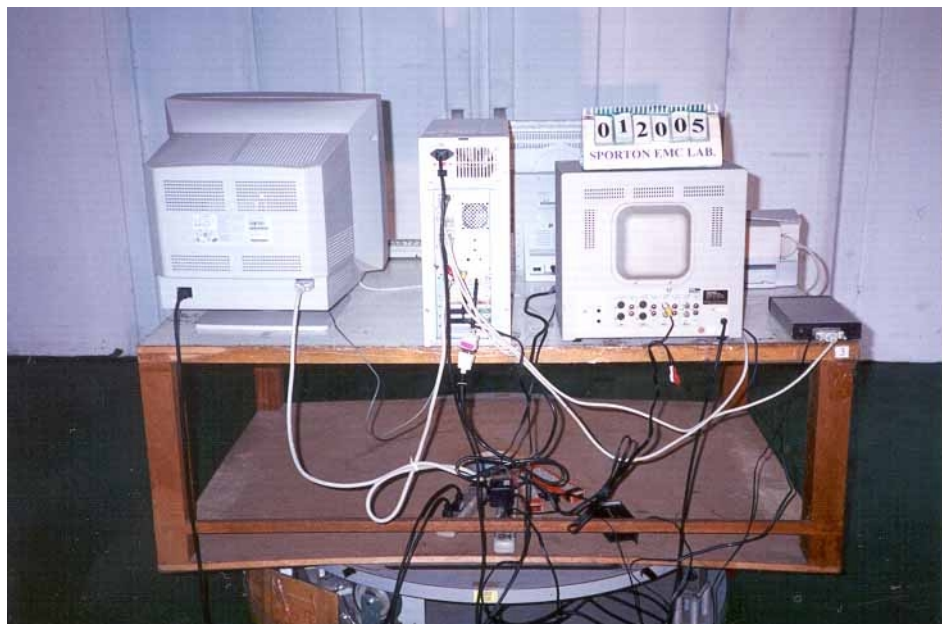

AV+CRT

FRONT VIEW



REAR VIEW





7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.0	0.7
35	16.3	0.7
40	12.6	0.7
45	12.4	0.8
50	10.4	0.8
55	8.4	0.9
60	6.4	0.9
65	6.4	0.9
70	6.4	1.0
75	6.7	1.1
80	7.1	1.0
85	7.5	1.1
90	7.8	1.1
95	9.3	1.1
100	10.7	1.2
110	11.9	1.3
120	12.9	1.3
130	12.6	1.3
140	12.2	1.3
150	11.4	1.5
160	9.5	1.4
170	9.8	1.5
180	9.7	1.8
190	9.5	1.6
200	9.3	1.6
220	10.7	1.6
240	12.0	1.7
260	13.0	1.9
280	13.7	2.0
300	14.4	2.0
320	14.9	1.9
340	15.3	2.0
360	15.8	2.0
380	16.3	1.9
400	16.7	2.3
450	17.0	2.4
500	17.3	2.4
550	18.5	2.6
600	19.7	2.7
650	19.2	2.9
700	18.7	3.1
750	19.3	3.3
800	19.9	3.5
850	21.2	3.6
900	22.4	3.6
950	21.7	3.7
1000	20.9	3.8
2000	31.6	6.2

LKOP3

## 8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz – 1.8 GHz	Sep. 06. 1999	Conduction
LISN (Support Unit) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Dec. 06, 1999	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98087	50 ohm / 50 uH	Dec. 06. 1999	Conduction
Amplifier (Site 3)	HP	87405A	3207A01437	10MHz –3.0GHz	Jun. 27, 1999	Radiation
Spectrum Analyzer (site 3)	HP	8594A	3051A00172	9KHz –2.9GHz	Apr. 16, 1999	Radiation
Bilog Antenna (Site 3)	CHASE	CBL6112A	2320	30MHz -2GHz	Sep. 08. 1999	Radiation
Half-wave dipole antenna (Site 3)	EMCO	3121C	9705-1285	28M - 1GHz	May 18, 1999	Radiation
Turn Table (site 3)	EMCO	2080	9711-2022	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 3)	EMCO	2075	9710-2101	1 m - 4 m	N/A	Radiation