

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : VGA CARD

Model No. : TM64L, TM64H (V02-00)

FCC ID : ICUVGA-GWV02

Filing Type : Original Grant

Applicant : **GAINWARD CO., LTD.**
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	8
3. Test Software	9
4. General Information of Test	10
4.1. Test Facility	10
4.2. Standard for Methods of Measurement	10
4.3. Test in Compliance with	10
4.4. Frequency Range Investigated	10
4.5. Test Distance	10
5. Test of Conducted Powerline	11
5.1. Major Measuring Instruments	11
5.2. Test Procedures	12
5.3. Typical Test Setup Layout of Conducted Powerline	13
5.4. Test Result of AC Powerline Conducted Emission	14
5.5. Photographs of Conducted Powerline Test Configuration	18
6. Test of Radiated Emission	24
6.1. Major Measuring Instruments	24
6.2. Test Procedures	25
6.3. Typical Test Setup Layout of Radiated Emission	26
6.4. Test Result of Radiated Emission	27
6.5. Photographs of Radiated Emission Test Configuration	31
7. Antenna Factor & Cable Loss	34
8. List of Measuring Equipment Used	35
Appendix A. Photographs of EUT	A1 ~ A2

CERTIFICATE OF COMPLIANCE

for

CISPR PUB. 22 Class B

Equipment : VGA CARD

Model No. : TM64L, TM64H (V02-00)

FCC ID : ICUVGA-GWV02

Applicant : **GAINWARD CO., LTD.**
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Apr. 26, 2000 at **SPORTON International Inc.** LAB. in Lin Kou.

Lenore Chang
President

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

GAINWARD CO., LTD.
12F, No. 96, Hsin Tai Wu Rd., Sec. 1,
Hsi-Chih, Taipei Hsien, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: VGA CARD
Model No.	: TM64L, TM64H (V02-00)
Trade Name	: CARDEXpert
FCC ID	: ICUVGA-GWV02
LCD Data cable	: Shielded, 1.65m
CRT Data cable	: Shielded, 1.7m
AV Cable	: Non-shielded, 1.6m
Power Supply Type	: From PC
Power Cord	: N/A

1.4. Feature of Equipment under Test

- nVIDIA RIVA TNT/RIVA TNT2/VANTA Twin-Texel 32-bit Graphics Engine.
-2 Texture-mapped, Lit Pixels per Clock
-Single Pass Multi-texture Rendering
- 24-bit or 16-bit Z-buffer, 8-bit Stencil Buffer.
- High Performance 128-bit 2D/GUI/Direct Draw Acceleration.
- Support PanelLink digital interface for LCD monitor.
- Resolution support up to: VGA 1600*1200, 106K/85Hz, LCD 1024*768, 48K/60Hz

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner that tended to maximize its emission characteristics in a typical application.
- b. The HITACHI Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem, PANASONIC TV, VIEWSONIC LCD Monitor and EUT were connected to the FIC PC for EMI test.
- c. The Following display resolution were investigated during the compliance test:
 1. Horizontal frequency (640*480 to 1,600*1,200, 31 KHz to 106 KHz)
 2. Vertical frequency (60 Hz to 85 Hz)
- d. According to the above tests, we listed the following display modes as the worst cases:
 1. 640*480 (31 KHz), refresh rate 60 Hz (TV Mode).
 2. 1,024*768 (48 KHz), refresh rate 60 Hz (LCD Mode).
 3. 1,280*1,024 (non-interlanced 91 KHz), refresh rate 85 Hz (CRT Mode).
 4. 1,600*1,200 (non-interlanced 106 KHz), refresh rate 85 Hz (CRT Mode).
- e. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 2,000 MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (HITACHI)

FCC ID	: N/A
Model No.	: CM814U
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0033
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID : GYUM92SK
Model No. : AT101(DE8M)
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

Support Unit 4. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ
Model No. : MUS9J
Serial No. : SP0045
Data Cable : Shielded, 360 degree via metal backshells, 1.7m

Support Unit 5. -- Printer (HP)

FCC ID : B94C2642X
Model No. : DeskJet 400
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Braided-Shielded, 360 degree via metal backshells, 1.35m

Support Unit 6. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m


Support Unit 7. -- TV (Panasonic)

FCC ID	: N/A
Model No.	: WV-CM1450
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0114
AV Data Cable	: Non-Shielded, 1.6m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 8. -- LCD Monitor (ViewSonic)

FCC ID	: N/A
Model No.	: VPD150
Serial No.	: SP0201
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Data Cable	: D-Shielded, 1.65m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

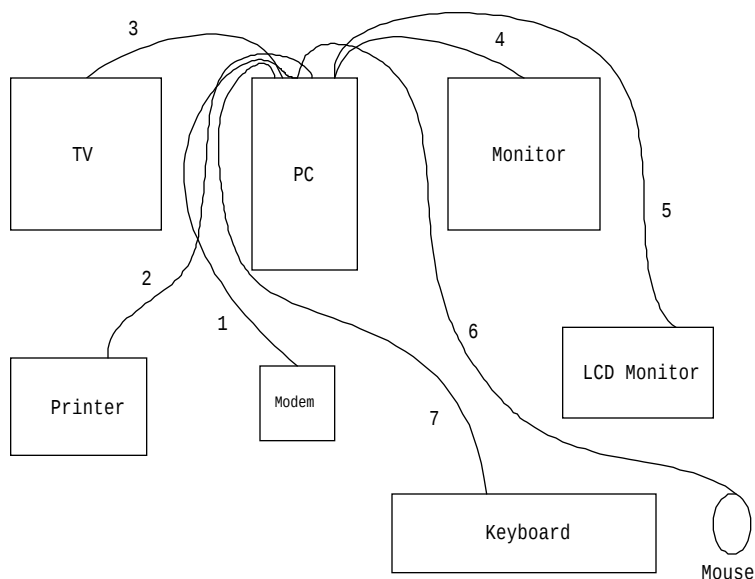

1. The I/O cable is connected from PC to the support unit 6.
2. The I/O cable is connected from PC to the support unit 5.
3. The I/O cable is connected from EUT to the support unit 7.
4. The I/O cable is connected from EUT to the support unit 2.
5. The I/O cable is connected from EUT to the support unit 8.
6. The I/O cable is connected from PC to the support unit 4.
7. The I/O cable is connected from PC to the support unit 3.

3. Test Software

Two executive programs, EMITEST.EXE & FCC.EXE under WIN 98, which generate a complete line of continuously repeating " H " pattern were used as the test software.

The programs were executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 2,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

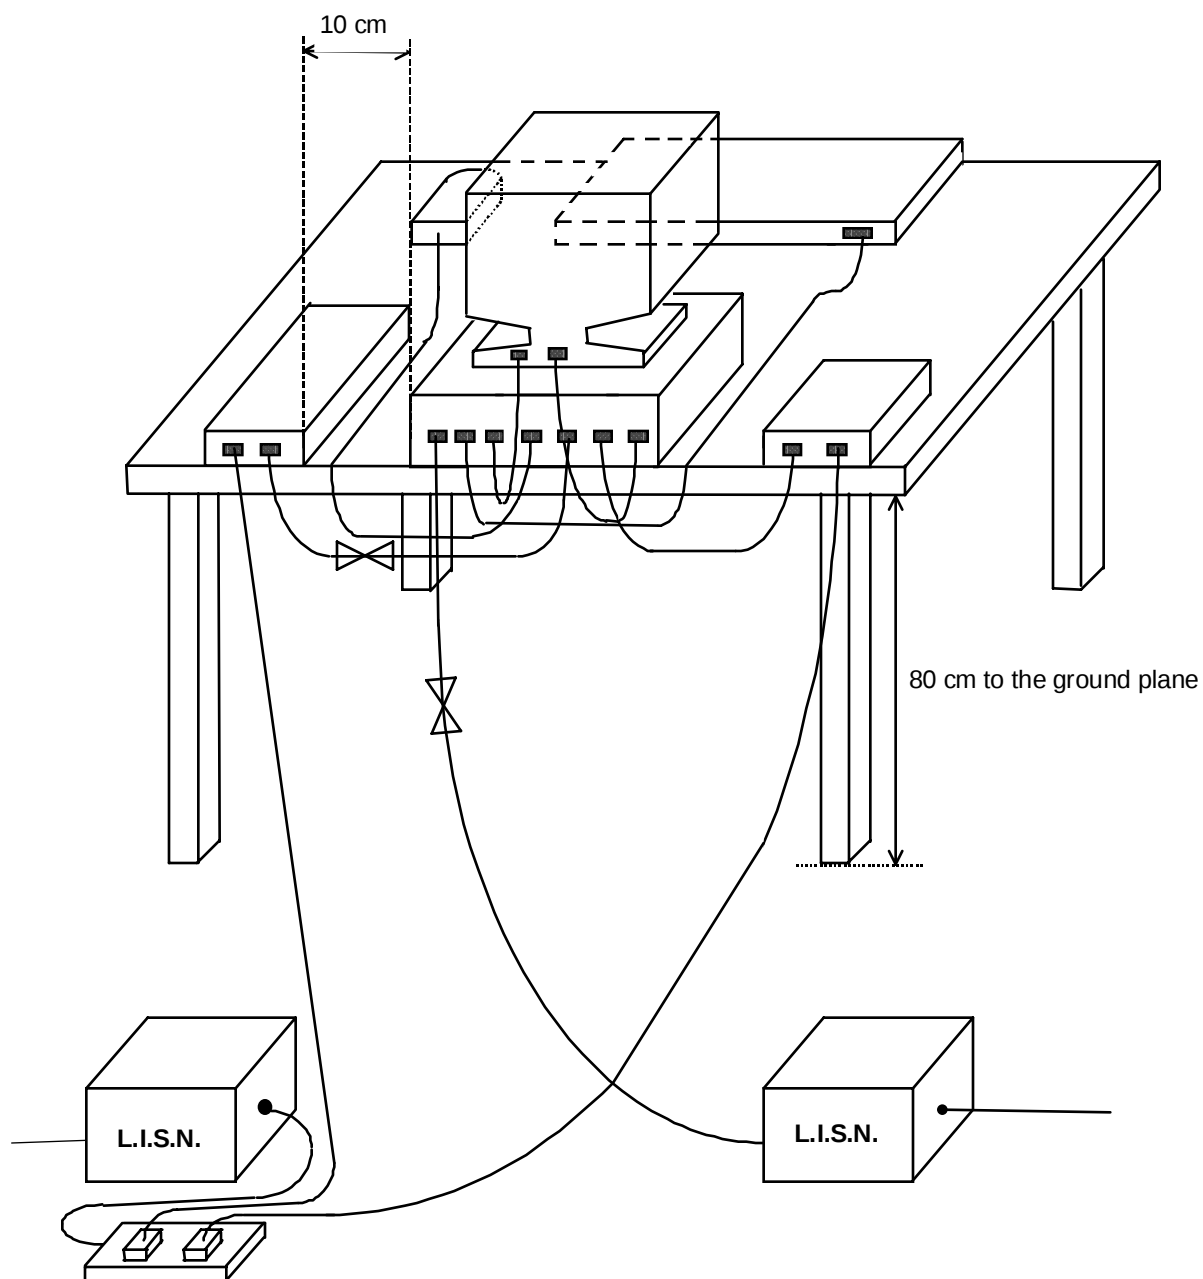

5.4. Test Result of AC Powerline Conducted Emission

5.4.1. Test mode : 640*480 60Hz/31K (TV Mode)

- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Apr. 26, 2000


The Conducted Emission test was passed at minimum margin

LINE 0.275 MHz / 47.80 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.275	L	48.70	47.80	272.27	245.47	60.98	50.98	1118.86	353.81	-12.3	-3.2
0.521	L	36.50	35.40	66.83	58.88	56.00	46.00	630.96	199.53	-19.5	-10.6
3.524	L	41.00	34.40	112.20	52.48	56.00	46.00	630.96	199.53	-15.0	-11.6
0.279	N	48.10	47.30	254.10	231.74	60.86	50.86	1103.84	349.06	-12.8	-3.6
0.521	N	36.20	35.10	64.57	56.89	56.00	46.00	630.96	199.53	-19.8	-10.9
3.524	N	40.70	34.00	108.39	50.12	56.00	46.00	630.96	199.53	-15.3	-12.0

Test Engineer :

Aldrich Hong



5.4.2. Test mode : 1024*768 60Hz/48K (LCD mode)

- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Apr. 26, 2000


The Conducted Emission test was passed at minimum margin

LINE 0.275 MHz / 47.70 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.275	L	48.60	47.70	269.15	242.66	60.98	50.98	1119.29	353.95	-12.4	-3.3
0.521	L	36.50	35.40	66.83	58.88	56.00	46.00	630.96	199.53	-19.5	-10.6
22.570	L	27.20	25.50	22.91	18.84	60.00	50.00	1000.00	316.23	-32.8	-24.5
0.279	N	48.20	47.30	257.04	231.74	60.86	50.86	1103.86	349.07	-12.7	-3.6
0.521	N	36.20	35.10	64.57	56.89	56.00	46.00	630.96	199.53	-19.8	-10.9
2.551	N	22.70	18.90	13.65	8.81	56.00	46.00	630.96	199.53	-33.3	-27.1

Test Engineer :

Aldrich Hong



5.4.3. Test mode : 1280*1024 85Hz/91K (CRT Mode)

- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Apr. 26, 2000


The Conducted Emission test was passed at minimum margin

LINE 0.275 MHz / 47.80 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.275	L	48.60	47.80	269.15	245.47	60.98	50.98	1119.33	353.96	-12.4	-3.2
0.521	L	36.50	35.50	66.83	59.57	56.00	46.00	630.96	199.53	-19.5	-10.5
9.859	L	30.00	25.80	31.62	19.50	60.00	50.00	1000.00	316.23	-30.0	-24.2
22.571	L	27.00	25.10	22.39	17.99	60.00	50.00	1000.00	316.23	-33.0	-24.9
0.279	N	48.10	47.20	254.10	229.09	60.86	50.86	1103.89	349.08	-12.8	-3.7
0.583	N	35.20	32.70	57.54	43.15	56.00	46.00	630.96	199.53	-20.8	-13.3

Test Engineer :

Aldrich Hong



5.4.4. Test mode : 1600*1200 85Hz/106K (CRT Mode)

- Temperature : 26°C
- Relative Humidity : 54 %
- Test Date : Apr. 26, 2000


The Conducted Emission test was passed at minimum margin

LINE 0.275 MHz / 48.00 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.275	L	48.90	48.00	278.61	251.19	60.98	50.98	1119.31	353.96	-12.1	-3.0
0.583	L	35.40	32.90	58.88	44.16	56.00	46.00	630.96	199.53	-20.6	-13.1
9.573	L	28.70	23.50	27.23	14.96	60.00	50.00	1000.00	316.23	-31.3	-26.5
22.571	L	27.90	26.30	24.83	20.65	60.00	50.00	1000.00	316.23	-32.1	-23.7
0.279	N	48.00	47.20	251.19	229.09	60.86	50.86	1103.93	349.09	-12.9	-3.7
0.583	N	35.10	32.60	56.89	42.66	56.00	46.00	630.96	199.53	-20.9	-13.4

Test Engineer :

Aldrich Hong



5.5. Photographs of Conducted Powerline Test Configuration


- The photographs show the configuration that generates the maximum emission.

TV Mode

FRONT VIEW



REAR VIEW

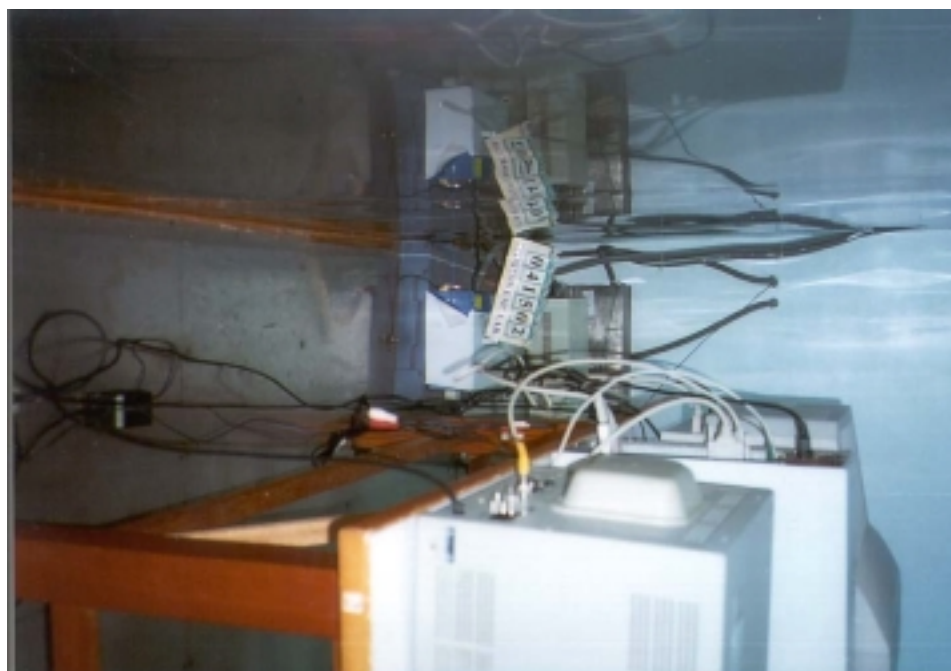

SIDE VIEW



CRT Mode

FRONT VIEW



REAR VIEW



SIDE VIEW




LCD Mode

FRONT VIEW



REAR VIEW

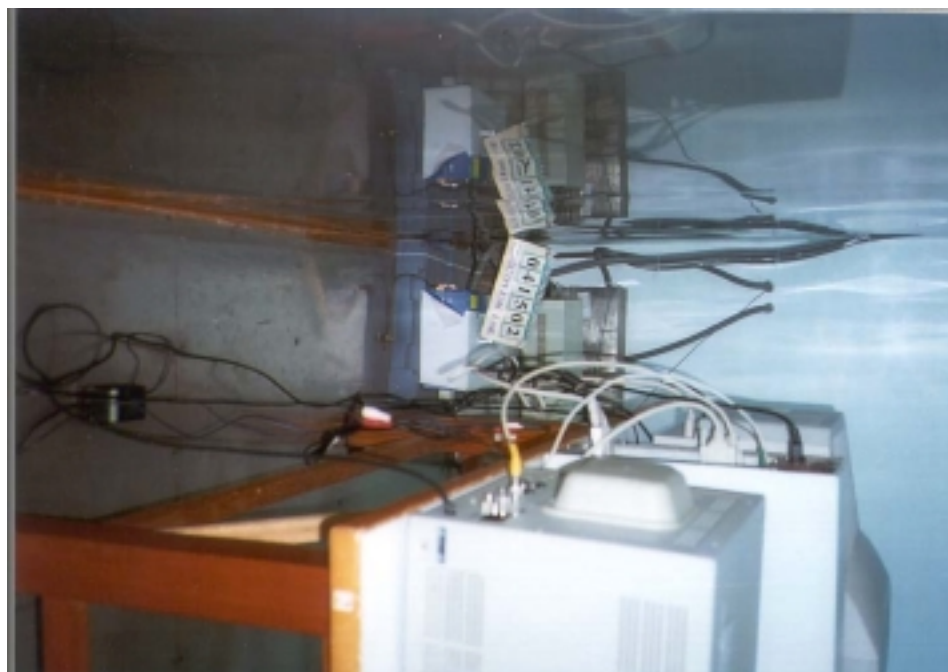

SIDE VIEW



6. Test of Radiated Emission

Radiated emissions from 30 MHz to 2,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments


- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 20 dB
 - Signal Input 10 MHz to 3 GHz

- Spectrum Analyzer (ADVANTEST R3261C)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 2000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.6 GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

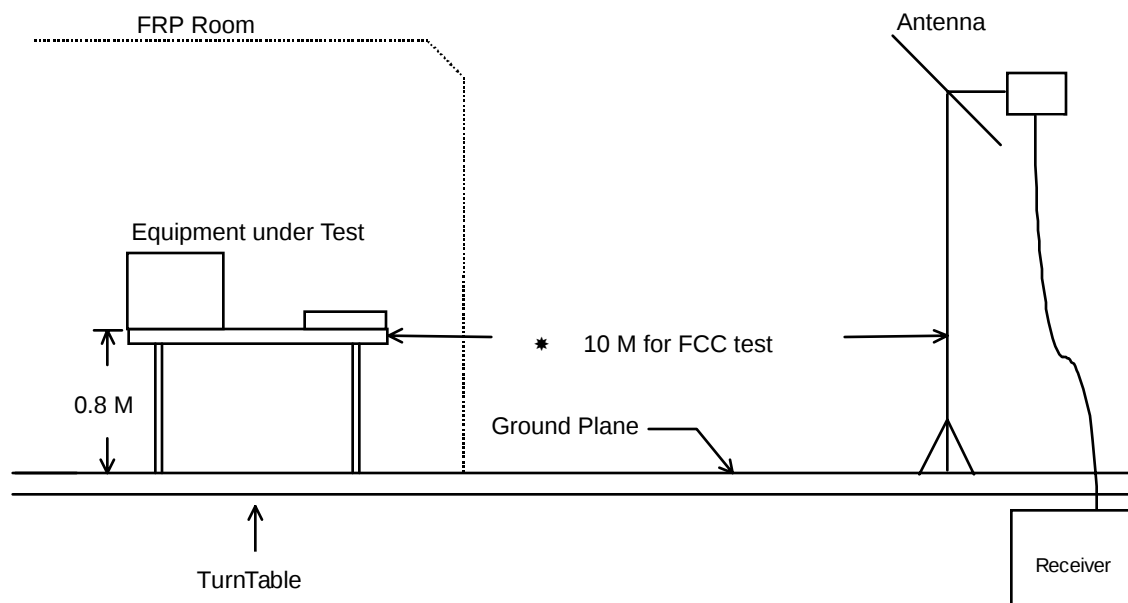

6.4. Test Result of Radiated Emission

6.4.1. Test mode : 640*480 60Hz/31K (TV Mode)

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 61 %
- Test Date : Apr. 25, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

50.100 MHz / 23.22 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 360 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
50.100	V	8.34	0.84	14.04	30.00	31.62	23.22	14.49	-6.78
66.300	V	6.02	0.83	13.92	30.00	31.62	20.77	10.93	-9.23
50.400	H	8.34	0.84	10.87	30.00	31.62	20.05	10.06	-9.95
176.200	H	8.74	1.67	11.89	30.00	31.62	22.30	13.03	-7.70
218.400	H	10.22	1.97	9.62	30.00	31.62	21.81	12.32	-8.19
368.000	H	14.79	2.34	9.61	37.00	70.79	26.74	21.73	-10.26

Test Engineer :

Benny Lee

6.4.2. Test mode : 1024*768 60Hz/48K (LCD mode)

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 61 %
- Test Date : Apr. 25, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

195.000 MHz / 27.58 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 180 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
162.500	V	9.39	1.78	14.73	30.00	31.62	25.90	19.72	-4.10
195.000	V	8.96	1.75	16.87	30.00	31.62	27.58	23.93	-2.42
212.000	V	9.81	1.87	14.99	30.00	31.62	26.67	21.55	-3.33
414.400	V	15.73	2.45	15.09	37.00	70.79	33.27	46.08	-3.73
195.000	H	8.96	1.75	15.67	30.00	31.62	26.38	20.84	-3.62
454.400	H	16.30	2.54	15.65	37.00	70.79	34.49	53.03	-2.51

Test Engineer :

Benny Lee

6.4.3. Test mode : 1280*1024 85Hz/91K (CRT Mode)

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 61 %
- Test Date : Apr. 25, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

137.800 MHz / 21.90 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 180 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
59.100	V	6.59	1.00	13.54	30.00	31.62	21.13	11.39	-8.87
79.000	V	6.58	1.00	12.75	30.00	31.62	20.33	10.39	-9.67
133.500	V	11.56	1.50	6.81	30.00	31.62	19.87	9.85	-10.13
137.800	V	11.38	1.50	9.02	30.00	31.62	21.90	12.45	-8.10
199.700	V	8.93	1.67	10.84	30.00	31.62	21.44	11.80	-8.56
59.400	H	6.59	1.00	13.54	30.00	31.62	21.13	11.39	-8.87

Test Engineer :

Benny Lee

6.4.4. Test mode : 1600*1200 85Hz/106K (CRT Mode)

- Test Distance : 10 M
- Temperature : 26°C
- Relative Humidity : 61 %
- Test Date : Apr. 25, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

57.300 MHz / 24.84 dBuV (HORIZONTAL) Antenna Height 4 Meter, Turntable Degree 360 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
43.100	V	11.48	0.70	8.21	30.00	31.62	20.39	10.46	-9.61
57.300	V	6.97	1.00	14.37	30.00	31.62	22.34	13.09	-7.66
70.700	V	5.87	0.86	14.37	30.00	31.62	21.10	11.35	-8.90
114.400	V	12.03	1.42	8.06	30.00	31.62	21.51	11.90	-8.49
171.000	V	8.85	1.67	10.98	30.00	31.62	21.50	11.89	-8.50
57.300	H	6.97	1.00	16.87	30.00	31.62	24.84	17.46	-5.16

Test Engineer :

Benny Lee

6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

TV Mode

FRONT VIEW



REAR VIEW



CRT Mode

FRONT VIEW



REAR VIEW



LCD Mode

FRONT VIEW



REAR VIEW



7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.3	0.7
35	15.5	0.7
40	13.9	0.8
45	10.4	0.7
50	8.3	0.8
55	7.4	1.0
60	6.4	1.0
65	6.1	0.8
70	5.8	0.8
75	6.2	1.0
80	6.8	1.0
85	7.7	1.2
90	8.6	1.2
95	10.0	1.2
100	11.3	1.2
110	11.8	1.5
120	12.3	1.3
130	11.7	1.5
140	11.3	1.5
150	10.6	1.5
160	9.6	1.8
170	8.8	1.7
180	9.1	1.7
190	9.0	1.8
200	8.9	1.7
220	10.4	2.0
240	11.7	1.7
260	12.8	2.0
280	13.5	2.0
300	14.2	2.0
320	14.3	2.2
340	14.4	2.3
360	14.6	2.3
380	15.1	2.3
400	15.5	2.3
450	16.3	2.6
500	16.6	2.5
550	17.7	3.0
600	17.9	3.0
650	17.8	3.3
700	16.9	3.3
750	17.4	3.8
800	18.2	3.7
850	18.6	4.0
900	20.1	4.0
950	19.8	4.2
1000	19.3	4.3
2000	27.2	5.8

LKOP6

8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz – 1.8 GHz	Sep. 06, 1999	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Dec. 06, 1999	Conduction
LISN (Support Unit) (site 2)	Telemeter	NNB-2/16Z	98089	50 ohm / 50 uH	Dec. 01, 1999	Conduction
Spectrum Analyzer (Site 6)	ADVANTEST	R3261A	71720760	9 KHz – 2.6GHz	Mar. 08, 2000	Radiation
Amplifier (Site 6)	HP	87405D	3207A01437	10MHz – 3.0GHz	Jun. 25, 1999	Radiation
Bilog Antenna (Site 6)	CHASE	CBL6112A	2442	30MHz -2GHz	Jan. 18, 2000	Radiation
Half-wave dipole antenna (Site 6)	EMCO	3121C	9705-1285	28 M - 1GHz	May 18, 1999	Radiation
Turn Table (site 6)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 6)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation