


## LoJack III Portable Transmitter Block Diagram

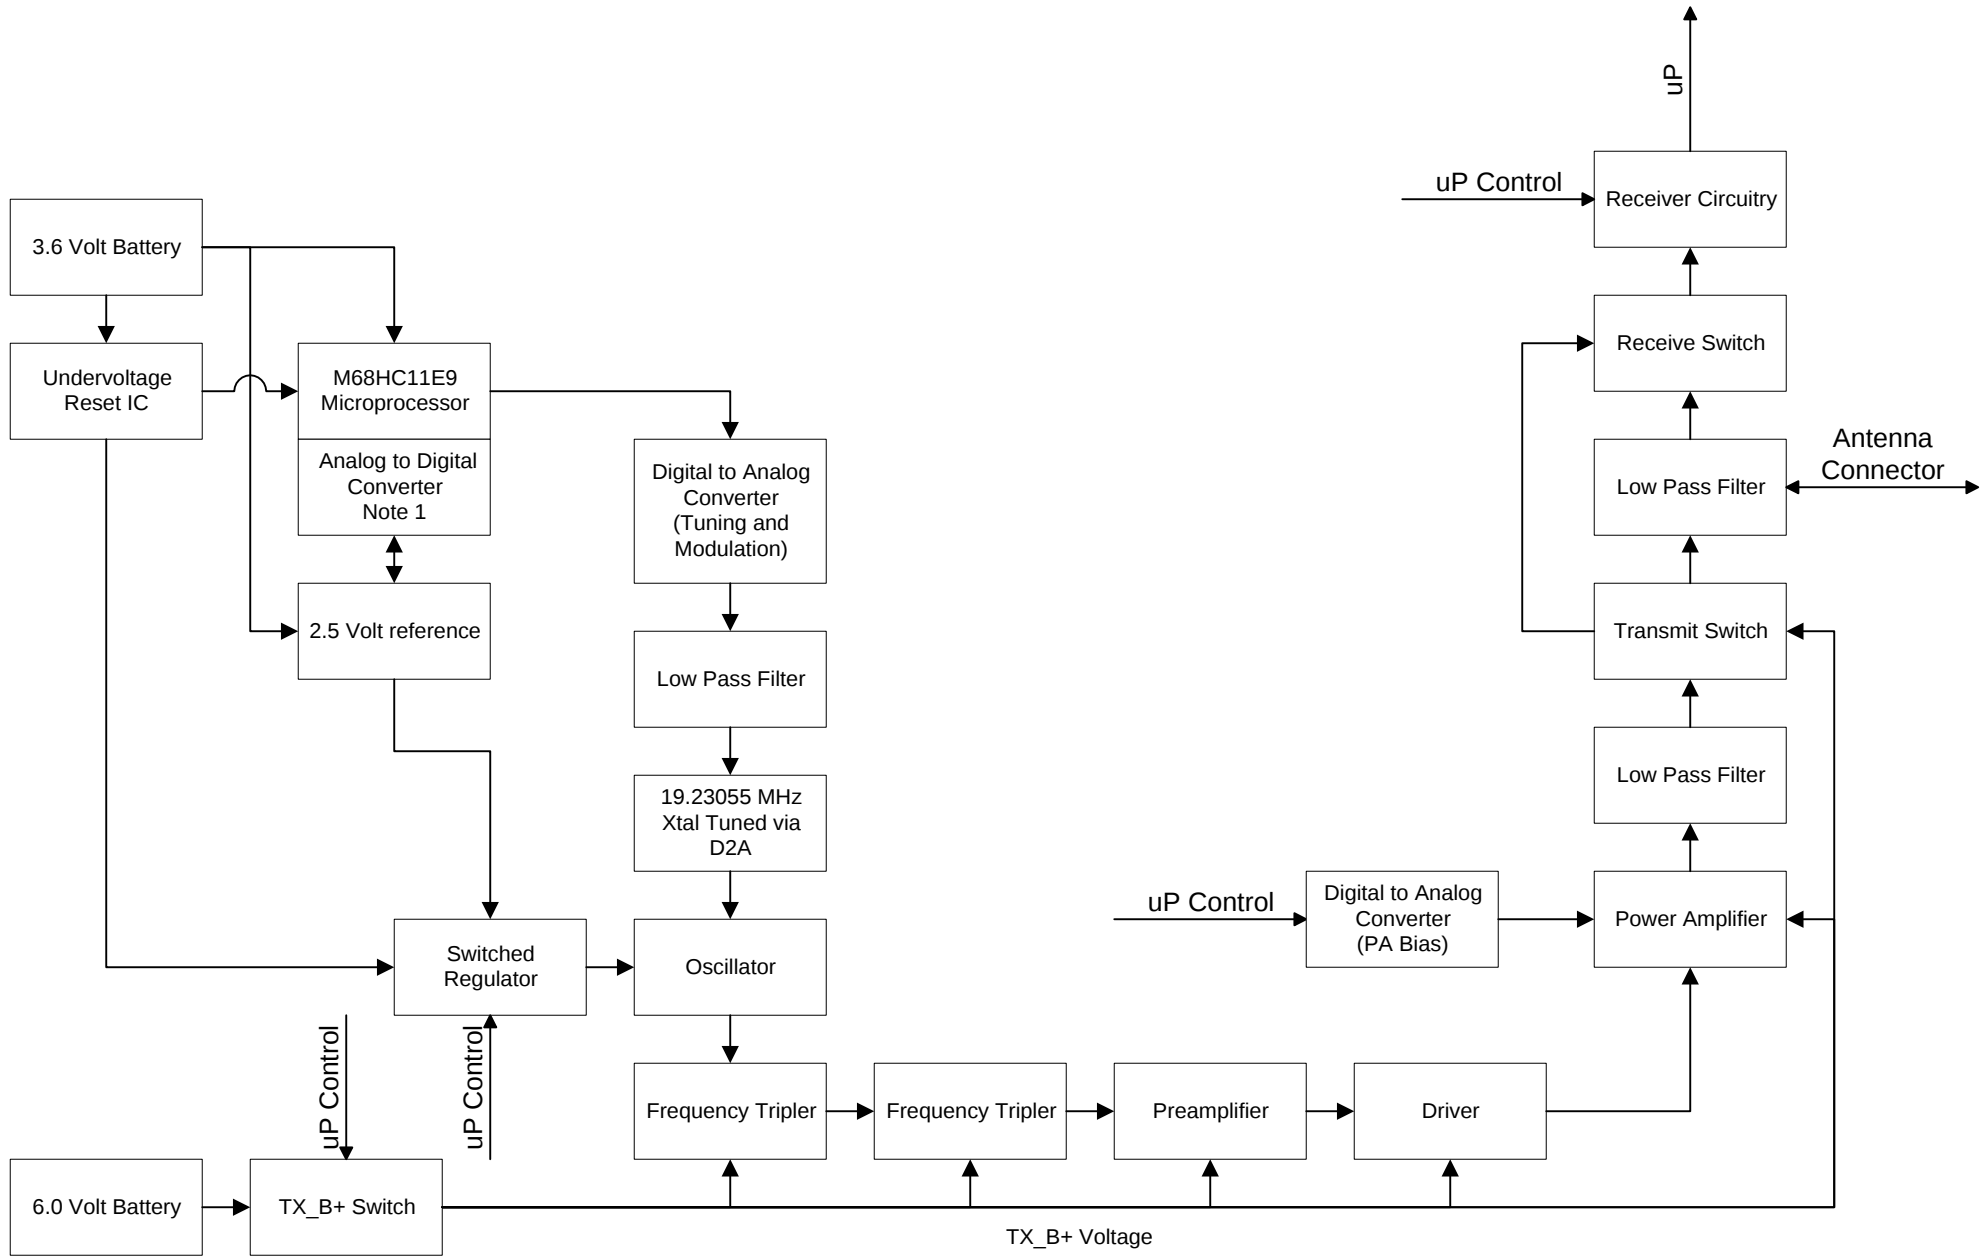

Note1: Microprocessor internal Analog to Digital is connected to the following: 2.5 Volt reference, 3.6 Volt battery input, 6.0 volt battery input