

EMISSIONS TEST REPORT

Report Number: 3107672BOX-001

Project Number: 3107672

**Testing performed on the
Motorcycle Location Unit
Model: ML5**

to

FCC Part 90

For

LoJack Corporation


Test Performed by:
Intertek – ETL SEMKO
70 Codman Hill Road
Boxborough, MA 01719

Test Authorized by:
LoJack Corporation
780 Dedham Street
Canton, MA 02021

Prepared by: 

Date: 11/26/2006

Michael F. Murphy

Reviewed by: 
Jeff Goulet

Date: 11/26/06

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

1.0 Job Description

1.1 Client Information

This EUT has been tested at the request of

Company: LoJack Corporation
780 Dedham Street
Canton, MA 02021
Contact: Bob White
Telephone: 781-302-7128
Fax: 781-302-7299


1.2 Equipment Under Test

Equipment Type: Vehicle Location Unit and Motorcycle Location Unit
Model Number(s): VLU5W EW2 and ML5 (respectively)
Serial number(s): (VLU) 05AA213 and 05AA3CA; (ML5) 000011
FCC ID Number: IDIEW2VLU-05 and TBD
Manufacturer: LoJack Corporation
EUT receive date: 09/14/2005 and 11/07/2006
EUT received condition: Good
Test report issue date: 09/29/2005 and 11/27/2006
Test start date: 09/14/2005
Test end date: 11/07/2006

1.3 Test Plan Reference: Tested according to the standards listed.

1.4 Test Configuration

1.4.1 Block Diagram

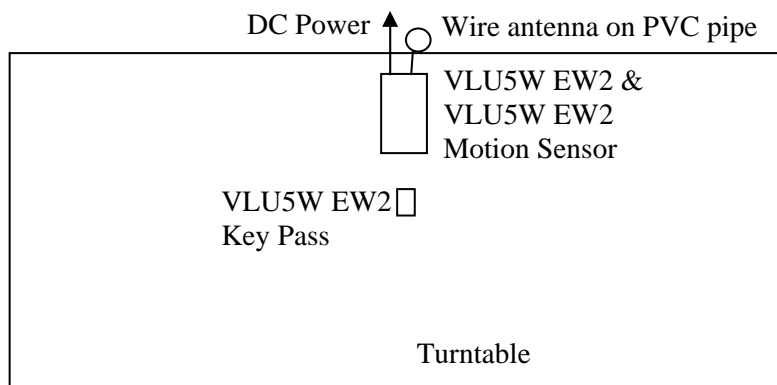

Note: The ML5 takes the place of the VLU5W EW2 in the diagram above (No Key Pass in ML5 config.).

1.4.2 Cable List:

Cable	Shielding	Connector	Length (m)	Qty.
DC Power	None	Wire	0.8	2

1.4.3 Support Equipment:

Name: Protek Triple DC Power Supply
 Model No.: 3040T
 Serial No.: AC3518

Name: Motion Sensor
 Model No.: VLU5W EW2 Motion Sensor
 Serial No.: 05AA213*

Name: Key Pass (Not used in ML5 testing)
 Model No.: VLU5W EW2 Key Pass
 Serial No.: T6

* - The Vehicle Location Unit and the Motion Sensor are contained in a single composite device

1.5 Mode of Operation:

The Vehicle Location Unit was powered from a DC power supply or battery at 13.8VDC and was transmitting continuously during testing. The Key Pass and Motion Sensor were both present and functioning in a normal fashion during the testing. During the frequency stability and the transient frequency behavior testing, the transmitter was unmodulated.

2.0 Test Summary

TEST STANDARD	RESULTS	
FCC Part 90		
SUB-TEST	TEST PARAMETER	COMMENT
RF Output Power and Spurious Emissions FCC 2.1046, 2.1053, 90.20(e)(6), 90.210(c)	RF Output Power must not exceed 2.5 Watts. Spurious emissions must not exceed -13 dBm.	Pass
Occupied Bandwidth FCC 2.1049, 90.20(e)(6)	Occupied bandwidth must not exceed 20 kHz.	Pass*
Emissions Mask FCC 90.210(c)	The transmit waveform must meet the requirements of Emissions Mask C.	Pass*
On-Time FCC 90.20(e)(6)	On time must not exceed 200 ms over the period of 1 second when the transmitter is in active mode. On time must not exceed 200 ms over the period of 10 seconds when the transmitter is not in active mode.	Pass*
Transient Frequency Behavior FCC 90.214	The transmit frequency must stay within 12.5 kHz of the nominal frequency for the 20 ms after the first 5 ms that follow the transmitter being keyed on.	Pass*
Frequency Stability FCC 2.1055, 90.213	Frequency drift must not exceed 50 PPM	Pass*

* Note: The ML5 is a VLU5W with a shorter antenna, and has been re-packaged for ease of installation in a motorcycle. The modifications required to produce the ML5 would not affect the data collected on the VLU5W for Occupied BW, Emissions Mask, On-Time, Test Frequency Behavior or Frequency Stability; so the VLU5W data has been reproduced in this report for certification purposes.

3.0 Sample Calculations

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 52.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB/m} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ FS &= 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = [10(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where

- NF = Net Reading in dB μ V
- RF = Reading from receiver in dB μ V
- LF = LISN Correction Factor in dB
- CF = Cable Correction Factor in dB
- AF = Attenuator Loss Factor in dB

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF/20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

Example:

$$\begin{aligned} NF &= RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu\text{V} \\ UF &= 10^{(49.1 \text{ dB}\mu\text{V} / 20)} = 254 \mu\text{V/m} \end{aligned}$$

3.1 Measurement Uncertainty

Compliance of the product is based on the measured value. However, the measurement uncertainty is included for informational purposes.

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be:
 ± 3.5 dB at 10m, ± 3.8 dB at 3m

The expanded uncertainty ($k = 2$) for mains conducted emissions from 150 kHz to 30 MHz has been determined to be:

± 2.6 dB

The expanded uncertainty ($k = 2$) for telecom port conducted emissions from 150 kHz to 30 MHz has been determined to be:

± 3.2 for ISN and voltage probe measurements

± 3.1 for current probe measurements

3.2 Site Description

Test Site(s): 2

Our OATS are 3m and 10m sheltered emissions measurement ranges located in a light commercial environment in Boxborough, Massachusetts. They meet the technical requirements of ANSI C63.4-1992 and CISPR 22:1993/EN 55022:1994 for radiated and conducted emission measurements. The shelter structure is entirely fiberglass and plastic, with outside dimensions of 33 ft x 57 ft. The structure resembles a quonset hut with a center ceiling height of 16.5 ft.

The testing floor is covered by a galvanized sheet metal groundplane that is earth-grounded via copper rods around the perimeter of the site. The joints between individual metal sheets are bridged with a 2 inch wide metal strips to provide low RF impedance contact throughout. The sheets are screwed in place with stainless steel, round-head screws every three inches. Site illumination and HVAC are provided from beneath the ground reference plane through flush entry ports, the port covers are electrically bonded to the ground plane.

A flush metal turntable with 12 ft. diameter and 5000 lb. load capacity (12,000 lb. in Site 3) is provided for floor-standing equipment. A wooden table 80 cm high is used for table-top equipment. The turntable is electrically connected to the ground plane with three copper straps. The straps are connected to the turntable at the center of it with ground braid. The copper strap is directly connected to the groundplane at the edges of the turntable. The turntable is located on the south end of the structure and the antennas are mounted 3 and 10 meters away to the north. The antenna mast is a non-conductive with remote control of antenna height and polarization. The antenna height is adjustable from 1 to 4 meters.

All final radiated emission measurements are performed with the testing personnel and measurement equipment located below the ground reference plane. The site has a full basement underneath the turntable where support equipment may be remotely located. Operation of the antenna, turntable and equipment under test is controlled by remote controls that manipulate the antenna height and polarization and with a turntable control. Test personnel are located below the ellipse when measurements are performed, however the site maintains the ability of having personnel manipulate cables while monitoring test equipment. Ambient radiated emissions are 6 dB or more below the relevant FCC emission limits.

AC mains power is brought to the equipment under test through a power line filter, to remove ambient conducted noise. 50 Hz (240 VAC single phase), 60 Hz power (120 VAC single phase, 208 VAC three phase), and 60 Hz (480 VAC three phase) are available. Conducted emission measurements are performed with a Line Impedance Stabilization Network (LISN) or Artificial Mains Network (AMN) bonded to the ground reference plane. A removable vertical groundplane (2 meter X 2 meter area) is used for line-conducted measurements for table top equipment. The vertical groundplane is electrically connected to the reference groundplane.

The EMC Lab has two Semi-anechoic Chambers and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference groundplanes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

Test Results: Pass

Test Standard: FCC 2.1046, 2.1053, 90.20(e)(6), 90.210(c)

Test: RF Output Power and Spurious Emissions

Performance Criterion: RF output power must not exceed 2.5 Watts. Spurious emissions must not exceed -13 dBm.

Test Environment:

See Data Tables

Software:

Name	Manufacturer	Version
EXCEL 2000	Microsoft Corporation	9.0.6926 SP-3
EMI BOXBOROUGH	Intertek	2/07/05 Revision

Test Date: 09/14-15/2005

Engineer Initials: _____ **on File_ Date:** _____

Test Engineer: Nicholas Abbondante

Reviewer Initials: _____ **on File _ Date:** _____

Test Engineer: Michael F. Murphy

Engineer Initials:  **Date:** 11/26/2006

Test Equipment Used (9/14/2005 and 9/15/2005):

Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
BAR2	Mannix	0ABA116	BAR2	08/02/2006
REC2	Hewlett Packard	8542E	3520A00125	02/08/2006
RECFL2	Hewlett Packard	85420E	3427A00126	02/08/2006
ROS001	Rohde & Schwarz	FSEK-30	100225	07/26/2006
LOG2	EMCO	3142	9711-1223	12/13/2005
S2 10M FLR	ITS	RG214B/U	S2 10M FLR	09/02/2006
CBL028	Megaphase	TM40 K1K1 197	CBL028	12/01/2005
CBL029	Megaphase	TM40 K1K1 80	CBL029	12/01/2005
CBL030	Megaphase	TM40 K1K1 80	CBL030	12/01/2005
EMC02	EMCO	3115	2784	08/11/2006
HORN1	EMCO	3115	9512-4632	11/24/2005
ANT4A	Compliance Design	B100	3317	09/12/2006
ANT4B	Compliance Design	B200	3245	09/12/2006
ANT4C	Compliance Design	B300	3352	09/12/2006
HEW62	Hewlett Packard	83620A	3213A01244	01/25/2006

Test Equipment Used (11/07/2006):

Atlanta5

Atlanta6

BAR2

LOG2

S2 10M FLR

ANT4

CBL029

HEW62

HORN3

HORN2

CBL027

Test Details: The Tables on this page have been included for reference purposes. They represent the results of testing prior to changing the VLU5W to an ML5 design.

Radiated Emissions / Interference

Company: LoJack Corporation Model #: VLU5W EW2
 Engineer: Nicholas Abbondante Barometer: BAR2 Serial #: 05AA213
 Project #: 3082162 Pressure: 1007mB Receiver: HP 8542E (REC2/RECFL2)
 Date: 09/14/05 09/15/05 Temp: 22c Antenna: LOG2 12-13-05 V10.txt LOG2 12-13-05 H10.txt
 Standard: FCC Part 90 Humidity: 65% PreAmp: NONE
 Class: - Group: - Cable(s): S2 10M FLR 9-2-2006.cbl NONE
 Limit Distance: 3 meters Test Distance: 10 meters Location: Site 2
 Voltage/Frequency: 13.8VDC Frequency Range: 30 MHz - 1 GHz
 Tx Signal Generator: HEW62 Tx Antenna: ANT4 Rx Antenna: LOG2
 Rx Cable: S2 10M FLR Tx Cable: CBL029
 Net = Generator Level (0.00 dBm) + (EUT reading - Generator reading) - Cable Loss + Antenna Gain (dBd)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	EUT Reading dB(uV)	Generator Reading dB(uV)	Transmit Cable Loss dB	Transmit Antenna Factor dBd	Generator Level dBm	Net dBm	Limit dBm	Margin dB	Bandwidth
PK	V	173.070	108.1	58.0	0.3	-4.2	-20.0	25.6	34.0	-8.4	120/300 kHz
PK	V	346.125	55.1	47.5	0.4	-3.3	-20.0	-16.1	-13.0	-3.1	120/300 kHz
PK	V	519.225	33.6	32.4	0.5	0.1	-20.0	-19.3	-13.0	-6.3	120/300 kHz
PK	V	692.290	29.7	31.0	0.6	-1.0	-20.0	-22.8	-13.0	-9.8	120/300 kHz

Radiated Emissions / Interference

Company: LoJack Corporation Model #: VLU5W EW2
 Engineer: Nicholas Abbondante Barometer: BAR2 Serial #: 05AA213
 Project #: 3082162 Pressure: 1007mB Receiver: R&S FSEK-30 (ROS001)
 Date: 09/14/05 09/15/05 Temp: 22c Antenna: HORN1 11-15-05 V3.ant HORN1 11-15-05 H3.ant
 Standard: FCC Part 90 Humidity: 65% PreAmp: NONE
 Class: - Group: - Cable(s): CBL028 12-1-2005.cbl CBL030 12-1-2005.cbl
 Limit Distance: - meters Test Distance: 3 meters Location: Site 2
 Voltage/Frequency: 13.8VDC Frequency Range: 1-2 GHz
 Tx Signal Generator: HEW62 Tx Antenna: EMCO2 Rx Antenna: HORN1
 Rx Cable: CBL028, CBL030 Tx Cable: CBL029
 Net = Generator Level (0.00 dBm) + (EUT reading - Generator reading) - Cable Loss + Antenna Gain
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	EUT Reading dB(uV)	Generator Reading dB(uV)	Transmit Cable Loss dB	Transmit Antenna Factor dBd	Generator Level dBm	Net dBm	Limit dBm	Margin dB	Bandwidth
PK	H	1038.450	33.0	36.0	0.7	6.0	-20.0	-17.8	-13.0	-4.8	1/3 MHz
PK	V	1211.525	31.4	39.0	0.9	7.0	-20.0	-21.4	-13.0	-8.4	1/3 MHz
PK	V	1384.600	31.7	33.1	0.9	8.1	-20.0	-14.3	-13.0	-1.3	1/3 MHz
PK	V	1557.675	31.7	39.4	0.9	8.6	-20.0	-20.1	-13.0	-7.1	1/3 MHz
PK	V	1730.750	29.0	45.4	1.0	8.7	-20.0	-28.7	-13.0	-15.7	1/3 MHz NF

NF – This measurement is a measurement of the instrumentation noise floor.

Intertek

Radiated Emissions, Substitution

Company: LoJACK Corporation
 Model #: ML5
 Serial #: 000011
 Engineer(s): Michael F. Murphy
 Project #: 3107672
 Standard: FCC Part 90
 Barometer: BAR2 Temp/Humidity/Pressure: 20C 31% 1018mb
 Test Distance (m): 10 Voltage/Frequency: 12VDC Frequency Range: 30-1000MHz
 Net = Generator Level (0.00 dBm) + (EUT reading - Generator reading) - Cable Loss + Antenna Gain (dBi or dBd)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS: NF = Noise Floor RB = Restricted Band; Bandwidth denoted as RBW/VBW

Rx Antenna: LOG2
 Rx Cable(s): S2 10M FLR
 Rx Preamp: NONE Receiver: Atlanta 5/6
 Tx Antenna: ANT4
 Tx Cable(s): CBL029
 Tx Signal Generator: HEW62
 ERP or EIRP?: ERP

Location: Site 2 Date(s): 11/06/06

Detector Type	Ant. Pol. (V/H)	Frequency MHz	EUT Reading dB(uV)	Generator Reading dB(uV)	Transmit Cable Loss dB	Transmit Antenna dBi	Generator Level dBm	Net dBm	Limit dBm	Margin dB	Bandwidth
PK	V	173.070	109.0	57.7	0.3	-0.3	-20.0	28.6	34.0	-5.4	120/300 kHz
PK	V	346.190	55.5	50.9	0.4	-1.6	-20.0	-19.6	-13.0	-6.6	120/300 kHz
PK	V	519.240	36.8	46.6	0.5	2.4	-20.0	-30.1	-13.0	-17.1	120/300 kHz
PK	V	692.300	27.8	43.2	0.6	1.6	-20.0	-36.6	-13.0	-23.6	120/300 kHz

Intertek

Radiated Emissions, Substitution

Company: LoJACK Corporation
 Model #: ML5
 Serial #: 000011
 Engineer(s): Michael F. Murphy
 Project #: 3107672
 Standard: FCC Part 90
 Barometer: BAR2 Temp/Humidity/Pressure: 20C 35% 1011mb
 Test Distance (m): 3 Voltage/Frequency: 12VDC Frequency Range: 1-2GHz
 Net = Generator Level (0.00 dBm) + (EUT reading - Generator reading) - Cable Loss + Antenna Gain (dBi or dBd)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS: NF = Noise Floor RB = Restricted Band; Bandwidth denoted as RBW/VBW

Rx Antenna: HORN3
 Rx Cable(s): CBL027
 Rx Preamp: NONE Receiver: Atlanta 5/6
 Tx Antenna: HORN2
 Tx Cable(s): CBL029
 Tx Signal Generator: HEW62
 ERP or EIRP?: ERP

Location: Site 2 Date(s): 11/07/06

Detector Type	Ant. Pol. (V/H)	Frequency MHz	EUT Reading dB(uV)	Generator Reading dB(uV)	Transmit Cable Loss dB	Transmit Antenna dBi	Generator Level dBm	Net dBm	Limit dBm	Margin dB	Bandwidth
PK	V	1038.460	30.0	56.1	0.7	4.7	-20.0	-44.3	-13.0	-31.3	1/3MHz
PK	V	1211.530	35.9	55.1	0.9	4.7	-20.0	-37.6	-13.0	-24.6	1/3MHz
PK	V	1384.600	31.9	54.1	0.9	4.7	-20.0	-40.6	-13.0	-27.6	1/3MHz
PK	V	1557.670	24.0	54.4	0.9	8.1	-20.0	-45.4	-13.0	-32.4	1/3MHz
PK	V	1730.740	23.7	54.3	1.0	8.1	-20.0	-45.7	-13.0	-32.7	1/3MHz

Setup Photos





ML5 Photos



Test Results: Pass

Test Standard: FCC 2.1049, 90.20(e)(6)

Test: Occupied Bandwidth

Performance Criterion: The 20 dB bandwidth of the emission must not exceed 20 kHz.

Test Date: 11/09/2005

Engineer Initials: _ on File _ **Date:** _____

Test Engineer: Nicholas Abbondante

Reviewer Initials: _ on File _ **Date:** _____

Test Equipment Used:

Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
ROS001	Rohde & Schwarz	FSEK-30	100225	07/26/2006

Test Details:

Notes: The 20 dB bandwidth is 11.27 kHz. The measurement is a relative measurement and is referenced to the signal strength when viewed with a 100 kHz bandwidth in the same configuration.



Date: 9.NOV.2005 16:24:08

Test Results: Pass

Test Standard: FCC 90.210(c)

Test: Emissions Mask

Performance Criterion: The transmit waveform must meet the requirements of Emissions Mask C. The fundamental emission waveform must be attenuated below the measured fundamental power P in watts by zero dB for frequencies within 5 kHz of the fundamental center frequency and by $83 \cdot \log(f/5)$ dB (f in kHz) in the bands between 5 and 10 kHz offset from the fundamental center frequency. Emissions offset by 10 kHz to 50 kHz must be attenuated below the measured fundamental power by at either 50 dB or $29 \cdot \log(f/11)$, whichever is the lesser attenuation.

Software:

Name	Manufacturer	Version
EXCEL 2000	Microsoft Corporation	9.0.6926 SP-3

Test Date: 11/09/2005

Engineer Initials: __ on File _ **Date:** _____

Test Engineer: Nicholas Abbondante


Reviewer Initials: __ on File _ **Date:** _____

Test Equipment Used:

Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
ROS001	Rohde & Schwarz	FSEK-30	100225	07/26/2006

Test Details:

Notes: The measurement is a relative measurement and is referenced to the signal strength when viewed with a 100 kHz bandwidth in the same configuration, which was -20.28 dBm.

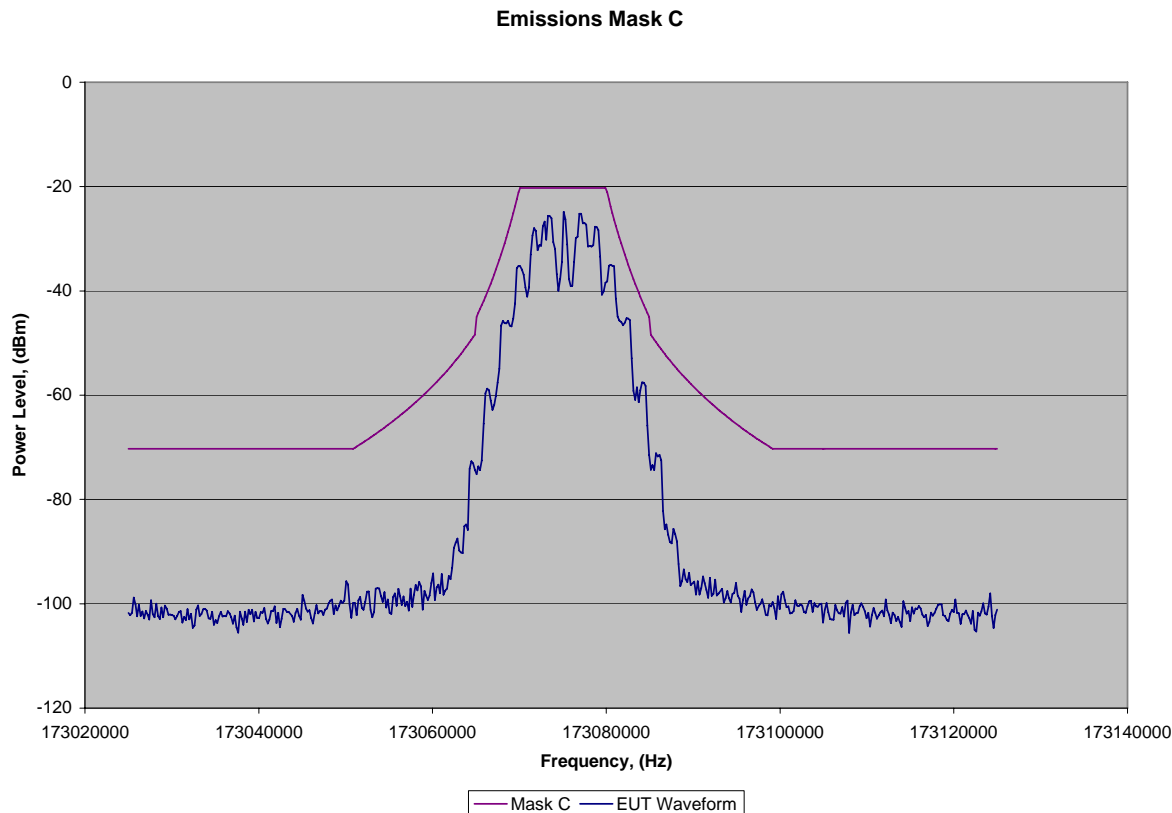

Test Results: Pass

Test Standard: FCC 90.20(e)(6)

Test: On Time

Performance Criterion: On time must not exceed 200 ms over the period of 1 second when the transmitter is in active mode. On time must not exceed 200 ms over the period of 10 seconds when the transmitter is not in active mode.

Test Date: 11/09/2005

Engineer Initials: _ on File _ **Date:** _____

Test Engineer: Nicholas Abbondante

Reviewer Initials: _ on File _ **Date:** _____

Test Equipment Used:


Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
REC2	Hewlett Packard	8542E	3520A00125	02/08/2006
RECFL2	Hewlett Packard	85420E	3427A00126	02/08/2006

Test Details:

Notes: Pulse duration is 200 ms. Pulse intervals in active mode are 1 second long. This meets the requirement of not more than 200 ms of on time in any 1 second period in active mode. The transmitter only transmits when instructed to go into active mode.


14:41:35 09 NOV 2005

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 200.00 msec
-30.20 dB

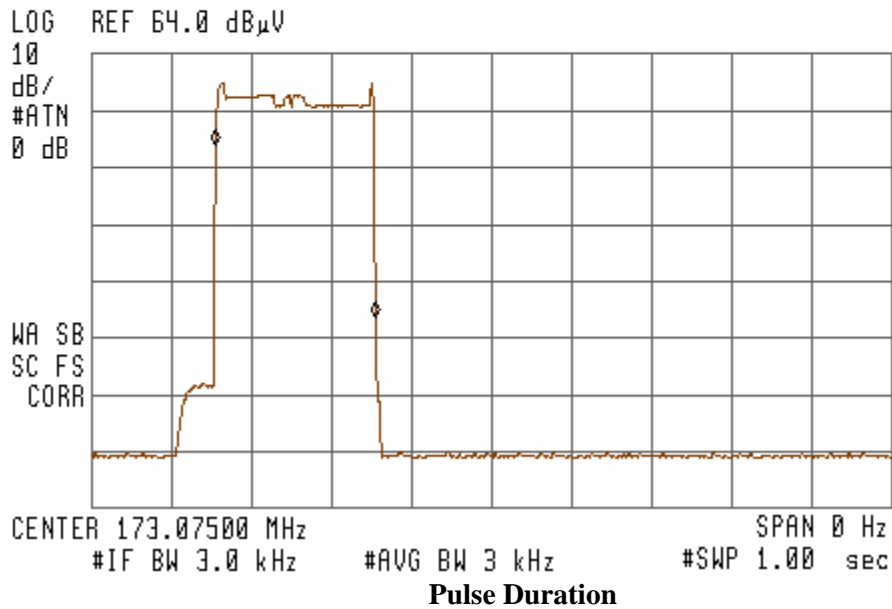

15:11:29 09 NOV 2005

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 1.0000 sec
-.75 dB

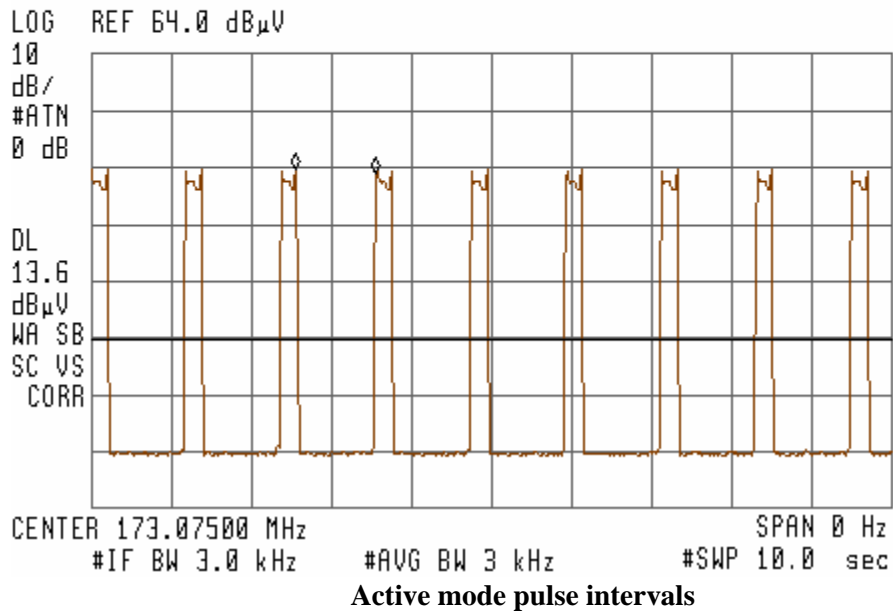

Test Results: Pass

Test Standard: FCC 90.214

Test: Transient Frequency Behavior

Performance Criterion: The EUT operates at 173.075 MHz at not more than 2.5 Watts of output power, therefore only the time interval t₂ (5-25 ms after turning the EUT on) is subject to the limits below.

equipment designed to operate on 25 kHz channels			
time intervals ¹	maximum frequency difference, kHz	frequency range, MHz	
		IC: 138-174 FCC: 150-174	IC: 406.1-470 FCC: 421-512
t ₁	± 25	5 ms	10 ms
t ₂	± 12.5	20 ms	25 ms
t ₃	± 25	5 ms	10 ms

- NOTES: 1. t_{on} is the instant when the EUT starts transmitting.
t₁ is the time period immediately following t_{on}.
t₂ is the time period immediately following t₁.
t₃ is the time period from the instant when the transmitter is turned off until t_{off}.
t_{off} is the instant when the transmitter stops transmitting.
2. If the transmitter carrier output power is 6 W or less, the frequency difference during the time periods t₁ and t₃ may exceed the maximum frequency difference limit for those periods.

Test Date: 11/14/2005

Engineer Initials: ___ on File _ **Date:** _____

Test Engineer: Nicholas Abbondante


Reviewer Initials: ___ on File _ **Date:** _____

Test Equipment Used:

Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
TEK4	Tektronix	TDS3052	B014809	02/24/2006
HEW63	Hewlett Packard	8648C	3847A05291	01/04/2006
HEW65	Hewlett Packard	8902A	3749A04397	01/20/2006

Test Details:

Notes: The upper and lower bounds were set using a signal generator.

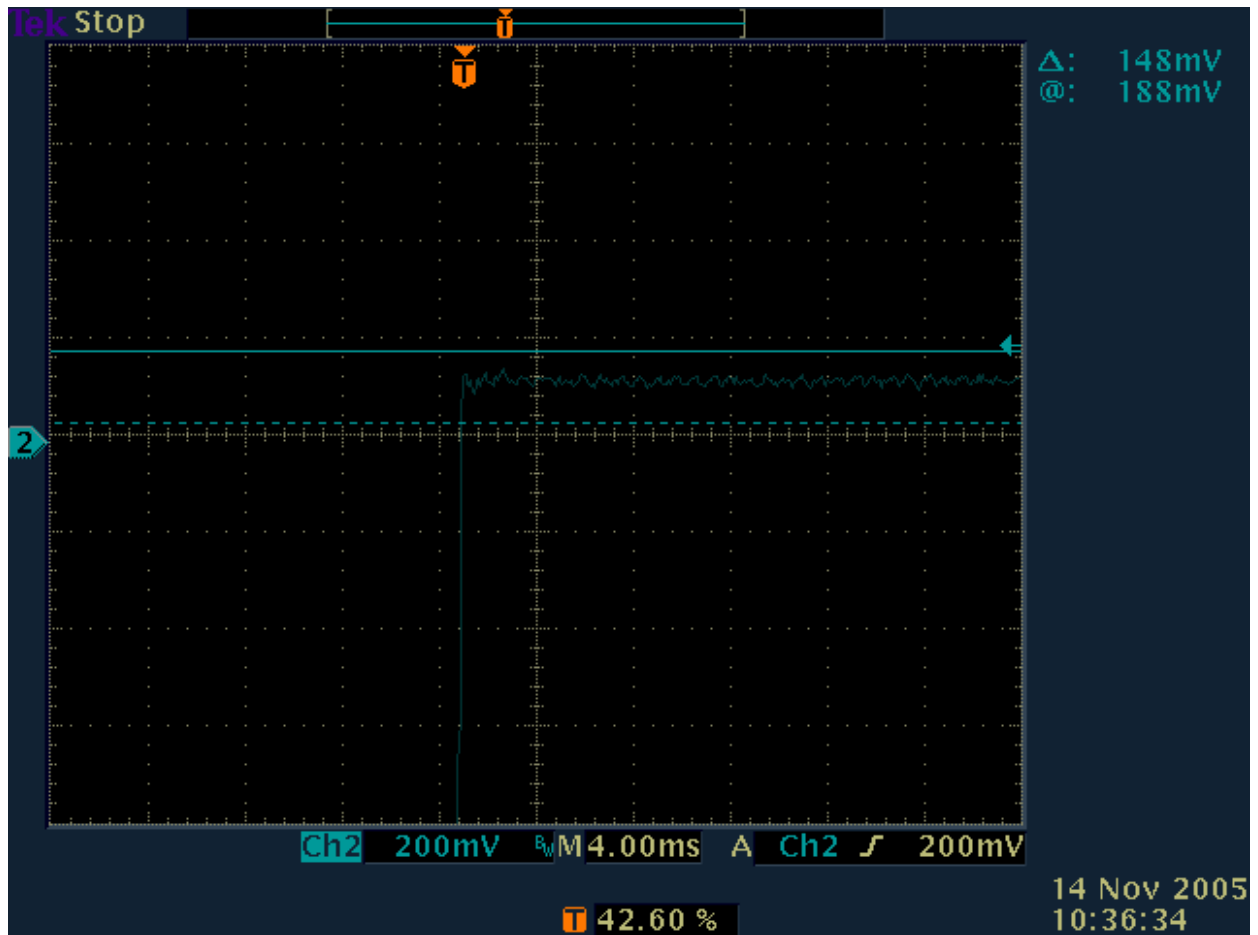

Test Results: Pass

Test Standard: FCC 2.1055, 90.213

Test: Frequency Stability

Performance Criterion: The frequency drift must not exceed 50 PPM.

Test Date: 11/10/2005

Engineer Initials: _ on File _ **Date:** _____

Test Engineer: Nicholas Abbondante

Reviewer Initials: _ on File _ **Date:** _____

Test Equipment Used:

Intertek ID	Manufacturer	Model	Serial Number	Cal. Due
AGL001	Agilent	E7405A	US40240205	08/09/2006
SAF187	Bryant Manufacturing	TH-5S	1207	04/06/2006
CBL030	Megaphase	TM40 K1K1 80	CBL030	12/01/2005

Test Details:

Limit: 50 PPM
Nominal f: 173.075 MHz

%	Voltage Volts	Frequency MHz	Deviation kHz	Limit kHz
-15%	11.73	173.07505	0.05	8.65
-10%	12.42	173.07505	0.05	8.65
-5%	13.11	173.07510	0.1	8.65
+0%	13.8	173.07500	0	8.65
+5%	14.49	173.07505	0.05	8.65
+10%	15.18	173.07505	0.05	8.65
+15%	15.87	173.07500	0	8.65

Date: 11/10/2005

Nominal V: 13.8 VDC

Temperature Celsius	Frequency MHz	Deviation kHz	Limit kHz
-30	173.07420	-0.8	8.65
-20	173.07445	-0.55	8.65
-10	173.07450	-0.5	8.65
0	173.07470	-0.3	8.65
10	173.07490	-0.1	8.65
20	173.07500	0	8.65
30	173.07505	0.05	8.65
40	173.07505	0.05	8.65
50	173.07505	0.05	8.65