

HYAK LABORATORIES, INC.

7011 CALAMO STREET, SUITE 107
SPRINGFIELD, VIRGINIA 22150
(703) 451-1188
FAX (703) 644-7492

ENGINEERING STATEMENT

For Type Certification of

Hitec RCD, Inc.

Model: Ranger 3FM

FCC ID: IFHRANGER3F75

I am an Electronics Engineer, a principal the firm of Hyak Laboratories, Inc., Springfield, Virginia. My education and experience are a matter of record with the Federal Communications Commission.

Hyak Laboratories, Inc. has been authorized by Hitec RCD, Inc., to make type certification measurements on the Ranger 3FM transmitter. These tests were made by me or under my supervision in our Springfield laboratory.

Test data and other documentation required by the FCC for type certification are included in this report. It is submitted that the above mentioned transmitter meets FCC requirements and type certification is requested.



Rowland S. Johnson

Dated: September 8, 1999

A. INTRODUCTION

The following data are submitted in connection with this request for type certification of the Ranger 3FM transmitter in accordance with Part 2, Subpart J of the FCC Rules.

The Ranger 3FM is a low power, non-voice, transmitter intended for remote control of model vehicles in the 75 MHz band.

The equipment employs a vertical polarized antenna directly mounted on the unit and meets Paragraphs 95.645, 95.647, 95.649, and the technical requirements established in the Report & Order in PR Docket 90-222.

B. GENERAL INFORMATION REQUIRED FOR TYPE CERTIFICATION
(Paragraph 2.983 of the Rules)

1. Name of applicant: Hitec RCD, Inc.
2. Identification of equipment: IFHRANGER3F75
 - a. The equipment identification label is shown in Appendix 1.
 - b. Photographs of the equipment are included in Appendix 2.
3. Quantity production is planned.
4. Technical description:
 - a. 6k00F1D emission
 - b. Frequency range: 75.41-75.99 MHz.
 - c. Operating power of transmitter is fixed at the factory at 0.41 Watt.
 - d. Maximum power permitted under Paragraph 95.635(b) of the FCC Rules is 750 milliwatts, and the Ranger 3FM fully complied with those power limitations.
 - e. The dc voltage and dc currents at final amplifier:
Collector voltage: 11.6 Vdc
Collector current: 93 mA
 - f. Function of each active semiconductor device:
See Appendix 3.
 - g. Complete circuit diagram is included in Appendix 4
 - h. Draft instruction book is submitted as Appendix 5.
 - i. The transmitter tune-up procedure is included in Appendix 6.
 - j. A description of circuits for stabilizing frequency is included in Appendix 7.
 - k. A description of circuits and devices employed for suppression of spurious radiation and for limiting modulation is included in Appendix 8.
 - l. Not applicable.
5. Data for 2.985 through 2.997 follow this section.

B. GENERAL INFORMATION...(Continued)

6. RF Power Output (Paragraph 2.985(a) of the Rules)

Since the Ranger 3FM has an immediately attached, integral antenna, no antenna port exists. Power was determined by calculation:

$$P = \frac{(E + D)^2}{30 G} \quad (1)$$

Where

P = Power input (same as power radiated assuming 100% efficient antenna)

E = Electric Field in V/M

D = Distance in meters

G = Gain of the antenna over isotropic. (For a 75 MHz monopole, gain = 0.8)

$$P = \frac{(1.0471 \times 3)^2}{30 \times 0.8} \quad (\text{from Table 1})$$

$$P = 0.41 \text{ watts}$$

C. MODULATION CHARACTERISTICS

1. Occupied Bandwidth
(Paragraphs 2.989(i), and 95.635(b) of the Rules)

Figure 1 is a plot of the sideband envelope of the transmitter taken with an Tektronix 494P spectrum analyzer. Modulation corresponded to conditions of 2.989(i) and consisted of the multiple pulses and synchronizing space normally used in radio control applications. Operator controls were adjusted for worst-case emission.

The plot is within the limits imposed by paragraph 95.635(c).


The horizontal scale (frequency) is 10 kHz per division and the vertical scale (amplitude) is a logarithmic presentation equal to 10 dB per division.

Resolution bandwidth was 1 kHz; video bandwidth was 100 kHz.

Figure 2 is a plot from a Tektronix 494P spectrum analyzer with 5 mS/division sweep in the time domain of the modulated carrier. Modulation consisted of three bursts with a nominal 2 mS duration at a nominal 50 Hz repetition rate.

(1) Kraus, J.D., Antennas p.55.

FIGURE 1
OCCUPIED BANDWIDTH

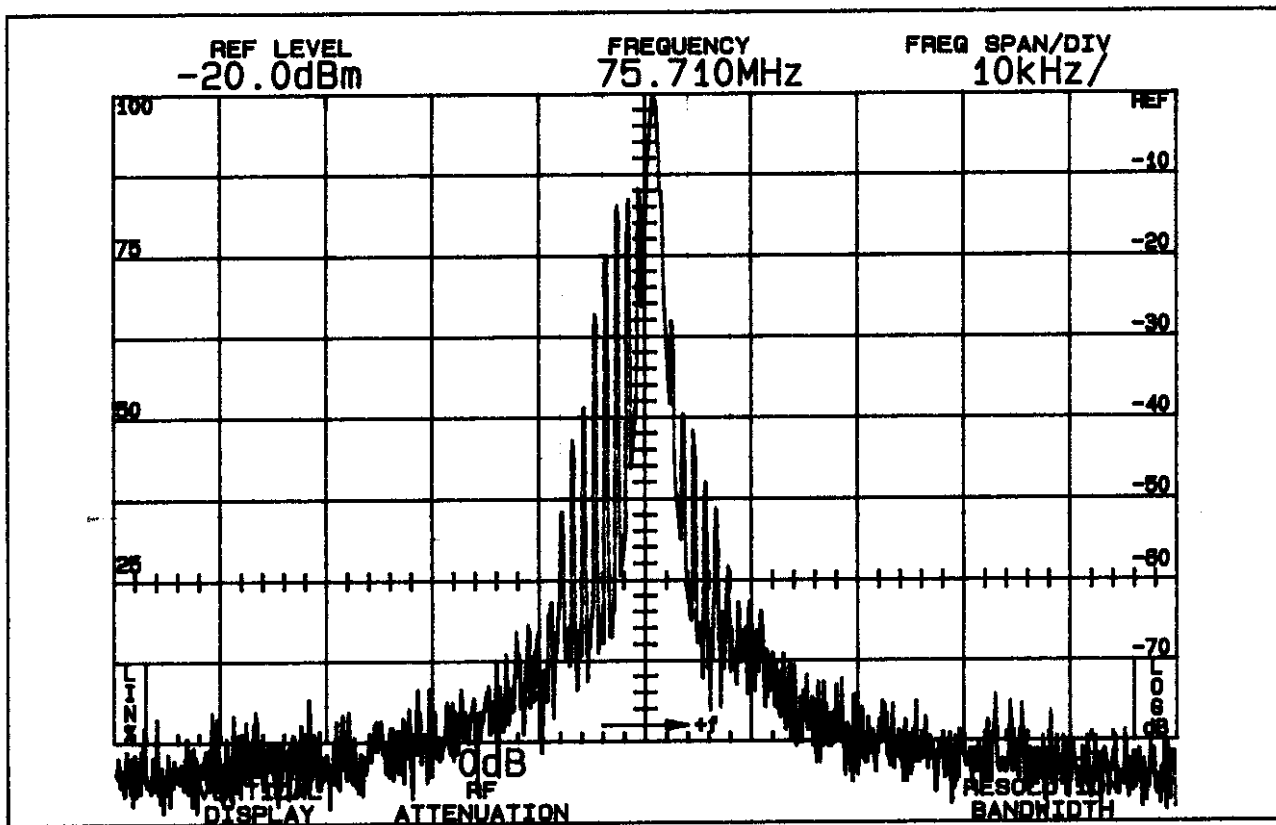

95.635:

(3) At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth (4 to 8 kHz).

(10) At least 45 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 125% of the authorized bandwidth. (8 to 10 kHz)


(11) At least 55 dB on any frequency removed from the center of the authorized bandwidth by more than 125% up to and including 250% of the authorized bandwidth. (10 to 20 kHz)

(12) At least $56 + 10 \log_{10} (TP)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

OCCUPIED BANDWIDTH
FCC ID: IFHRANGER3F75

FIGURE 1

FIGURE 2

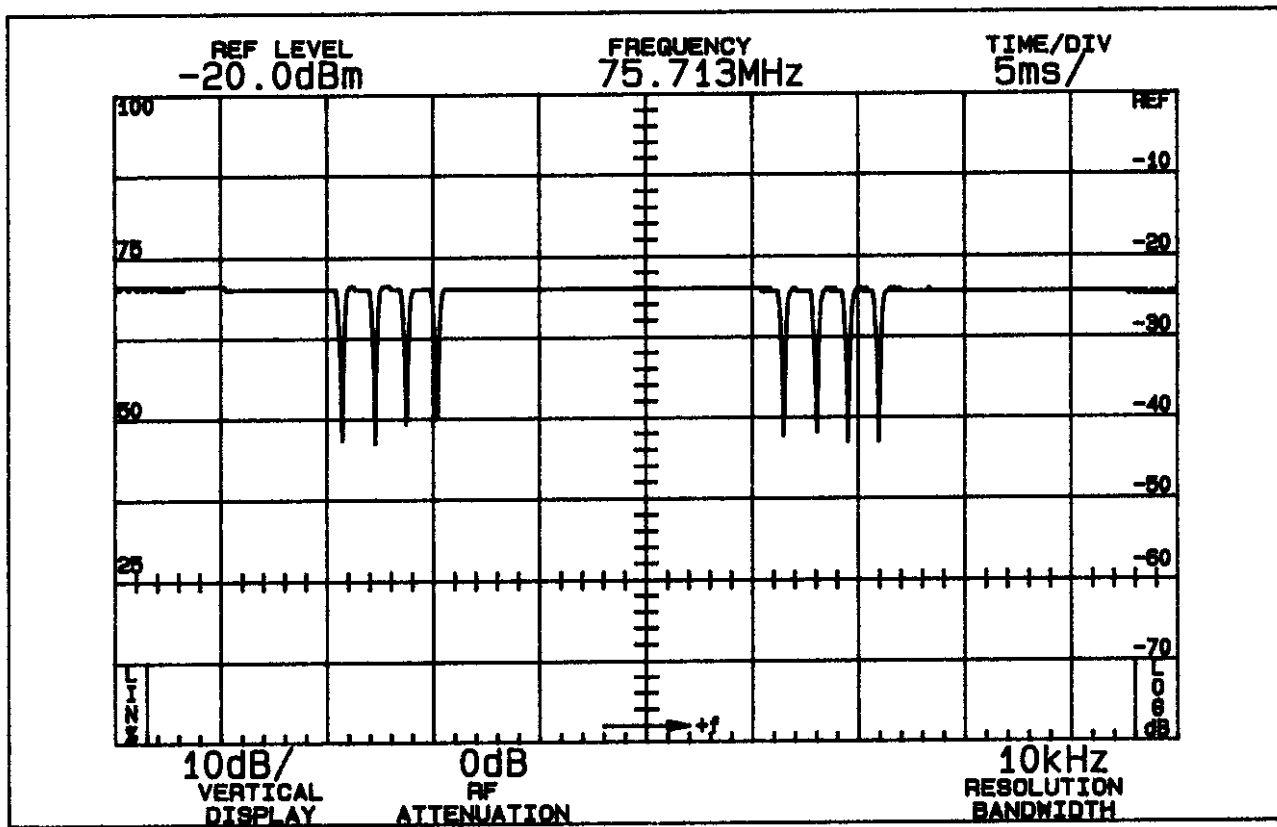MODULATING WAVEFORM
TIME DOMAIN

5 millisecond/division sweep

OCCUPIED BANDWIDTH
(Modulating Waveform)
FCC ID: IFHRANGER3F75

FIGURE 2

D. SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS
(Paragraph 2.991 of the Rules)

Since the Ranger 3FM transmitter meets FCC Rules 95.645, there are no provisions for antenna terminal output measurements.

Substitution of a suitable matching network and retuning to permit observations at 50 ohms would not be representative of normal operation.

Accordingly data on radiated spurious emissions are included in lieu of antenna terminal conducted spurious emissions.

E. FIELD STRENGTH MEASUREMENTS OF SPURIOUS RADIATION
(Paragraph 2.993(a) (b) (2) of the Rules)

Field intensity measurements of radiated spurious emissions from the Ranger 3FM were made with a Tektronix 494P spectrum analyzer using EMCO 3121C calibrated test antennas.

The transmitter and its integral vertical antenna were located in an open field 3 meters from the test antenna. Supply voltage was from a fresh set of batteries with a terminal voltage under load of 12.0 Vdc. The transmitter and test antennas were arranged to maximize pickup. Both vertical and horizontal test antenna polarization were employed.

Reference was measured emission at the carrier frequency, 75.71 MHz, expressed in $\mu\text{V/m}$ @ 3m.

The measurement system was capable of detecting signals 100 dB or more below the reference level. Measurements were made from the lowest frequency generated within the unit, 8 MHz, to 10 times operating frequency. Data after application of antenna factors and line loss corrections are shown in Table 1.

TABLE 1

TRANSMITTER RADIATED EMISSION
75.71 MHz; 12.0 Vdc; 0.41 watt ERP

<u>Emission Frequency</u> <u>MHz</u>	<u>Radiated</u> <u>Emission</u> <u>uV/m</u>	<u>dB Below</u> <u>Carrier Reference</u> ¹
75.710	1047128.0	0.0
151.424	1122.0	59.4
227.132	691.8	63.6
302.840	912.0	61.2
378.552	1230.3	58.6
454.260	653.1	64.1
529.970	1621.8	56.2
605.680	1188.5	58.9
681.390	1603.2	56.3
757.098	1548.8	56.6

Required: $56 + 10 \log(0.41) =$ 52.1

1. Worst-case polarization, H-horizontal, V-vertical.

All other spurious from 8 - 758 MHz were 20 dB or more below FCC limit.

F. FREQUENCY STABILITY
(Paragraph 2.995(a) and 95.623(c) of the Rules)

Measurement of frequency stability versus temperature was made at temperatures from -30°C to $+50^{\circ}\text{C}$. At each temperature, the unit was exposed to test chamber ambient a minimum of 60 minutes after indicated chamber temperature ambient had stabilized to within $\pm 2^{\circ}$ of the desired test temperature. Following the 1 hour soak at each temperature, the unit was turned on, keyed and frequency measured within 2 minutes. Test temperature was sequenced in the order shown in Table 2, starting with -30°C .

A Thermotron S1.2 temperature chamber was used. Temperature was monitored with a Keithley 177 DVM and Fluke 150-30 temperature probe. The transmitter output stage was terminated in a dummy load. Primary supply was 12.0 volts. Frequency was measured with a HP 5385A digital frequency counter connected to the transmitter through a power attenuator. Measurements were made at 75.71 MHz. No transient keying effects were observed.

TABLE 2

FREQUENCY STABILITY vs. TEMPERATURE
75.71 MHz; 12.0 Vdc; 0.41 watt

<u>Temperature, $^{\circ}\text{C}$</u>	<u>Output Frequency, MHz</u>	<u>p.p.m.</u>
-29.4	75.711298	17.1
-20.1	75.711483	19.6
- 9.7	75.711439	19.0
0.1	75.711257	16.6
9.8	75.710938	12.4
20.1	75.710452	6.0
30.0	72.710026	0.3
40.1	72.709602	-5.3
50.0	72.709252	-9.9

Maximum frequency error: 75.711483
75.710000
+ .001483 MHz

Rule 95.623(c) specifies 0.002% or a maximum of ± 0.001514 MHz, which corresponds to:

High Limit 75.511514 MHz
Low Limit 75.508486 MHz

G. FREQUENCY STABILITY AS A FUNCTION OF SUPPLY VOLTAGE
(Paragraph 2.995(d)(2) of the Rules)

Oscillator frequency as a function of power supply voltage was measured with an HP 5385A digital frequency counter as supply voltage provided by an HP 6264B variable dc power supply was varied $\pm 15\%$ from the nominal 12.0 volt rating. A Keithley 197 digital voltmeter was used to measure supply voltage at transmitter primary input terminals. Measurements were made at 20°C ambient.

TABLE 3

FREQUENCY STABILITY vs. SUPPLY VOLTAGE
75.51 MHz; 12.0 Vdc; 0.41 Watt

<u>Supply Voltage</u>	<u>Output Frequency, MHz</u>	<u>p.p.m.</u>
13.80	75.710584	7.7
13.20	75.710544	7.2
12.60	75.710497	6.6
12.00	75.710452	6.0
11.40	75.710420	5.5
10.80	75.710404	5.3
10.20	75.710396	5.2
9.60	75.710399	5.2

Maximum frequency error: 75.710584
75.710000

+ .000584 MHz

* Manufacturer's battery end point.

FCC Rule 95.623(c) specifies 0.002% or a maximum of ± 0.001514 MHz, corresponding to:

High Limit	75.511514 MHz
Low Limit	75.508486 MHz

APPENDIX 3
FUNCTIONS OF ACTIVE SEMICONDUCTORS

<u>Reference</u>	<u>Type</u>	<u>Function</u>
Q1	2SC1623	Buffer/SW
Q2	2SC1623	Modulator
Q3	2SC2223	Buffer/Driver
Q4	2SC2223	Driver
Q5	2SC4910	Final Amplifier
IC1	NE5044	Encoder

FUNCTION OF ACTIVE
SEMICONDUCTORS
FCC ID: IFHRANGER3F75

APPENDIX 3