



NVLAP LAB CODE 200707-0



FCC PART 22 H/24 E

MEASUREMENT AND TEST REPORT

For

Arbitron Inc.

9705 Patuxent Woods Drive, Columbia, MD 21076, U.S.A

FCC ID: IGKDA113A

Report Type: Original Report	Product Type: Gen2 Meter
Test Engineer: <u>Vicent Kang</u>	<i>Vicent Kang</i>
Report Number: <u>RSC10011851-22H&24E</u>	
Report Date: <u>2010-02-10</u>	
Reviewed By: <u>EMC Engineer</u>	<i>Merry Zhao</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
EUT PHOTO	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	5
TEST METHODOLOGY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §1.1307 & §2.1093 - RF EXPOSURE.....	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	13
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	18
APPLICABLE STANDARDS.....	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
APPLICABLE STANDARDS.....	22
TEST PROCEDURE	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	26
APPLICABLE STANDARDS.....	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	27
FCC §22.917(A) & §24.238(A) - BAND EDGES.....	29
APPLICABLE STANDARDS.....	29

TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	30
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Arbitron Inc.*'s product, model number: *IGKDA113A* (FCC ID: *IGKDA113A*) or the "EUT" as referred to in this report is a *Gen2 Meter*, which measures approximately: 8.0 cm L x 5.2 cm W x 2.5 cm H, rated input voltage: DC 5V adapter or 3.7V battery.

Adapter Information:

Model: TS22-500500S;

Input: AC 100-240V 50/60Hz 0.2A;

Output: DC 5.0V 500mA.

** All measurement and test data in this report was gathered from production sample serial number: IMEI: 355294030002190 (Assigned by manufacturer). The EUT was received on 2010-01-18.*

EUT Photo



Please see additional photos in Exhibit B & C

Objective

This type approval report is prepared on behalf of *Arbitron Inc.* in accordance with Part 2, Subpart J, Part 22 Subpart H, and Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, band edge and radiated margin.

Related Submittal(s)/Grant(s)

FCC Part 15.247 submissions with FCC ID: IGKDA113A.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modifications were made to the EUT.

EUT Exercise Software

META executable provided by manufacturer

Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Motherboard	OWC297	CN-OWC297-70821-566-02BR	DoC
DELL	Power	NPS-250KB D	CN-0H2678-17972-56E8NBM	DoC
Seagate	Hard Disk	ST340014A	5JXK3NAD	DoC
DELL	3.5' Floppy	N/A	CN-0N8893-69802-54Q-02OZ	DoC
Lite-ON	CD-Rom	LTN-489S	N/A	DoC
Intel	CPU	Celeron D-2533	N/A	N/A
ProMOS	Memory	V826632K24SATG-C0	0525-K1933700	N/A
Intel	Ethernet	PRO 10/100 VE	N/A	DoC


Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
DELL	PC	2#	N/A	DOC
DELL	Keyboard 2#	L100	CNORH65668907BL05DC	DOC
DELL	Mouse 2#	MOC5UO	G1900NKD	DOC
DELL	LCD Monitor	1505FP	Y4287-7168-574-GBSH	DOC

External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable K/B Cable	1.50	K/B Port/Host	K/B
Shielded Detachable Mouse Cable	1.50	Mouse Port/Host	Mouse
Shielded DetachableVGA Cable	1.50	VGA Port/Host	Monitor
Unshielded Detachable Power Cable	1.80	EUT	Adapter

Configuration of Test Setup

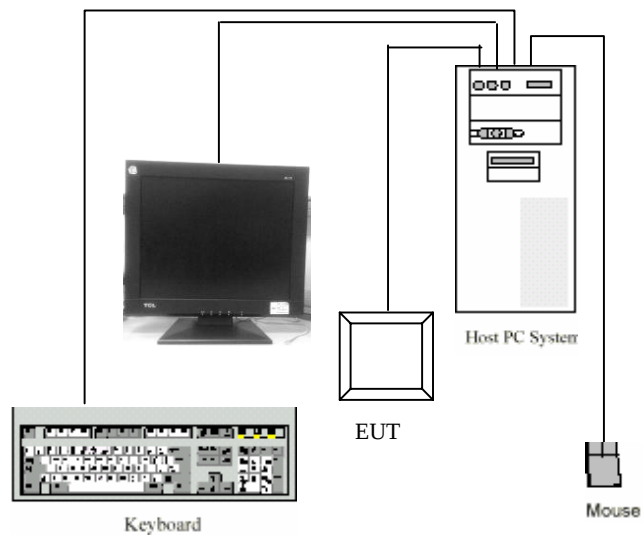

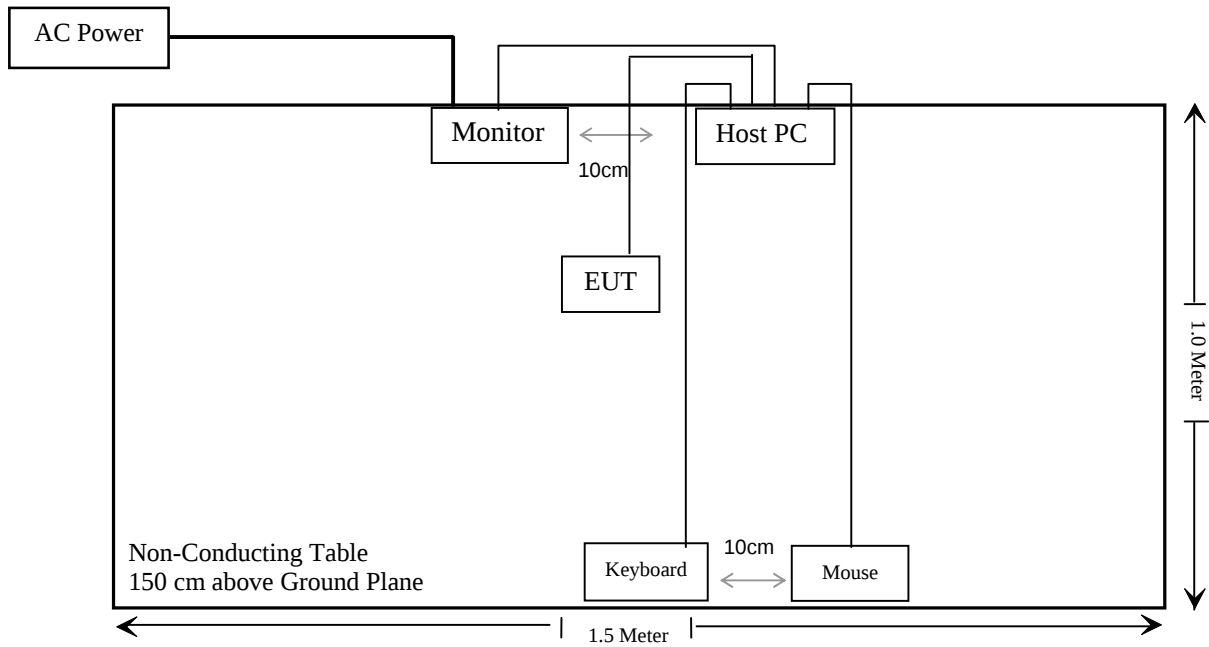Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliant *
§2.1046; § 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049, § 22.905 § 22.917, § 24.238	99% & -26 dB Occupied Bandwidth	Compliant
§ 2.1051, § 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053 § 22.917 (a), § 24.238 (a)	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a), § 24.238 (a)	Out of band emission, Band Edge	Compliant
§ 2.1055 § 22.355, § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant

Note: * SAR report released by BACL, Report Number: RSC10011851-SAR

FCC §1.1307 & §2.1093 - RF EXPOSURE

Applicable Standard

§1.1307 and §2.1093.

Test Result

Compliance, The EUT is a portable device, thus requires SAR evaluation; please refer to BACL SAR Report: RSC10011851-SAR.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC §2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), in no case may the peak output power of a base station transmitter exceed 2 watt EIRP.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

TIA 603-C section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-09-25	2010-09-25
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-07	2010-10-16
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
HP	Preamplifier	8449B	3008A00277	2009-09-12	2010-09-11
HP	Signal Generator	HP8657A	2849U00982	2009-10-16	2010-10-15
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
HP	Synthesized Sweeper	8341B	2624A00116	2009-11-07	2010-11-06
COM POWER	Dipole Antenna	AD-100	041000	2009-09-25	2010-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-06.

Conducted Power

Band	Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (dBm)
				(dBm)	(Watt)	
Cellular	GPRS	128	824.2	32.32	1.706	38.45
		190	836.6	32.27	1.687	38.45
		251	848.8	32.23	1.671	38.45
PCS	GPRS	512	1850.2	29.50	0.891	33
		661	1880.0	29.99	0.998	33
		810	1909.8	29.50	0.891	33

ERP & EIRP**Cellular Band (Part 22H)**


Indicated		Table Angle (Degree)	Test Antenna		Substituted			Antenna Gain Correction (dBd)	Cable Loss (dB)	Absolute Level (dBm)	Part 22H
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Frequency in Low Channel											
824.2	117.46	120	1.00	H	824.2	28.2	H	0	0.9	27.3	38.45
824.2	118.72	80	1.50	V	824.2	29.7	V	0	0.9	28.8	38.45
Frequency in Middle Channel											
836.6	117.65	120	1.25	H	836.6	28.6	H	0	0.9	27.7	38.45
836.6	118.71	88	1.55	V	836.6	29.8	V	0	0.9	28.9	38.45
Frequency in High Channel											
848.8	117.55	120	1.00	H	848.8	28.6	H	0	0.9	27.7	38.45
848.8	118.49	82	1.54	V	848.8	29.5	V	0	0.9	28.6	38.45

PCS Band (Part 24E)


Indicated		Table Angle (Degree)	Test Antenna		Substituted			Antenna Gain Correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Part 24E
Frequency (MHz)	S.A. Reading (dBμV/m)		Height (m)	Polar (H/V)	Frequency (MHz)	S.G. Level (dBm)	Polar (H/V)				Limit (dBm)
Frequency in Low Channel											
1850.2	116.46	342	1.40	H	1850.2	15.5	H	6.2	1.02	20.68	33
1850.2	121.05	80	1.00	V	1850.2	21.4	V	6.2	1.02	26.58	33
Frequency in Middle Channel											
1880.0	114.86	135	1.00	H	1880	13.7	H	6.2	1.03	18.87	33
1880.0	117.64	45	1.10	V	1880	16.9	V	6.2	1.03	22.07	33
Frequency in High Channel											
1909.8	114.03	98	1.90	H	1909.8	14.3	H	6.2	1.03	19.47	33
1909.8	115.99	250	1.00	V	1909.8	18.1	V	6.2	1.03	23.27	33

Plots of Conducted Output Power**Cellular Band (Part 22H)**


Low Channel

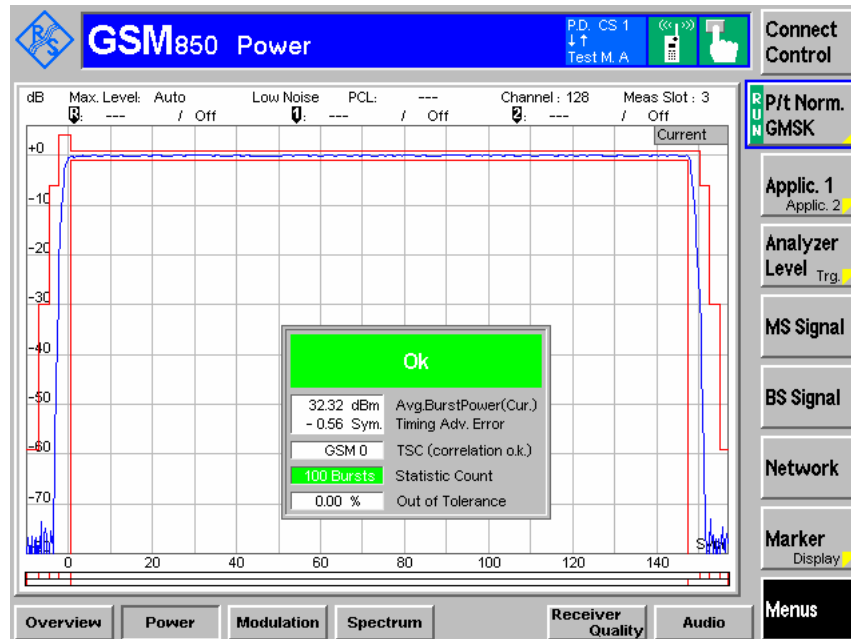

Middle Channel

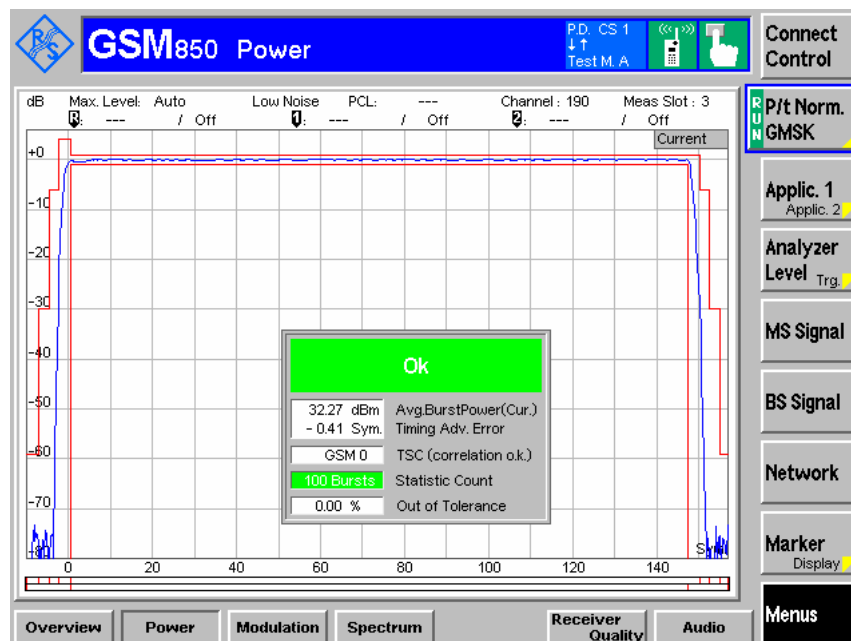


High Channel

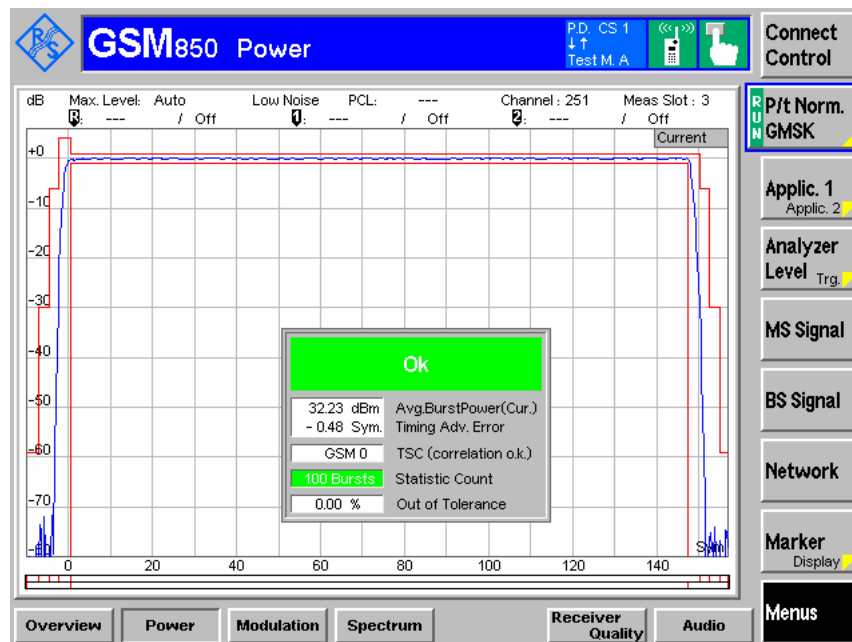


PCS Band (Part 24E)


Low Channel

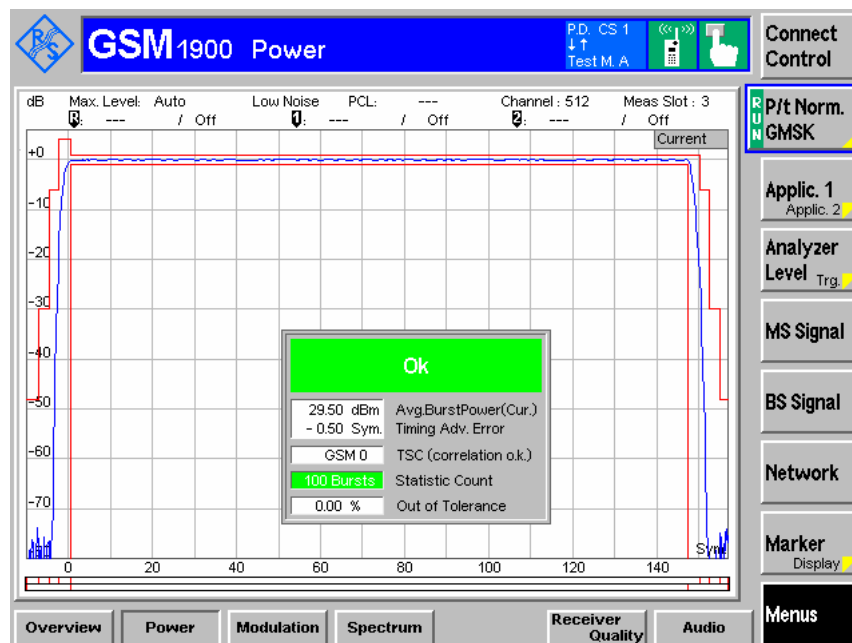

Middle Channel

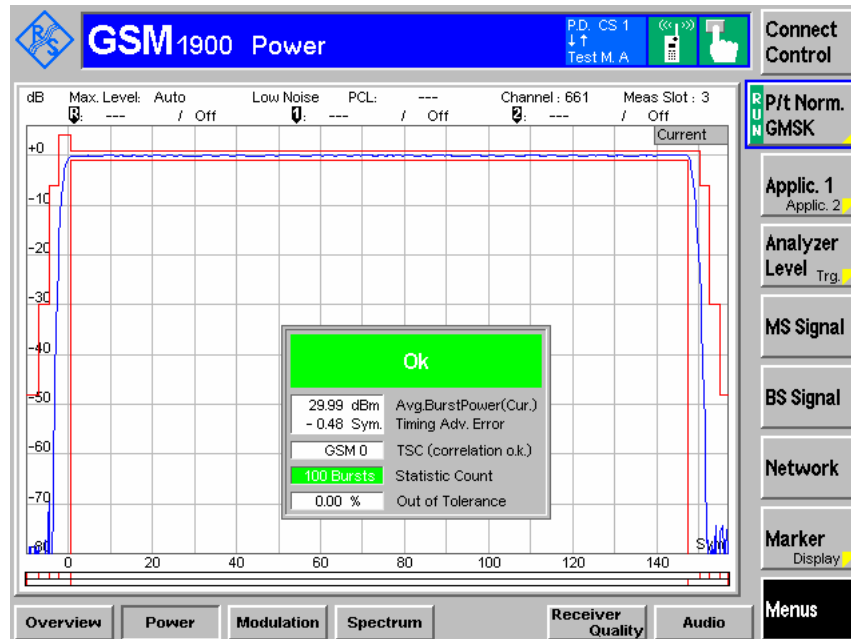

High Channel

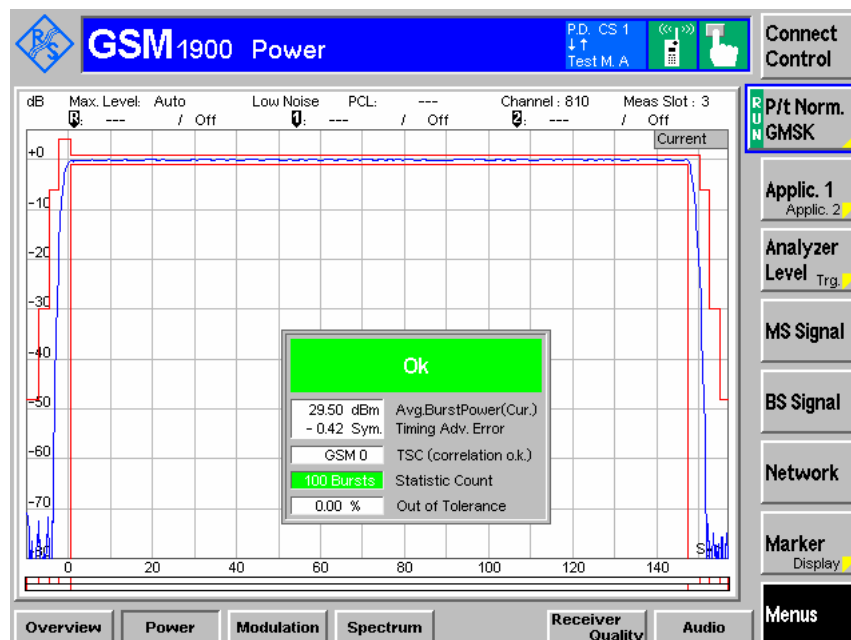

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standards

CFR 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular /PCS) and the 26 dB & 99% bandwidth was recorded.

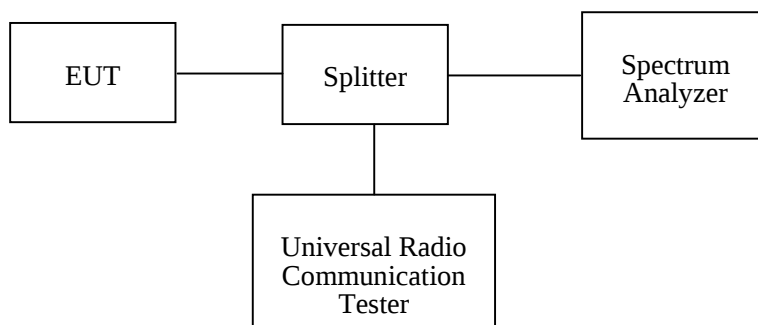

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-07	2010-10-16
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-01.

Cellular Band (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Occupied Bandwidth (kHz)
190	836.6	250.00	340.00


PCS Band (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Occupied Bandwidth (kHz)
661	1880.0	252.00	336.00

Please refer to the following plots.


Cellular Band (Part 22H)

Middle Channel, 99% Occupied Bandwidth

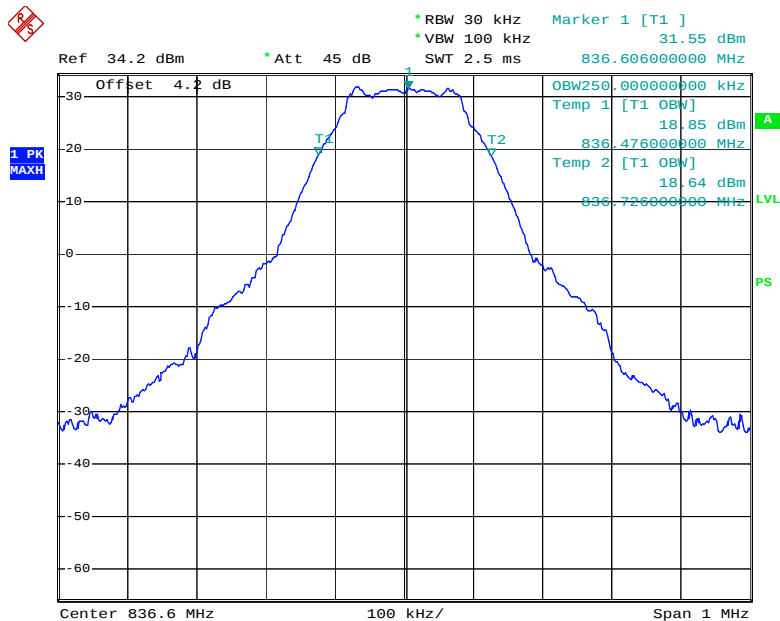

Date: 1.FEB.2010 16:57:59


Middle Channel, 26 dB Occupied Bandwidth

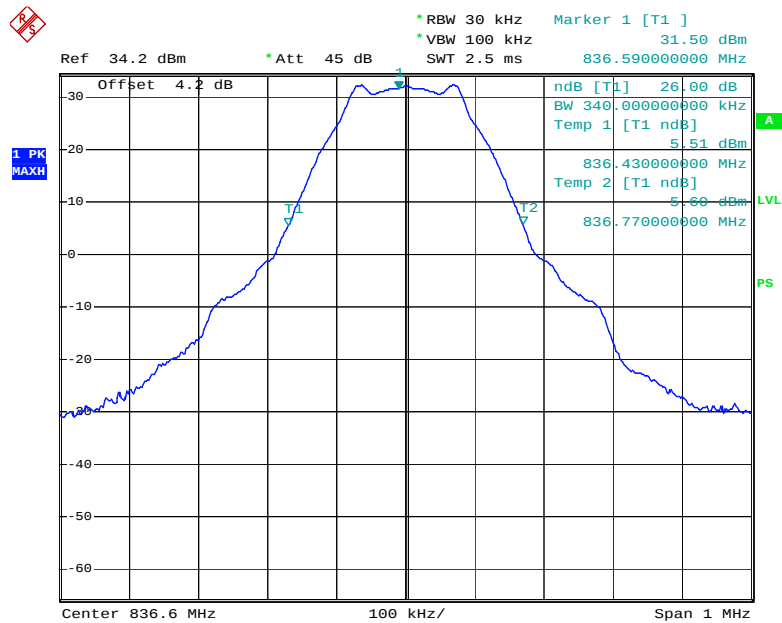

Date: 1.FEB.2010 16:57:16


PCS Band (Part 24E)

Middle Channel, 99% Occupied Bandwidth

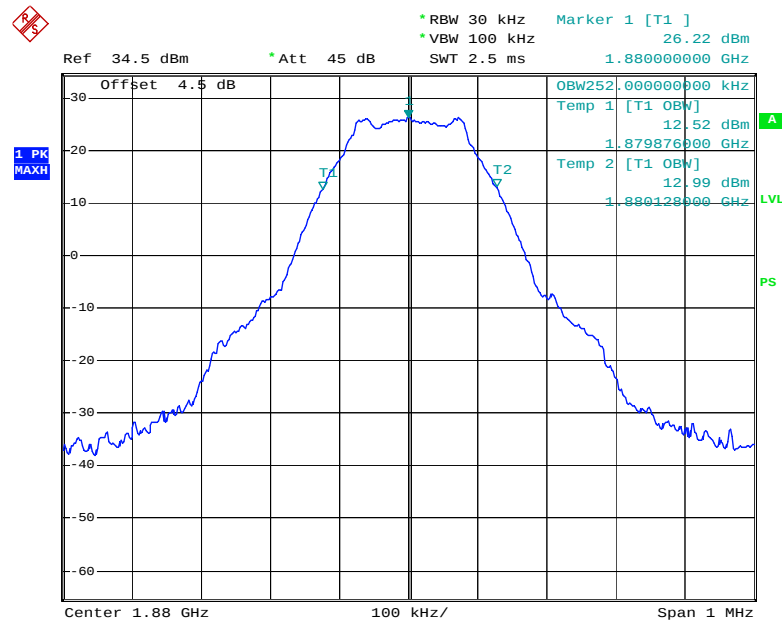

Date: 1.FEB.2010 17:06:38

Middle Channel, 26 dB Occupied Bandwidth

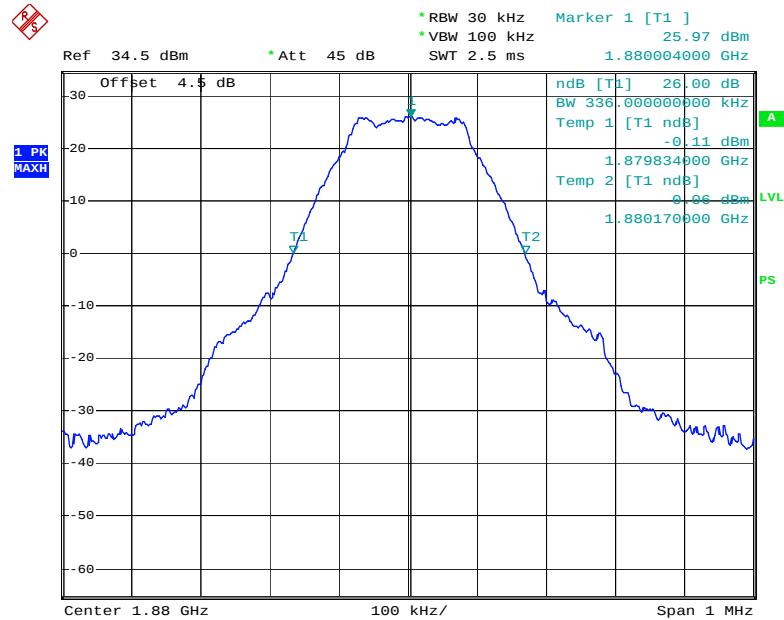

Date: 1.FEB.2010 17:07:07

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

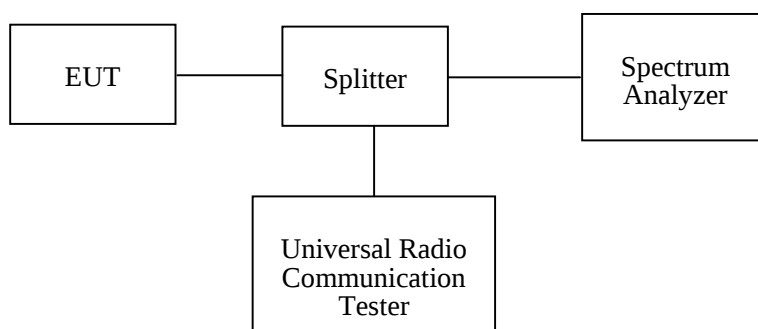

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-07	2010-10-16
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-01 and 2010-02-02.

Please refer to the following plots.


Cellular Band (Part 22H)

30 – 1000 MHz - Middle Channel (GPRS)

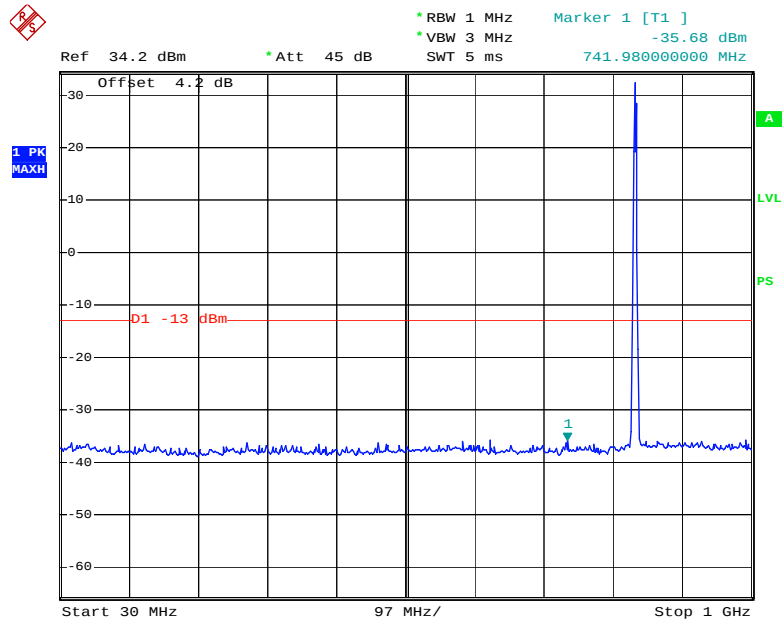

Date: 1.FEB.2010 18:50:40


1 – 10 GHz - Middle Channel (GPRS)

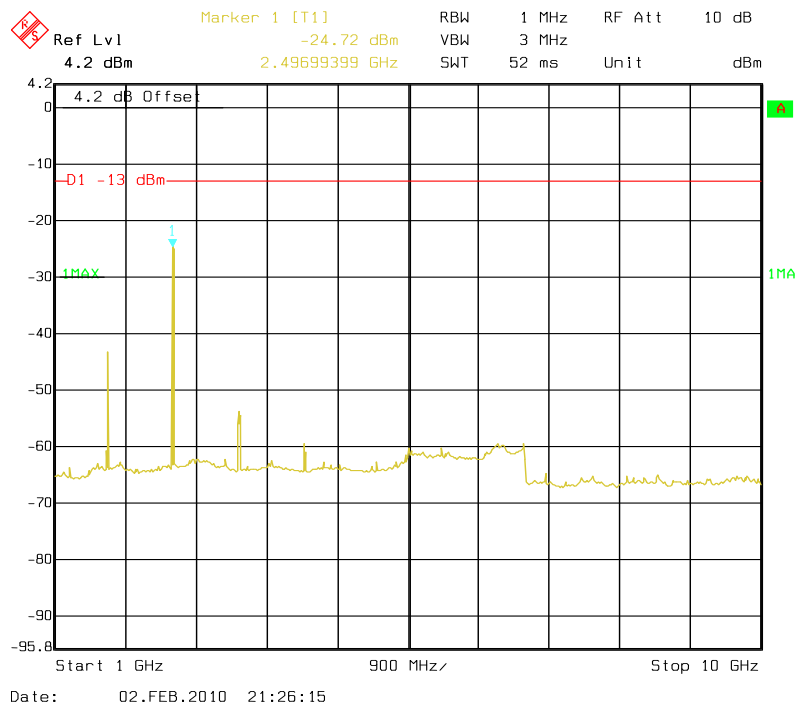

Date: 02.FEB.2010 21:26:15


PCS Band (Part24E)

30 – 1000 MHz - Middle Channel (GPRS)

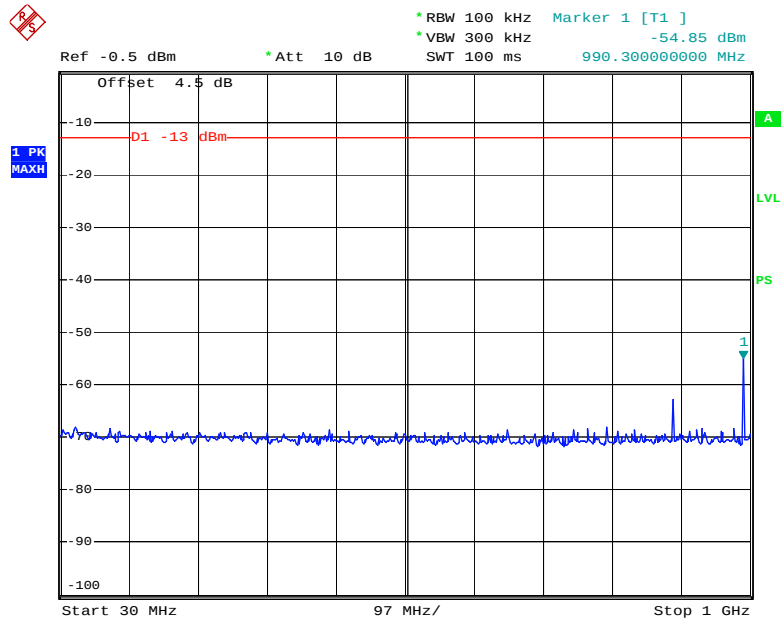


Date: 1.FEB.2010 18:48:11

1 - 2 GHz - Middle Channel (GPRS)

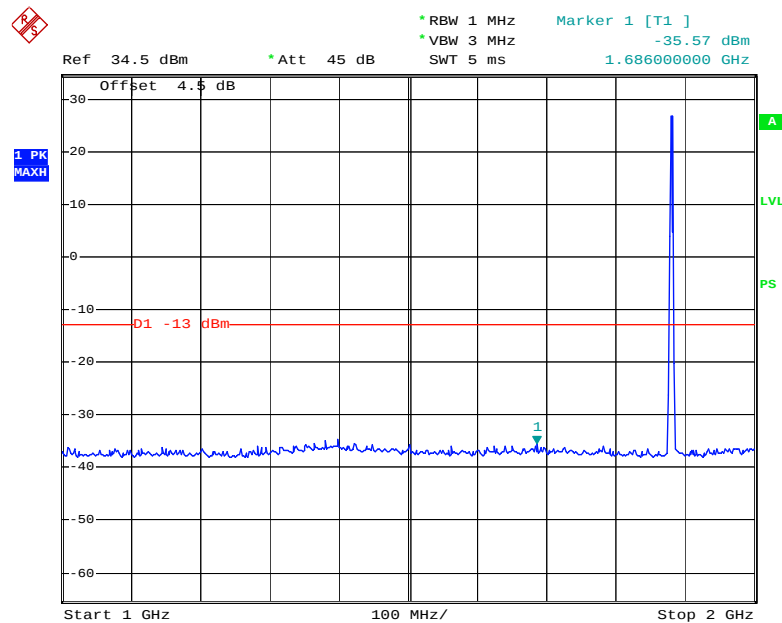

Date: 1.FEB.2010 18:49:05

2 – 20 GHz - Middle Channel (GPRS)

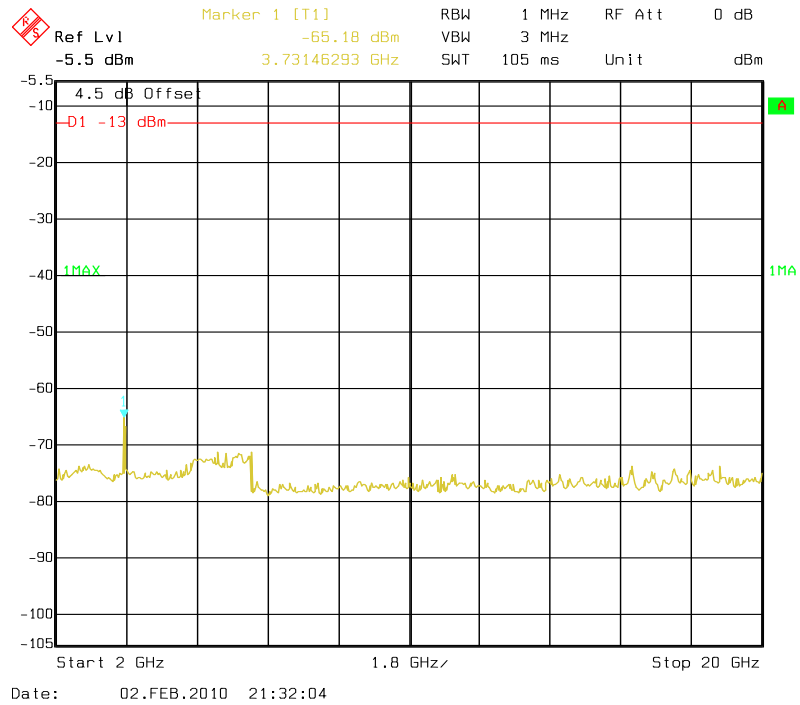

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC §2.1053, §22.917 and §24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg_{10}(\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-09-25	2010-09-25
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-07	2010-10-16
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-08-28	2010-08-27
HP	Preamplifier	8449B	3008A00277	2009-09-12	2010-09-11
HP	Signal Generator	HP8657A	2849U00982	2009-10-16	2010-10-15
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
HP	Synthesized Sweeper	8341B	2624A00116	2009-11-07	2010-11-06
COM POWER	Dipole Antenna	AD-100	041000	2009-09-25	2010-09-25
A.H. System	Horn Antenna	SAS-200/571	135	2009-05-17	2010-05-17
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-03.

Test mode: Transmitting

Below 1 GHz**Cellular Band**

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Middle Channel											
270.51	45.09	150	1.5	H	270.51	-51.9	0	0.6	-52.50	-13	39.50
36.09	41.06	140	1.0	V	36.09	-53.4	0	0.42	-53.82	-13	40.82
566.78	40.98	210	1.0	H	566.78	-56.1	0	0.65	-56.75	-13	43.75
695.54	42.11	242	1.2	V	695.54	-56.3	0	0.74	-57.04	-13	44.04
270.51	37.7	70	1.5	V	270.51	-59.6	0	0.6	-60.20	-13	47.20

PCS Band

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Middle Channel											
270.51	44.04	150	1.5	H	270.51	-52.9	0	0.6	-53.5	-13	40.50
36.25	39.28	242	1.2	V	36.25	-55.1	0	0.42	-55.52	-13	42.52
695.54	41.46	70	1.5	V	695.54	-56.7	0	0.74	-57.44	-13	44.44
695.54	39.94	210	1	H	695.54	-57.7	0	0.74	-58.44	-13	45.44
33.79	34.42	260	1.5	H	33.79	-59.8	0	0.42	-60.22	-13	47.22

Above 1 GHz**Cellular Band**

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Middle Channel											
1673.2	59.06	220	1.0	V	1673.2	-41.2	6.2	0.94	-35.94	-13	22.94
1673.2	55.34	100	1.4	H	1673.2	-44.8	6.2	0.94	-39.54	-13	26.54
2509.8	46.38	130	1.5	V	2509.8	-55.4	7.3	1.19	-49.29	-13	36.29
2509.8	46.09	210	1.8	H	2509.8	-56.2	7.3	1.19	-50.09	-13	37.09
3346.6	42.36	150	1.4	V	3346.6	-61.3	6.7	1.38	-55.98	-13	42.98
3346.6	41.12	130	1.6	H	3346.6	-62.8	6.7	1.38	-57.48	-13	44.48

PCS Band

Indicated		Table Angle Degree	Test Antenna		Substituted				Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	Frequency (MHz)	Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Middle Channel											
7520	42.26	110	1.5	V	7520	-57.7	7.6	2.09	-52.19	-13	39.19
7520	41.35	180	1.5	H	7520	-58.6	7.6	2.09	-53.09	-13	40.09
5640	42.05	80	1.5	V	5640	-59.9	8.3	1.76	-53.36	-13	40.36
3760	44.11	200	1.0	V	3760	-59.4	6.9	1.47	-53.97	-13	40.97
5640	41.41	170	1.6	H	5640	-60.8	8.3	1.76	-54.26	-13	41.26
3760	43.53	190	2	H	3760	-59.8	6.9	1.47	-54.37	-13	41.37

FCC §22.917(a) & §24.238(a) - BAND EDGES

Applicable Standards


According to FCC §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 3 kHz.

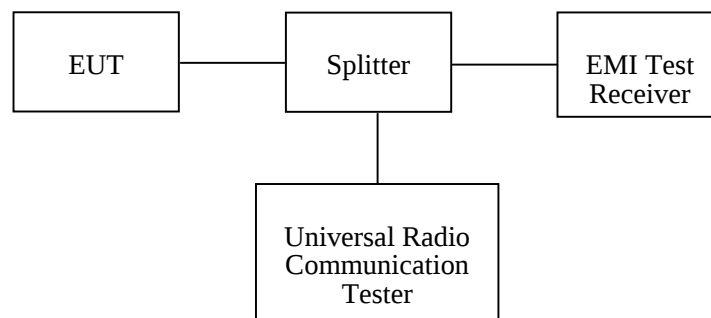

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-07	2010-11-06
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-01.

Please refer to the following tables and plots.


Cellular Band

Frequency (MHz)	Emission (dBm)	Limit (dBm)
824	-14.90	-13
849	-16.16	-13

PCS Band


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1850	-17.83	-13
1910	-20.49	-13

Cellular Band, Left Channel (GPRS)

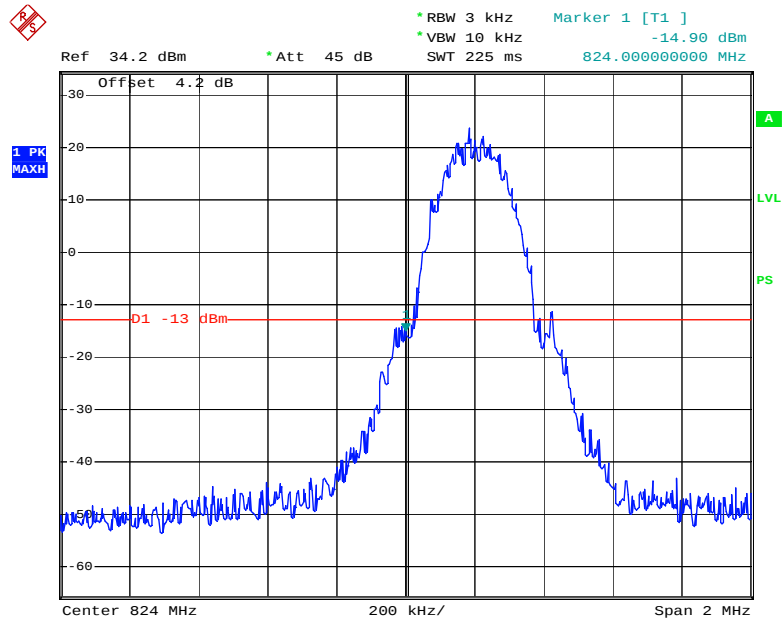


Date: 1.FEB.2010 16:59:35

Cellular Band, Right Channel (GPRS)

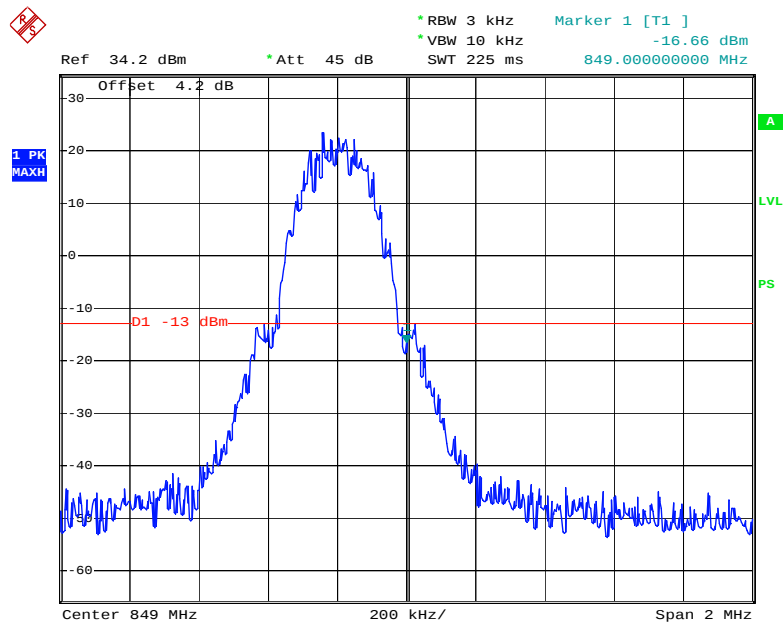


Date: 1.FEB.2010 17:01:29

PCS Band, Left Channel (GPRS)

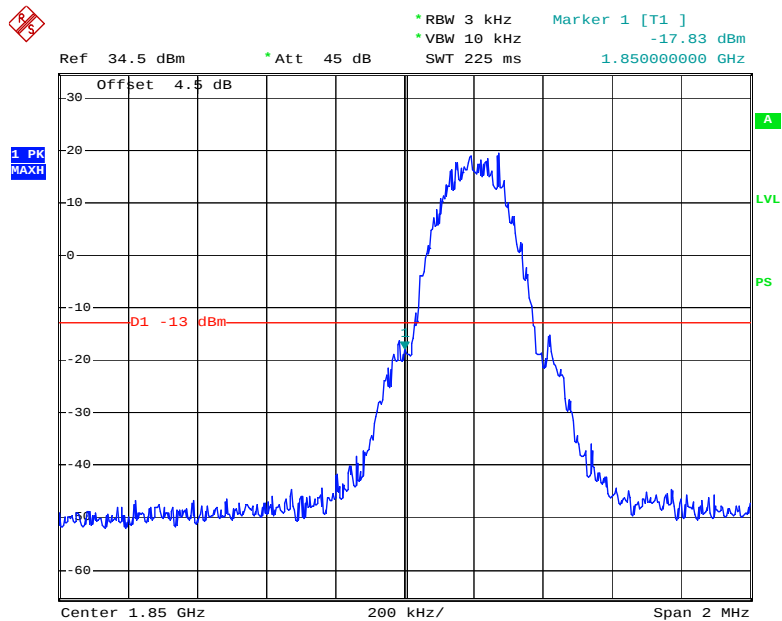

Date: 1.FEB.2010 17:04:35

PCS Band, Right Channel (GPRS)

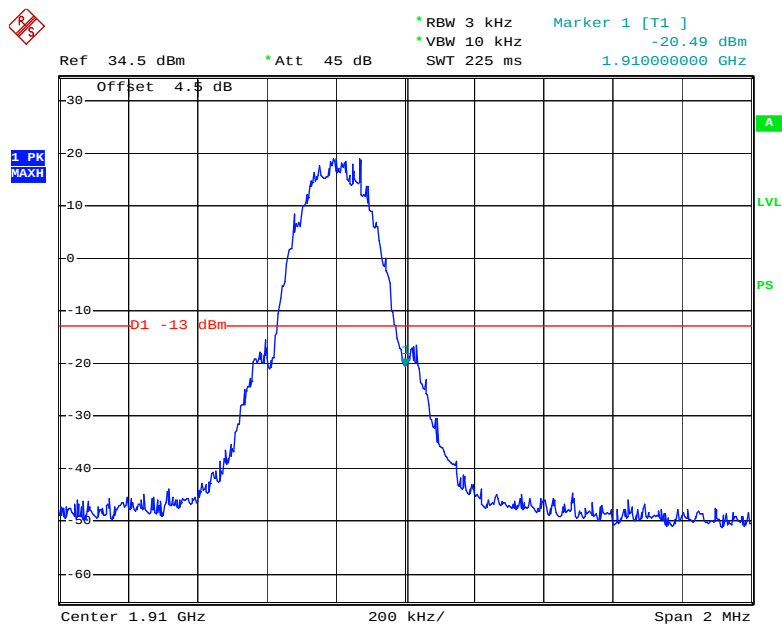

Date: 1.FEB.2010 17:05:33

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055 (a), §2.1055 (d), §22.355 and §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

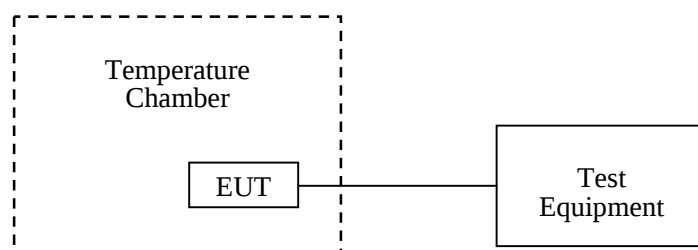

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2009-05-09	2010-05-09
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-05-09	2010-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Vicent Kang on 2010-02-01.

Cellular Band:

Middle Channel, fo = 836.6 MHz				
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.70	-6	-0.0072	2.5
	3.50	-8	-0.0096	2.5
-25	3.70	-8	-0.0096	2.5
	3.50	-4	-0.0048	2.5
-15	3.70	-6	-0.0072	2.5
	3.50	-4	-0.0048	2.5
-5	3.70	-2	-0.0024	2.5
	3.50	-3	-0.0036	2.5
5	3.70	0	0.0000	2.5
	3.50	2	0.0024	2.5
15	3.70	6	0.0072	2.5
	3.50	9	0.0108	2.5
25	3.70	13	0.0155	2.5
	3.50	11	0.0131	2.5
35	3.70	-20	-0.0239	2.5
	3.50	-12	-0.0143	2.5
45	3.70	-17	-0.0203	2.5
	3.50	-19	-0.0227	2.5
55	3.70	-22	-0.0263	2.5
	3.50	-21	-0.0251	2.5

PCS Band:

Middle Channel, fo = 1880.0 MHz				
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.70	-16	-0.0085	2.5
	3.50	-18	-0.0096	2.5
-25	3.70	-18	-0.0096	2.5
	3.50	-14	-0.0074	2.5
-15	3.70	-16	-0.0085	2.5
	3.50	-14	-0.0074	2.5
-5	3.70	-22	-0.0117	2.5
	3.50	-13	-0.0069	2.5
5	3.70	-11	-0.0059	2.5
	3.50	-20	-0.0106	2.5
15	3.70	-14	-0.0074	2.5
	3.50	-11	-0.0059	2.5
25	3.70	-7	-0.0037	2.5
	3.50	-9	-0.0048	2.5
35	3.70	-20	-0.0106	2.5
	3.50	-12	-0.0064	2.5
45	3.70	-17	-0.0090	2.5
	3.50	-19	-0.0101	2.5
55	3.70	-22	-0.0117	2.5
	3.50	-21	-0.0112	2.5

***** END OF REPORT *****