

# SAR TEST REPORT

**Report No. :** SET2017-09250

**Product :** PPM 360 Meter

**Model No. :** DA118

**Brand Name :** Nielsen

**FCC ID :** IGKDA118

**Applicant :** Nielsen Audio, inc.

**Address :** 7000 Columbia Gateway Drive, Suite 200, Columbia  
Maryland, USA 21046.

**Issued by :** CCIC-SET

**Lab Location :** Electronic Testing Building, Shahe Road, Xili, Nanshan  
District, Shenzhen, 518055, P. R. China

**Tel :** +86 755 26627338      **Fax :** +86 755 26627238

**Mail :** manager@ccic-set.com      **Website :** <http://www.ccic-set.com>



This test report consists of 92 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Test Report


**Product.....:** PPM 360 Meter  
**Model No. ....:** DA118  
**Brand Name.....:** Nielsen  
**FCC ID.....:** IGKDA118  
**Applicant.....:** Nielsen Audio, inc.  
**Applicant Address.....:** 7000 Columbia Gateway Drive, Suite 200, Columbia Maryland, USA 21046.

**Manufacturer.....:** Nielsen Audio, inc.  
**Manufacturer Address.....:** 7000 Columbia Gateway Drive, Suite 200, Columbia Maryland, USA 21046.

**Test Standards.....:** **47CFR § 2.1093**-Radiofrequency Radiation Exposure Evaluation: Portable Devices;  
**ANSI C95.1-2005:**Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-2005)

**Test Result.....:** Pass

**Tested by .....**  2017-06-23  
 Chun Mei, Test Engineer

**Reviewed by.....:**  2017-06-23  
 Shuangwen Zhang, Senior Engineer

**Approved by.....:**  2017-06-23  
 Wu Li'an , Manager

## Contents

- 1. GENERAL CONDITIONS**
- 2. ADMINISTRATIVE DATA**
  - 2.1. Identification of the Responsible Testing Laboratory
  - 2.2. Identification of the Responsible Testing Location(s)
  - 2.3. Organization Item
  - 2.4. Identification of Applicant
  - 2.5. Identification of Manufacture
- 3. GENERAL INFORMATION**
  - 3.1. Description Of Equipment Under Test (EUT)
- 4. SPECIFIC ABSORPTION RATE(SAR)**
  - 4.1. Introduction
  - 4.2. SAR Definition
  - 4.3. Phantoms
  - 4.4. Device Holder
  - 4.5. Probe Specification
- 5. OPERATIONAL CONDITIONS DURING TEST**
  - 5.1. Schematic Test Configuration
  - 5.2. SAR Measurement System
- 6. CHARACTERISTICS OF THE TEST**
  - 6.1. Applicable Limit Regulations
  - 6.2. Applicable Measurement Standards
- 7. LABORATORY ENVIRONMENT**
- 8. CONDUCTED RF OUTPUT POWER**
- 9. SAR DATA SUMMARY**
  - 9.1. General Note
  - 9.2. Scaling Factor calculation
- 10. TEST RESULTS**
  - 10.1. Standalone body Worn SAR DATA
  - 10.2. System Performance Check Data
  - 10.3. Highest SAR Plots
- 11. MEASUREMENT UNCERTAINTY**
- 12. MAIN TEST INSTRUMENTS**

**This Test Report consists of the following Annexes:**

**Annex A: Test Layout**

**Annex B: Sample Photographs**

**Annex C: Calibration Certificate of Probe and Dipoles**

## **1. GENERAL CONDITIONS**

**1.1 This report only refers to the item that has undergone the test.**

**1.2 This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.**

**1.3 This document is only valid if complete; no partial reproduction can be made without written approval of CCIC-SET.**

**1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CCIC-SET and the Accreditation Bodies, if it applies.**

## 2. Administrative Data

### 2.1. Identification of the Responsible Testing Laboratory

**Company Name:** CCIC-SET

**Department:** EMC & RF Department

**Address:** Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road,  
Nanshan District, Shenzhen, Guangdong, China

**Telephone:** +86-755-26629676

**Fax:** +86-755-26627238

**Responsible Test Lab  
Managers:** Mr. Wu Li'an

### 2.2. Identification of the Responsible Testing Location(s)

**Company Name:** CCIC-SET

**Address:** Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road,  
Nanshan District, Shenzhen, Guangdong, China

### 2.3. Organization Item

**CCIC-SET Report No.:** SET2017-09250

**CCIC-SET Project Leader:** Mr. Chun Mei,

**CCIC-SET Responsible  
for accreditation scope:** Mr. Wu Li'an

**Start of Testing:** 2017-06-20

**End of Testing:** 2017-06-23

### 2.4. Identification of Applicant

**Company Name:** Nielsen Audio, inc.

**Address:** 7000 Columbia Gateway Drive, Suite 200, Columbia  
Maryland, USA 21046.

### 2.5. Identification of Manufacture

**Company Name:** Nielsen Audio, inc.

**Address:** 7000 Columbia Gateway Drive, Suite 200, Columbia  
Maryland, USA 21046.

**Notes:** This data is based on the information by the applicant.

### 3. General Information

#### 3.1. Description Of Equipment Under Test (EUT)

|                                                 |                                  |                                                                                                                                                                                     |
|-------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Sample Name:</b>                             | PPM 360 Meter                    |                                                                                                                                                                                     |
| <b>Type Name:</b>                               | DA118                            |                                                                                                                                                                                     |
| <b>Brand Name:</b>                              | Nielsen                          |                                                                                                                                                                                     |
| <b>Mobile phone capability</b>                  | Class B                          |                                                                                                                                                                                     |
| <b>Dual Transfer Mode (DTM) per 3GPP 51.010</b> | Not supported                    |                                                                                                                                                                                     |
| <b>General description:</b>                     | Support Band and Frequency Range | GSM 850MHz: 824.2MHz -848.8MHz<br>GSM 1900MHz: 1850.2MHz-1909.8MHz<br>WCDMA/HSPA Band V: 826.4MHz-846.6MHz<br>WCDMA/HSPA Band II: 1852.4MHz-1907.6MHz<br>Bluetooth: 2402MHz-2480MHz |
|                                                 | Development Stage                | Identical Prototype                                                                                                                                                                 |
|                                                 | Accessories                      | Power Supply, Belt-clip.                                                                                                                                                            |
|                                                 | Battery type                     | Lithium-ion Battery                                                                                                                                                                 |
|                                                 | Battery specification            | 980mAh 3.7V                                                                                                                                                                         |
|                                                 | Antenna type                     | Internal                                                                                                                                                                            |
|                                                 | Modulation mode                  | GSM: GMSK, 8PSK; WCDMA: QPSK;<br>Bluetooth: GFSK/ $\pi/4$ -DQPSK/ 8-DPSK                                                                                                            |
| <b>MAX. SAR Value:</b>                          | Body: 0.964W/Kg (Back)           |                                                                                                                                                                                     |

#### NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- This device supports GPRS/EGPRS operation up to class12.

## 4 Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

### 4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

### 4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

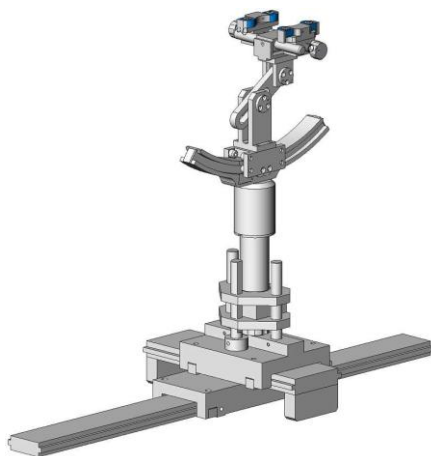

Device holder

## 4.5 Probe Specification




|               |                                                                                                                                                                                    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration   | ISO/IEC 17025 calibration service available.                                                                                                                                       |
| Frequency     | 700 MHz to 3 GHz;<br>Linearity: $\pm 0.5$ dB (700 MHz to 3 GHz)                                                                                                                    |
| Directivity   | $\pm 0.25$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                               |
| Dynamic Range | $1.5 \mu\text{W/g}$ to $100 \text{ mW/g}$ ;<br>Linearity: $\pm 0.5$ dB                                                                                                             |
| Dimensions    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 5 mm (Body: 8 mm)<br>Distance from probe tip to dipole centers: $<2.7$ mm                                                     |
| Application   | General dosimetry up to 3 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of mobile phones                                                                          |
| Compatibility | COMOSAR                                                                                                                                                                            |

### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

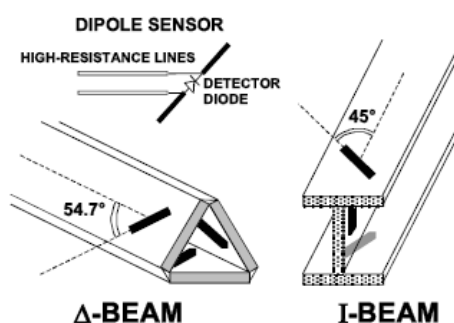

## **5. OPERATIONAL CONDITIONS DURING TEST**

### **5.1 Schematic Test Configuration**

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) was allocated to 128, 190 and 251 respectively in the case of GSM 850MHz, or to 512, 661 and 810 respectively in the case of PCS 1900MHz, or to 4132, 4183 and 4233 respectively in the case of WCDMA 850MHz, or to 9262, 9400 and 9538 respectively in the case of WCDMA 1900 MHz. The EUT was commanded to operate at maximum transmitting power.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point should be lower than the output power level of the handset by at least 35 dB

### **5.2 SAR Measurement System**

The SAR measurement system being used is the SATIMO system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

#### **5.2.1 Tissue Dielectric Parameters for Head and Body Phantoms**

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

## Recommended Dielectric Performance of Tissue

| Ingredients<br>(% by weight ) | Frequency (MHz) |       |       |      |       |       |       |      |      |      |
|-------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
|                               | 450             |       | 835   |      | 915   |       | 1900  |      | 2450 |      |
| Tissue Type                   | Head            | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body |
| Water                         | 38.56           | 51.16 | 41.45 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 |
| Salt (Nacl)                   | 3.95            | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 |
| Sugar                         | 56.32           | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  |
| HEC                           | 0.98            | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  |
| Bactericide                   | 0.19            | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  |
| Triton x-100                  | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  |
| DGBE                          | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 |
| Dielectric Constant           | 43.42           | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.8 | 52.5 |
| Conductivity (s/m)            | 0.85            | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.88 | 1.78 |

## Recommended Tissue Dielectric Parameters

| Frequency (MHz) | Head Tissue  |               | Body Tissue  |               |
|-----------------|--------------|---------------|--------------|---------------|
|                 | $\epsilon_r$ | $\sigma(S/m)$ | $\epsilon_r$ | $\sigma(S/m)$ |
| 150             | 52.3         | 0.76          | 61.9         | 0.80          |
| 300             | 45.3         | 0.87          | 58.2         | 0.92          |
| 450             | 43.5         | 0.87          | 56.7         | 0.94          |
| 835             | 41.5         | 0.90          | 55.2         | 0.97          |
| 900             | 41.5         | 0.97          | 55.0         | 1.05          |
| 915             | 41.5         | 0.98          | 55.0         | 1.06          |
| 1450            | 40.5         | 1.20          | 54.0         | 1.30          |
| 1610            | 40.3         | 1.29          | 53.8         | 1.40          |
| 1800-2000       | 40.0         | 1.40          | 53.3         | 1.52          |
| 2450            | 39.2         | 1.80          | 52.7         | 1.95          |
| 3000            | 38.5         | 2.40          | 52.0         | 2.73          |
| 5800            | 35.3         | 5.27          | 48.2         | 6.00          |

### 5.2.2 Simulant liquids

For measurements against the phantom head, the “cheek” and “tilt” position on both the left hand and the right hand sides of the phantom. For body-worn measurements, the EUT was tested against flat phantom representing the user body. The EUT was put on in the belt holder. Simulant liquids that are used for testing at frequencies of GSM 850MHz, GSM 1900MHz, WCDMA 850MHz, WCDMA 1900MHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Dielectric Performance of Body Tissue Simulating Liquid

| Temperature: 23.2°C; Humidity: 64%; |           |                         |                             |
|-------------------------------------|-----------|-------------------------|-----------------------------|
| /                                   | Frequency | Permittivity $\epsilon$ | Conductivity $\sigma$ (S/m) |
| Target value                        | 835MHz    | $55.2 \pm 5\%$          | $0.97 \pm 5\%$              |
| Validation value(2017-06-19)        | 835MHz    | 55.23                   | 0.98                        |
| Target value                        | 1900MHz   | $53.3 \pm 5\%$          | $1.52 \pm 5\%$              |
| Validation value(2017-06-20)        | 1900MHz   | 53.26                   | 1.50                        |

Dielectric Performance of Tissue Simulating Liquid at test channel

| Band       | Channel | Frequency (MHz) | Permittivity $\epsilon$ |       | Conductivity $\sigma$ (S/m) |      |
|------------|---------|-----------------|-------------------------|-------|-----------------------------|------|
|            |         |                 | Head                    | Body  | Head                        | Body |
| GSM 850    | 128     | 824.2           | /                       | 55.51 | /                           | 0.97 |
|            | 189     | 836.4           | /                       | 55.65 | /                           | 0.98 |
|            | 251     | 848.8           | /                       | 55.45 | /                           | 0.98 |
| GSM 1900   | 512     | 1850.2          | /                       | 53.24 | /                           | 1.48 |
|            | 661     | 1880.0          | /                       | 53.27 | /                           | 1.51 |
|            | 810     | 1909.8          | /                       | 53.21 | /                           | 1.46 |
| WCDMA 850  | 4132    | 826.4           | /                       | 55.51 | /                           | 0.97 |
|            | 4183    | 836.6           | /                       | 55.65 | /                           | 0.98 |
|            | 4233    | 846.6           | /                       | 55.45 | /                           | 0.98 |
| WCDMA 1900 | 9262    | 1852.4          | /                       | 53.24 | /                           | 1.48 |
|            | 9400    | 1880.0          | /                       | 53.27 | /                           | 1.51 |
|            | 9538    | 1907.6          | /                       | 53.21 | /                           | 1.46 |


### 5.2.3 Equipments and results of validation testing

Important equipments :

| Equipment description   | Manufacturer/Model                                                                                                                                            | Identification No.   |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| SAR Probe               | SATIMO                                                                                                                                                        | SN_0913_EP169        |
| Phantom                 | SATIMO                                                                                                                                                        | SN_0913_SAM97        |
| Liquid                  | SATIMO                                                                                                                                                        | -                    |
| Dipole                  | SATIMO-SID835                                                                                                                                                 | SN_0913_DIP0G835-217 |
| Dipole                  | SATIMO-SID18ip1e1010.08r<br>k Analyzere the 2450 MHz<br>bandoperation mode.<br>following table, for more<br>information, please refer the<br>RF test report00 | SN_0913_DIP1G800-216 |
| Dipole                  | SATIMO-SID1900                                                                                                                                                | SN_0913_DIP1G900-218 |
| Dipole                  | SATIMO-SID2450                                                                                                                                                | SN_0913_DIP2G450-220 |
| Vector Network Analyzer | Rohde & Schwarz - ZVB8                                                                                                                                        | 1145.1010.08         |
| Amplifier               | Nucletudes                                                                                                                                                    | 143060               |
| Power Meter             | Rohde & Schwarz - NRVS                                                                                                                                        | 1020.1809.02         |
| Multimeter              | Keithley - 2000                                                                                                                                               | 4014020              |

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the draft IEEE standard P1528. Setup according to the setup diagram below :

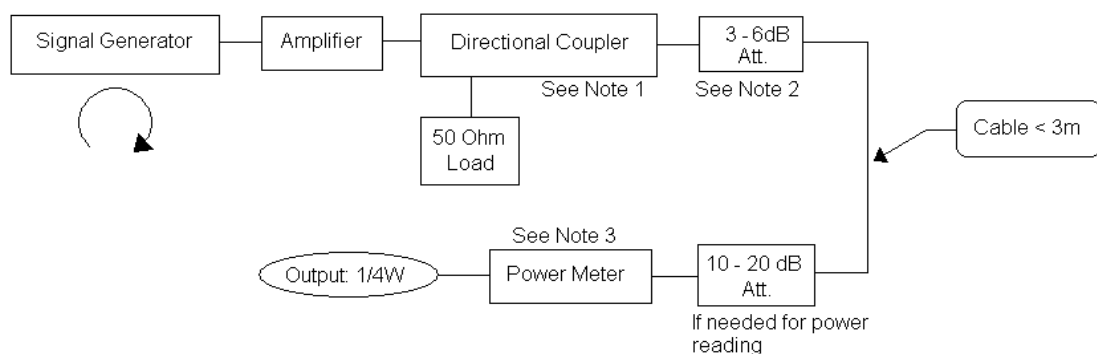

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528-2013 and the place of the antenna).

Body Liquid Verification Results (1g)


| Frequency           | Duty cycle | Target value<br>(W/kg) | Test value (W/kg) |       |
|---------------------|------------|------------------------|-------------------|-------|
|                     |            |                        | 10 mW             | 1W    |
| 835MHz(2017-06-19)  | 1:1        | $10.31 \pm 10\%$       | 0.1031            | 10.31 |
| 1900MHz(2017-06-20) | 1:1        | $40.81 \pm 10\%$       | 0.4074            | 40.74 |

Note: Target value was referring to the required value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.

## 5.2.4 SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

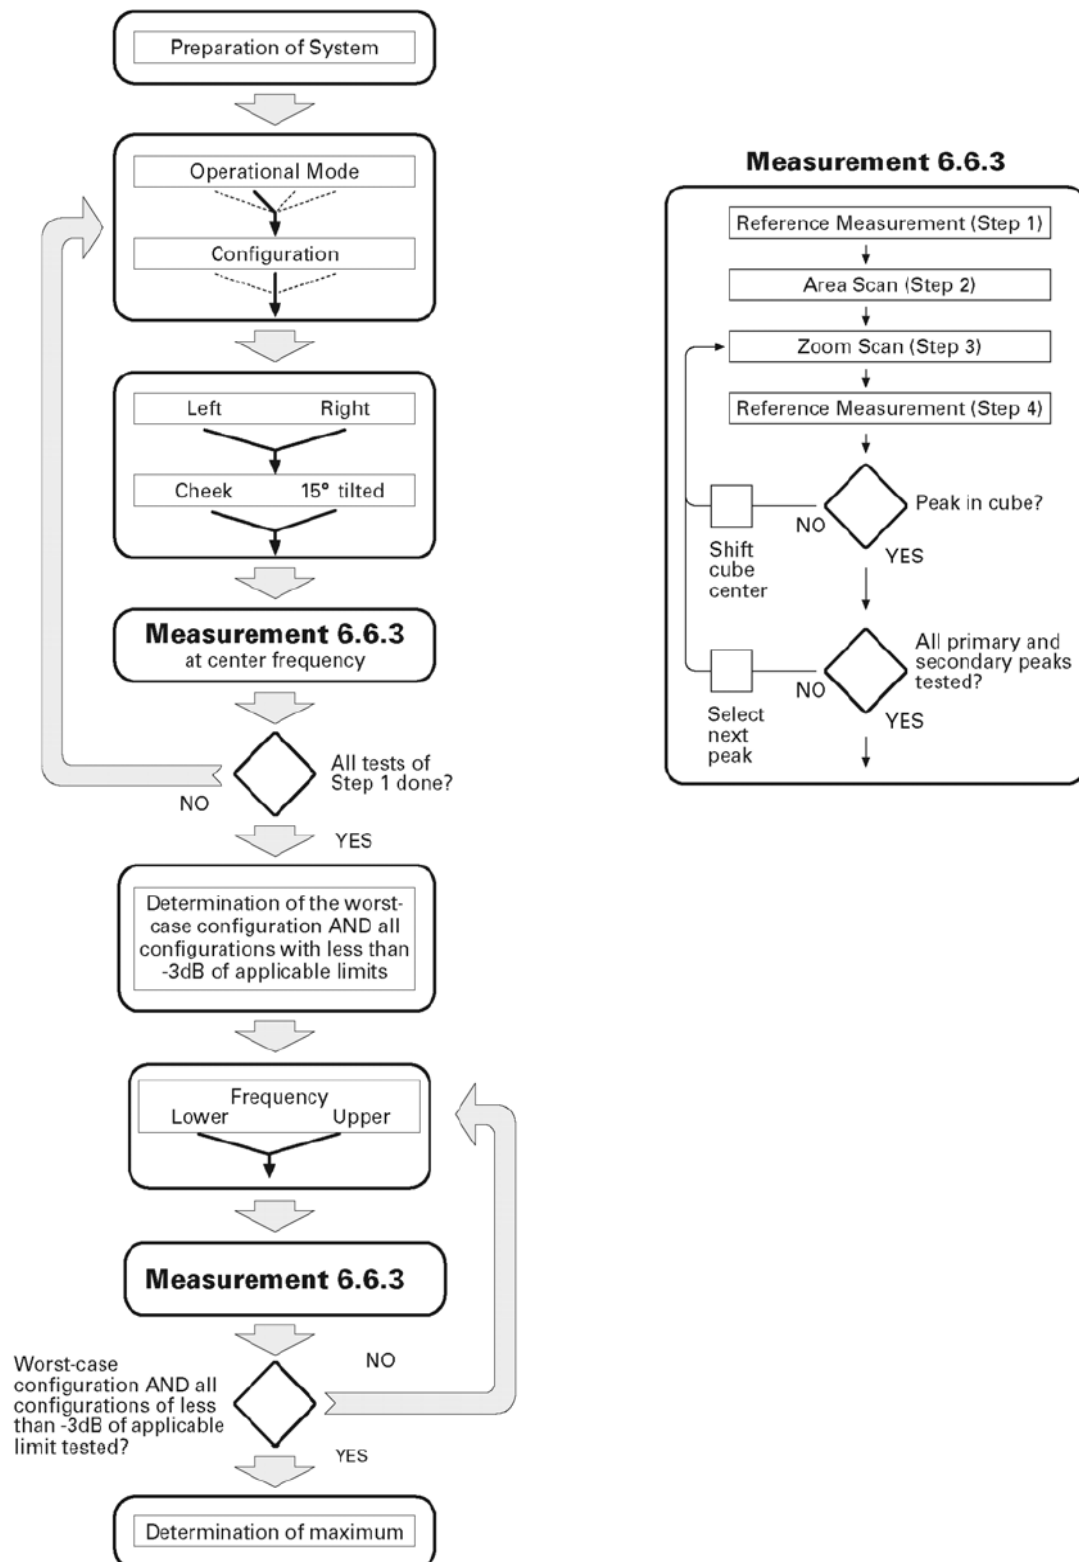

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 2mm from the surface of the

phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.


Above is the scanning procedure flow chart and table from the IEEE1528-2013 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

For SAR measurement, the liquid deep max more than 15cm as below photo

| Head Liquid                                                                        | Body Liquid                                                                         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |

### 5.2.5 Transmitting antenna information

There are four antennas (GSM/WCDMA antenna, WLAN antenna, BT antenna and GPS antenna) inside the EUT, the former three antennas are the transmitting source, and they are a type of PIFA antenna, the following picture shows the position of the antennas.

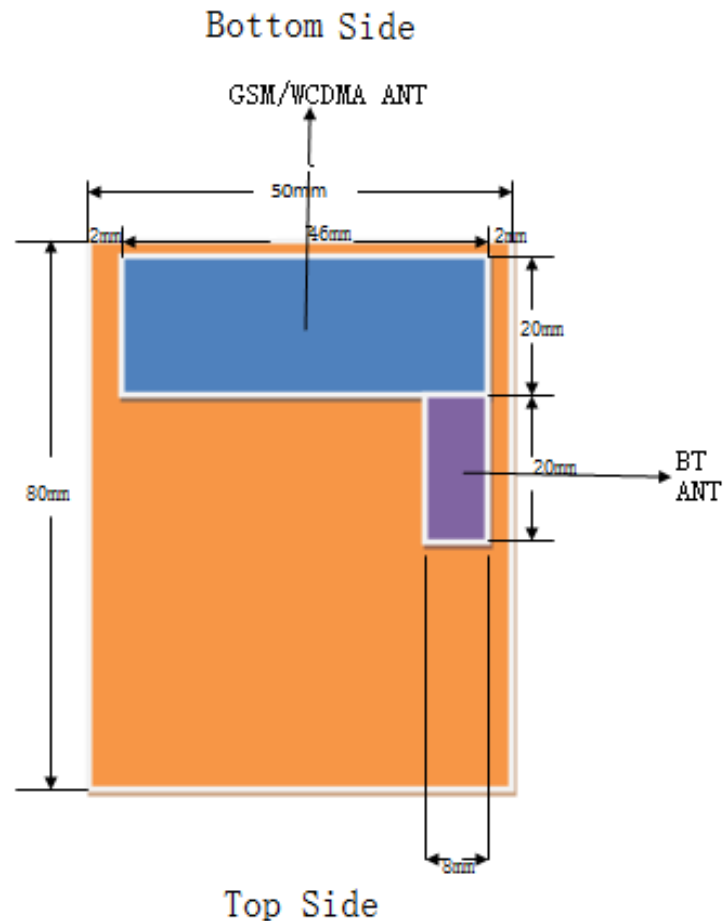

Note: The back of this device has a belt-clip, and the thickness of the clip is greater than 5mm. So the SAR close test not need to do.



## 6 CHARACTERISTICS OF THE TEST

### 6.1 Applicable Limit Regulations

**47CFR § 2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;

**RSS-102-2015:** Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands);

**ANSI C95.1–2005:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 6.2 Applicable Measurement Standards

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this is in accordance with the following standards:

FCC 47 CFR Part2 (2.1093)

ANSI/IEEE C95.1-2005

IEEE 1528-2013

FCC KDB 865664 DO1 SAR Measurement 100MHz to 6GHz v01r04

FCC KDB 865664 DO2 Exposure Reporting v01r02

FCC KDB 447498 DO1 General RF Exposure Guidance v06

FCC KDB 648474 DO4 Handset SAR v01r04

FCC 941225 D01 3G SAR Procedures v03r01

## 7 LABORATORY ENVIRONMENTS

### The Ambient Conditions during SAR Test

|                                                                                                                                                                                                 |                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| Temperature                                                                                                                                                                                     | Min. = 20 ° C, Max. = 30 ° C |
| Atmospheric pressure                                                                                                                                                                            | Min.=86 kPa, Max.=106 kPa    |
| Relative humidity                                                                                                                                                                               | Min. = 30%, Max. = 70%       |
| Ground system resistance                                                                                                                                                                        | < 0.5 $\Omega$               |
| Ambient noise is checked and found very low and in compliance with requirement of standards.<br>Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                              |

## 8. Conducted RF Output Power

| Band   |                                | Burst Average Power<br>(dBm) |       |       | Frame-Average Power<br>(dBm) |       |       |
|--------|--------------------------------|------------------------------|-------|-------|------------------------------|-------|-------|
| GSM850 | TX Channel                     | 128                          | 190   | 251   | 128                          | 190   | 251   |
|        | Frequency(MHz)                 | 824.2                        | 836.4 | 848.8 | 824.2                        | 836.4 | 848.8 |
|        | GPRS(GMSK, 1 Tx slot)<br>CS1   | 32.73                        | 32.76 | 32.64 | 23.73                        | 23.75 | 23.64 |
|        | GPRS(GMSK, 2 Tx slot)<br>CS1   | 32.65                        | 32.58 | 32.50 | 26.65                        | 26.58 | 26.50 |
|        | GPRS(GMSK, 3 Tx slot)<br>CS1   | 32.48                        | 32.47 | 32.41 | 28.48                        | 28.47 | 28.41 |
|        | GPRS(GMSK, 4 Tx slot)<br>CS1   | 31.37                        | 31.49 | 31.33 | 28.37                        | 28.49 | 28.33 |
|        | EGPRS(GMSK, 1 Tx slot)<br>MCS1 | 32.65                        | 32.68 | 32.62 | 23.65                        | 23.68 | 23.62 |
|        | EGPRS(GMSK, 2 Tx slot)<br>MCS1 | 32.48                        | 32.51 | 32.44 | 26.48                        | 26.51 | 26.44 |
|        | EGPRS(GMSK, 3 Tx slot)<br>MCS1 | 32.31                        | 32.35 | 32.29 | 28.31                        | 28.35 | 28.29 |
|        | EGPRS(GMSK, 4 Tx slot)<br>MCS1 | 31.13                        | 31.26 | 31.11 | 28.13                        | 28.26 | 28.11 |
|        | EGPRS(8PSK, 1 Tx slot)<br>MCS5 | 27.57                        | 27.63 | 27.41 | 18.57                        | 18.63 | 18.41 |
|        | EGPRS(8PSK, 2 Tx slot)<br>MCS5 | 26.90                        | 27.06 | 26.86 | 20.90                        | 21.06 | 20.86 |
|        | EGPRS(8PSK, 3 Tx slot)<br>MCS5 | 26.82                        | 26.94 | 26.80 | 22.82                        | 22.94 | 22.80 |
|        | EGPRS(8PSK, 4 Tx slot)<br>MCS5 | 26.28                        | 26.34 | 26.24 | 23.28                        | 23.34 | 23.24 |

|         |                                |        |       |        |        |       |        |
|---------|--------------------------------|--------|-------|--------|--------|-------|--------|
| GSM1900 | TX Channel                     | 512    | 661   | 810    | 512    | 661   | 810    |
|         | Frequency(MHz)                 | 1850.2 | 1880  | 1909.8 | 1850.2 | 1880  | 1909.8 |
|         | GPRS(GMSK, 1 Tx slot)<br>CS1   | 29.36  | 29.86 | 29.82  | 20.36  | 20.85 | 20.82  |
|         | GPRS(GMSK, 2 Tx slot)<br>CS1   | 29.33  | 29.81 | 29.77  | 23.33  | 23.81 | 23.77  |
|         | GPRS(GMSK, 3 Tx slot)<br>CS1   | 29.31  | 29.71 | 29.20  | 25.31  | 25.71 | 25.20  |
|         | GPRS(GMSK, 4 Tx slot)<br>CS1   | 28.29  | 28.74 | 28.63  | 25.29  | 25.74 | 25.63  |
|         | EGPRS(GMSK, 1 Tx slot)<br>MCS1 | 29.26  | 29.66 | 29.64  | 20.26  | 20.66 | 20.64  |
|         | EGPRS(GMSK, 2 Tx slot)<br>MCS1 | 29.24  | 29.59 | 29.54  | 23.24  | 23.59 | 23.54  |
|         | EGPRS(GMSK, 3 Tx slot)<br>MCS1 | 29.17  | 29.48 | 29.20  | 25.17  | 25.48 | 25.20  |
|         | EGPRS(GMSK, 4 Tx slot)<br>MCS1 | 28.14  | 28.45 | 28.43  | 25.14  | 25.45 | 25.43  |
|         | EGPRS(8PSK, 1 Tx slot)<br>MCS5 | 25.96  | 26.43 | 27.32  | 16.96  | 17.43 | 18.32  |
|         | EGPRS(8PSK, 2 Tx slot)<br>MCS5 | 25.45  | 25.91 | 26.76  | 19.45  | 19.91 | 20.76  |
|         | EGPRS(8PSK, 3 Tx slot)<br>MCS5 | 25.42  | 25.88 | 26.72  | 21.42  | 21.88 | 22.72  |
|         | EGPRS(8PSK, 4 Tx slot)<br>MCS5 | 24.92  | 25.36 | 26.18  | 21.92  | 22.36 | 23.18  |

| Conducted Power (Unit: dBm) |               |              |        |              |              |       |
|-----------------------------|---------------|--------------|--------|--------------|--------------|-------|
| Band                        | WCDMA Band II |              |        | WCDMA Band V |              |       |
| Channel                     | 9262          | 9400         | 9538   | 4132         | 4183         | 4233  |
| Frequency                   | 1852.4        | 1880         | 1907.6 | 826.4        | 836.6        | 846.6 |
| RMC 12.2Kbps                | 23.53         | <b>23.67</b> | 23.58  | 23.29        | <b>23.75</b> | 23.56 |
| HSDPA Subtest-1             | 23.26         | 23.57        | 23.42  | 23.11        | 23.63        | 23.35 |
| HSDPA Subtest-2             | 23.18         | 23.58        | 23.40  | 23.08        | 23.51        | 23.26 |
| HSDPA Subtest-3             | 23.14         | 23.51        | 23.37  | 23.07        | 23.35        | 23.21 |
| HSDPA Subtest-4             | 23.15         | 23.47        | 23.35  | 23.02        | 23.41        | 23.19 |

**Note:** Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

| Bluetooth Average Power (dBm) |                 |                 |            |        |
|-------------------------------|-----------------|-----------------|------------|--------|
| Channel                       | Frequency (MHz) | Modulation Type |            |        |
|                               |                 | GFSK            | π/4-DQPSK  | 8-DPSK |
| CH 0                          | 2402            | 4.6             | <b>5.6</b> | 4.9    |
| CH 39                         | 2441            | 4.8             | 5.4        | 5.1    |
| CH 78                         | 2480            | 4.6             | 5.4        | 5.2    |

**Note:**

- Per KDB 447498 D01 v06, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances  $\leq 50\text{mm}$  are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

- (1)  $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- (2) Power and distance are round to the nearest mW and mm before calculation
- (3) The result is rounded to one decimal place for comparison
- (4) If the test separation distance(antenna-user) is  $< 5\text{mm}$ , 5mm is used for excluded SAR calculation.

| Bluetooth Max Power (dBm) | mW   | Test Distance (mm) | Frequency(GHz) | Exclusion Thresholds |
|---------------------------|------|--------------------|----------------|----------------------|
| 6                         | 3.98 | 5                  | 2.402          | 1.234                |

- Per KDB 447498 D01 v06 exclusion thresholds  $1.234 < 3.0$ , RF exposure evaluation is not required.

## 9. SAR DATA SUMMARY

### 9.1 General Note

1. Per KDB 447498 D01 v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor =  $\text{tune-up limit power(mW)/EUT RF power(mW)}$ , where tune-up limit is the maximum rated power among all production units.
2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported  $\text{SAR} \leq 0.8 \text{ W/kg}$ , other channels SAR testing is not necessary.
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/Kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45 \text{ W/Kg}$ , only one repeated measurement is required.
4. Per KDB865664 D02 v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5 \text{ W/kg}$ , or  $> 7.0 \text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix D for details).
5. Per KDB 648474 D04v01r01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2 \text{ W/kg}$ , SAR testing with a headset connected to the handset is not required.

### 9.2 Scaling Factor calculation

| Operation Mode | Channel | Output Power (dBm) | Tune up Power in tolerance (dBm) | Output Power (Watt) | Tune up Power in tolerance (Watt) | Scaling Factor |
|----------------|---------|--------------------|----------------------------------|---------------------|-----------------------------------|----------------|
| GPRS 850 4Tx   | 190     | 31.41              | 32.5                             | 1.38                | 1.78                              | 1.28           |
| GPRS 1900 4Tx  | 661     | 28.74              | 29.5                             | 0.75                | 0.89                              | 1.19           |
| WCDMA Band II  | 9400    | 23.67              | 24                               | 0.23                | 0.25                              | 1.08           |
| WCDMA Band V   | 4132    | 23.29              | 24                               | 0.21                | 0.25                              | 1.19           |
|                | 4183    | 23.75              | 24                               | 0.24                | 0.25                              | 1.06           |
|                | 4233    | 23.56              | 24                               | 0.23                | 0.25                              | 1.08           |

## 10. TEST RESULTS

### 10.1 Standalone body Worn SAR DATA

Summary of SAR Measurement Results

| Mode          | Test Positions | Channel /Frequency (MHz) | SAR(W/Kg), 1.6 (1g average) |               |                     | Plot No. | Repeated SAR Specific value |
|---------------|----------------|--------------------------|-----------------------------|---------------|---------------------|----------|-----------------------------|
|               |                |                          | SAR(W/Kg)1g                 | Scaled Factor | Scaled SAR(W/Kg),1g |          |                             |
| GPRS 850 4Tx  | FACE           | 190/836.4                | 0.305                       | 1.28          | 0.39                | --       |                             |
|               | BACK           | 190/836.4                | <b>0.509</b>                |               | <b>0.652</b>        | <b>1</b> |                             |
|               | TOP            | 190/836.4                | 0.103                       |               | 0.132               | --       |                             |
|               | Body-Right     | 190/836.4                | 0.342                       |               | 0.438               | --       |                             |
|               | DOWN           | 190/836.4                | 0.358                       |               | 0.458               | --       |                             |
|               | Body-Left      | 190/836.4                | 0.33                        |               | 0.422               | --       |                             |
| GPRS 1900 4Tx | FACE           | 661/1880                 | 0.655                       | 1.19          | 0.779               | --       |                             |
|               | BACK           | 661/1880                 | <b>0.748</b>                |               | <b>0.89</b>         | <b>2</b> |                             |
|               | TOP            | 661/1880                 | 0.132                       |               | 0.157               | --       |                             |
|               | Body-Right     | 661/1880                 | 0.232                       |               | 0.276               | --       |                             |
|               | DOWN           | 661/1880                 | 0.455                       |               | 0.541               | --       |                             |
|               | Body-Left      | 661/1880                 | 0.218                       |               | 0.259               | --       |                             |
| WCDMA Band V  | FACE           | 4183/836.6               | 0.613                       | 1.06          | 0.65                | --       |                             |
|               | BACK           | 4123/826.4               | 0.776                       | 1.19          | 0.923               |          |                             |
|               |                | 4183/836.6               | <b>0.909</b>                | 1.06          | <b>0.964</b>        | <b>3</b> | 1.026                       |
|               |                | 4183/836.6               | 0.886                       | 1.06          | 0.939               | --       |                             |
|               |                | 4233/846.6               | 0.753                       | 1.08          | 0.813               |          |                             |
|               | TOP            | 4183/836.6               | 0.351                       | 1.06          | 0.372               | --       |                             |
|               | Body-Right     | 4183/836.6               | 0.611                       | 1.06          | 0.678               | --       |                             |
|               | DOWN           | 4183/836.6               | 0.712                       | 1.06          | 0.755               | --       |                             |
| WCDMA Band II | Body-Left      | 4183/836.6               | 0.65                        | 1.06          | 0.689               | --       |                             |
|               | FACE           | 9400/1880                | 0.254                       | 1.08          | 0.274               | --       |                             |
|               | BACK           | 9400/1880                | <b>0.389</b>                |               | <b>0.42</b>         | <b>4</b> |                             |
|               | TOP            | 9400/1880                | 0.128                       |               | 0.138               | --       |                             |
|               | Body-Right     | 9400/1880                | 0.185                       |               | 0.2                 | --       |                             |
|               | DOWN           | 9400/1880                | 0.256                       |               | 0.461               | --       |                             |
|               | Body-Left      | 9400/1880                | 0.204                       |               | 0.22                | --       |                             |

Note: The first measured SAR values  $\geq 0.8\text{W/Kg}$  are all measured repeatedly, and the deviation among the repeated measurement is  $\leq 20\%$ .

**10.2 System Performance Check Data**

| TYPE       | BAND   | Liquid |                                                                                        |
|------------|--------|--------|----------------------------------------------------------------------------------------|
| Validation | CW850  | Body   | Measurement 4: Validation Plane with Body device position on Middle Channel in CW mode |
| Validation | CW1900 | Body   | Measurement 5: Validation Plane with Body device position on Middle Channel in CW mode |

# MEASUREMENT 1

Type: Validation measurement

Date of measurement: 19/6/2017

Measurement duration: 22 minutes 11 seconds


Mobile Phone IMEI number: --

## A. Experimental conditions.

|                        |                               |
|------------------------|-------------------------------|
| <u>Area Scan</u>       | dx=8mm dy=8mm                 |
| <u>ZoomScan</u>        | 5x5x7, dx=8mm dy=8mm dz=5mm   |
| <u>Phantom</u>         | <u>Validation plane</u>       |
| <u>Device Position</u> | <u>Body</u>                   |
| <u>Band</u>            | <u>CW835</u>                  |
| <u>Channels</u>        | <u>Middle</u>                 |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u> |

**B. SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 835.0                 |
| <b>Relative permittivity (real part)</b>      | 55.6541514            |
| <b>Relative permittivity (imaginary part)</b> | 21.145161             |
| <b>Conductivity (S/m)</b>                     | 0.976051              |
| <b>Variation (%)</b>                          | -0.150000             |
| <b>Temperature:</b>                           | 21.3 °C               |
| <b>ConvF:</b>                                 | 7.07                  |

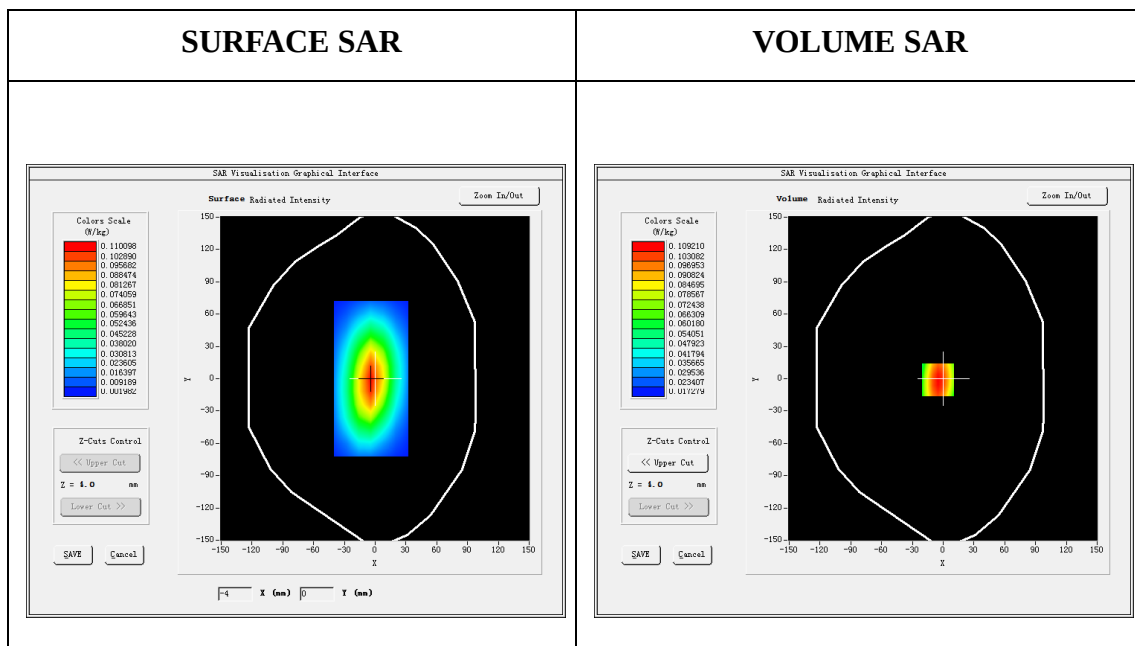

**Maximum location: X=-5.00, Y=-1.00**

**SAR Peak: 0.15 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.065164 |
| <b>SAR 1g (W/Kg)</b>  | 0.104514 |

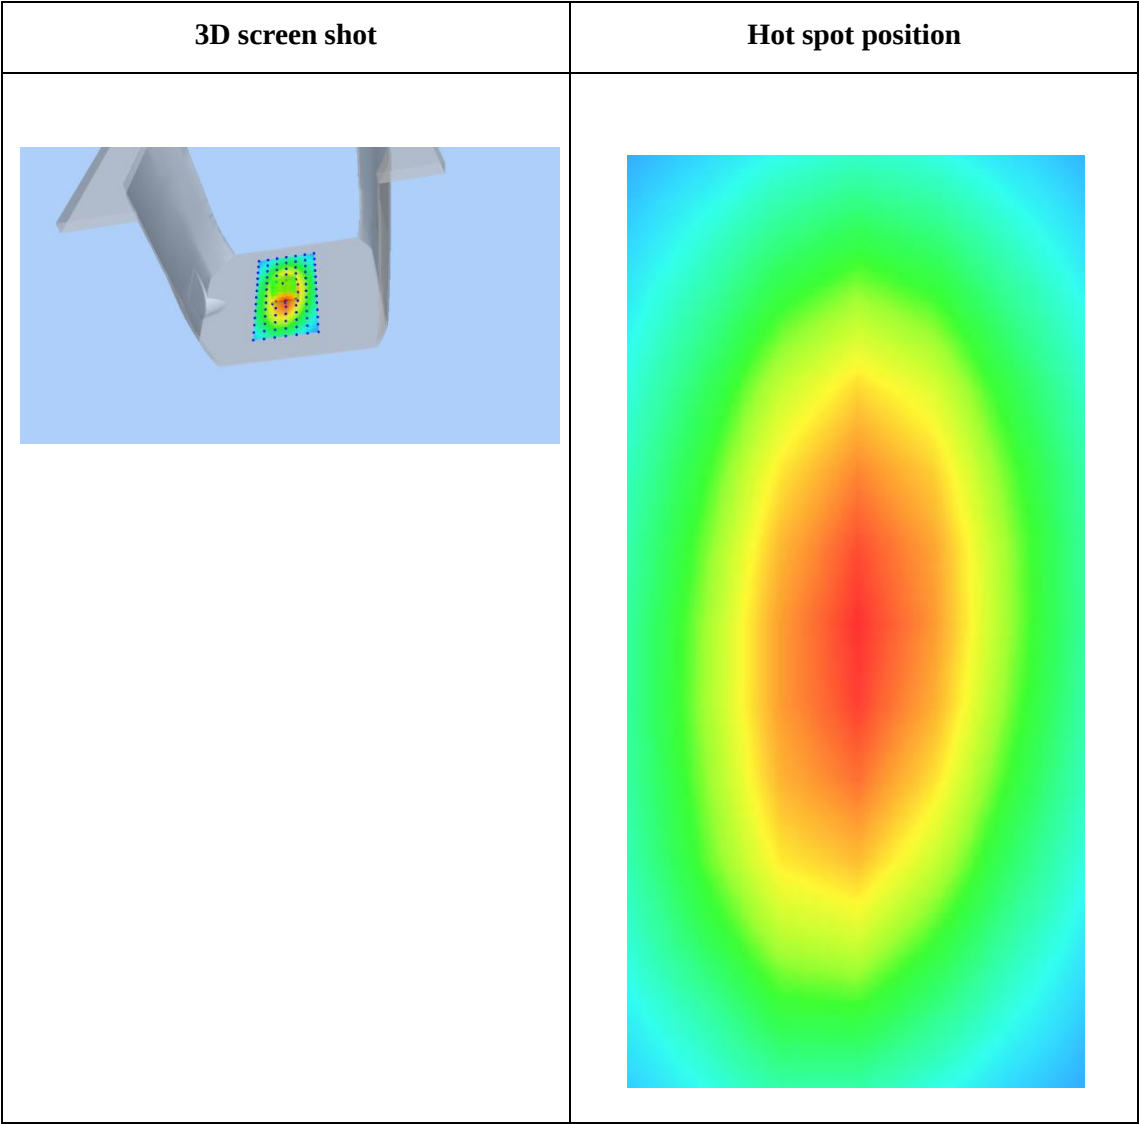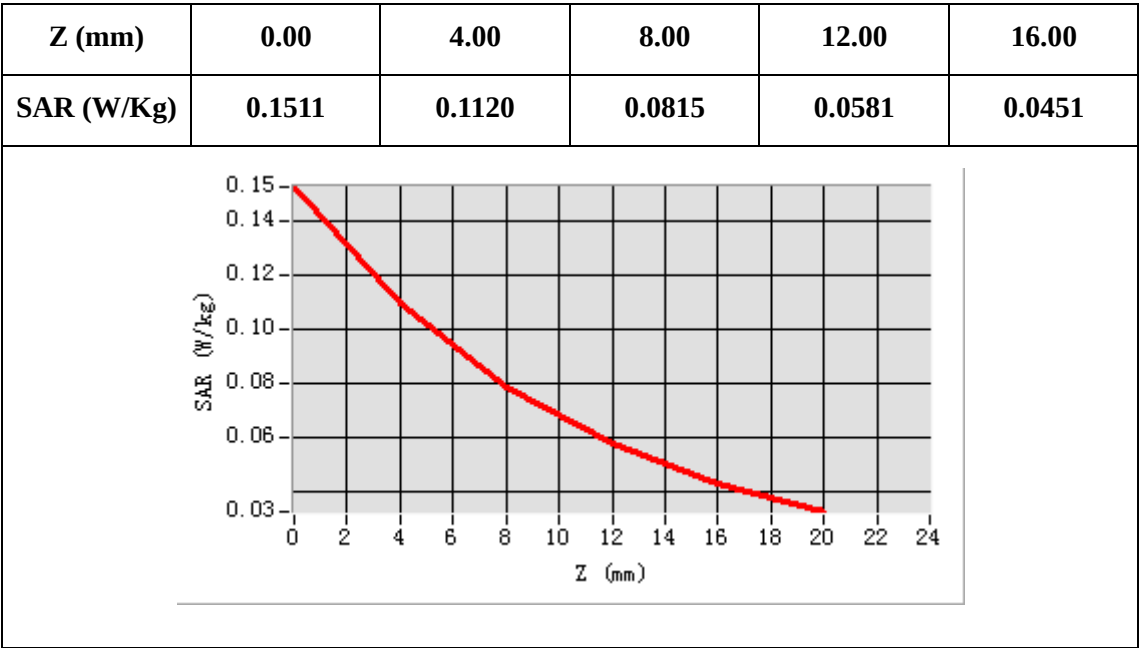

## MEASUREMENT 2

Type: Validation measurement

Date of measurement: 20/6/2017

Measurement duration: 22 minutes 27 seconds


Mobile Phone IMEI number: --

### A. Experimental conditions.

|                        |                               |
|------------------------|-------------------------------|
| <u>Area Scan</u>       | dx=8mm dy=8mm                 |
| <u>ZoomScan</u>        | 5x5x7, dx=8mm dy=8mm dz=5mm   |
| <u>Phantom</u>         | <u>Validation plane</u>       |
| <u>Device Position</u> | <u>Body</u>                   |
| <u>Band</u>            | <u>CW1900</u>                 |
| <u>Channels</u>        | <u>Middle</u>                 |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u> |

**B. SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 1900.0                |
| <b>Relative permittivity (real part)</b>      | 53.268598             |
| <b>Relative permittivity (imaginary part)</b> | 14.220900             |
| <b>Conductivity (S/m)</b>                     | 1.51039               |
| <b>Variation (%)</b>                          | -0.650000             |
| <b>Temperature:</b>                           | 21.3 °C               |
| <b>ConvF:</b>                                 | 6.05                  |

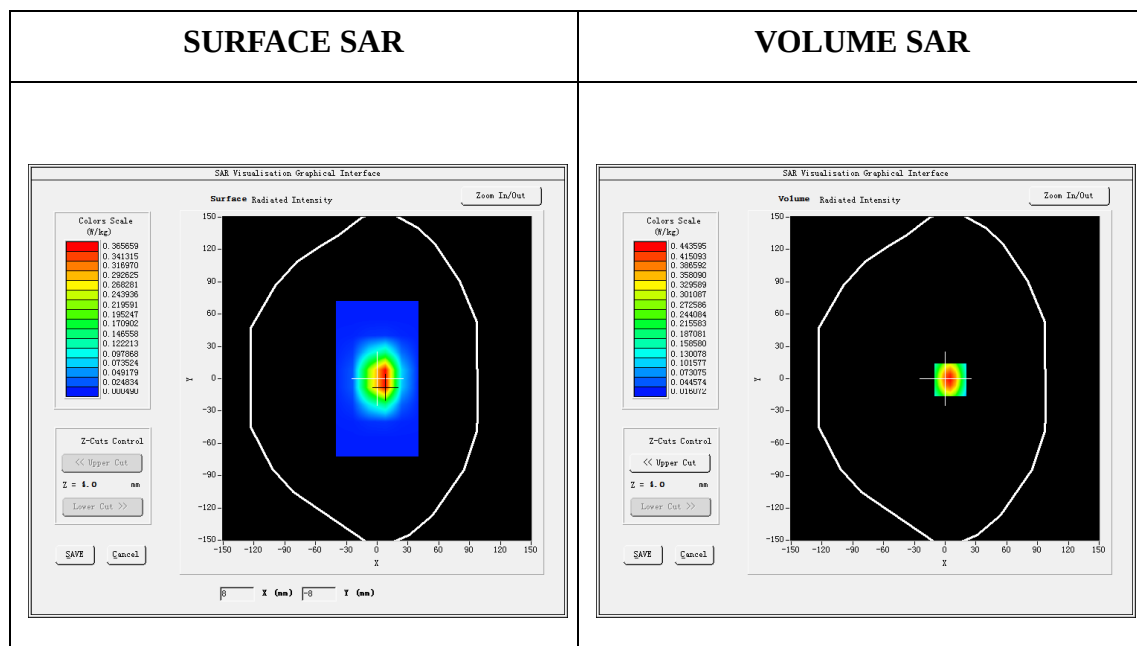

**Maximum location: X=5.00, Y=-1.00**

**SAR Peak: 0.69 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.216880 |
| <b>SAR 1g (W/Kg)</b>  | 0.407011 |

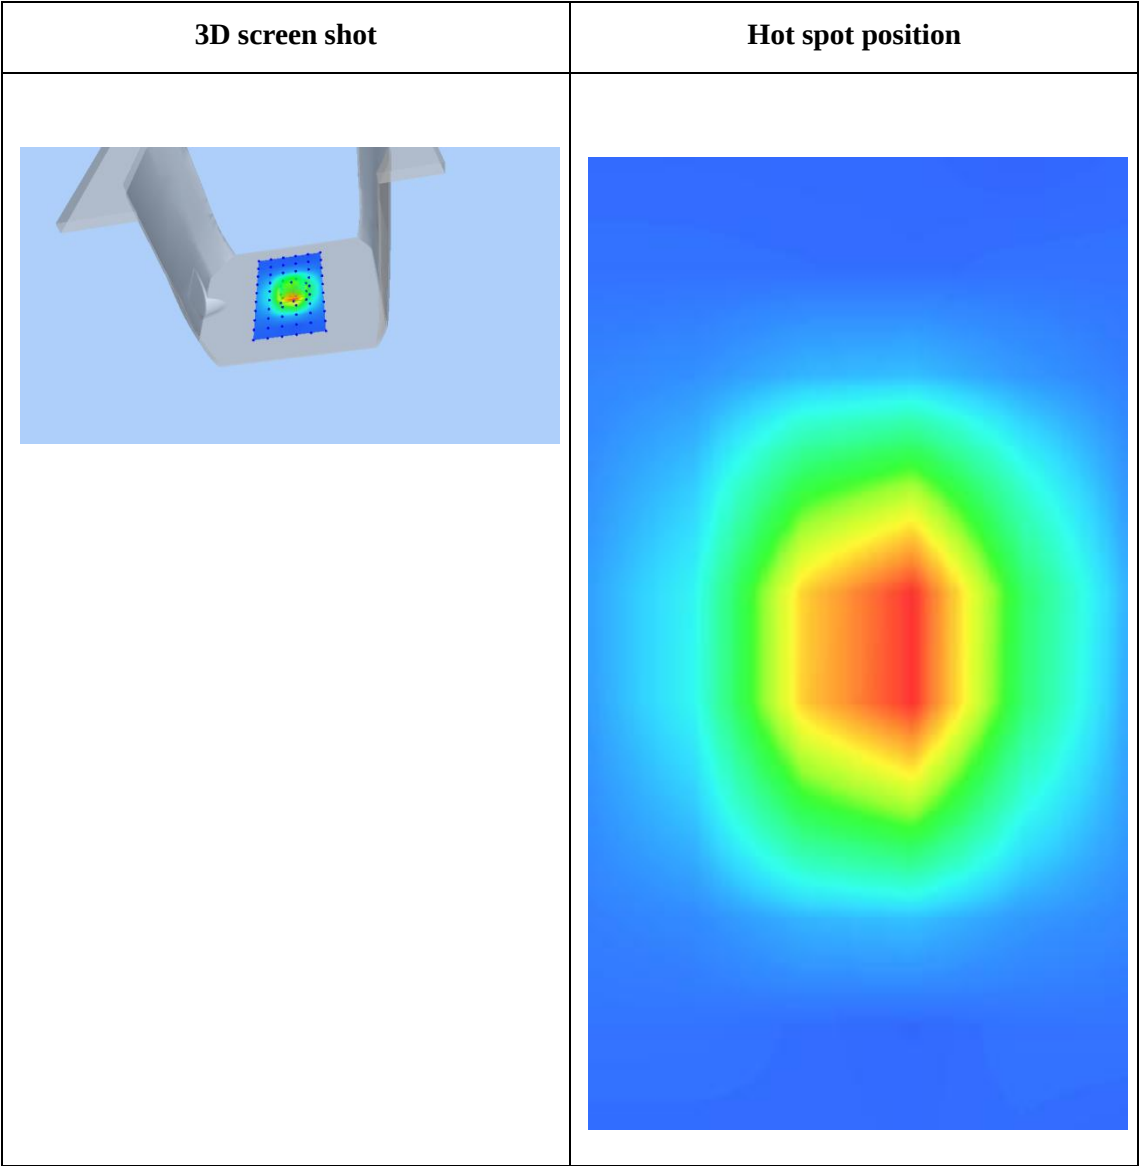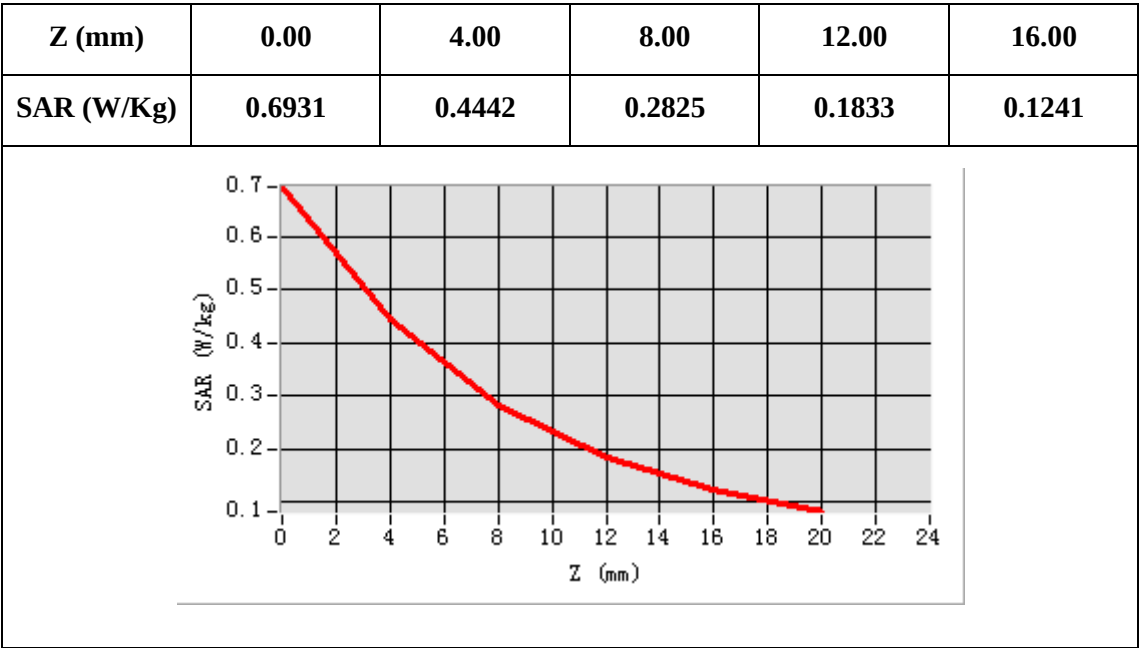

**10.3 Highest SAR Plots**

| Plot No | Band | Mode | Test Position | Channel |
|---------|------|------|---------------|---------|
| 1       | G850 | GPRS | Back          | 190     |

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 23/06/2017

Measurement duration: 22minutes 21 seconds


Mobile Phone IMEI number: --

**A. Experimental conditions.**

|                               |                                             |
|-------------------------------|---------------------------------------------|
| <b><u>Area Scan</u></b>       | dx=8mm dy=8mm                               |
| <b><u>ZoomScan</u></b>        | 5x5x7,dx=8mm dy=8mm dz=5mm                  |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                     |
| <b><u>Device Position</u></b> | <u>Body</u>                                 |
| <b><u>Band</u></b>            | <u>Gsm850</u>                               |
| <b><u>Channels</u></b>        | <u>Middle</u>                               |
| <b><u>Signal</u></b>          | <u>Duty Cycle: 2.00 (Crest factor: 2.0)</u> |

**B. SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 835.0                 |
| <b>Relative permittivity (real part)</b>      | 55.6541514            |
| <b>Relative permittivity (imaginary part)</b> | 21.145161             |
| <b>Conductivity (S/m)</b>                     | 0.976051              |
| <b>Variation (%)</b>                          | 1.54                  |

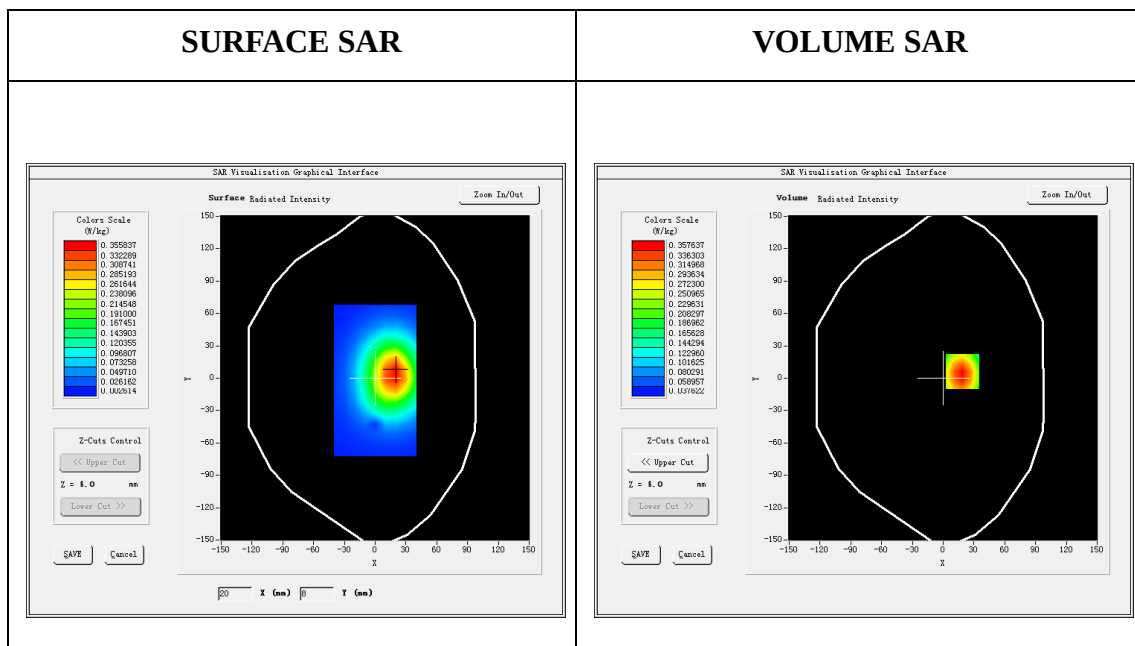

**Maximum location: X=19.00, Y=6.00**

**SAR Peak: 0.51W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.319939 |
| <b>SAR 1g (W/Kg)</b>  | 0.508794 |

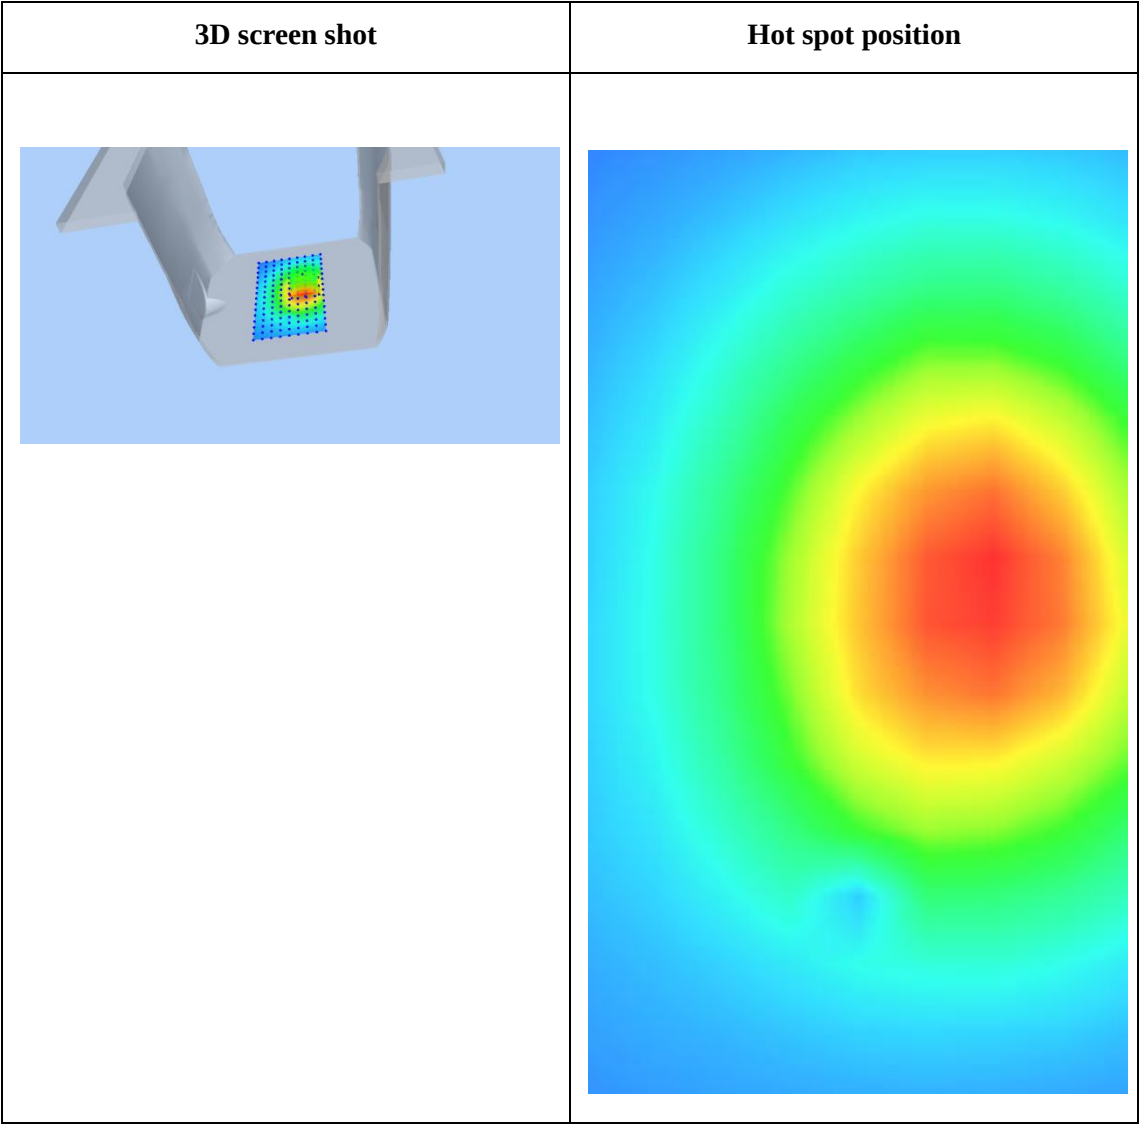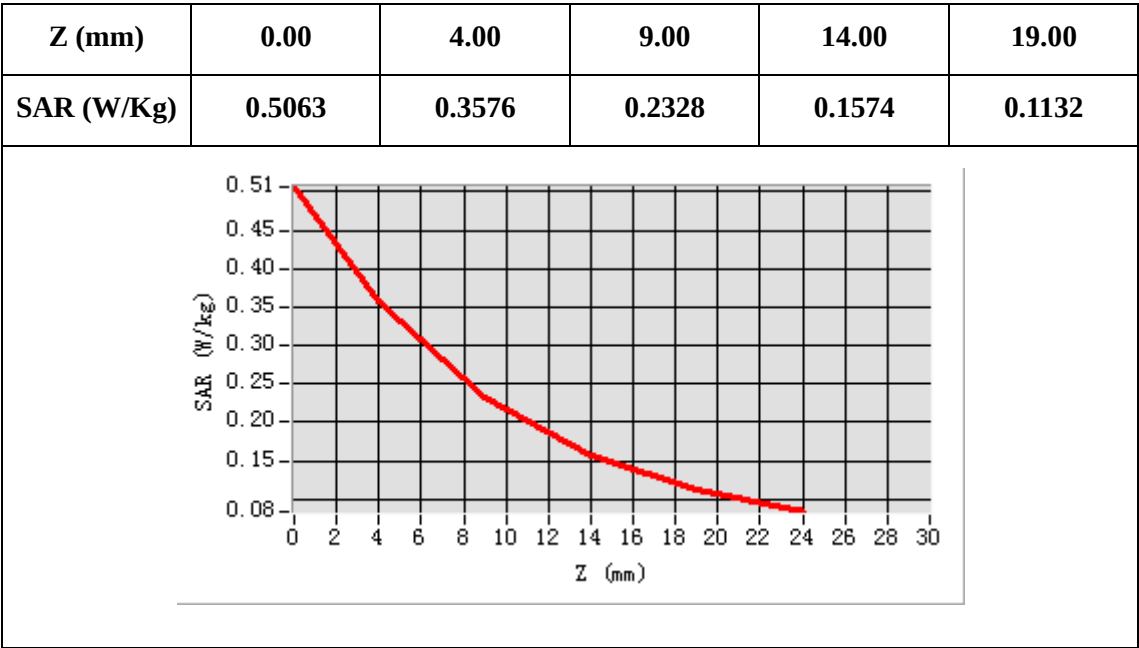

| Plot No | Band  | Mode | Test Position | Channel |
|---------|-------|------|---------------|---------|
| 2       | G1900 | GSM  | Back          | 661     |

Date of measurement: 23/06/2017

Measurement duration: 22 minutes 25 seconds


Mobile Phone IMEI number: --

### **A. Experimental conditions.**

|                               |                                             |
|-------------------------------|---------------------------------------------|
| <b><u>Area Scan</u></b>       | dx=8mm dy=8mm                               |
| <b><u>ZoomScan</u></b>        | 5x5x7, dx=8mm dy=8mm dz=5mm                 |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                     |
| <b><u>Device Position</u></b> | <u>Body</u>                                 |
| <b><u>Band</u></b>            | <u>Gsm1900</u>                              |
| <b><u>Channels</u></b>        | <u>Middle</u>                               |
| <b><u>Signal</u></b>          | <u>Duty Cycle: 2.00 (Crest factor: 2.0)</u> |

**B. SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 1880.000000           |
| <b>Relative permittivity (real part)</b>      | 53.268598             |
| <b>Relative permittivity (imaginary part)</b> | 14.220900             |
| <b>Conductivity (S/m)</b>                     | 1.51039               |
| <b>Variation (%)</b>                          | -2.57                 |

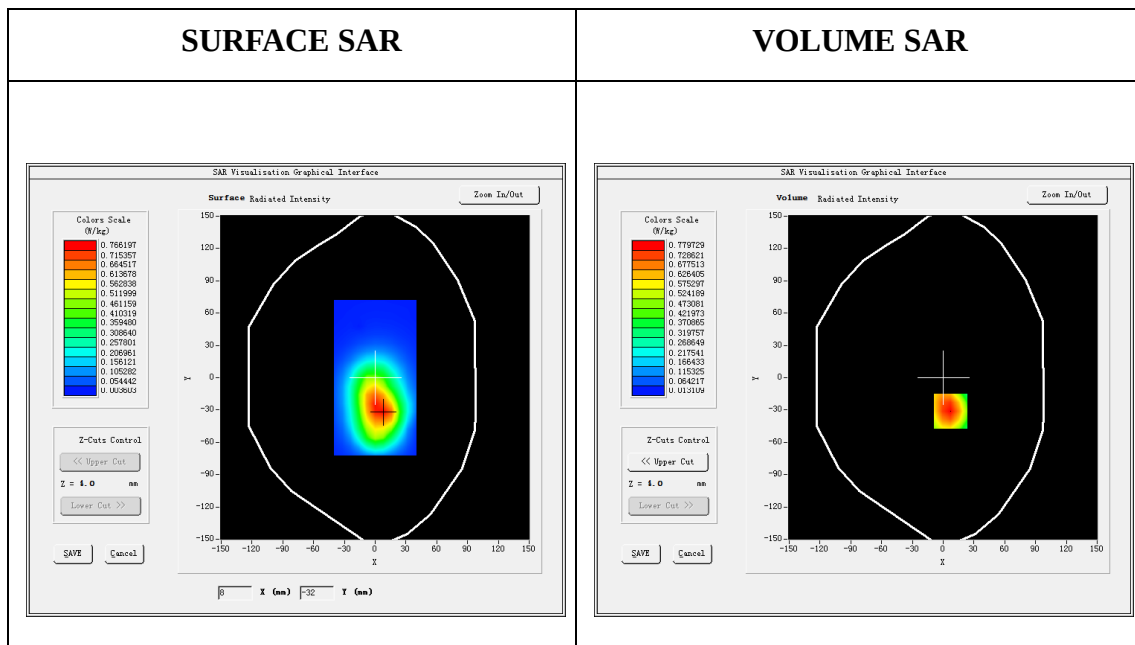

**Maximum location: X=7.00, Y= -31.00**

**SAR Peak: 1.42W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.379744 |
| <b>SAR 1g (W/Kg)</b>  | 0.748242 |

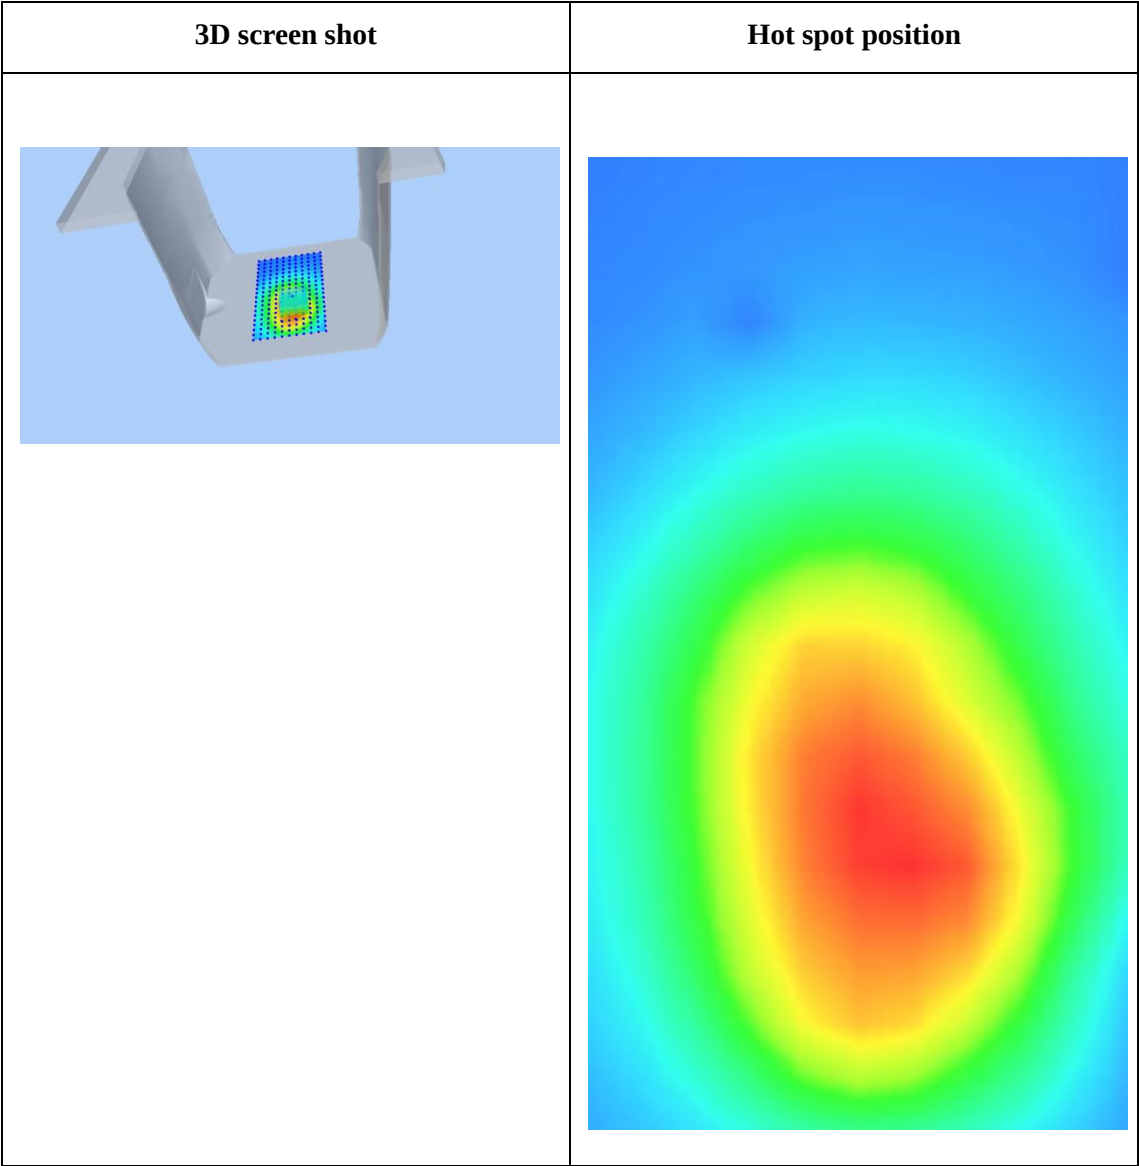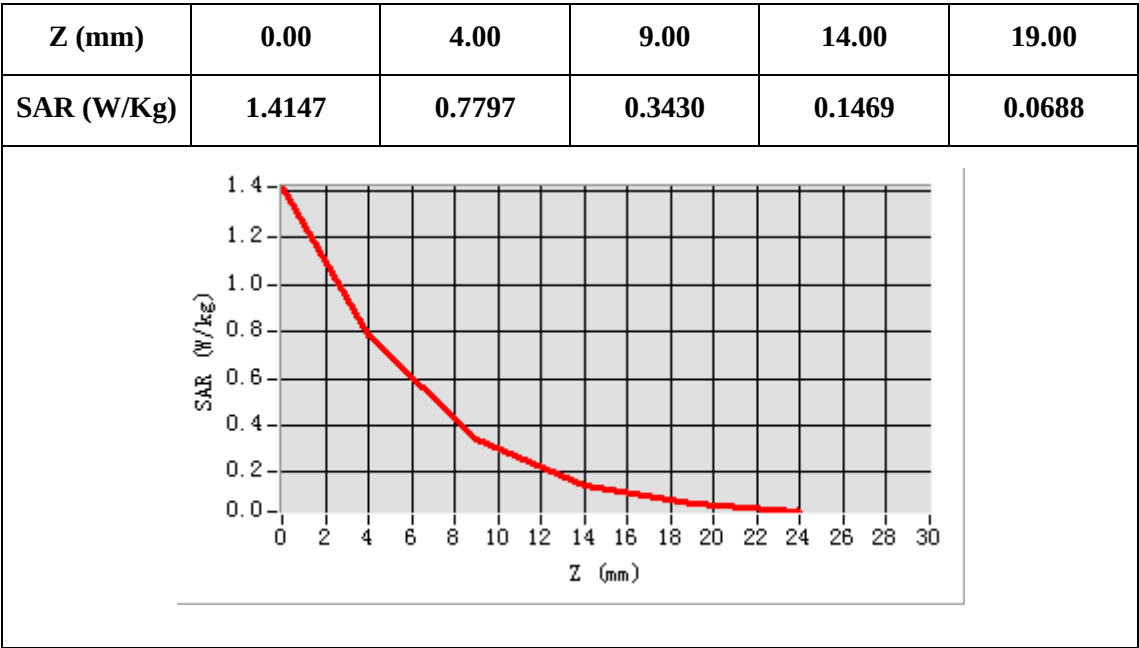

| Plot No | Band | Mode     | Test Position | Channel |
|---------|------|----------|---------------|---------|
| 3       | W850 | RMC12.2K | Back          | 836.6   |

Date of measurement: 23/06/2016

Measurement duration: 22 minutes 15 seconds


Mobile Phone IMEI number: --

#### **A. Experimental conditions.**

|                               |                                             |
|-------------------------------|---------------------------------------------|
| <b><u>Area Scan</u></b>       | dx=8mm dy=8mm                               |
| <b><u>ZoomScan</u></b>        | 5x5x7,dx=8mm dy=8mm dz=5mm                  |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                     |
| <b><u>Device Position</u></b> | <u>Body</u>                                 |
| <b><u>Band</u></b>            | <u>WCDMA850</u>                             |
| <b><u>Channels</u></b>        | <u>Middle</u>                               |
| <b><u>Signal</u></b>          | <u>Duty Cycle: 4.00 (Crest factor: 4.0)</u> |

**B.SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 835.000000            |
| <b>Relative permittivity (real part)</b>      | 55.6541514            |
| <b>Relative permittivity (imaginary part)</b> | 21.145161             |
| <b>Conductivity (S/m)</b>                     | 0.976051              |
| <b>Variation (%)</b>                          | -3.93                 |

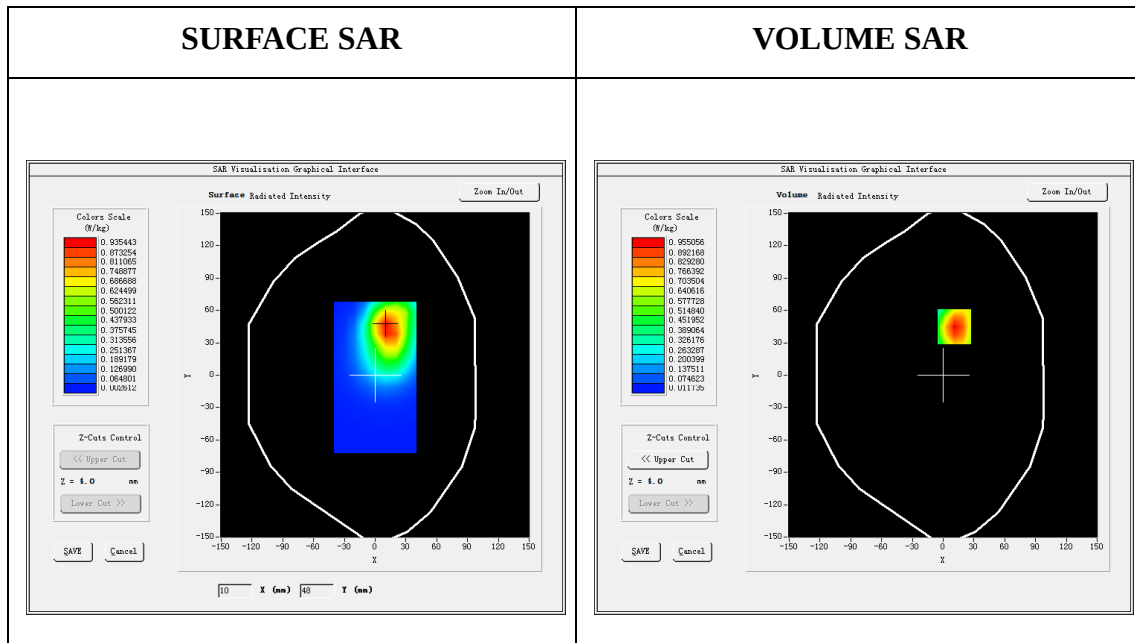

**Maximum location: X=11.00, Y=45.00**

**SAR Peak: 1.71 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.457816 |
| <b>SAR 1g (W/Kg)</b>  | 0.909305 |

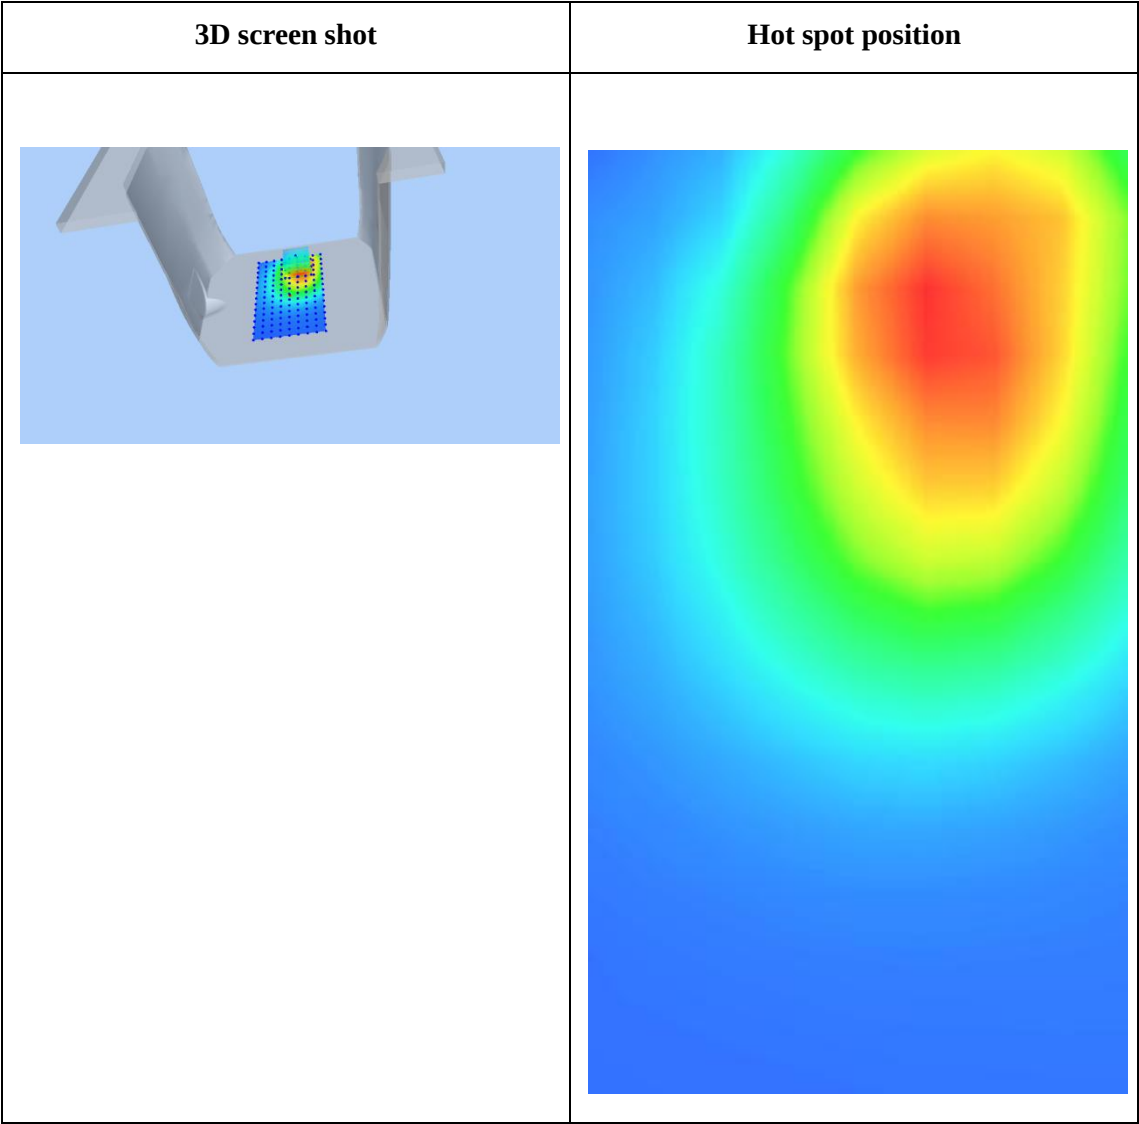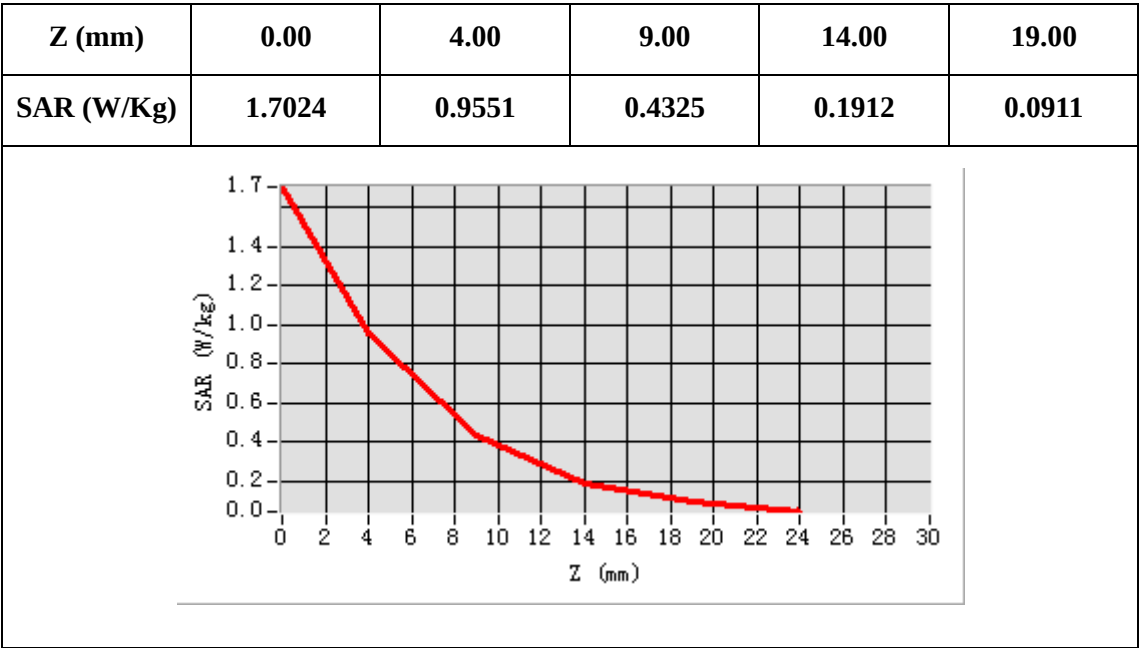

| Plot No | Band  | Mode     | Test Position | Channel |
|---------|-------|----------|---------------|---------|
| 4       | W1900 | RMC12.2K | Back          | 9400    |

Date of measurement: 23/06/2017

Measurement duration: 22 minutes 26 seconds


Mobile Phone IMEI number: --

### **A. Experimental conditions.**

|                               |                                             |
|-------------------------------|---------------------------------------------|
| <b><u>Area Scan</u></b>       | dx=8mm dy=8mm                               |
| <b><u>ZoomScan</u></b>        | 5x5x7,dx=8mm dy=8mm dz=5mm                  |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                     |
| <b><u>Device Position</u></b> | <u>Body</u>                                 |
| <b><u>Band</u></b>            | <u>WCDMA1900</u>                            |
| <b><u>Channels</u></b>        | <u>Middle</u>                               |
| <b><u>Signal</u></b>          | <u>Duty Cycle: 2.00 (Crest factor: 2.0)</u> |

### **B.SAR Measurement Results**



|                                               |                       |
|-----------------------------------------------|-----------------------|
| <b>E-Field Probe</b>                          | SATIMO SN_43/15_EP276 |
| <b>Frequency (MHz)</b>                        | 1900.000000           |
| Relative permittivity (real part)             | 53.268598             |
| <b>Relative permittivity (imaginary part)</b> | 14.220900             |
| <b>Conductivity (S/m)</b>                     | 1.51039               |
| <b>Variation (%)</b>                          | -1.42                 |

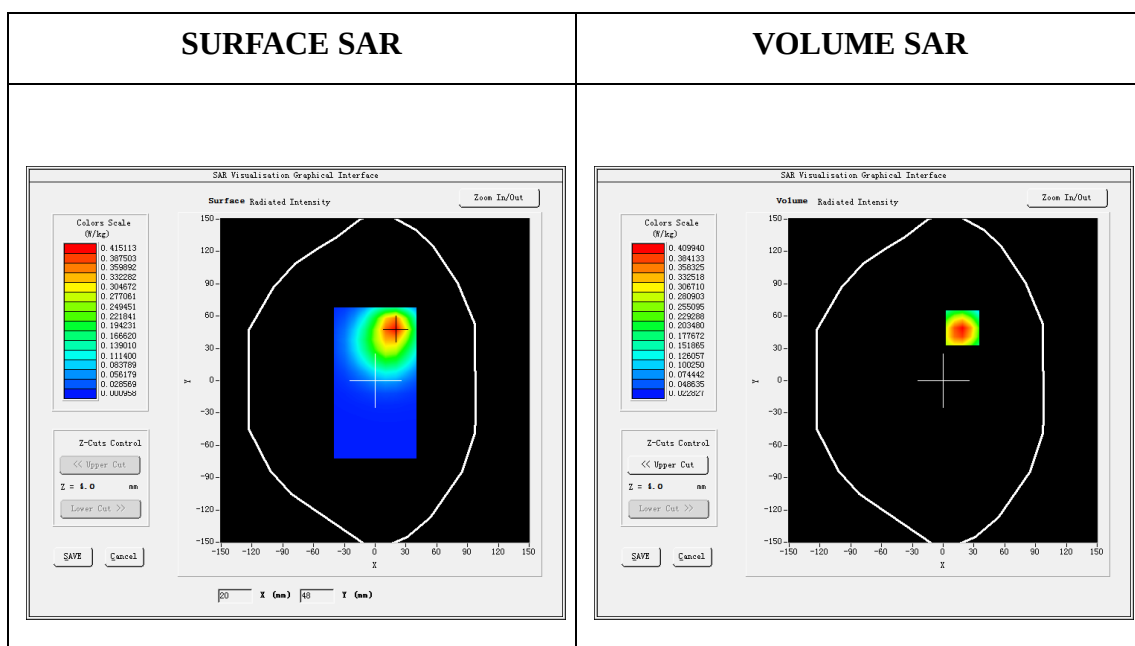

**Maximum location: X=19.00, Y=49.00**

**SAR Peak: 0.57 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.239730 |
| <b>SAR 1g (W/Kg)</b>  | 0.389395 |

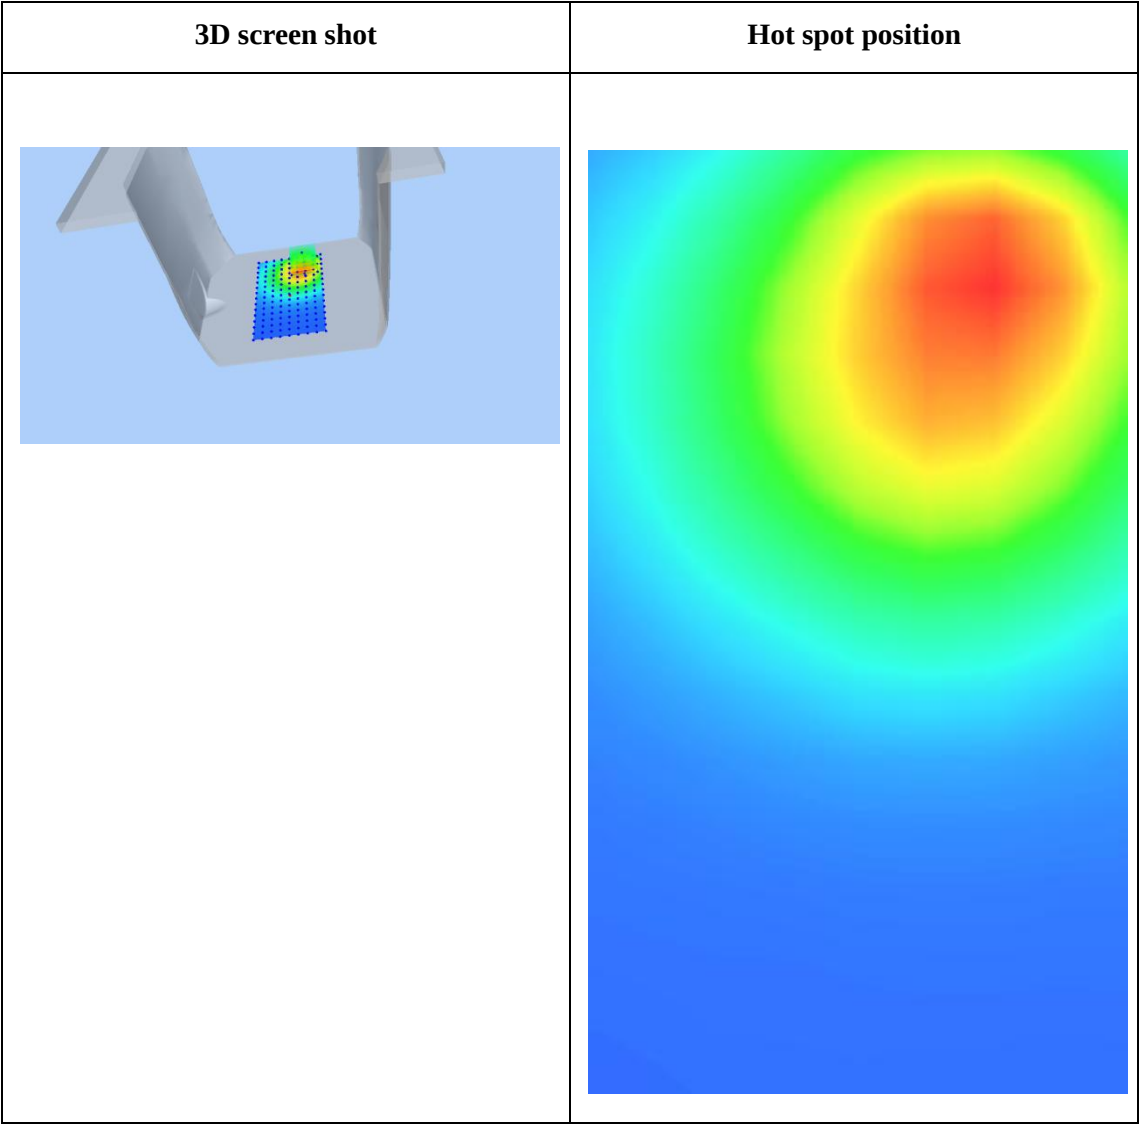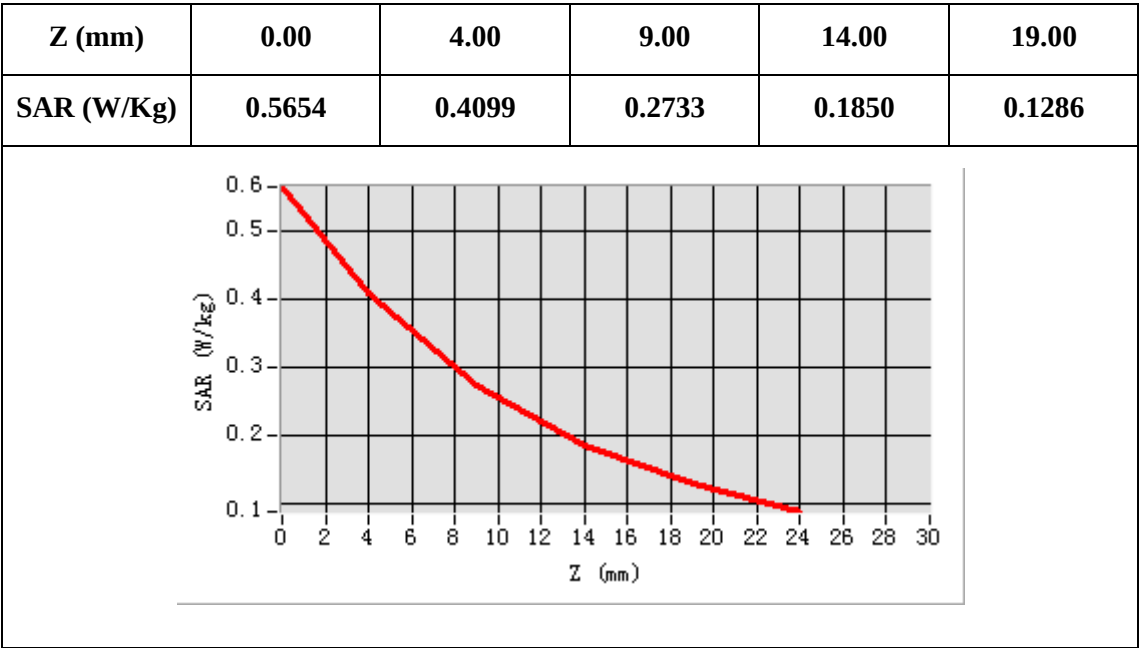

## 11. MEASUREMENT UNCERTAINTY

Measurement Uncertainty according to IEEE 1528

| No.                       | Uncertainty Component                                                           | Reference | Uncertainty Value (%) | Probability Distribution | k          | ci           | Standard Uncertainty (%) $u_i(\%)$ | Degree of freedom $v_{eff}$ or $v_i$ |
|---------------------------|---------------------------------------------------------------------------------|-----------|-----------------------|--------------------------|------------|--------------|------------------------------------|--------------------------------------|
| <b>Measurement System</b> |                                                                                 |           |                       |                          |            |              |                                    |                                      |
| 1                         | Probe Calibration(k=1)                                                          | E2.1      | 4.8                   | N                        | 1          | 1            | 4.8                                | $\infty$                             |
| 2                         | Axial isotropy                                                                  | E2.2      | 4.7                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$ | 1.9                                | $\infty$                             |
| 3                         | Hemispherical Isotropy                                                          | E2.2      | 9.6                   | R                        | $\sqrt{3}$ | $\sqrt{0.5}$ | 3.9                                | $\infty$                             |
| 4                         | Boundary Effect                                                                 | E2.3      | 8.3                   | R                        | $\sqrt{3}$ | 1            | 4.8                                | $\infty$                             |
| 5                         | Linearity                                                                       | E2.4      | 4.7                   | R                        | $\sqrt{3}$ | 1            | 2.7                                | $\infty$                             |
| 6                         | System Detection Limits                                                         | E2.4      | 1.0                   | R                        | $\sqrt{3}$ | 1            | 0.6                                | $\infty$                             |
| 8                         | Modulation response                                                             | E2.5      | 4.0                   | R                        | $\sqrt{3}$ | 1            | 2.3                                | $\infty$                             |
| 9                         | Readout Electronics                                                             | E2.6      | 1.0                   | N                        | 1          | 1            | 1.0                                | $\infty$                             |
| 10                        | Response Time                                                                   | E2.7      | 0.8                   | R                        | $\sqrt{3}$ | 1            | 0.5                                | $\infty$                             |
| 11                        | Integration Time                                                                | E2.8      | 1.4                   | R                        | $\sqrt{3}$ | 1            | 0.8                                | $\infty$                             |
| 12                        | RF Ambient Conditions-noise                                                     | E6.1      | 3.0                   | R                        | $\sqrt{3}$ | 1            | 1.7                                | $\infty$                             |
| 13                        | RF Ambient Conditions-reflections                                               | E6.1      | 3.0                   | R                        | $\sqrt{3}$ | 1            | 1.7                                | $\infty$                             |
| 14                        | Probe Position Mechanical tolerance                                             | E6.2      | 0.4                   | R                        | $\sqrt{3}$ | 1            | 0.2                                | $\infty$                             |
| 15                        | Probe Position with respect to Phantom Shell                                    | E6.3      | 2.9                   | R                        | $\sqrt{3}$ | 1            | 1.7                                | $\infty$                             |
| 16                        | Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation | E5        | 3.9                   | R                        | $\sqrt{3}$ | 1            | 2.3                                | $\infty$                             |

|                                                            | Test sample related                                                           |      |     |     |            |      |            |          |
|------------------------------------------------------------|-------------------------------------------------------------------------------|------|-----|-----|------------|------|------------|----------|
| 17                                                         | Test sample positioning                                                       | E4.2 | 6.0 | N   | 1          | 1    | 6.0        | 11       |
| 18                                                         | Device holder uncertainty                                                     | E4.1 | 5.0 | N   | 1          | 1    | 5.0        | 7        |
| 19                                                         | Output Power Variation-SAR drift measurement                                  | E2.9 | 5.0 | R   | $\sqrt{3}$ | 1    | 2.9        | $\infty$ |
| 20                                                         | SAR scaling                                                                   | E6.5 | 2.0 | R   | $\sqrt{3}$ | 1    | 1.2        | $\infty$ |
|                                                            | Phantom and Tissue Parameters                                                 |      |     |     |            |      |            |          |
| 21                                                         | Phantom Uncertainty-shape, thickness and permittivity                         | E3.1 | 4.0 | R   | $\sqrt{3}$ | 1    | 2.3        | $\infty$ |
| 22                                                         | Uncertainty in SAR correction for deviations in permittivity and conductivity | E3.2 | 1.9 | N   | 1          | 1    | 1.9        | $\infty$ |
| 23                                                         | Liquid Conductivity measurement                                               | E3.3 | 5.5 | N   | 1          | 0.78 | 4.3        | 5        |
| 24                                                         | Liquid Permittivity measurement                                               | E3.3 | 2.9 | N   | 1          | 0.23 | 0.7        | 5        |
| 25                                                         | Liquid conductivity-temperature uncertainty                                   | E3.4 | 1.7 | R   | $\sqrt{3}$ | 0.78 | 0.8        | $\infty$ |
| 26                                                         | Liquid permittivity -temperature uncertainty                                  | E3.4 | 2.7 | R   | $\sqrt{3}$ | 0.23 | 0.4        | $\infty$ |
| <b>Combined Standard Uncertainty</b>                       |                                                                               |      |     | RSS |            |      | 13.9       | 135      |
| <b>Expanded uncertainty</b><br>(95 % confidence interval ) |                                                                               |      |     | K=2 |            |      | $\pm 27.8$ |          |

## Measurement Uncertainty for DUT SAR Test according to IEC 62209-2

| No.                | Source of Uncertainty                           | Description | Uncertainty Value (%) | Probability Distribution | k          | ci | Standard Uncertainty (%) $u_i(\%)$ | Degree of freedom $\nu_{eff}$ or $\nu_i$ |
|--------------------|-------------------------------------------------|-------------|-----------------------|--------------------------|------------|----|------------------------------------|------------------------------------------|
| Measurement System |                                                 |             |                       |                          |            |    |                                    |                                          |
| 1                  | Probe Calibration                               | 7.2.2.1     | 6                     | N                        | 1          | 1  | 3.5                                | $\infty$                                 |
| 2                  | Isotropy                                        | 7.2.2.2     | 14.1                  | R                        | $\sqrt{3}$ | 1  | 4.1                                | $\infty$                                 |
| 3                  | Linearity                                       | 7.2.2.3     | 4.7                   | R                        | $\sqrt{3}$ | 1  | 2.7                                | $\infty$                                 |
| 4                  | Probe modulation response                       | 7.2.2.4     | 3.2                   | R                        | $\sqrt{3}$ | 1  | 1.6                                |                                          |
| 5                  | Detection Limits                                | 7.2.2.5     | 1.0                   | R                        | $\sqrt{3}$ | 1  | 0.6                                | $\infty$                                 |
| 6                  | Boundary Effect                                 | 7.2.2.6     | 11.0                  | R                        | $\sqrt{3}$ | 1  | 6.4                                | $\infty$                                 |
| 7                  | Readout Electronics                             | 7.2.2.7     | 1.0                   | N                        | 1          | 1  | 1.00                               | $\infty$                                 |
| 8                  | Response Time                                   | 7.2.2.8     | 0.00                  | R                        | $\sqrt{3}$ | 1  | 0.00                               | $\infty$                                 |
| 9                  | Integration Time                                | 7.2.2.9     | 0.00                  | R                        | $\sqrt{3}$ | 1  | 0.00                               | $\infty$                                 |
| 10                 | RF Ambient Conditions-noise                     | 7.2.4.5     | 3.0                   | R                        | $\sqrt{3}$ | 1  | 1.73                               | $\infty$                                 |
| 11                 | RF Ambient Conditions-reflections               | 7.2.4.5     | 3.0                   | R                        | $\sqrt{3}$ | 1  | 1.73                               | $\infty$                                 |
| 12                 | Probe Positioner Mech.restrictions              | 7.2.3.1     | 0.4                   | R                        | $\sqrt{3}$ | 1  | 0.2                                | $\infty$                                 |
| 13                 | Probe Positioning with respect to Phantom Shell | 7.2.3.3     | 2.9                   | R                        | $\sqrt{3}$ | 1  | 1.7                                | $\infty$                                 |
| 14                 | Post-processing                                 | 7.2.5       | 5.0                   | R                        | $\sqrt{3}$ | 1  | 2.9                                | $\infty$                                 |

| Uncertainties of the DUT                                     |                                                             |   |      |     |            |     |       |          |
|--------------------------------------------------------------|-------------------------------------------------------------|---|------|-----|------------|-----|-------|----------|
| 15                                                           | — Position of the DUT                                       | A | 4.8  | N   | 1          | 1   | 4.8   | 5        |
| 16                                                           | — Holder of the DUT                                         | A | 7.1  | N   | 1          | 1   | 7.1   | 5        |
| 17                                                           | — Power Scaling                                             | B | 1.0  | R   | $\sqrt{3}$ | 1   | 0.6   | $\infty$ |
| 18                                                           | — Output Power Variation<br>— SAR drift measurement         | B | 5.0  | R   | $\sqrt{3}$ | 1   | 2.9   | $\infty$ |
| Phantom and Tissue Parameters                                |                                                             |   |      |     |            |     |       |          |
| 19                                                           | — Phantom<br>Uncertainty(shape and<br>thickness tolerances) | B | 1.0  | R   | $\sqrt{3}$ | 1   | 0.6   | $\infty$ |
| 20                                                           | — Liquid Conductivity Target<br>—tolerance                  | B | 5.0  | R   | $\sqrt{3}$ | 0.6 | 1.7   | $\infty$ |
| 21                                                           | — Liquid Conductivity<br>—measurement Uncertainty)          | B | 0.23 | N   | 1          | 1   | 0.23  | 9        |
| 22                                                           | — Liquid Permittivity Target<br>tolerance                   | B | 5.0  | R   | $\sqrt{3}$ | 0.6 | 1.7   | $\infty$ |
| 23                                                           | — Liquid Permittivity<br>—measurement uncertainty           | B | 0.46 | N   | 1          | 1   | 0.46  | $\infty$ |
| 24                                                           | — liquid temperature<br>uncertainty                         | B | 1    | N   | 1          | 1   | 1     | $\infty$ |
| <b>Combined Standard Uncertainty</b>                         |                                                             |   |      | RSS |            |     | 13.12 | 44.15    |
| <b>Expanded uncertainty</b><br>(Confidence interval of 95 %) |                                                             |   |      | K=2 |            |     | 26.24 |          |

## System Repeatability Measurement Uncertainty

| No.                | Uncertainty Component                                                            | Type | Uncertainty Value (%) | Probability Distribution | k          | ci  | Standard Uncertainty (%) $u_i$ (%) | Degree of freedom $V_{eff}$ or $v_i$ |
|--------------------|----------------------------------------------------------------------------------|------|-----------------------|--------------------------|------------|-----|------------------------------------|--------------------------------------|
| Measurement System |                                                                                  |      |                       |                          |            |     |                                    |                                      |
| 1                  | —Probe Calibration                                                               | B    | 5.8                   | N                        | 1          | 1   | 5.8                                | $\infty$                             |
| 2                  | —Axial isotropy                                                                  | B    | 3.5                   | R                        | $\sqrt{3}$ | 0.5 | 1.43                               | $\infty$                             |
| 3                  | - Hemispherical Isotropy                                                         | B    | 5.9                   | R                        | $\sqrt{3}$ | 0.5 | 2.41                               | $\infty$                             |
| 4                  | —Boundary Effect                                                                 | B    | 1                     | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                             |
| 5                  | —Linearity                                                                       | B    | 4.7                   | R                        | $\sqrt{3}$ | 1   | 2.71                               | $\infty$                             |
| 6                  | —System Detection Limits                                                         | B    | 1.0                   | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                             |
| 7                  | Modulation response                                                              | B    | 3                     | N                        | 1          | 1   | 3.00                               |                                      |
| 8                  | —Readout Electronics                                                             | B    | 0.5                   | N                        | 1          | 1   | 0.50                               | $\infty$                             |
| 9                  | —Response Time                                                                   | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 10                 | —Integration Time                                                                | B    | 3.0                   | R                        | $\sqrt{3}$ | 1   | 1.73                               | $\infty$                             |
| 11                 | —RF Ambient Conditions                                                           | B    | 3.0                   | R                        | $\sqrt{3}$ | 1   | 1.73                               | $\infty$                             |
| 12                 | —Probe Position Mechanical tolerance                                             | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 13                 | —Probe Position with respect to Phantom Shell                                    | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 14                 | —Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation | B    | 2.3                   | R                        | $\sqrt{3}$ | 1   | 1.33                               | $\infty$                             |

| Uncertainties of the DUT                                     |                                                                                     |   |     |     |            |     |       |          |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------|---|-----|-----|------------|-----|-------|----------|
| 15                                                           | — Position of the DUT                                                               | A | 2.6 | N   | $\sqrt{3}$ | 1   | 2.6   | 5        |
| 16                                                           | — Holder of the DUT                                                                 | A | 3   | N   | $\sqrt{3}$ | 1   | 3.0   | 5        |
| 17                                                           | — Output Power Variation<br>— SAR drift measurement                                 | B | 5.0 | R   | $\sqrt{3}$ | 1   | 2.89  | $\infty$ |
| Phantom and Tissue Parameters                                |                                                                                     |   |     |     |            |     |       |          |
| 18                                                           | — Phantom<br>Uncertainty(shape and<br>thickness tolerances)                         | B | 4   | R   | $\sqrt{3}$ | 1   | 2.31  | $\infty$ |
| 19                                                           | Uncertainty in SAR<br>correction for deviation(in<br>permittivity and conductivity) | B | 2   | N   | 1          | 1   | 2.00  |          |
| 20                                                           | — Liquid Conductivity Target<br>—tolerance                                          | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 21                                                           | — Liquid Conductivity<br>—measurement Uncertainty)                                  | B | 4   | N   | $\sqrt{3}$ | 1   | 0.92  | 9        |
| 22                                                           | — Liquid Permittivity Target<br>tolerance                                           | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 22                                                           | — Liquid Permittivity<br>—measurement uncertainty                                   | B | 5   | N   | $\sqrt{3}$ | 1   | 1.15  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                         |                                                                                     |   |     | RSS |            |     | 10.63 |          |
| <b>Expanded uncertainty</b><br>(Confidence interval of 95 %) |                                                                                     |   |     | K=2 |            |     | 21.26 |          |

## System Validation Uncertainty

| No.                | Uncertainty Component                                                            | Type | Uncertainty Value (%) | Probability Distribution | k          | ci  | Standard Uncertainty (%) $u_i(\%)$ | Degree of freedom $V_{eff}$ or $v_i$ |
|--------------------|----------------------------------------------------------------------------------|------|-----------------------|--------------------------|------------|-----|------------------------------------|--------------------------------------|
| Measurement System |                                                                                  |      |                       |                          |            |     |                                    |                                      |
| 1                  | —Probe Calibration                                                               | B    | 5.8                   | N                        | 1          | 1   | 5.8                                | $\infty$                             |
| 2                  | —Axial isotropy                                                                  | B    | 3.5                   | R                        | $\sqrt{3}$ | 0.5 | 1.43                               | $\infty$                             |
| 3                  | - Hemispherical Isotropy                                                         | B    | 5.9                   | R                        | $\sqrt{3}$ | 0.5 | 2.41                               | $\infty$                             |
| 4                  | —Boundary Effect                                                                 | B    | 1                     | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                             |
| 5                  | —Linearity                                                                       | B    | 4.7                   | R                        | $\sqrt{3}$ | 1   | 2.71                               | $\infty$                             |
| 6                  | —System Detection Limits                                                         | B    | 1                     | R                        | $\sqrt{3}$ | 1   | 0.58                               | $\infty$                             |
| 7                  | Modulation response                                                              | B    | 0                     | N                        | 1          | 1   | 0.00                               |                                      |
| 8                  | —Readout Electronics                                                             | B    | 0.5                   | N                        | 1          | 1   | 0.50                               | $\infty$                             |
| 9                  | —Response Time                                                                   | B    | 0.00                  | R                        | $\sqrt{3}$ | 1   | 0.00                               | $\infty$                             |
| 10                 | —Integration Time                                                                | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 11                 | —RF Ambient Conditions                                                           | B    | 3.0                   | R                        | $\sqrt{3}$ | 1   | 1.73                               | $\infty$                             |
| 12                 | —Probe Position Mechanical tolerance                                             | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 13                 | —Probe Position with respect to Phantom Shell                                    | B    | 1.4                   | R                        | $\sqrt{3}$ | 1   | 0.81                               | $\infty$                             |
| 14                 | —Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation | B    | 2.3                   | R                        | $\sqrt{3}$ | 1   | 1.33                               | $\infty$                             |

| Uncertainties of the DUT                                     |                                                                               |   |     |     |            |     |       |          |
|--------------------------------------------------------------|-------------------------------------------------------------------------------|---|-----|-----|------------|-----|-------|----------|
| 15                                                           | Deviation of experimental source from numerical source                        | A | 4   | N   | 1          | 1   | 4.00  | 5        |
| 16                                                           | Input Power and SAR drift measurement                                         | A | 5   | R   | $\sqrt{3}$ | 1   | 2.89  | 5        |
| 17                                                           | Dipole Axis to Liquid Distance                                                | B | 2   | R   | $\sqrt{3}$ | 1   | 1.2   | $\infty$ |
| Phantom and Tissue Parameters                                |                                                                               |   |     |     |            |     |       |          |
| 18                                                           | —Phantom Uncertainty(shape and thickness tolerances)                          | B | 4   | R   | $\sqrt{3}$ | 1   | 2.31  | $\infty$ |
| 19                                                           | Uncertainty in SAR correction for deviation(in permittivity and conductivity) | B | 2   | N   | 1          | 1   | 2.00  |          |
| 20                                                           | — Liquid Conductivity Target —tolerance                                       | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 21                                                           | — Liquid Conductivity —measurement Uncertainty)                               | B | 4   | N   | $\sqrt{3}$ | 1   | 0.92  | 9        |
| 22                                                           | — Liquid Permittivity Target tolerance                                        | B | 2.5 | R   | $\sqrt{3}$ | 0.6 | 1.95  | $\infty$ |
| 22                                                           | — Liquid Permittivity —measurement uncertainty                                | B | 5   | N   | $\sqrt{3}$ | 1   | 1.15  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                         |                                                                               |   |     | RSS |            |     | 10.15 |          |
| <b>Expanded uncertainty</b><br>(Confidence interval of 95 %) |                                                                               |   |     | K=2 |            |     | 20.29 |          |

**12. MAIN TEST INSTRUMENTS**

| <b>EQUIPMENT</b>        | <b>TYPE</b>   | <b>Series No.</b>      | <b>Calibration Date</b> | <b>calibration period</b> |
|-------------------------|---------------|------------------------|-------------------------|---------------------------|
| System Simulator        | CMW500        | 130805                 | 2016/08/10              | 1 Year                    |
| SAR Probe               | SATIMO        | SN04/13EP166           | 2016/08/10              | 1 Year                    |
| Dipole                  | SID835        | SN09/13 DIP0G835-217   | 2014/08/28              | 3 Year                    |
| Dipole                  | SID1900       | SN09/13 DIP1G900-218   | 2014/08/28              | 3 Year                    |
| Vector Network Analyzer | ZVB8          | A0802530               | 2016/06/07              | 1 Year                    |
| Signal Generator        | SMR27         | A0304219               | 2016/06/07              | 1 Year                    |
| Power Meter             | NRP2          | A140401673             | 2017/03/09              | 1 Year                    |
| Power Sensor            | NPR-Z11       | 1138.3004.02-114072-nq | 2017/03/09              | 1 Year                    |
| Amplifier               | Nucletudes    | 143060                 | 2017/03/09              | 1 Year                    |
| Directional Coupler     | DC6180A       | 305827                 | 2017/03/09              | 1 Year                    |
| Power Meter             | NRVS          | A0802531               | 2017/03/09              | 1 Year                    |
| Power Sensor            | NRV-Z4        | 100069                 | 2017/03/09              | 1 Year                    |
| Multimeter              | Keithley-2000 | 4014020                | 2017/03/09              | 1 Year                    |

**ANNEX A**

**of**

**CCIC-SET**

**CONFORMANCE TEST REPORT FOR**

**HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS**

**SET2017-09250**

**Nielsen Audio, inc.**

**PPM 360 Meter**

**Type Name: DA118**

**Hardware Version: 8420439T000**

**Software Version: TF\_QCT1050\_G2V2\_VER\_2.10C\_PP\_20161212**

**TEST LAYOUT**

**This Annex consists of 4 pages**


**Date of Report: 2017-06-23**




**Fig.1 Body-Left**



**Fig.2 Body-Right**

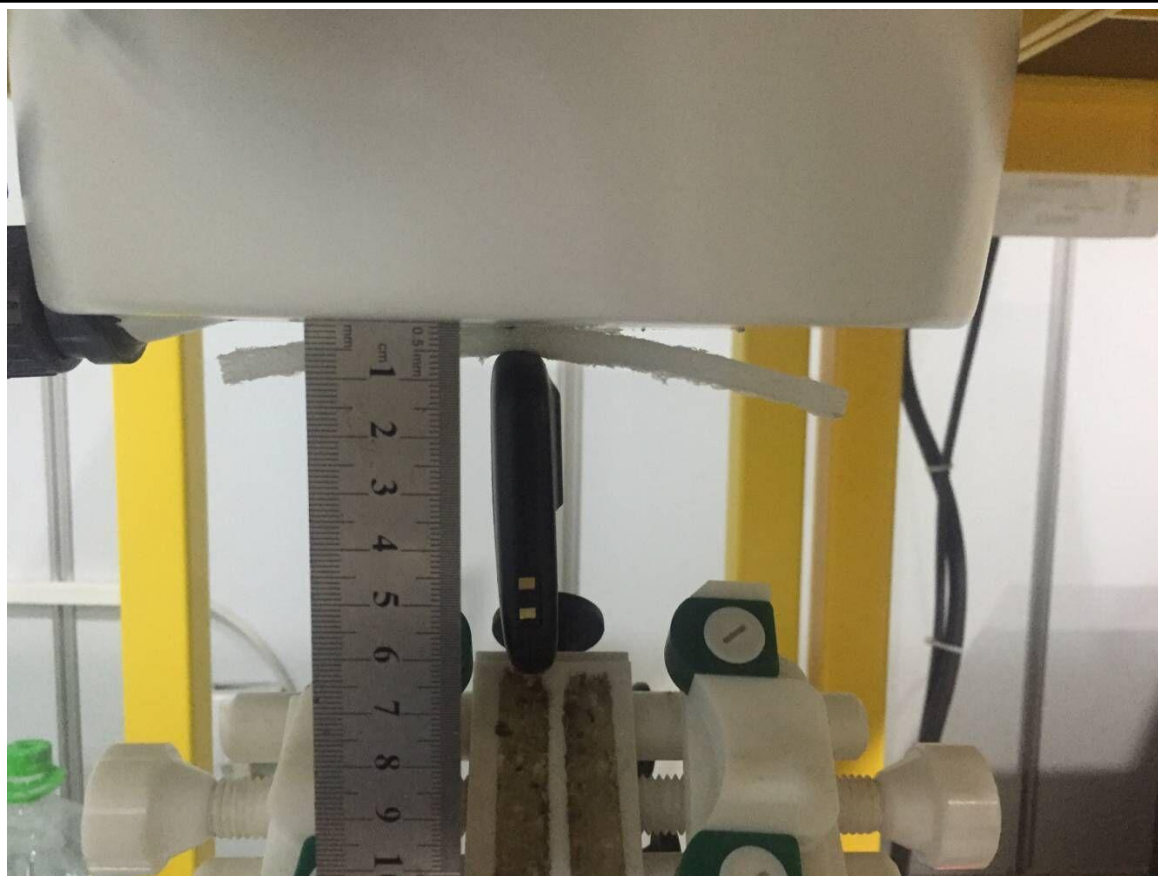

**Fig.3 Top**

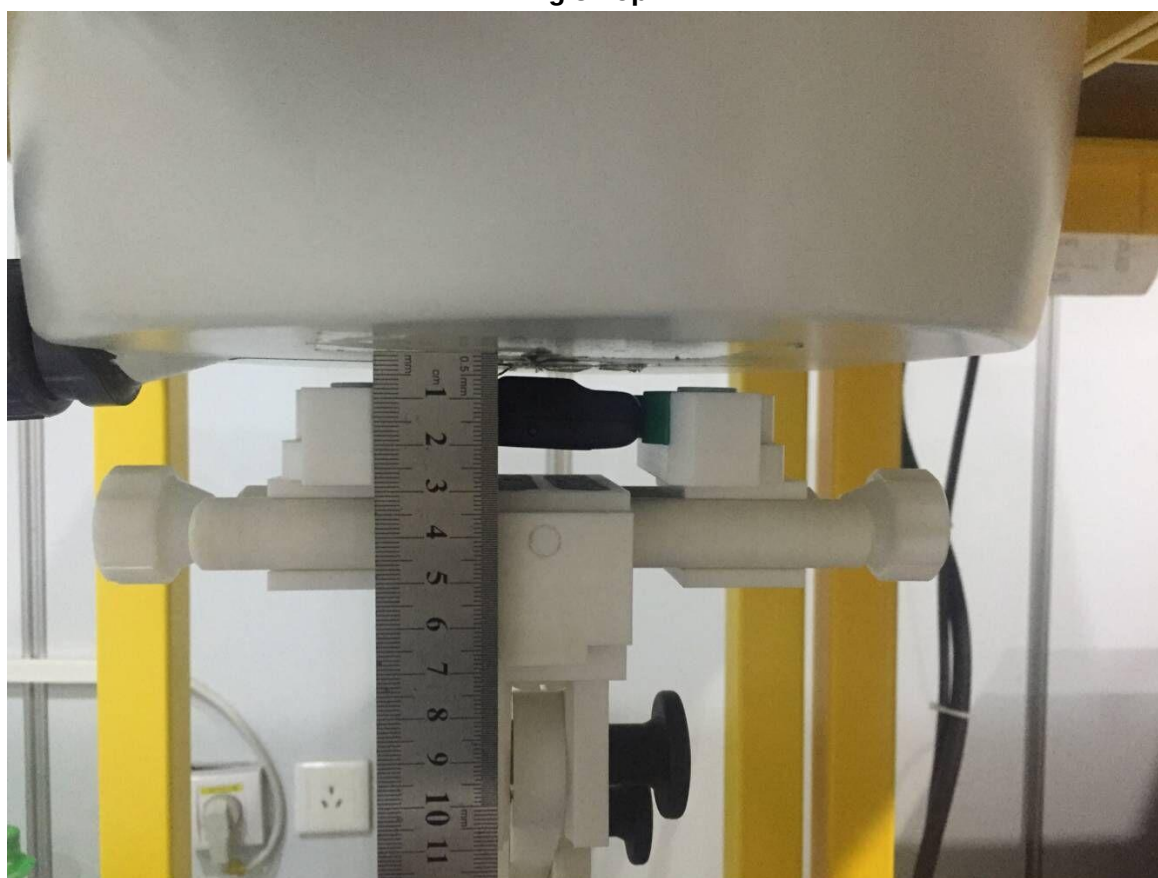

**Fig.4 Back**



**Fig.5 Face**



**Fig.6 Down**

**ANNEX B**

**of**

**CCIC-SET**

**CONFORMANCE TEST REPORT FOR**

**HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS**

**SET2017-09250**

**Nielsen Audio, inc.**

**PPM 360 Meter**

**Type Name: DA118**

**Hardware Version: 8420439T000**

**Software Version: TF\_QCT1050\_G2V2\_VER\_2.10C\_PP\_20161212**

**Sample Photographs**

**This Annex consists of 4 pages**

**Date of Report: 2017-06-23**

## 1. Appearance



Appearance and size (obverse)



Appearance and size (reverse)


### 3. Inside



### 4. Battery



#### 4. Position of antennas

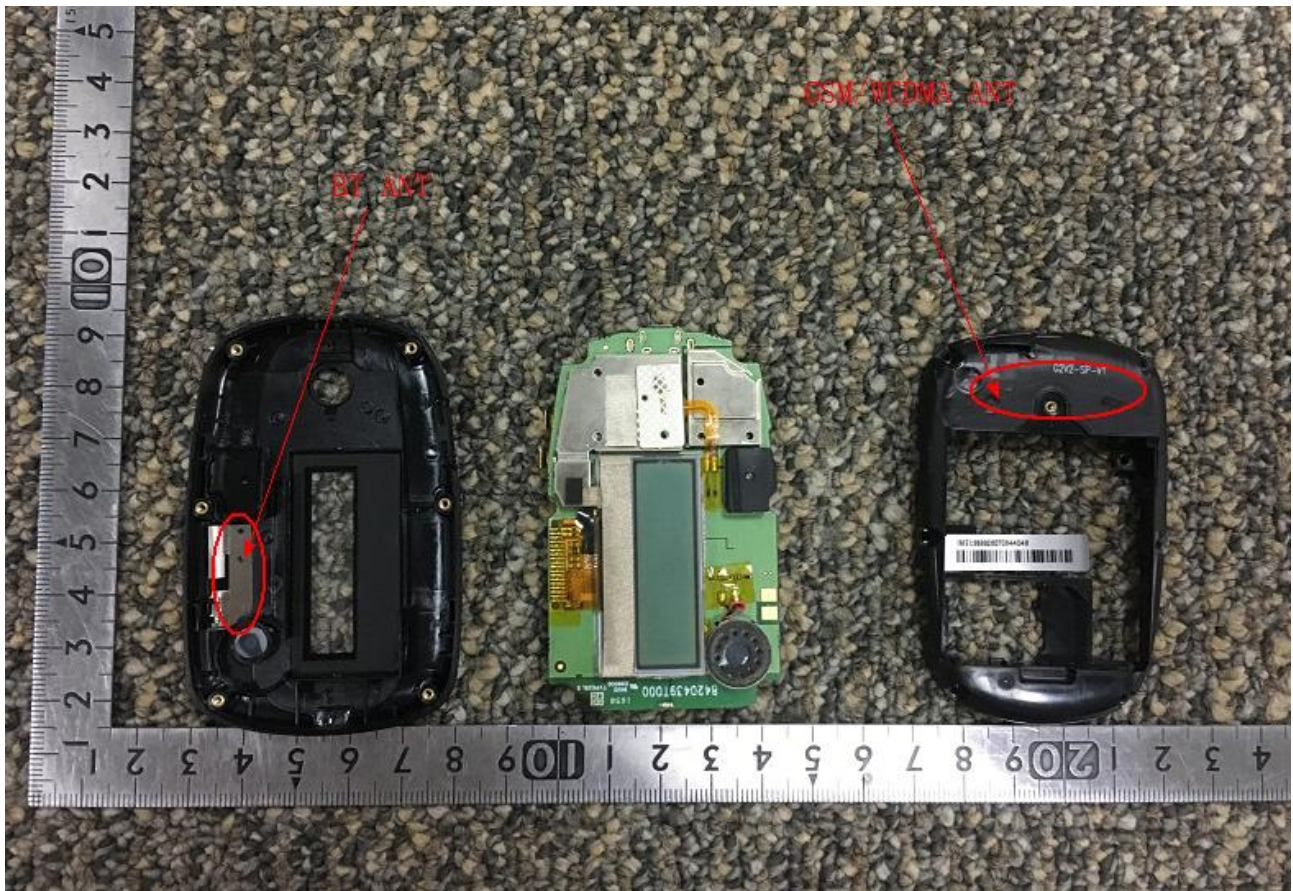

**ANNEX C**

**of**

**CCIC-SET**

**CONFORMANCE TEST REPORT FOR**

**HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS**

**SET2017-09250**

**Nielsen Audio, inc.**

**PPM 360 Meter**

**Type Name: DA118**

**Hardware Version: 8420439T000**

**Software Version: TF\_QCT1050\_G2V2\_VER\_2.10C\_PP\_20161212**

**Calibration Certificate of Probe and Dipoles**

**This Annex consists of 32 pages**

**Date of Report: 2017-06-23**

## Probe Calibration Certificate



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.227.15.14.SATU.A

**CCIC SOUTHERN ELECTRONIC PRODUCT  
TESTING (SHENZHEN) CO., LTD  
ELECTRONIC TESTING BUILDING, SHAHE ROAD, XILI  
TOWN  
SHENZHEN, P.R. CHINA (POST CODE:518055)  
SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE  
SERIAL NO.: SN 04/13 EP166**

**Calibrated at SATIMO US  
2105 Barrett Park Dr. - Kennesaw, GA 30144**



08/10/2016

*Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.227.15.14 SATUA

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 8/11/2016   | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 8/11/2016   | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 8/11/2016   | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                                        |
|-----------------------|-----------------------------------------------------------------------------|
| <i>Distribution :</i> | CCIC SOUTHERN<br>ELECTRONIC<br>PRODUCT<br>TESTING<br>(SHENZHEN) Co.,<br>Ltd |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 8/11/2016   | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## TABLE OF CONTENTS

|     |                                       |   |
|-----|---------------------------------------|---|
| 1   | Device Under Test .....               | 4 |
| 2   | Product Description .....             | 4 |
| 2.1 | General Information .....             | 4 |
| 3   | Measurement Method .....              | 4 |
| 3.1 | Linearity .....                       | 4 |
| 3.2 | Sensitivity .....                     | 5 |
| 3.3 | Lower Detection Limit .....           | 5 |
| 3.4 | Isotropy .....                        | 5 |
| 3.5 | Boundary Effect .....                 | 5 |
| 4   | Measurement Uncertainty .....         | 5 |
| 5   | Calibration Measurement Results ..... | 6 |
| 5.1 | Sensitivity in air .....              | 6 |
| 5.2 | Linearity .....                       | 7 |
| 5.3 | Sensitivity in liquid .....           | 7 |
| 5.4 | Isotropy .....                        | 8 |
| 6   | List of Equipment .....               | 9 |

Page: 3/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to  
be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.227.15.14.SATUA

## 1 DEVICE UNDER TEST

| Device Under Test                        |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE                                        |
| Manufacturer                             | Satimo                                                                  |
| Model                                    | SSE5                                                                    |
| Serial Number                            | SN 04/13 EP166                                                          |
| Product Condition (new / used)           | Used                                                                    |
| Frequency Range of Probe                 | 0.7 GHz-3GHz                                                            |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.231 MΩ<br>Dipole 2: R2=0.225 MΩ<br>Dipole 3: R3=0.228 MΩ |

A yearly calibration interval is recommended.

## 2 PRODUCT DESCRIPTION

## 2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – Satimo COMOSAR Dosimetric E field Dipole

|                                            |        |
|--------------------------------------------|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 4.5 mm |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 5 mm   |
| Distance between dipoles / probe extremity | 2.7 mm |

## 3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

## 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01 W/kg to 100 W/kg.

Page: 4/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

### 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

### 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

## 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

| Uncertainty analysis of the probe calibration in waveguide |                       |                          |            |    |                          |
|------------------------------------------------------------|-----------------------|--------------------------|------------|----|--------------------------|
| ERROR SOURCES                                              | Uncertainty value (%) | Probability Distribution | Divisor    | ci | Standard Uncertainty (%) |
| Incident or forward power                                  | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Reflected power                                            | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Liquid conductivity                                        | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Liquid permittivity                                        | 4.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.309%                   |
| Field homogeneity                                          | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |
| Field probe positioning                                    | 5.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 2.887%                   |
| Field probe linearity                                      | 3.00%                 | Rectangular              | $\sqrt{3}$ | 1  | 1.732%                   |

Page: 5/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.227.15.14.SATUA

|                                                     |  |  |  |  |        |
|-----------------------------------------------------|--|--|--|--|--------|
| Combined standard uncertainty                       |  |  |  |  | 5.831% |
| Expanded uncertainty<br>95 % confidence level k = 2 |  |  |  |  | 12.0%  |

## 5 CALIBRATION MEASUREMENT RESULTS

| Calibration Parameters |       |
|------------------------|-------|
| Liquid Temperature     | 21 °C |
| Lab Temperature        | 21 °C |
| Lab Humidity           | 45 %  |


## 5.1 SENSITIVITY IN AIR

| Normx dipole<br>1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normy dipole<br>2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normz dipole<br>3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) |
|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| 8.57                                                      | 4.83                                                      | 7.15                                                      |

| DCP dipole 1<br>(mV) | DCP dipole 2<br>(mV) | DCP dipole 3<br>(mV) |
|----------------------|----------------------|----------------------|
| 92                   | 90                   | 95                   |

Calibration curves  $e_i=f(V)$  ( $i=1,2,3$ ) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

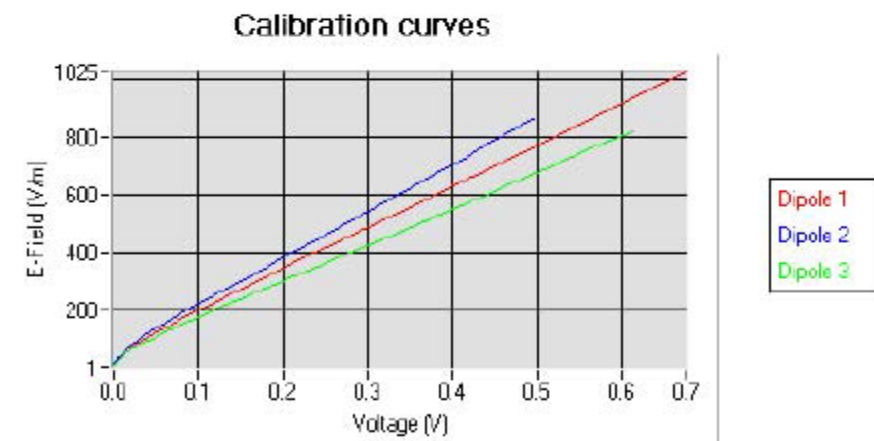

Page: 69

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.227.15.14 SATUA

## 5.2 LINEARITY

## Linearity

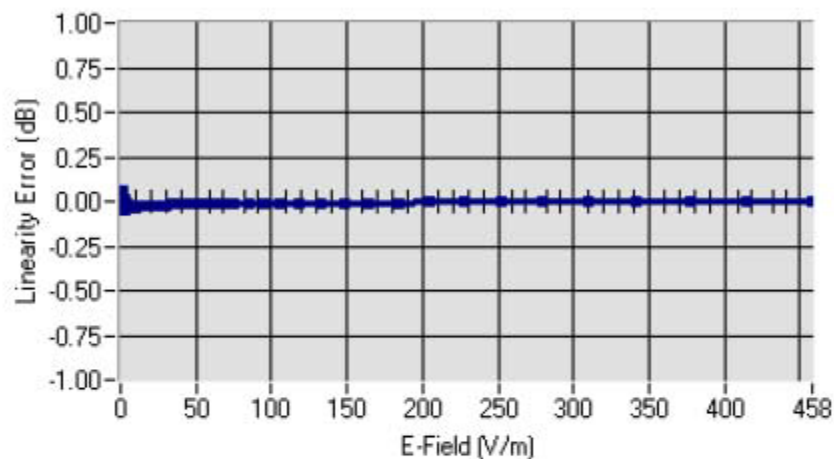Linearity:  $\pm 1.55\%$  ( $\pm 0.07\text{dB}$ )

## 5.3 SENSITIVITY IN LIQUID

| Liquid | Frequency<br>(MHz $\pm 100\text{MHz}$ ) | Permittivity | Epsilon (S/m) | ConvF |
|--------|-----------------------------------------|--------------|---------------|-------|
| HL850  | 835                                     | 42.80        | 0.89          | 5.69  |
| BL850  | 835                                     | 53.45        | 0.96          | 5.82  |
| HL900  | 900                                     | 42.47        | 0.96          | 5.34  |
| BL900  | 900                                     | 56.68        | 1.08          | 5.55  |
| HL1800 | 1800                                    | 41.30        | 1.38          | 4.75  |
| BL1800 | 1800                                    | 53.27        | 1.51          | 4.96  |
| HL1900 | 1900                                    | 41.09        | 1.42          | 5.25  |
| BL1900 | 1900                                    | 54.20        | 1.54          | 5.43  |
| HL2000 | 2000                                    | 39.72        | 1.43          | 4.81  |
| BL2000 | 2000                                    | 53.90        | 1.53          | 4.95  |
| HL2450 | 2450                                    | 39.05        | 1.77          | 4.93  |
| BL2450 | 2450                                    | 52.98        | 1.93          | 5.09  |
| HL2600 | 2600                                    | 38.35        | 1.92          | 5.08  |
| BL2600 | 2600                                    | 51.82        | 2.19          | 5.22  |

LOWER DETECTION LIMIT: 7m W/kg

Page: 7/9


*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



#### 5.4 ISOTROPY


##### HL900 MHz

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

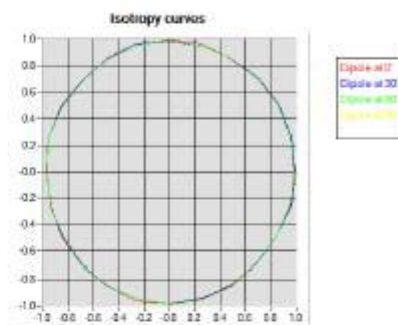

##### HL1800 MHz

- Axial isotropy: 0.05 dB
- Hemispherical isotropy: 0.07 dB

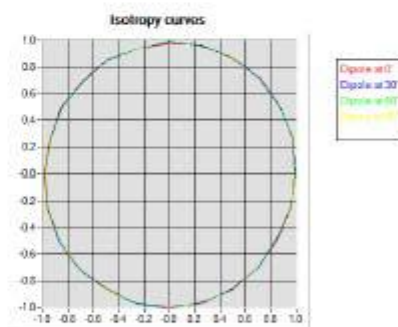

Page: 8/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## 6 LIST OF EQUIPMENT

| Equipment Summary Sheet       |                      |                    |                                               |                                               |
|-------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description         | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| Flat Phantom                  | Satimo               | SN-20/09-SAM 71    | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench            | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer              | Rhode & Schwarz ZVA  | SN100132           | 02/2016                                       | 02/2019                                       |
| Reference Probe               | Satimo               | EP 94 SN 37/08     | 10/2015                                       | 10/2016                                       |
| Multimeter                    | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator              | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                     | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                   | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                  | HP ECP-E 26A         | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler           | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Waveguide                     | Mega Industries      | 069Y7-158-13-712   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Transition          | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Termination         | Mega Industries      | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Temperature / Humidity Sensor | Control Company      | 11-661-9           | 7/2016                                        | 7/2019                                        |

Page: 9/9

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*

## SID835 Dipole Calibration Certificate



## SAR Reference Dipole Calibration Report

Ref: ACR.240.1.14.SATU.A

**CCIC SOUTHERN ELECTRONIC PRODUCT  
TESTING (SHENZHEN) CO., LTD**  
ELECTRONIC TESTING BUILDING, SHAHE ROAD, XILI  
TOWN  
SHENZHEN, P.R. CHINA (POST CODE:518055)  
**SATIMO COMOSAR REFERENCE DIPOLE**  
FREQUENCY: 835 MHZ  
SERIAL NO.: SN 09/13 DIP0G835-217

Calibrated at SATIMO US  
2105 Barrett Park Dr. - Kennesaw, GA 30144



08/28/14

*Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACRL240.1.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>   |
|----------------------|---------------|-----------------|-------------|--------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 8/29/2014   | <i>[Signature]</i> |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 8/29/2014   | <i>[Signature]</i> |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 8/29/2014   | <i>[Signature]</i> |

|                       | <i>Customer Name</i>                                                        |
|-----------------------|-----------------------------------------------------------------------------|
| <i>Distribution :</i> | CCIC SOUTHERN<br>ELECTRONIC<br>PRODUCT<br>TESTING<br>(SHENZHEN) Co.,<br>Ltd |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 8/29/2014   | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.



## TABLE OF CONTENTS

|     |                                                |    |
|-----|------------------------------------------------|----|
| 1   | Introduction.....                              | 4  |
| 2   | Device Under Test .....                        | 4  |
| 3   | Product Description .....                      | 4  |
| 3.1 | General Information .....                      | 4  |
| 4   | Measurement Method .....                       | 5  |
| 4.1 | Return Loss Requirements .....                 | 5  |
| 4.2 | Mechanical Requirements .....                  | 5  |
| 5   | Measurement Uncertainty.....                   | 5  |
| 5.1 | Return Loss .....                              | 5  |
| 5.2 | Dimension Measurement .....                    | 5  |
| 5.3 | Validation Measurement .....                   | 5  |
| 6   | Calibration Measurement Results.....           | 6  |
| 6.1 | Return Loss and Impedance In Head Liquid ..... | 6  |
| 6.2 | Return Loss and Impedance In Body Liquid ..... | 6  |
| 6.3 | Mechanical Dimensions .....                    | 6  |
| 7   | Validation measurement .....                   | 7  |
| 7.1 | Head Liquid Measurement .....                  | 7  |
| 7.2 | SAR Measurement Result With Head Liquid .....  | 8  |
| 7.3 | Body Liquid Measurement .....                  | 9  |
| 7.4 | SAR Measurement Result With Body Liquid .....  | 10 |
| 8   | List of Equipment .....                        | 11 |

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                  |
|--------------------------------|----------------------------------|
| Device Type                    | COMOSAR 835 MHz REFERENCE DIPOLE |
| Manufacturer                   | Satimo                           |
| Model                          | SID835                           |
| Serial Number                  | SN 09/13 DIP0G835-217            |
| Product Condition (new / used) | used                             |

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – Satimo COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ , traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.1 dB                              |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 3 - 300     | 0.05 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
| 1 g         | 20.3 %               |
| 10 g        | 20.1 %               |


Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*




## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

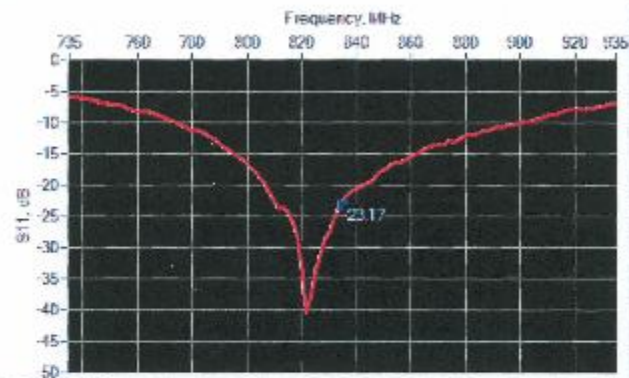

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 835             | -23.17           | -20              | $57.4 \Omega - 0.2 j\Omega$ |

### 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

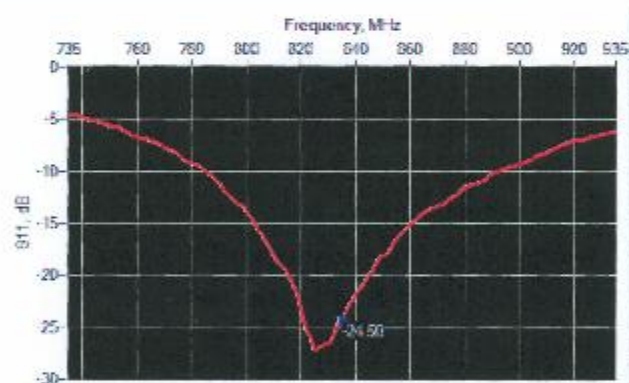

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 835             | -24.50           | -20              | $55.0 \Omega + 3.9 j\Omega$ |

### 6.3 MECHANICAL DIMENSIONS

| Frequency MHz | L mm             |          | h mm             |          | d mm            |          |
|---------------|------------------|----------|------------------|----------|-----------------|----------|
|               | required         | measured | required         | measured | required        | measured |
| 300           | $420.0 \pm 1 \%$ |          | $250.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 450           | $290.0 \pm 1 \%$ |          | $156.7 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 750           | $176.0 \pm 1 \%$ |          | $100.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 835           | $161.0 \pm 1 \%$ | PASS     | $89.8 \pm 1 \%$  | PASS     | $3.6 \pm 1 \%$  | PASS     |

Page: 6/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.200.114.SATIM.A

|      |            |  |           |  |          |  |
|------|------------|--|-----------|--|----------|--|
| 900  | 149.0 ±1 % |  | 89.3 ±1 % |  | 3.6 ±1 % |  |
| 1450 | 89.1 ±1 %  |  | 51.7 ±1 % |  | 3.6 ±1 % |  |
| 1500 | 80.5 ±1 %  |  | 50.0 ±1 % |  | 3.6 ±1 % |  |
| 1640 | 79.0 ±1 %  |  | 45.7 ±1 % |  | 3.6 ±1 % |  |
| 1750 | 75.2 ±1 %  |  | 42.9 ±1 % |  | 3.6 ±1 % |  |
| 1800 | 72.0 ±1 %  |  | 41.7 ±1 % |  | 3.6 ±1 % |  |
| 1900 | 68.0 ±1 %  |  | 39.5 ±1 % |  | 3.6 ±1 % |  |
| 1950 | 66.3 ±1 %  |  | 38.5 ±1 % |  | 3.6 ±1 % |  |
| 2000 | 64.5 ±1 %  |  | 37.5 ±1 % |  | 3.6 ±1 % |  |
| 2100 | 61.0 ±1 %  |  | 35.7 ±1 % |  | 3.6 ±1 % |  |
| 2300 | 55.5 ±1 %  |  | 32.6 ±1 % |  | 3.6 ±1 % |  |
| 2450 | 51.5 ±1 %  |  | 30.4 ±1 % |  | 3.6 ±1 % |  |
| 2600 | 48.5 ±1 %  |  | 28.8 ±1 % |  | 3.6 ±1 % |  |
| 3000 | 41.5 ±1 %  |  | 25.0 ±1 % |  | 3.6 ±1 % |  |
| 3500 | 37.0 ±1 %  |  | 26.4 ±1 % |  | 3.6 ±1 % |  |
| 3700 | 34.7 ±1 %  |  | 26.4 ±1 % |  | 3.6 ±1 % |  |

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 300              | 45.3 ±5 %                              |          | 0.87 ±5 %                     |          |
| 450              | 43.5 ±5 %                              |          | 0.87 ±5 %                     |          |
| 750              | 41.9 ±5 %                              |          | 0.89 ±5 %                     |          |
| 835              | 41.5 ±5 %                              | PASS     | 0.90 ±5 %                     | PASS     |
| 900              | 41.5 ±5 %                              |          | 0.97 ±5 %                     |          |
| 1450             | 40.5 ±5 %                              |          | 1.20 ±5 %                     |          |
| 1500             | 40.4 ±5 %                              |          | 1.23 ±5 %                     |          |
| 1640             | 40.2 ±5 %                              |          | 1.31 ±5 %                     |          |
| 1750             | 40.1 ±5 %                              |          | 1.37 ±5 %                     |          |
| 1800             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 1900             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 1950             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 2000             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.240.114.SATUJA

|      |           |  |           |  |
|------|-----------|--|-----------|--|
| 2100 | 39.8 ±5 % |  | 1.49 ±5 % |  |
| 2300 | 39.5 ±5 % |  | 1.67 ±5 % |  |
| 2450 | 39.2 ±5 % |  | 1.80 ±5 % |  |
| 2600 | 39.0 ±5 % |  | 1.96 ±5 % |  |
| 3000 | 38.5 ±5 % |  | 2.40 ±5 % |  |
| 3500 | 37.9 ±5 % |  | 2.91 ±5 % |  |

## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                                                    |
|-------------------------------------------|--------------------------------------------------------------------|
| Software                                  | OPENSAR V4                                                         |
| Phantom                                   | SN 20/09 SAM71                                                     |
| Probe                                     | SN 18/11 EPG122                                                    |
| Liquid                                    | Head Liquid Values: $\epsilon_{ps}^*$ : 42.3 $\sigma_{\mu}$ : 0.92 |
| Distance between dipole center and liquid | 15.0 mm                                                            |
| Area scan resolution                      | $dx=8mm/dy=8mm$                                                    |
| Zoon Scan Resolution                      | $dx=8mm/dy=8mm/dz=5mm$                                             |
| Frequency                                 | 835 MHz                                                            |
| Input power                               | 20 dBm                                                             |
| Liquid Temperature                        | 21 °C                                                              |
| Lab Temperature                           | 21 °C                                                              |
| Lab Humidity                              | 45 %                                                               |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |             | 10 g SAR (W/kg/W) |             |
|------------------|------------------|-------------|-------------------|-------------|
|                  | required         | measured    | required          | measured    |
| 300              | 2.85             |             | 1.94              |             |
| 450              | 4.58             |             | 3.06              |             |
| 750              | 8.49             |             | 5.55              |             |
| 835              | 9.56             | 9.77 (0.98) | 6.22              | 6.30 (0.63) |
| 900              | 10.9             |             | 6.99              |             |
| 1450             | 29               |             | 16                |             |
| 1500             | 30.5             |             | 16.8              |             |
| 1640             | 34.2             |             | 18.4              |             |
| 1750             | 36.4             |             | 19.3              |             |
| 1800             | 38.4             |             | 20.1              |             |
| 1900             | 39.7             |             | 20.5              |             |
| 1950             | 40.5             |             | 20.9              |             |
| 2000             | 41.1             |             | 21.1              |             |
| 2100             | 43.6             |             | 21.9              |             |
| 2300             | 48.7             |             | 23.3              |             |

Page: 8/11


*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.240.1.14/SATIMA

|      |      |  |      |  |
|------|------|--|------|--|
| 2450 | 52.4 |  | 24   |  |
| 2620 | 55.3 |  | 24.6 |  |
| 3020 | 63.8 |  | 25.7 |  |
| 3520 | 67.1 |  | 25   |  |

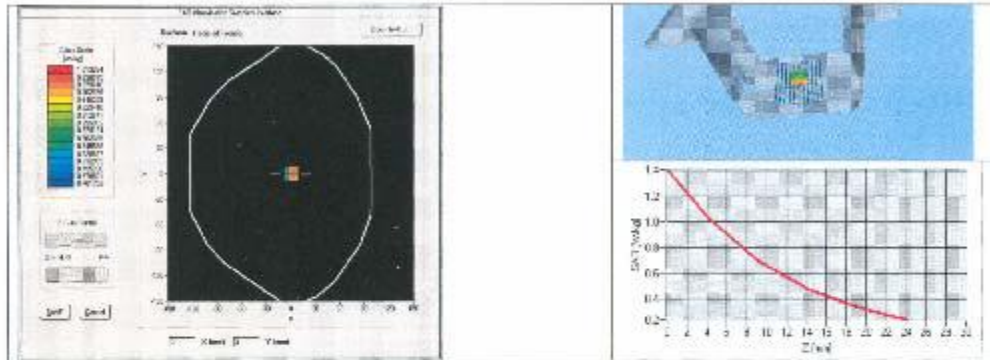

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 150              | 61.9 $\pm$ 5 %                          |          | 0.80 $\pm$ 5 %                |          |
| 300              | 58.2 $\pm$ 5 %                          |          | 0.92 $\pm$ 5 %                |          |
| 450              | 56.7 $\pm$ 5 %                          |          | 0.94 $\pm$ 5 %                |          |
| 750              | 55.5 $\pm$ 5 %                          |          | 0.96 $\pm$ 5 %                |          |
| 835              | 55.2 $\pm$ 5 %                          | PASS     | 0.97 $\pm$ 5 %                | PASS     |
| 900              | 55.0 $\pm$ 5 %                          |          | 1.05 $\pm$ 5 %                |          |
| 915              | 55.0 $\pm$ 5 %                          |          | 1.06 $\pm$ 5 %                |          |
| 1450             | 54.0 $\pm$ 5 %                          |          | 1.30 $\pm$ 5 %                |          |
| 1610             | 53.8 $\pm$ 5 %                          |          | 1.40 $\pm$ 5 %                |          |
| 1800             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 1900             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2000             | 53.3 $\pm$ 5 %                          |          | 1.52 $\pm$ 5 %                |          |
| 2100             | 53.2 $\pm$ 5 %                          |          | 1.62 $\pm$ 5 %                |          |
| 2450             | 52.7 $\pm$ 5 %                          |          | 1.95 $\pm$ 5 %                |          |
| 2600             | 52.5 $\pm$ 5 %                          |          | 2.16 $\pm$ 5 %                |          |
| 3000             | 52.0 $\pm$ 5 %                          |          | 2.73 $\pm$ 5 %                |          |
| 3500             | 51.3 $\pm$ 5 %                          |          | 3.31 $\pm$ 5 %                |          |
| 5200             | 49.0 $\pm$ 10 %                         |          | 5.30 $\pm$ 10 %               |          |
| 5300             | 48.9 $\pm$ 10 %                         |          | 5.42 $\pm$ 10 %               |          |
| 5400             | 48.7 $\pm$ 10 %                         |          | 5.53 $\pm$ 10 %               |          |

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMA.



## SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR 340 | 14 SATUA

|      |            |  |            |  |
|------|------------|--|------------|--|
| 5500 | 48.5 ±10 % |  | 5.65 ±10 % |  |
| 5600 | 48.5 ±10 % |  | 5.77 ±10 % |  |
| 5800 | 48.2 ±10 % |  | 6.00 ±10 % |  |

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                                           |
|-------------------------------------------|-----------------------------------------------------------|
| Software                                  | OPENSAR V4                                                |
| Phantom                                   | SN 20/09 SAM71                                            |
| Probe                                     | SN 18/11 EPG122                                           |
| Liquid                                    | Body Liquid Values: $\epsilon_{ps}^1$ : 54.1 sigma : 0.97 |
| Distance between dipole center and liquid | 15.0 mm                                                   |
| Area scan resolution                      | $dx=8mm/dy=8mm$                                           |
| Zoon Scan Resolution                      | $dx=8mm/dy=8m/dz=5mm$                                     |
| Frequency                                 | 835 MHz                                                   |
| Input power                               | 20 dBm                                                    |
| Liquid Temperature                        | 21 °C                                                     |
| Lab Temperature                           | 21 °C                                                     |
| Lab Humidity                              | 45 %                                                      |

| Frequency<br>MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
|                  | measured         | measured          |
| 835              | 10.31 (1.03)     | 6.74 (0.67)       |

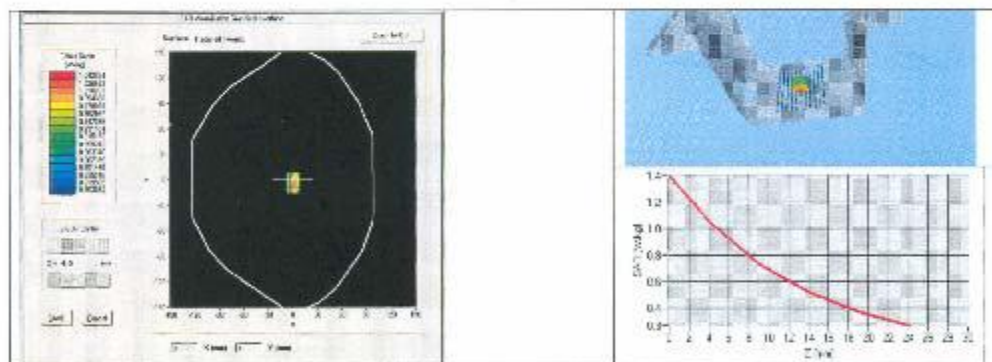

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 240114 SATUA

## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet         |                      |                    |                                               |                                               |
|---------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description           | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                     | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench              | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Calipers                        | Carrera              | CALIPER-01         | 12/2013                                       | 12/2016                                       |
| Reference Probe                 | Satimo               | EPG122 SN 18/11    | 10/2013                                       | 10/2014                                       |
| Multimeter                      | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator                | Agilent E4438C       | MY49070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                       | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                     | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                    | HP ECP-E26A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler             | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company      | 11-861-9           | 8/2012                                        | 8/2015                                        |

Page: 11/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.

**SID1900 Dipole Calibration Certificate****SAR Reference Dipole Calibration Report**

Ref : ACR.240.4.14.SATU.A

**CCIC SOUTHERN ELECTRONIC PRODUCT  
TESTING (SHENZHEN) CO., LTD**  
ELECTRONIC TESTING BUILDING, SHAHE ROAD, XILI  
TOWN  
SHENZHEN, P.R. CHINA (POST CODE:518055)  
**SATIMO COMOSAR REFERENCE DIPOLE**  
FREQUENCY: 1900 MHZ  
SERIAL NO.: SN 09/13 DIP1G900-218

Calibrated at SATIMO US  
2105 Barrett Park Dr. - Kennesaw, GA 30144



08/28/14

*Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 240.4.14.SATU.A

|                      | <i>Name</i>   | <i>Function</i> | <i>Date</i> | <i>Signature</i>     |
|----------------------|---------------|-----------------|-------------|----------------------|
| <i>Prepared by :</i> | Jérôme LUC    | Product Manager | 8/29/2014   | <i>JS</i>            |
| <i>Checked by :</i>  | Jérôme LUC    | Product Manager | 8/29/2014   | <i>JS</i>            |
| <i>Approved by :</i> | Kim RUTKOWSKI | Quality Manager | 8/29/2014   | <i>Kim Rutkowski</i> |

|                       | <i>Customer Name</i>                                                        |
|-----------------------|-----------------------------------------------------------------------------|
| <i>Distribution :</i> | CCIC SOUTHERN<br>ELECTRONIC<br>PRODUCT<br>TESTING<br>(SHENZHEN) Co.,<br>Ltd |

| <i>Issue</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|----------------------|
| A            | 8/29/2014   | Initial release      |
|              |             |                      |
|              |             |                      |
|              |             |                      |

Page: 2/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is an internal work for the company and its subsidiaries and is not to be used*



## TABLE OF CONTENTS

|     |                                                |    |
|-----|------------------------------------------------|----|
| 1   | Introduction.....                              | 4  |
| 2   | Device Under Test .....                        | 4  |
| 3   | Product Description .....                      | 4  |
| 3.1 | General Information .....                      | 4  |
| 4   | Measurement Method .....                       | 5  |
| 4.1 | Return Loss Requirements .....                 | 5  |
| 4.2 | Mechanical Requirements .....                  | 5  |
| 5   | Measurement Uncertainty .....                  | 5  |
| 5.1 | Return Loss .....                              | 5  |
| 5.2 | Dimension Measurement .....                    | 5  |
| 5.3 | Validation Measurement .....                   | 5  |
| 6   | Calibration Measurement Results .....          | 6  |
| 6.1 | Return Loss and Impedance In Head Liquid ..... | 6  |
| 6.2 | Return Loss and Impedance In Body Liquid ..... | 6  |
| 6.3 | Mechanical Dimensions .....                    | 6  |
| 7   | Validation measurement .....                   | 7  |
| 7.1 | Head Liquid Measurement .....                  | 7  |
| 7.2 | SAR Measurement Result With Head Liquid .....  | 8  |
| 7.3 | Body Liquid Measurement .....                  | 9  |
| 7.4 | SAR Measurement Result With Body Liquid .....  | 10 |
| 8   | List of Equipment .....                        | 11 |



## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                   |
|--------------------------------|-----------------------------------|
| Device Type                    | COMOSAR 1900 MHz REFERENCE DIPOLE |
| Manufacturer                   | Satimo                            |
| Model                          | SID1900                           |
| Serial Number                  | SN 09/13 DIP1G900-218             |
| Product Condition (new / used) | Used                              |

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – Satimo COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.*



#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ , traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.1 dB                              |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 3 - 300     | 0.05 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
| 1 g         | 20.3 %               |
| 10 g        | 20.1 %               |


Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of SATIMO. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without written approval of SATIMO.*




## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

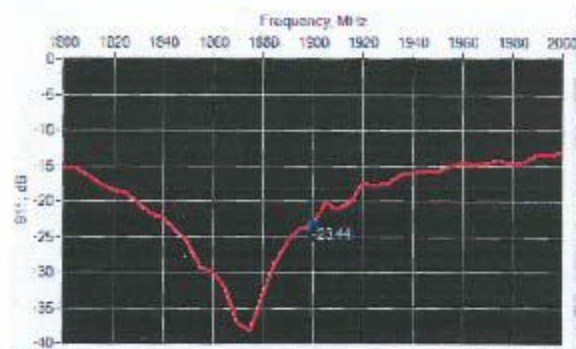

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 1900            | -23.44           | -20              | $55.4 \Omega + 5.2 j\Omega$ |

### 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

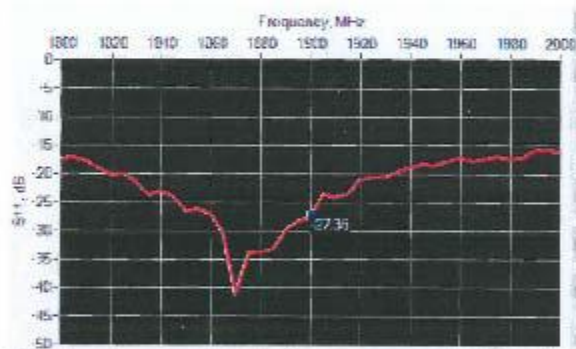

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                   |
|-----------------|------------------|------------------|-----------------------------|
| 1900            | -27.36           | -20              | $51.7 \Omega + 4.4 j\Omega$ |

### 6.3 MECHANICAL DIMENSIONS

| Frequency MHz | L mm             |          | h mm             |          | d mm            |          |
|---------------|------------------|----------|------------------|----------|-----------------|----------|
|               | required         | measured | required         | measured | required        | measured |
| 300           | $420.0 \pm 1 \%$ |          | $250.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 450           | $250.0 \pm 1 \%$ |          | $166.7 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 750           | $176.0 \pm 1 \%$ |          | $100.0 \pm 1 \%$ |          | $6.35 \pm 1 \%$ |          |
| 835           | $161.0 \pm 1 \%$ |          | $89.8 \pm 1 \%$  |          | $3.5 \pm 1 \%$  |          |

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The reproduction mentioned herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR200510SATC.A

|      |            |      |           |      |          |      |
|------|------------|------|-----------|------|----------|------|
| 900  | 149.3 ±1 % |      | 83.3 ±1 % |      | 3.6 ±1 % |      |
| 1450 | 89.1 ±1 %  |      | 51.7 ±1 % |      | 3.6 ±1 % |      |
| 1500 | 80.5 ±1 %  |      | 50.0 ±1 % |      | 3.6 ±1 % |      |
| 1640 | 79.0 ±1 %  |      | 45.7 ±1 % |      | 3.6 ±1 % |      |
| 1750 | 75.2 ±1 %  |      | 42.9 ±1 % |      | 3.6 ±1 % |      |
| 1800 | 72.0 ±1 %  |      | 41.7 ±1 % |      | 3.6 ±1 % |      |
| 1900 | 68.0 ±1 %  | PASS | 39.5 ±1 % | PASS | 3.6 ±1 % | PASS |
| 1950 | 66.3 ±1 %  |      | 38.5 ±1 % |      | 3.6 ±1 % |      |
| 2000 | 64.5 ±1 %  |      | 37.5 ±1 % |      | 3.6 ±1 % |      |
| 2100 | 61.0 ±1 %  |      | 35.7 ±1 % |      | 3.6 ±1 % |      |
| 2300 | 55.5 ±1 %  |      | 32.6 ±1 % |      | 3.6 ±1 % |      |
| 2450 | 51.5 ±1 %  |      | 33.4 ±1 % |      | 3.6 ±1 % |      |
| 2600 | 48.5 ±1 %  |      | 28.8 ±1 % |      | 3.6 ±1 % |      |
| 3000 | 41.5 ±1 %  |      | 25.0 ±1 % |      | 3.6 ±1 % |      |
| 3500 | 37.0 ±1 %  |      | 26.4 ±1 % |      | 3.6 ±1 % |      |
| 3700 | 34.7 ±1 %  |      | 26.4 ±1 % |      | 3.6 ±1 % |      |

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 300              | 45.3 ±5 %                              |          | 0.87 ±5 %                     |          |
| 450              | 43.5 ±5 %                              |          | 0.87 ±5 %                     |          |
| 750              | 41.5 ±5 %                              |          | 0.89 ±5 %                     |          |
| 835              | 41.5 ±5 %                              |          | 0.90 ±5 %                     |          |
| 900              | 41.5 ±5 %                              |          | 0.97 ±5 %                     |          |
| 1450             | 40.5 ±5 %                              |          | 1.70 ±5 %                     |          |
| 1500             | 40.4 ±5 %                              |          | 1.23 ±5 %                     |          |
| 1540             | 40.2 ±5 %                              |          | 1.31 ±5 %                     |          |
| 1750             | 40.1 ±5 %                              |          | 1.37 ±5 %                     |          |
| 1800             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 1900             | 40.0 ±5 %                              | PASS     | 1.40 ±5 %                     | PASS     |
| 1950             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |
| 2000             | 40.0 ±5 %                              |          | 1.40 ±5 %                     |          |

Page: 7/11

This document shall not be reproduced, copied in full or in part without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be retained in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR2016-19 SATL/A

|      |            |            |
|------|------------|------------|
| 2100 | 59.8 ± 5 % | 1.49 ± 5 % |
| 2300 | 39.5 ± 5 % | 1.67 ± 5 % |
| 2450 | 33.2 ± 5 % | 1.80 ± 5 % |
| 2600 | 39.0 ± 5 % | 1.96 ± 5 % |
| 3000 | 38.5 ± 5 % | 2.40 ± 5 % |
| 3500 | 37.8 ± 5 % | 2.81 ± 5 % |

## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CENELEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                                                    |
|-------------------------------------------|--------------------------------------------------------------------|
| Software                                  | OPEN SAR V4                                                        |
| Phantom                                   | SN 2009 SAM71                                                      |
| Probe                                     | SN 1811 EPG122                                                     |
| Liquid                                    | Head Liquid Values: $\epsilon_{\text{eff}} = 41.1$ $\sigma = 1.42$ |
| Distance between dipole center and liquid | 13.0 mm                                                            |
| Area scan resolution                      | $dx=8\text{mm}/dy=8\text{mm}$                                      |
| Zoon Scan Resolution                      | $dx=8\text{mm}/dy=8\text{mm}/dz=5\text{mm}$                        |
| Frequency                                 | 1900 MHz                                                           |
| Input power                               | 23 dBm                                                             |
| Liquid Temperature                        | 21 °C                                                              |
| Lab Temperature                           | 21 °C                                                              |
| Lab Humidity                              | 45 %                                                               |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |              | 10 g SAR (W/kg/W) |              |
|------------------|------------------|--------------|-------------------|--------------|
|                  | required         | measured     | required          | measured     |
| 300              | 2.85             |              | 1.34              |              |
| 450              | 4.58             |              | 3.26              |              |
| 750              | 8.49             |              | 5.55              |              |
| 835              | 9.56             |              | 5.27              |              |
| 900              | 10.9             |              | 5.98              |              |
| 1450             | 29               |              | 16                |              |
| 1500             | 30.5             |              | 16.8              |              |
| 1640             | 34.2             |              | 18.4              |              |
| 1750             | 36.4             |              | 19.2              |              |
| 1800             | 38.4             |              | 20.1              |              |
| 1900             | 39.7             | 40.87 (4.04) | 20.5              | 20.62 (2.06) |
| 1950             | 40.5             |              | 20.9              |              |
| 2000             | 41.1             |              | 21.1              |              |
| 2100             | 43.6             |              | 21.9              |              |
| 2300             | 48.7             |              | 23.3              |              |

Page: 8/11


*This document shall not be reproduced, stored in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR 240.4.14 SATUA

|      |      |  |      |  |
|------|------|--|------|--|
| 2450 | 52.4 |  | 24   |  |
| 2500 | 55.3 |  | 24.6 |  |
| 3000 | 63.8 |  | 25.7 |  |
| 3500 | 67.1 |  | 25   |  |

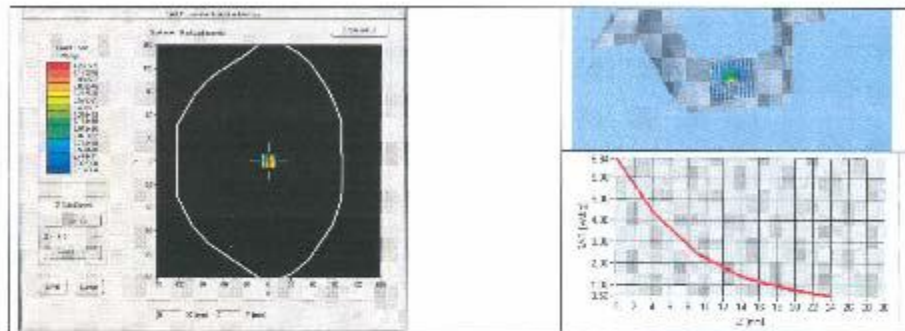

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 150              | 51.5 $\pm$ 5 %                         |          | 0.80 $\pm$ 5 %                |          |
| 300              | 58.7 $\pm$ 5 %                         |          | 0.92 $\pm$ 5 %                |          |
| 450              | 56.7 $\pm$ 5 %                         |          | 0.94 $\pm$ 5 %                |          |
| 750              | 55.5 $\pm$ 5 %                         |          | 0.96 $\pm$ 5 %                |          |
| 835              | 55.2 $\pm$ 5 %                         |          | 0.97 $\pm$ 5 %                |          |
| 900              | 55.0 $\pm$ 5 %                         |          | 1.05 $\pm$ 5 %                |          |
| 915              | 55.0 $\pm$ 5 %                         |          | 1.06 $\pm$ 5 %                |          |
| 1450             | 54.0 $\pm$ 5 %                         |          | 1.30 $\pm$ 5 %                |          |
| 1610             | 53.8 $\pm$ 5 %                         |          | 1.40 $\pm$ 5 %                |          |
| 1800             | 53.3 $\pm$ 5 %                         |          | 1.52 $\pm$ 5 %                |          |
| 1900             | 53.3 $\pm$ 5 %                         | PASS     | 1.52 $\pm$ 5 %                | PASS     |
| 2000             | 53.3 $\pm$ 5 %                         |          | 1.52 $\pm$ 5 %                |          |
| 2100             | 53.2 $\pm$ 5 %                         |          | 1.62 $\pm$ 5 %                |          |
| 2450             | 52.7 $\pm$ 5 %                         |          | 1.95 $\pm$ 5 %                |          |
| 2600             | 52.5 $\pm$ 5 %                         |          | 2.10 $\pm$ 5 %                |          |
| 3000             | 52.0 $\pm$ 5 %                         |          | 2.73 $\pm$ 5 %                |          |
| 3500             | 51.3 $\pm$ 5 %                         |          | 3.31 $\pm$ 5 %                |          |
| 5200             | 49.0 $\pm$ 10 %                        |          | 5.30 $\pm$ 10 %               |          |
| 5300             | 48.9 $\pm$ 10 %                        |          | 5.42 $\pm$ 10 %               |          |
| 5400             | 48.7 $\pm$ 10 %                        |          | 5.53 $\pm$ 10 %               |          |

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR 1604-14-SAT/JA

|      |            |  |            |  |
|------|------------|--|------------|--|
| 5500 | 48.6 ±10 % |  | 5.95 ±10 % |  |
| 5600 | 48.5 ±10 % |  | 5.77 ±10 % |  |
| 5800 | 48.2 ±10 % |  | 5.00 ±10 % |  |

## 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                                           |
|-------------------------------------------|-----------------------------------------------------------|
| Software                                  | OPENSAR V4                                                |
| Phantom                                   | SN 2009 SAM71                                             |
| Probe                                     | SN 18/11 EPG122                                           |
| Liquid                                    | Body Liquid Values: $\epsilon_{ps}^*$ : 54.2 sigma : 1.54 |
| Distance between dipole center and liquid | 10.0 mm                                                   |
| Area scan resolution                      | $dx=8mm/dy=8mm$                                           |
| Zona Scan Resolution                      | $dx=8mm/dy=8mm/dz=5mm$                                    |
| Frequency                                 | 1900 MHz                                                  |
| Input power                               | 20 dBm                                                    |
| Liquid Temperature                        | 21 °C                                                     |
| Lab Temperature                           | 21 °C                                                     |
| Lab Humidity                              | 45 %                                                      |

| Frequency (MHz) | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|-----------------|------------------|-------------------|
|                 | measured         | measured          |
| 1900            | 40.81 [4.08]     | 71.71 [2.12]      |

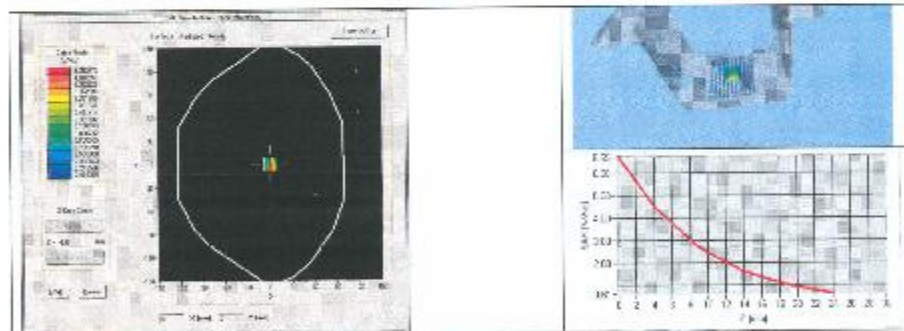

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be referred in whole or part without written approval of SATIMO.



## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet         |                      |                    |                                               |                                               |
|---------------------------------|----------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description           | Manufacturer / Model | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                     | Satimo               | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| CCMOSAR Test Bench              | Version 3            | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                | Rhode & Schwarz ZVA  | SN100132           | 02/2013                                       | 02/2016                                       |
| Calipers                        | Camera               | CALIPER-01         | 12/2013                                       | 12/2016                                       |
| Reference Probe                 | Satimo               | EPG122 SN 18/11    | 10/2013                                       | 10/2014                                       |
| Multimeter                      | Keithley 2000        | 1188656            | 12/2013                                       | 12/2016                                       |
| Signal Generator                | Agilent E4438C       | MY48070581         | 12/2013                                       | 12/2016                                       |
| Amplifier                       | Aethercomm           | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                     | HP E4418A            | US38261498         | 12/2013                                       | 12/2016                                       |
| Power Sensor                    | HP ECP-E28A          | US37181460         | 12/2013                                       | 12/2016                                       |
| Directional Coupler             | Narda 4216-20        | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company      | 11 861-9           | 8/2012                                        | 8/2015                                        |

Page: 11/11

*This document shall not be reproduced, copied in full or in part, without the written approval of SATIMO.  
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.*

————End of the Report————