



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2215-2, XT2215-3, XT2215-4, XT2215DL
FCC ID : IHDT56AA4
STANDARD : 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jan. 07, 2022 ~ Jan. 15, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Modification of EUT 6

 1.6 Maximum Conducted Power and Emission Designator 6

 1.7 Testing Site..... 6

 1.8 Test Software 7

 1.9 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Support Unit used in test configuration and system 9

 2.4 Measurement Results Explanation Example 10

 2.5 Frequency List of Low/Middle/High Channels 10

3 TEST RESULT 11

 3.1 Conducted Output Power Measurement 11

 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 12

 3.3 Emissions Mask Measurement 13

 3.4 Emissions Mask – Out Of Band Emissions Measurement..... 15

 3.5 Field Strength of Spurious Radiation Measurement 16

 3.6 Frequency Stability Measurement..... 19

4 LIST OF MEASURING EQUIPMENT 21

5 UNCERTAINTY OF EVALUATION 22

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG1N0903L	Rev. 01	Initial issue of report	Jan. 30, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	—	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	—	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 47.03 dB at 1648.00 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2215-2, XT2215-3, XT2215-4, XT2215DL
FCC ID	IHDT56AA4
IMEI Code	Conducted: NA Radiation: 351475460012023
HW Version	DVT2
SW Version	S1SD32.29
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	814 ~ 824 MHz
Rx Frequency	859 ~ 869 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Antenna Gain	-7.8 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. Only 5G NR bands are tested in this report, all the other RF bands are tested in the other reports separately.
2. The four models XT2215-2, XT2215-3, XT2215-4 and XT2215DL are only for market differentiation, all the others are the same.
3. The maximum ERP is calculated from max Output power and antenna gain, only the maximum ERP are shown in the report.
4. 5G NR n26 only support SA.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power(W)	Emission Designator (99%OBW)	Maximum Conducted power(W)	Emission Designator (99%OBW)
5	816.5 ~ 821.5	0.2350	4M48G7D	0.1972	4M48W7D
10	819	0.2323	9M25G7D	0.1888	9M28W7D
15	821.5	0.2399	14M1G7D	0.1892	14M1W7D
20	824	0.2415	19M0G7D	0.1837	19M0W7D

1.7 Testing Site

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272



1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 90(S)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band	Bandwidth (MHz)				Modulation					RB #			Test Channel		
		5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n26	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n26	v	v			v	v	v	v	v			v		v	
				v	v	v	v	v	v	v			v	v		
Emission masks In-band emissions	n26	v				v	v				v		v	v		v
			v			v	v				v		v		v	
					v	v	v				v		v	v		
Emission masks – Out of band emissions	n26	v				v	v				v			v	v	v
			v			v	v				v				v	
					v	v	v				v			v		
Frequency Stability	n26		v			-	v						v		v	
Radiated Spurious Emission	n26	Worst Case													v	
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. 5G n26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.															

2.2 Connection Diagram of Test System

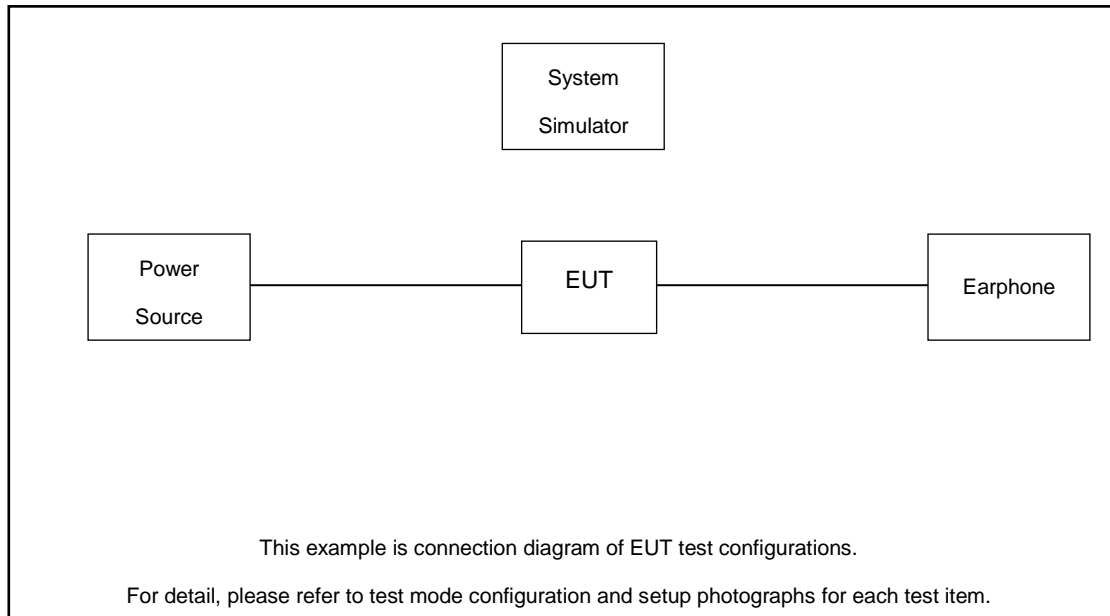

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	164800	-	-
	Frequency	824	-	-
15	Channel	164300	-	-
	Frequency	821.5	-	-
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	143300
	Frequency	816.5	819	821.5

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

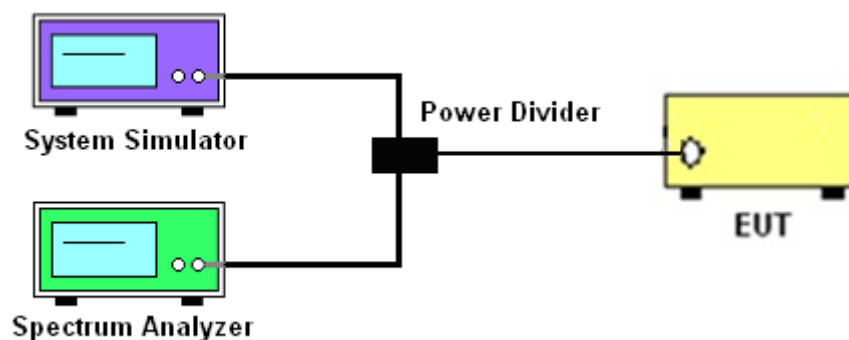

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.



3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor $10 \log (1\% \text{ of OBW}/\text{measured RBW})(\text{dB})$ was compensated, if required.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

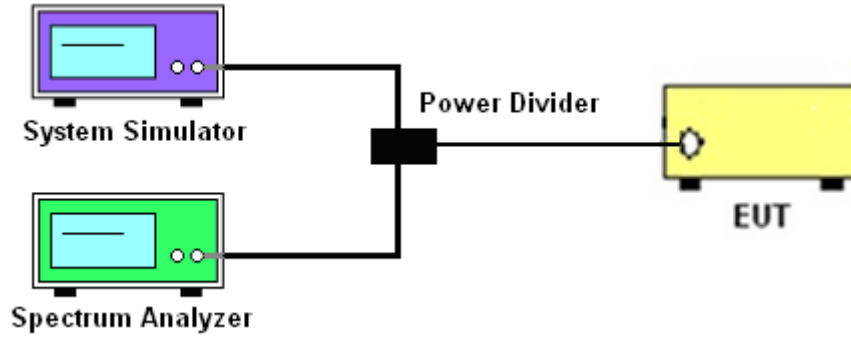

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.4.4 Test Setup

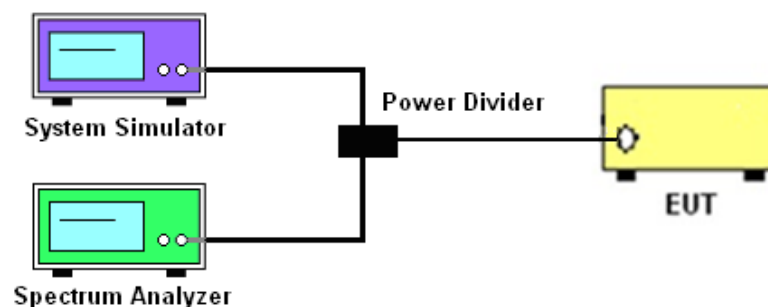

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.



3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

3.5.4 Test Setup

For radiated test from 30MHz

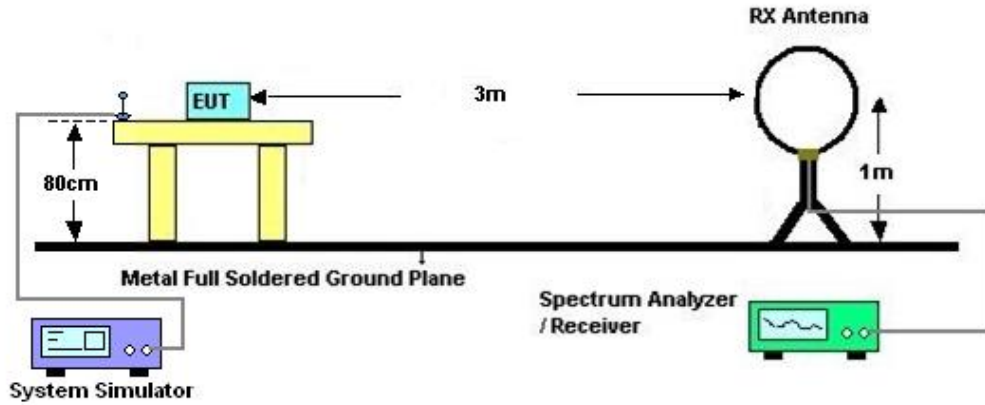

For radiated test from 30MHz to 1GHz

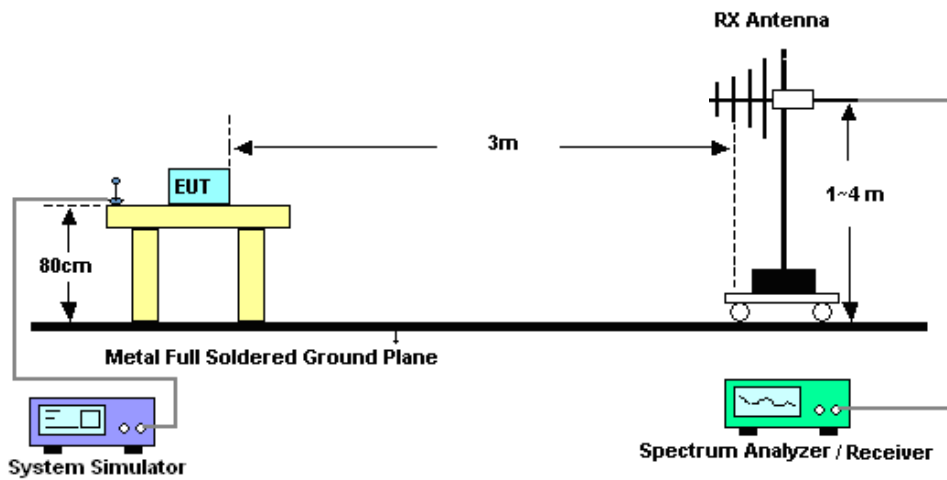

For radiated test above 1GHz



3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
4. The variation in frequency was measured for the worst case.

3.6.5 Test Setup



3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jan. 07, 2022~ Jan. 10, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jan. 07, 2022~ Jan. 10, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jan. 07, 2022~ Jan. 10, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 22, 2021	Jan. 15, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 20, 2021	Jan. 15, 2022	Jul. 19, 2022	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jan. 15, 2022	Jun. 21, 2022	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Oct. 22, 2021	Jan. 15, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 15, 2021	Jan. 15, 2022	Jul. 14, 2022	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 25, 2021	Jan. 15, 2022	Jul. 24, 2022	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22, 2021	Jan. 15, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jan. 15, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 20, 2021	Jan. 15, 2022	Jul. 19, 2022	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 22, 2021	Jan. 15, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Jan. 15, 2022	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 15, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 15, 2022	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	21~23°C
		Relative Humidity :	45~51%

FR1 N26

Transmitter Conducted Output Power And ERP/EIRP, (G_T - L_C) = -7.8dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	Conducted Power(W)
26	15	5	172300	816.5	DFT-s-OFDM PI/2 BPSK	12@6	23.49	0.2234
26	15	5	172300	816.5	DFT-s-OFDM PI/2 BPSK	1@1	23.5	0.2239
26	15	5	172300	816.5	DFT-s-OFDM PI/2 BPSK	1@23	23.56	0.2270
26	15	5	172300	816.5	DFT-s-OFDM QPSK	12@6	23.5	0.2239
26	15	5	172300	816.5	DFT-s-OFDM QPSK	1@1	23.69	0.2339
26	15	5	172300	816.5	DFT-s-OFDM QPSK	1@23	23.68	0.2333
26	15	5	172300	816.5	DFT-s-OFDM 16 QAM	12@6	22.44	0.1754
26	15	5	172300	816.5	DFT-s-OFDM 16 QAM	1@1	22.69	0.1858
26	15	5	172300	816.5	DFT-s-OFDM 16 QAM	1@23	22.83	0.1919
26	15	5	172300	816.5	DFT-s-OFDM 64 QAM	12@6	21.14	0.1300
26	15	5	172300	816.5	DFT-s-OFDM 64 QAM	1@1	21.33	0.1358
26	15	5	172300	816.5	DFT-s-OFDM 64 QAM	1@23	21.3	0.1349
26	15	5	172300	816.5	DFT-s-OFDM 256 QAM	12@6	19.06	0.0805
26	15	5	172300	816.5	DFT-s-OFDM 256 QAM	1@1	18.95	0.0785
26	15	5	172300	816.5	DFT-s-OFDM 256 QAM	1@23	18.9	0.0776
26	15	5	172300	816.5	CP-OFDM QPSK	13@6	22.22	0.1667
26	15	5	172300	816.5	CP-OFDM QPSK	1@1	22.27	0.1687
26	15	5	172300	816.5	CP-OFDM QPSK	1@23	22.23	0.1671
26	15	5	172800	819	DFT-s-OFDM PI/2	12@6	23.62	0.2301

BPSK								
26	15	5	172800	819	DFT-s-OFDM PI/2 BPSK	1@1	23.51	0.2244
26	15	5	172800	819	DFT-s-OFDM PI/2 BPSK	1@23	23.57	0.2275
26	15	5	172800	819	DFT-s-OFDM QPSK	12@6	23.61	0.2296
26	15	5	172800	819	DFT-s-OFDM QPSK	1@1	23.67	0.2328
26	15	5	172800	819	DFT-s-OFDM QPSK	1@23	23.71	0.2350
26	15	5	172800	819	DFT-s-OFDM 16 QAM	12@6	22.39	0.1734
26	15	5	172800	819	DFT-s-OFDM 16 QAM	1@1	22.86	0.1932
26	15	5	172800	819	DFT-s-OFDM 16 QAM	1@23	22.71	0.1866
26	15	5	172800	819	DFT-s-OFDM 64 QAM	12@6	21.16	0.1306
26	15	5	172800	819	DFT-s-OFDM 64 QAM	1@1	21.31	0.1352
26	15	5	172800	819	DFT-s-OFDM 64 QAM	1@23	21.41	0.1384
26	15	5	172800	819	DFT-s-OFDM 256 QAM	12@6	19.14	0.0820
26	15	5	172800	819	DFT-s-OFDM 256 QAM	1@1	18.9	0.0776
26	15	5	172800	819	DFT-s-OFDM 256 QAM	1@23	18.95	0.0785
26	15	5	172800	819	CP-OFDM QPSK	13@6	22.27	0.1687
26	15	5	172800	819	CP-OFDM QPSK	1@1	22.22	0.1667
26	15	5	172800	819	CP-OFDM QPSK	1@23	22.28	0.1690
26	15	5	173300	821.5	DFT-s-OFDM PI/2 BPSK	12@6	23.58	0.2280
26	15	5	173300	821.5	DFT-s-OFDM PI/2 BPSK	1@1	23.51	0.2244
26	15	5	173300	821.5	DFT-s-OFDM PI/2 BPSK	1@23	23.51	0.2244
26	15	5	173300	821.5	DFT-s-OFDM QPSK	12@6	23.59	0.2286
26	15	5	173300	821.5	DFT-s-OFDM QPSK	1@1	23.7	0.2344

26	15	5	173300	821.5	DFT-s-OFDM QPSK	1@23	23.64	0.2312
26	15	5	173300	821.5	DFT-s-OFDM 16 QAM	12@6	22.42	0.1746
26	15	5	173300	821.5	DFT-s-OFDM 16 QAM	1@1	22.95	0.1972
26	15	5	173300	821.5	DFT-s-OFDM 16 QAM	1@23	22.54	0.1795
26	15	5	173300	821.5	DFT-s-OFDM 64 QAM	12@6	21.19	0.1315
26	15	5	173300	821.5	DFT-s-OFDM 64 QAM	1@1	21.38	0.1374
26	15	5	173300	821.5	DFT-s-OFDM 64 QAM	1@23	21.32	0.1355
26	15	5	173300	821.5	DFT-s-OFDM 256 QAM	12@6	19.11	0.0815
26	15	5	173300	821.5	DFT-s-OFDM 256 QAM	1@1	19	0.0794
26	15	5	173300	821.5	DFT-s-OFDM 256 QAM	1@23	18.94	0.0783
26	15	5	173300	821.5	CP-OFDM QPSK	13@6	22.28	0.1690
26	15	5	173300	821.5	CP-OFDM QPSK	1@1	22.33	0.1710
26	15	5	173300	821.5	CP-OFDM QPSK	1@23	22.29	0.1694
26	15	10	172800	819	DFT-s-OFDM PI/2 BPSK	25@12	23.58	0.2280
26	15	10	172800	819	DFT-s-OFDM PI/2 BPSK	1@1	23.44	0.2208
26	15	10	172800	819	DFT-s-OFDM PI/2 BPSK	1@50	23.55	0.2265
26	15	10	172800	819	DFT-s-OFDM QPSK	25@12	23.62	0.2301
26	15	10	172800	819	DFT-s-OFDM QPSK	1@1	23.66	0.2323
26	15	10	172800	819	DFT-s-OFDM QPSK	1@50	23.66	0.2323
26	15	10	172800	819	DFT-s-OFDM 16 QAM	25@12	22.54	0.1795
26	15	10	172800	819	DFT-s-OFDM 16 QAM	1@1	22.7	0.1862
26	15	10	172800	819	DFT-s-OFDM 16 QAM	1@50	22.76	0.1888
26	15	10	172800	819	DFT-s-OFDM 64 QAM	25@12	21.34	0.1361

26	15	10	172800	819	DFT-s-OFDM 64 QAM	1@1	21.34	0.1361
26	15	10	172800	819	DFT-s-OFDM 64 QAM	1@50	21.34	0.1361
26	15	10	172800	819	DFT-s-OFDM 256 QAM	25@12	19.15	0.0822
26	15	10	172800	819	DFT-s-OFDM 256 QAM	1@1	18.9	0.0776
26	15	10	172800	819	DFT-s-OFDM 256 QAM	1@50	18.94	0.0783
26	15	10	172800	819	CP-OFDM QPSK	26@13	22.21	0.1663
26	15	10	172800	819	CP-OFDM QPSK	1@1	22.27	0.1687
26	15	10	172800	819	CP-OFDM QPSK	1@50	22.33	0.1710
26	15	15	173300	821.5	DFT-s-OFDM PI/2 BPSK	36@18	23.56	0.2270
26	15	15	173300	821.5	DFT-s-OFDM PI/2 BPSK	1@1	23.46	0.2218
26	15	15	173300	821.5	DFT-s-OFDM PI/2 BPSK	1@77	23.59	0.2286
26	15	15	173300	821.5	DFT-s-OFDM QPSK	36@18	23.6	0.2291
26	15	15	173300	821.5	DFT-s-OFDM QPSK	1@1	23.68	0.2333
26	15	15	173300	821.5	DFT-s-OFDM QPSK	1@77	23.8	0.2399
26	15	15	173300	821.5	DFT-s-OFDM 16 QAM	36@18	22.53	0.1791
26	15	15	173300	821.5	DFT-s-OFDM 16 QAM	1@1	22.67	0.1849
26	15	15	173300	821.5	DFT-s-OFDM 16 QAM	1@77	22.77	0.1892
26	15	15	173300	821.5	DFT-s-OFDM 64 QAM	36@18	21.16	0.1306
26	15	15	173300	821.5	DFT-s-OFDM 64 QAM	1@1	21.28	0.1343
26	15	15	173300	821.5	DFT-s-OFDM 64 QAM	1@77	21.29	0.1346
26	15	15	173300	821.5	DFT-s-OFDM 256 QAM	36@18	19.03	0.0800
26	15	15	173300	821.5	DFT-s-OFDM 256 QAM	1@1	18.97	0.0789
26	15	15	173300	821.5	DFT-s-OFDM 256 QAM	1@77	18.97	0.0789

26	15	15	173300	821.5	CP-OFDM QPSK	39@19	22.25	0.1679
26	15	15	173300	821.5	CP-OFDM QPSK	1@1	22.22	0.1667
26	15	15	173300	821.5	CP-OFDM QPSK	1@77	22.16	0.1644
26	15	20	173800	824	DFT-s- OFDM PI/2 BPSK	50@25	23.56	0.2270
26	15	20	173800	824	DFT-s- OFDM PI/2 BPSK	1@1	23.46	0.2218
26	15	20	173800	824	DFT-s- OFDM PI/2 BPSK	1@104	23.53	0.2254
26	15	20	173800	824	DFT-s- OFDM QPSK	50@25	23.56	0.2270
26	15	20	173800	824	DFT-s- OFDM QPSK	1@1	23.83	0.2415
26	15	20	173800	824	DFT-s- OFDM QPSK	1@104	23.71	0.2350
26	15	20	173800	824	DFT-s- OFDM 16 QAM	50@25	22.47	0.1766
26	15	20	173800	824	DFT-s- OFDM 16 QAM	1@1	22.64	0.1837
26	15	20	173800	824	DFT-s- OFDM 16 QAM	1@104	22.63	0.1832
26	15	20	173800	824	DFT-s- OFDM 64 QAM	50@25	21.2	0.1318
26	15	20	173800	824	DFT-s- OFDM 64 QAM	1@1	21.27	0.1340
26	15	20	173800	824	DFT-s- OFDM 64 QAM	1@104	21.32	0.1355
26	15	20	173800	824	DFT-s- OFDM 256 QAM	50@25	18.53	0.0713
26	15	20	173800	824	DFT-s- OFDM 256 QAM	1@1	18.87	0.0771
26	15	20	173800	824	DFT-s- OFDM 256 QAM	1@104	19.04	0.0802
26	15	20	173800	824	CP-OFDM QPSK	53@26	22.22	0.1667
26	15	20	173800	824	CP-OFDM QPSK	1@1	22.32	0.1706
26	15	20	173800	824	CP-OFDM QPSK	1@104	22.32	0.1706


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0547	PASS	NV
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0644	PASS	LV
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0474	PASS	HV
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0611	PASS	-30°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0301	PASS	-20°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0421	PASS	-10°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0646	PASS	0°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0449	PASS	10°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0239	PASS	20°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0295	PASS	30°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0597	PASS	40°C
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	0.0593	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
26	15	10	172800	819.0	DFT-s-OFDM PI/2 BPSK	50@0	4.16	13	PASS
26	15	10	172800	819.0	DFT-s-OFDM PI/2 BPSK	1@0	4.62	13	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	5.32	13	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	1@0	4.67	13	PASS

N26(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

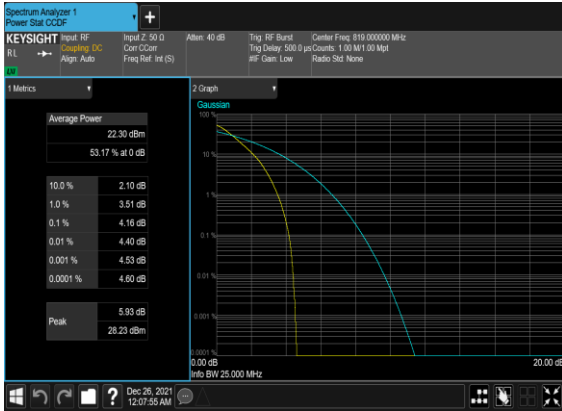

N26(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

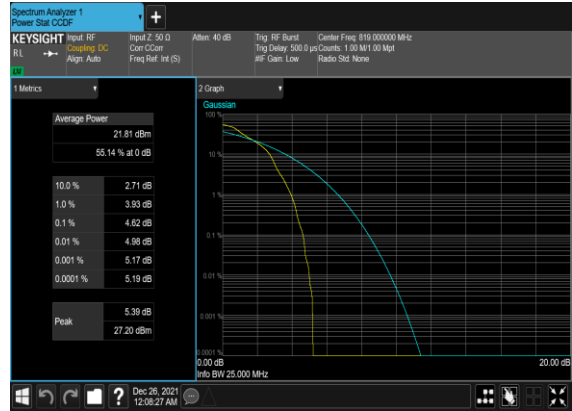

N26(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
26	15	5	172800	819.0	DFT-s-OFDM PI/2 BPSK	25@0	4.4662	4.823
26	15	5	172800	819.0	DFT-s-OFDM QPSK	25@0	4.4649	4.821
26	15	5	172800	819.0	CP-OFDM QPSK	25@0	4.4793	4.899
26	15	5	172800	819.0	CP-OFDM 16 QAM	25@0	4.4766	4.918
26	15	5	172800	819.0	CP-OFDM 64 QAM	25@0	4.478	4.962
26	15	5	172800	819.0	CP-OFDM 256 QAM	25@0	4.4673	4.948
26	15	10	172800	819.0	DFT-s-OFDM PI/2 BPSK	50@0	8.8841	9.463
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	8.9117	9.493
26	15	10	172800	819.0	CP-OFDM QPSK	52@0	9.2526	9.932
26	15	10	172800	819.0	CP-OFDM 16 QAM	52@0	9.2795	9.858
26	15	10	172800	819.0	CP-OFDM 64 QAM	52@0	9.2512	9.778
26	15	10	172800	819.0	CP-OFDM 256 QAM	52@0	9.2599	9.835
26	15	15	173300	821.5	DFT-s-OFDM PI/2 BPSK	75@0	13.358	14.11
26	15	15	173300	821.5	DFT-s-OFDM QPSK	75@0	13.391	14.12
26	15	15	173300	821.5	CP-OFDM QPSK	79@0	14.06	14.82
26	15	15	173300	821.5	CP-OFDM 16 QAM	79@0	14.069	14.83
26	15	15	173300	821.5	CP-OFDM 64 QAM	79@0	14.085	14.76
26	15	15	173300	821.5	CP-OFDM 256 QAM	79@0	14.05	14.83
26	15	20	173800	824.0	DFT-s-OFDM PI/2 BPSK	100@0	17.841	18.65
26	15	20	173800	824.0	DFT-s-OFDM QPSK	100@0	17.818	18.72
26	15	20	173800	824.0	CP-OFDM QPSK	106@0	19.014	20.08
26	15	20	173800	824.0	CP-OFDM 16 QAM	106@0	18.882	19.76
26	15	20	173800	824.0	CP-OFDM 64 QAM	106@0	18.868	19.79
26	15	20	173800	824.0	CP-OFDM 256 QAM	106@0	18.971	19.81

N26(5M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH




N26(5M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

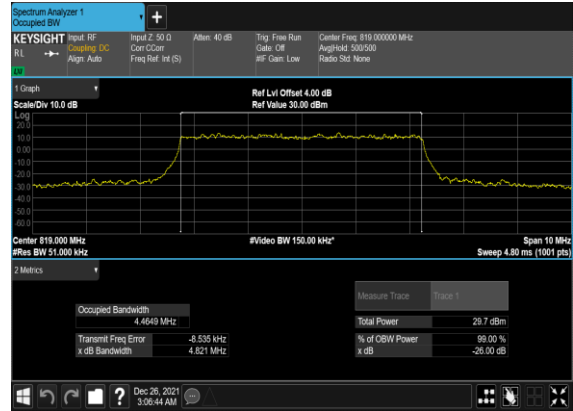


N26(5M)_CP- OFDM_QPSK_Outer_Full_Mid_CH




N26(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

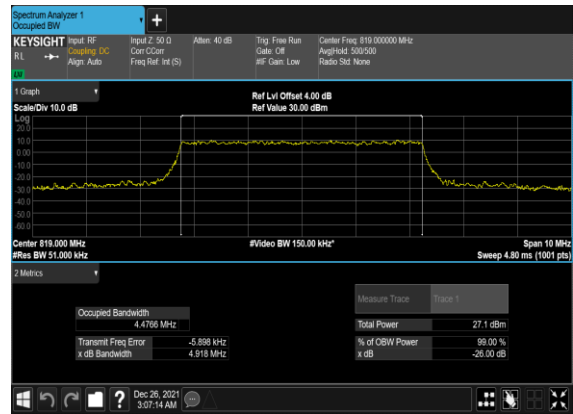

N26(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

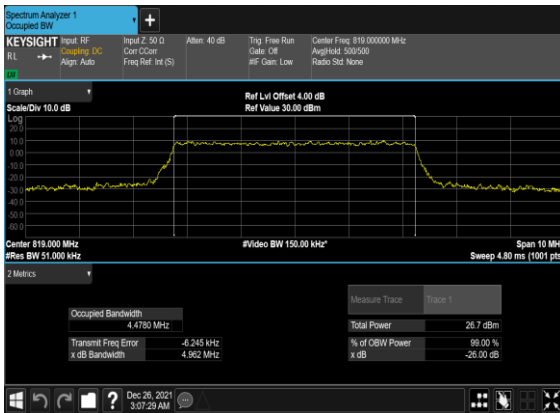


N26(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

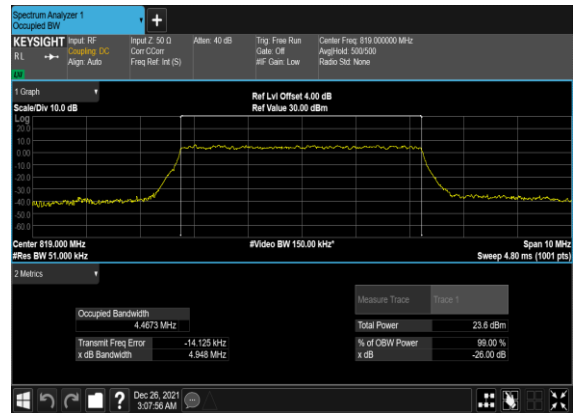


N26(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH




N26(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

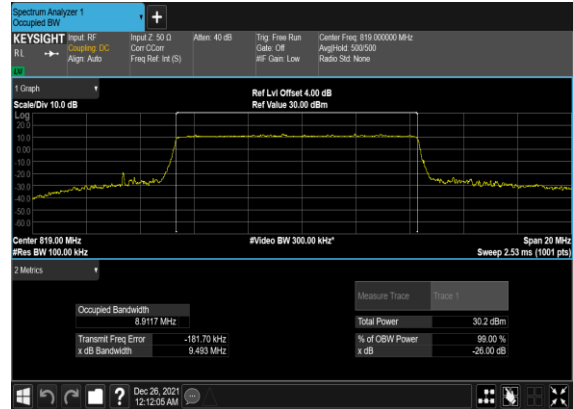


N26(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

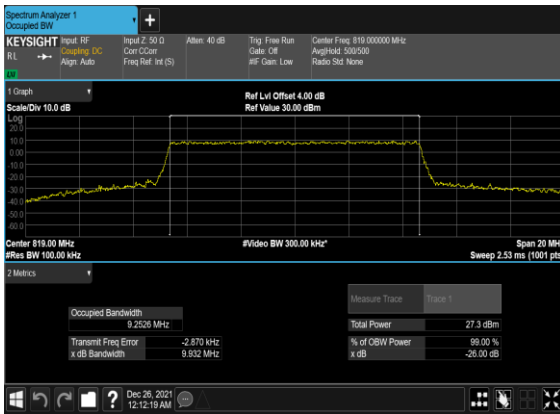


N26(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

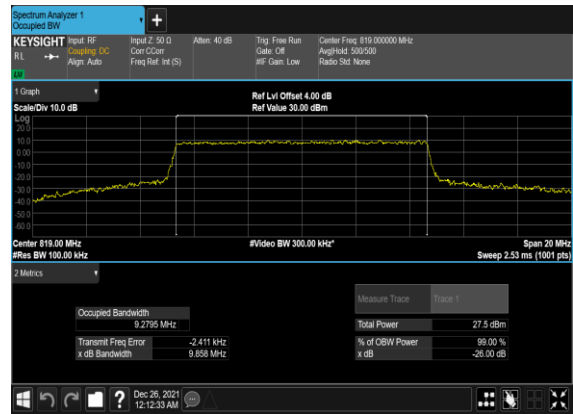


N26(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

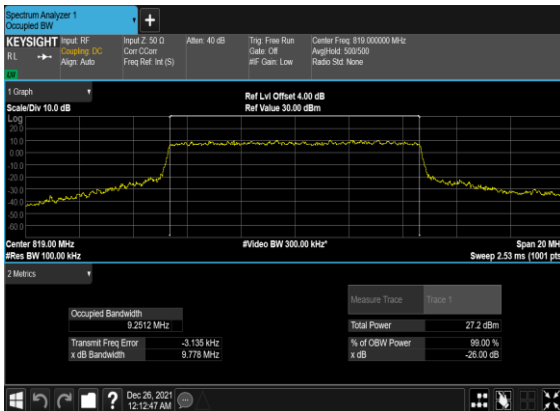


N26(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

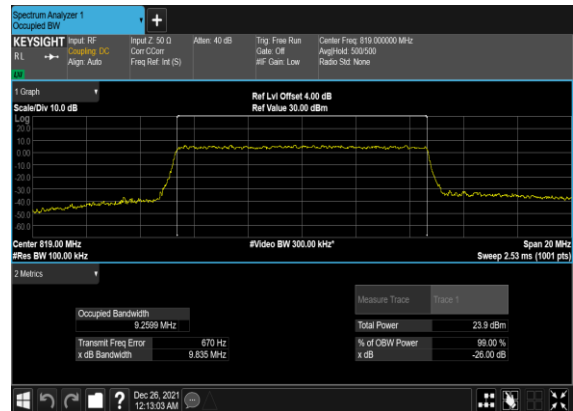


N26(15M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH

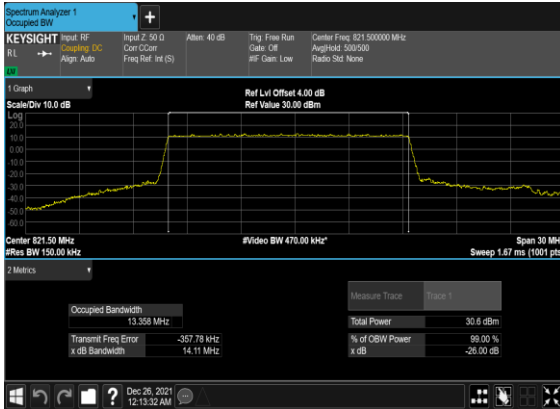


N26(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

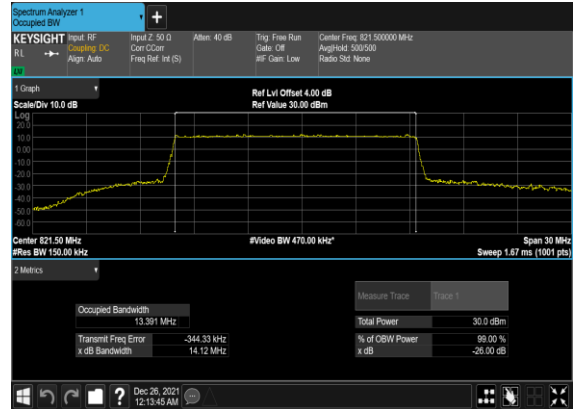


N26(15M)_CP-
OFDM_QPSK_Outer_Full_Low_CH

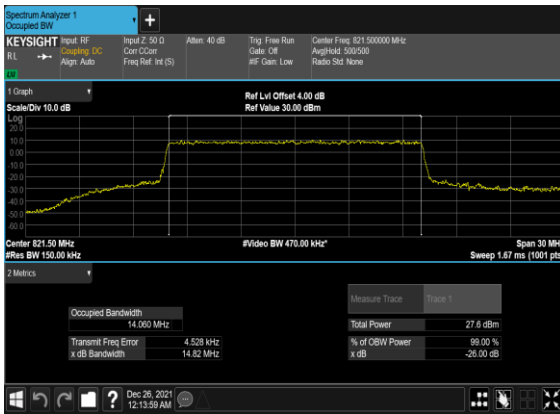


N26(15M)_CP-OFDM_16
QAM_Outer_Full_Low_CH

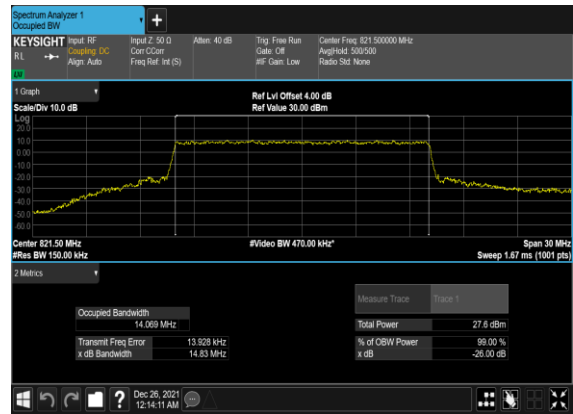

N26(15M)_CP-OFDM_64
QAM_Outer_Full_Low_CH

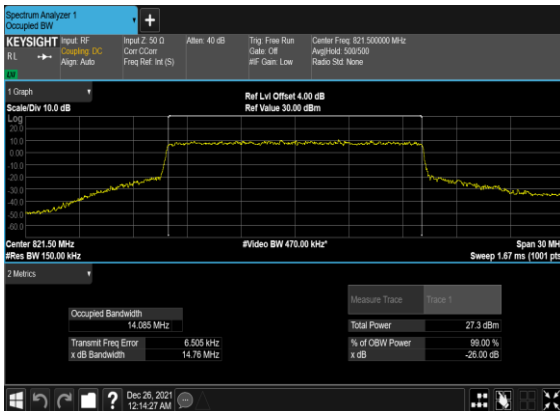


N26(15M)_CP-OFDM_256
QAM_Outer_Full_Low_CH

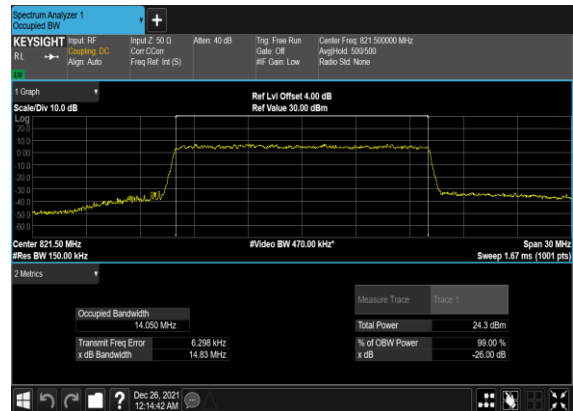


N26(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH




N26(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

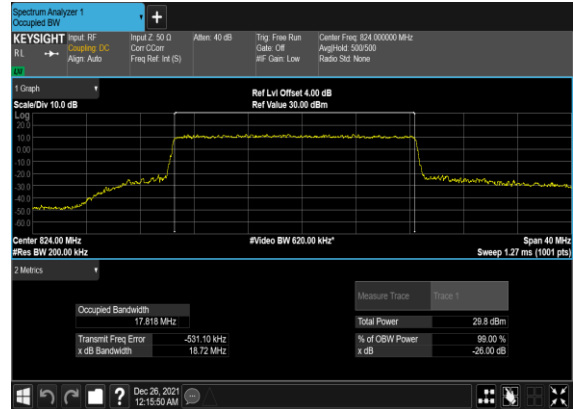


N26(20M)_CP-
OFDM_QPSK_Outer_Full_Low_CH

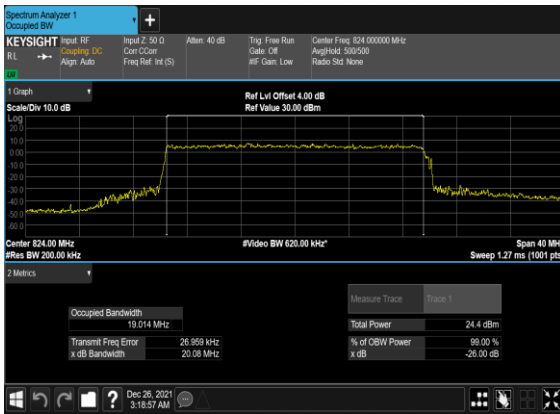


N26(20M)_CP-OFDM_16
QAM_Outer_Full_Low_CH

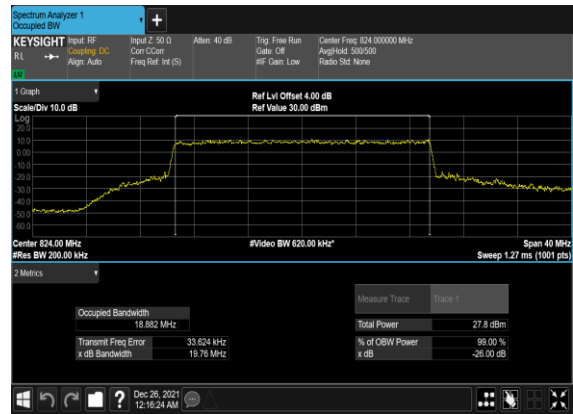

N26(20M)_CP-OFDM_64
QAM_Outer_Full_Low_CH

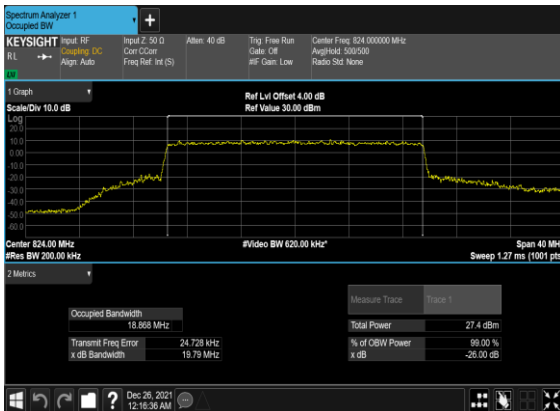


N26(20M)_CP-OFDM_256
QAM_Outer_Full_Low_CH

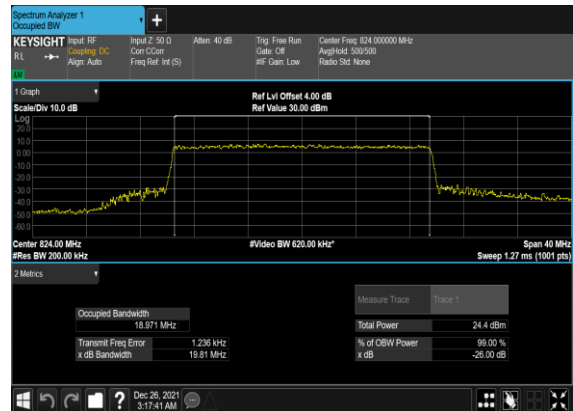

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
26	15	5	172300	816.5	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	172300	816.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	172300	816.5	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	172300	816.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	172800	819.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	172800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	172800	819.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	172800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	173300	821.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	173300	821.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	10	172800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	10	172800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	20	173800	824.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	20	173800	824.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N26(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

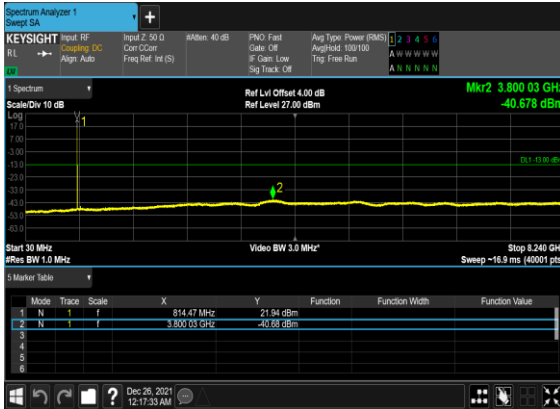


N26(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH




N26(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

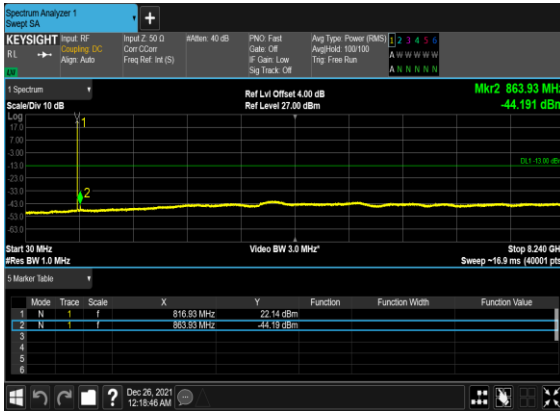


N26(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

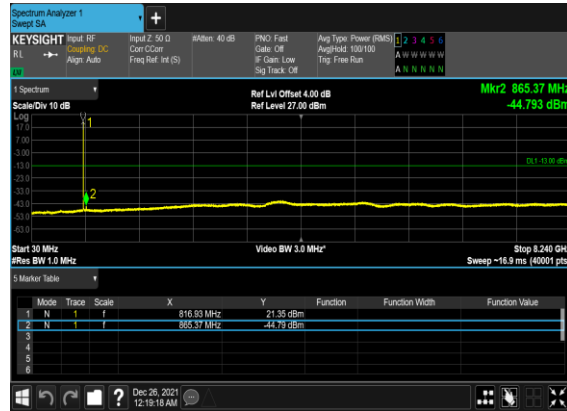


N26(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

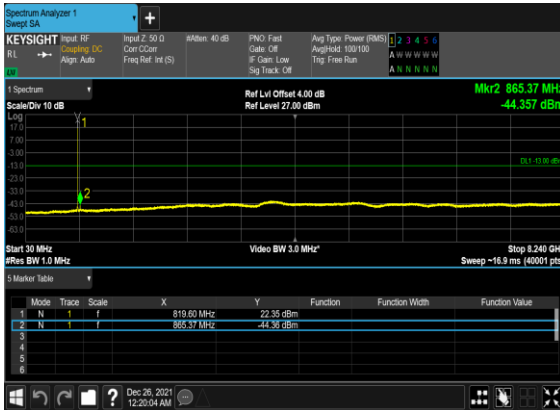


N26(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

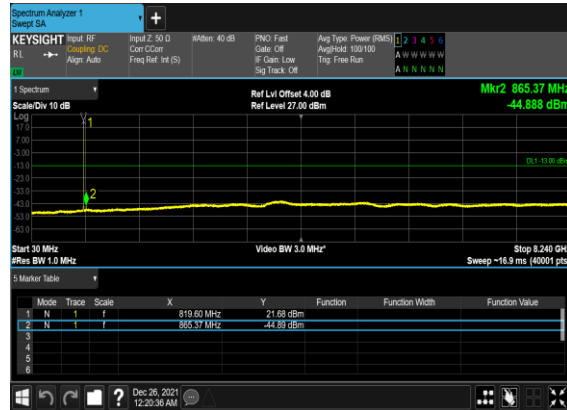


N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

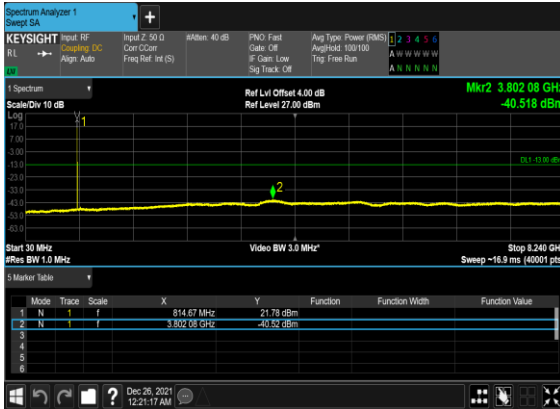


N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

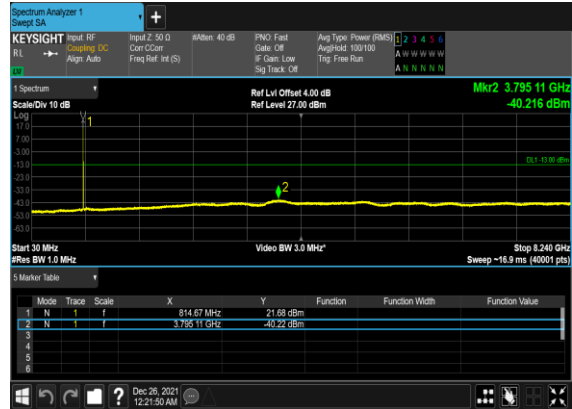

N26(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

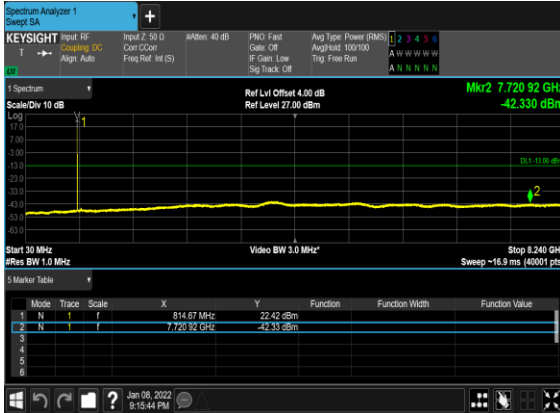


N26(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

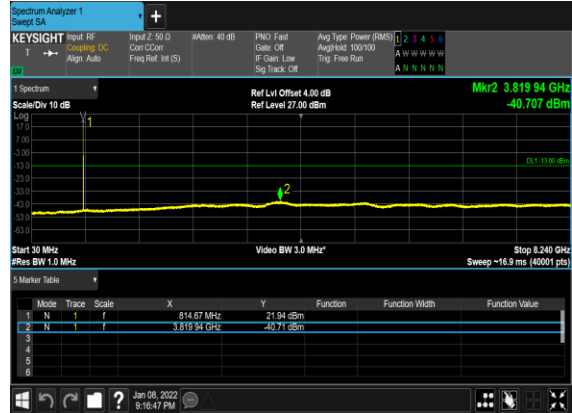


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
26	15	5	172300	816.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	172300	816.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	172300	816.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
26	15	5	172300	816.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
26	15	5	173300	821.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
26	15	10	172800	819.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
26	15	20	173800	824.0	DFT-s-OFDM QPSK	100@0	see graph	PASS


N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

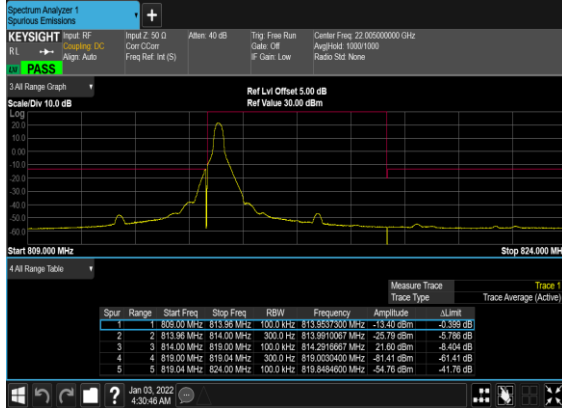

N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH_CHP_PASS

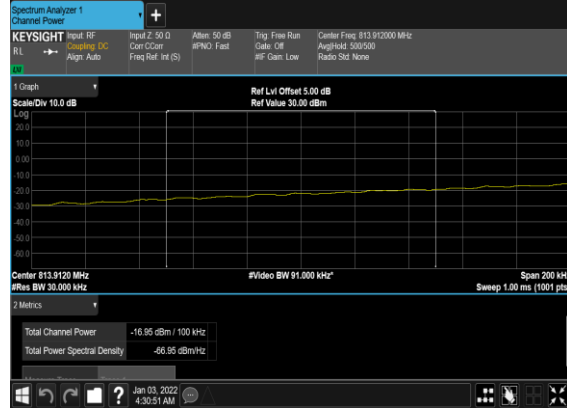


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

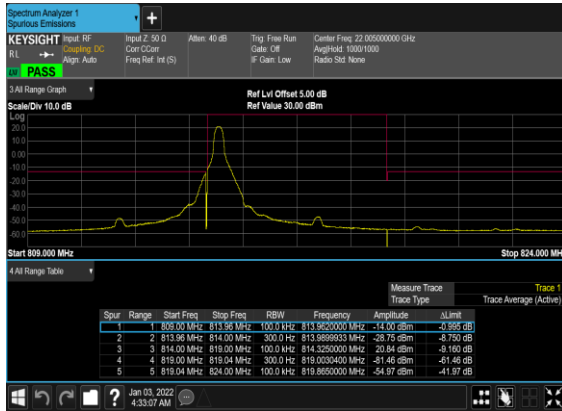


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH_CHP_PASS




N26(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

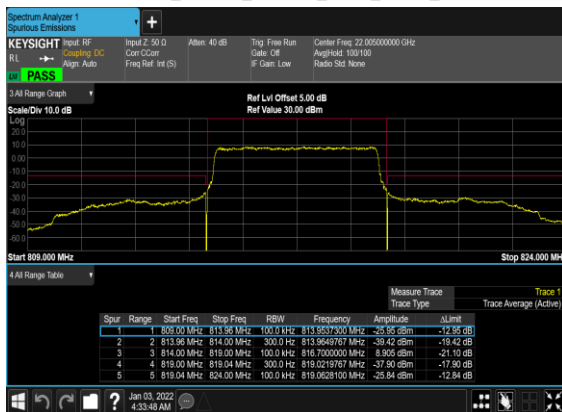


N26(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

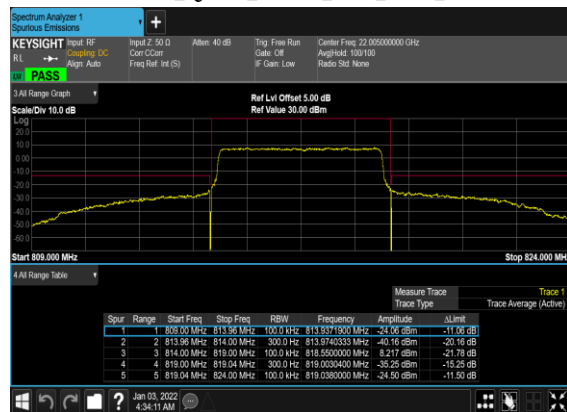


N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

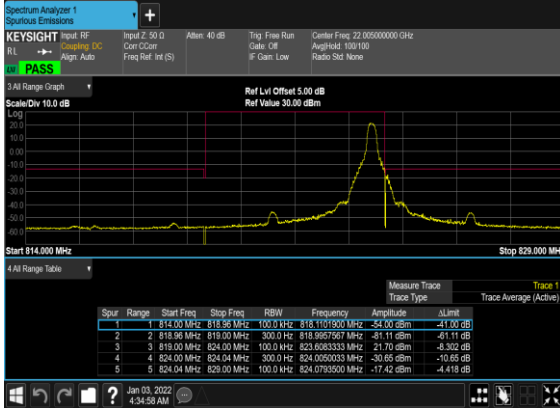


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

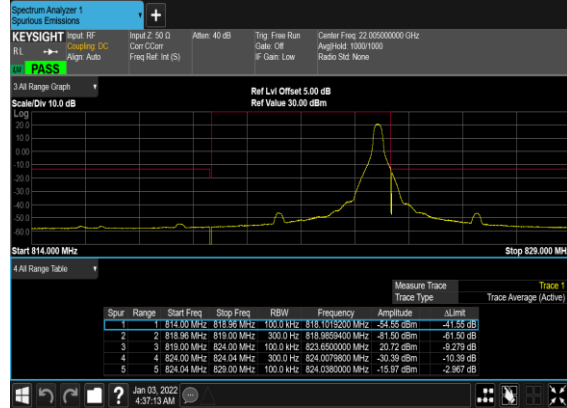


N26(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

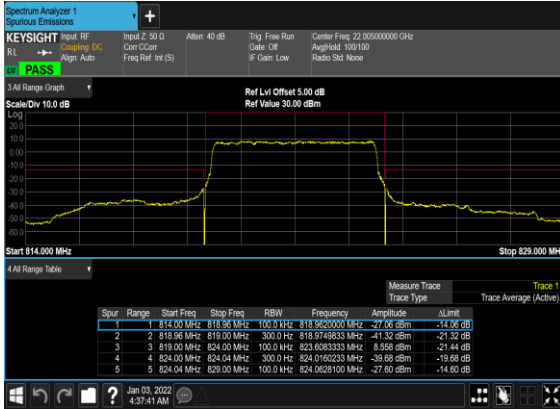


N26(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

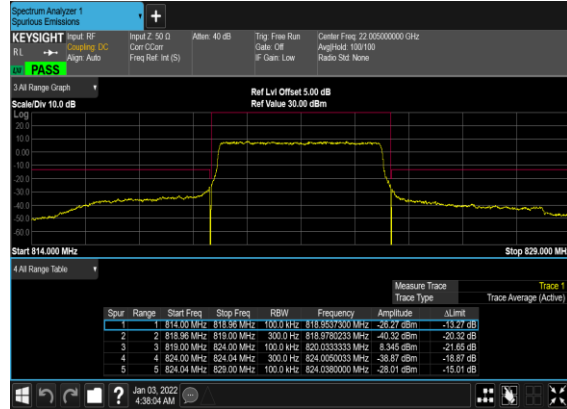


N26(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

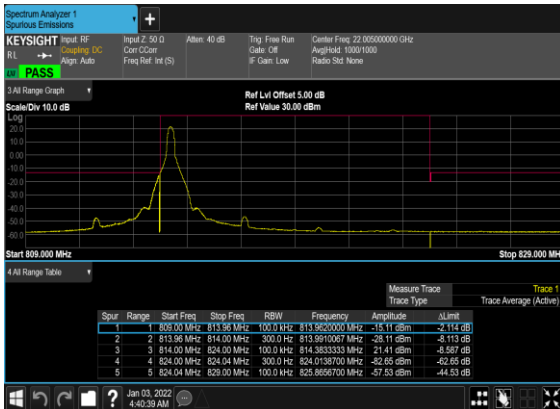


N26(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

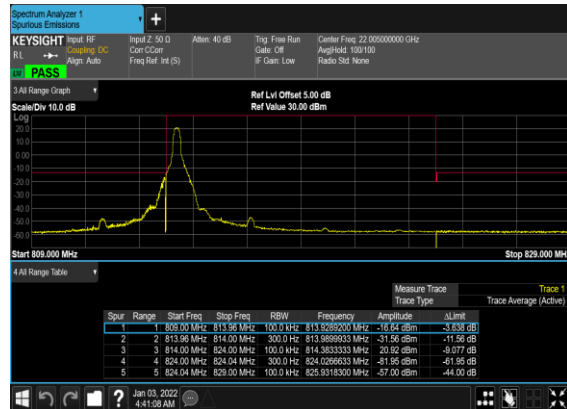


N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Mid_CH

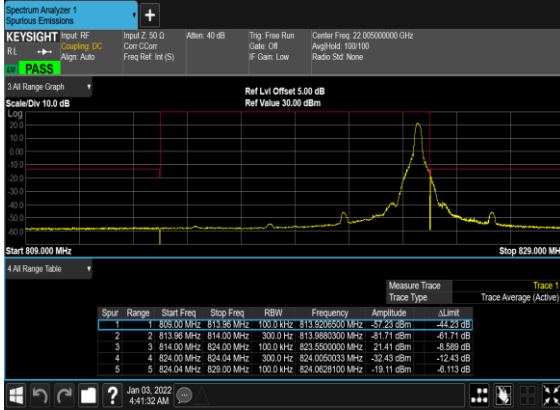


N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

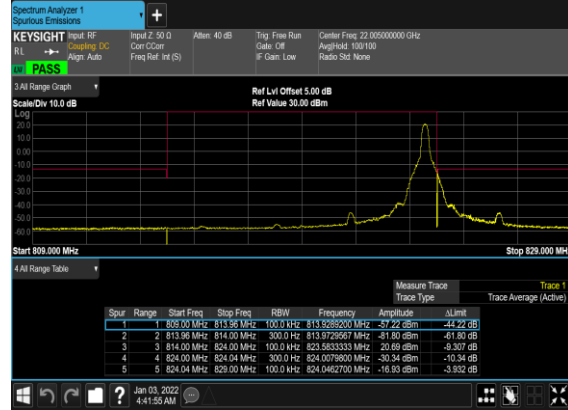


N26(10M)_DFT-s-OFDM_BPSK_Outer_Full_Mid_CH

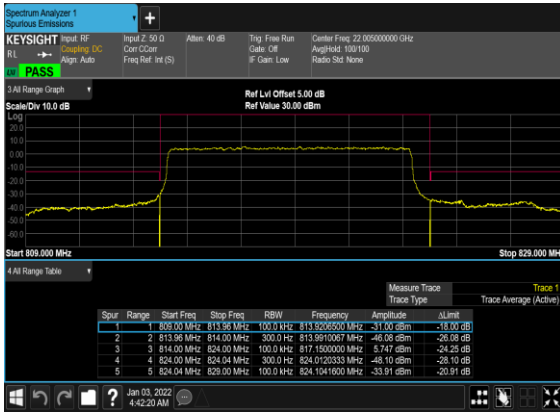


N26(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

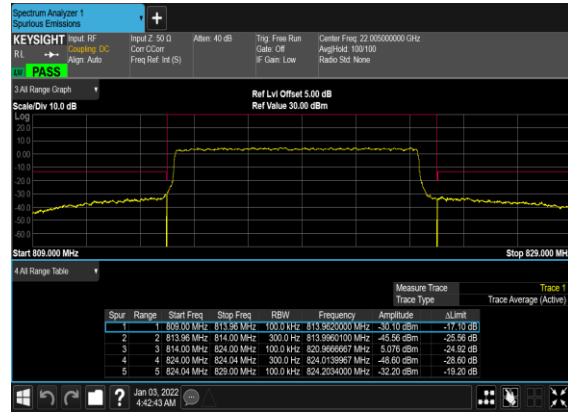


N26(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

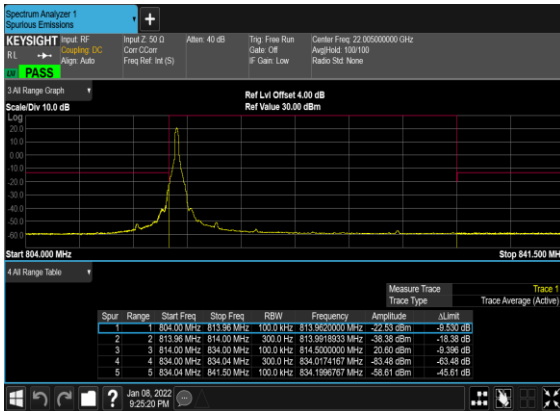


N26(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

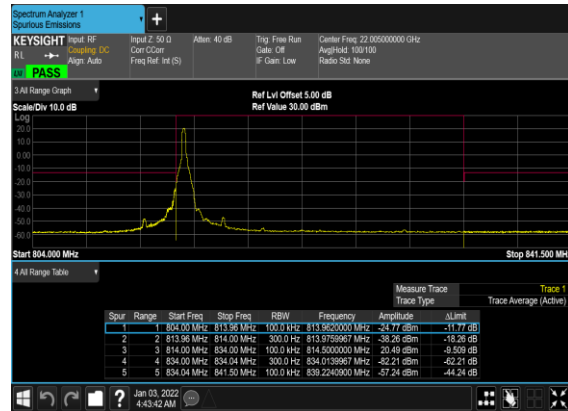

N26(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

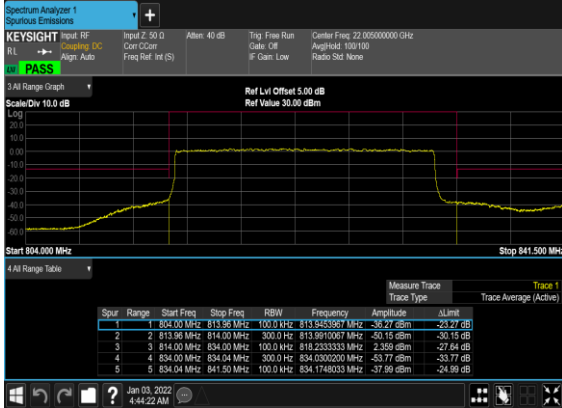

N26(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

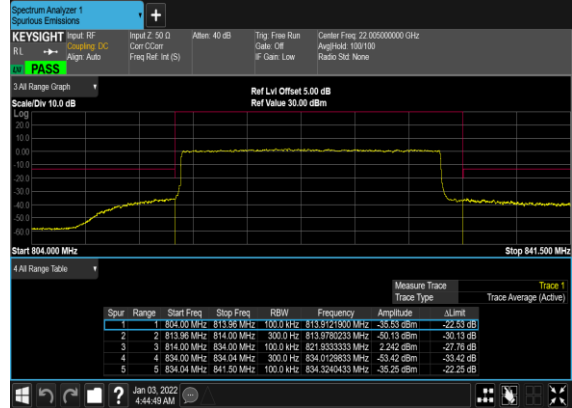



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Levi Zhuo	Temperature :	22~23°C
		Relative Humidity :	41~42%

N26 SA / NR 10MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1648	-60.03	-13	-47.03	-67.35	-63.28	4.00	9.40	H
	2472	-62.38	-13	-49.38	-73.99	-65.95	4.88	10.60	H
	3296	-63.14	-13	-50.14	-78.03	-68.07	5.52	12.60	H
	1648	-63.04	-13	-50.04	-70.40	-66.29	4.00	9.40	V
	2472	-62.58	-13	-49.58	-74.22	-66.15	4.88	10.60	V
	3296	-63.04	-13	-50.04	-77.84	-67.97	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

———— THE END ————