



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2215-2, XT2215-3, XT2215-4, XT2215DL
FCC ID : IHDT56AA4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Dec. 19, 2021 ~ Jan. 16, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Specification of Accessory..... 6

 1.7 Testing Location 7

 1.8 Test Software..... 7

 1.9 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Output Power Measurement..... 15

 3.3 Power Spectral Density Measurement 16

 3.4 Conducted Band Edges and Spurious Emission Measurement 18

 3.5 Radiated Band Edges and Spurious Emission Measurement 31

 3.6 AC Conducted Emission Measurement..... 35

 3.7 Antenna Requirements 37

4 LIST OF MEASURING EQUIPMENT 38

5 UNCERTAINTY OF EVALUATION 39

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N0903C	Rev. 01	Initial issue of report	Jan. 30, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 15.48 dB at 0.56 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 3.14 dB at 4924.00 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2215-2, XT2215-3, XT2215-4, XT2215DL
FCC ID	IHDT56AA4
IMEI Code	Conducted: 351475460011330 Conduction: 351475460015273 Radiation: 35147560011876
HW Version	DVT2
SW Version	S1SD32.29
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The four models XT2215-2, XT2215-3, XT2215-4 and XT2215DL are only for market differentiation, all the others are the same.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.92 dBm (0.1959 W) 802.11g : 24.72 dBm (0.2965 W) 802.11n HT20 : 24.34 dBm (0.2716 W) 802.11n HT40 : 25.25 dBm (0.3350 W) 802.11ac VHT20 : 22.97 dBm (0.1982 W) 802.11ac VHT40 : 24.66 dBm (0.2924 W)
99% Occupied Bandwidth	802.11b : 13.94MHz 802.11g : 17.83MHz 802.11n HT20 : 18.93MHz 802.11n HT40 : 36.66MHz
Antenna Type / Gain	Loop Antenna type with gain -5.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

Note:

For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20 / HT40 by referring to the higher output power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola(AOHAI)	Model Name	MC-101
Battery	Brand Name	Motorola(ATL)	Model Name	MD50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D22299



1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		




2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter1) + Earphone
Remark: For Radiated Test Cases, The tests were performed with Adapter 1, Earphone and USB Cable 1.	

2.3 Connection Diagram of Test System

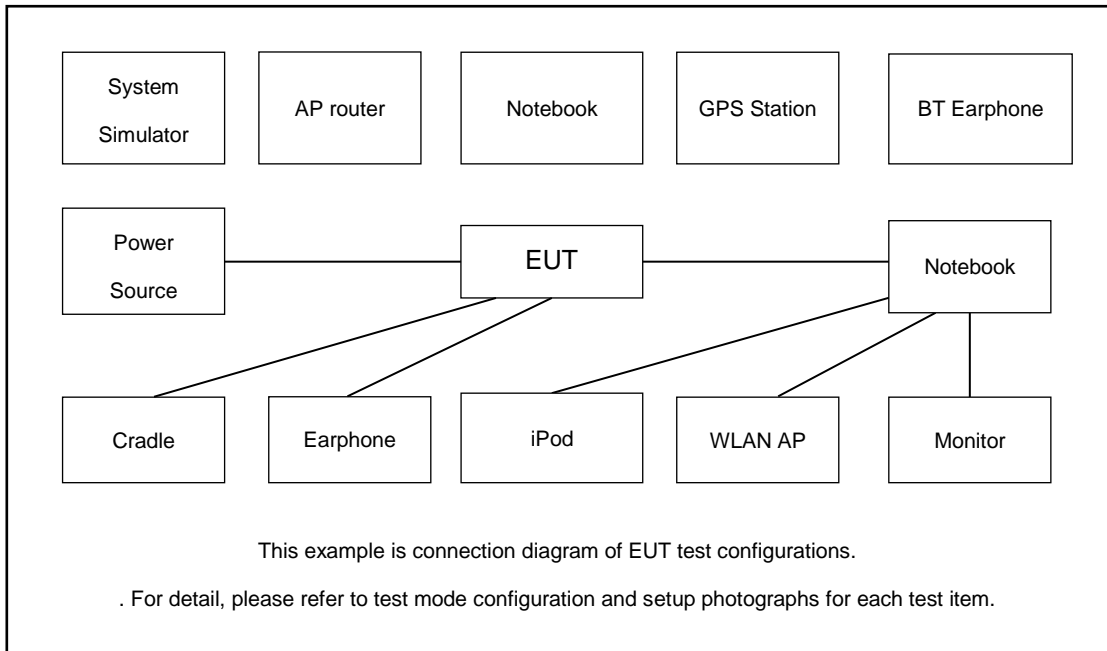

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
5.	Earphone	MOTO	N/A	N/A	N/A	N/A
6.	NFC Card	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 13.0 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 13.0 + 10 = 23.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

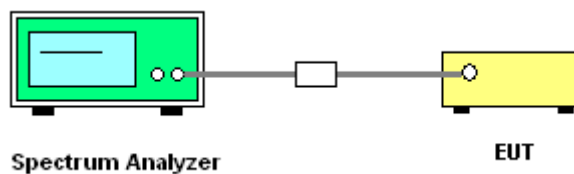



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

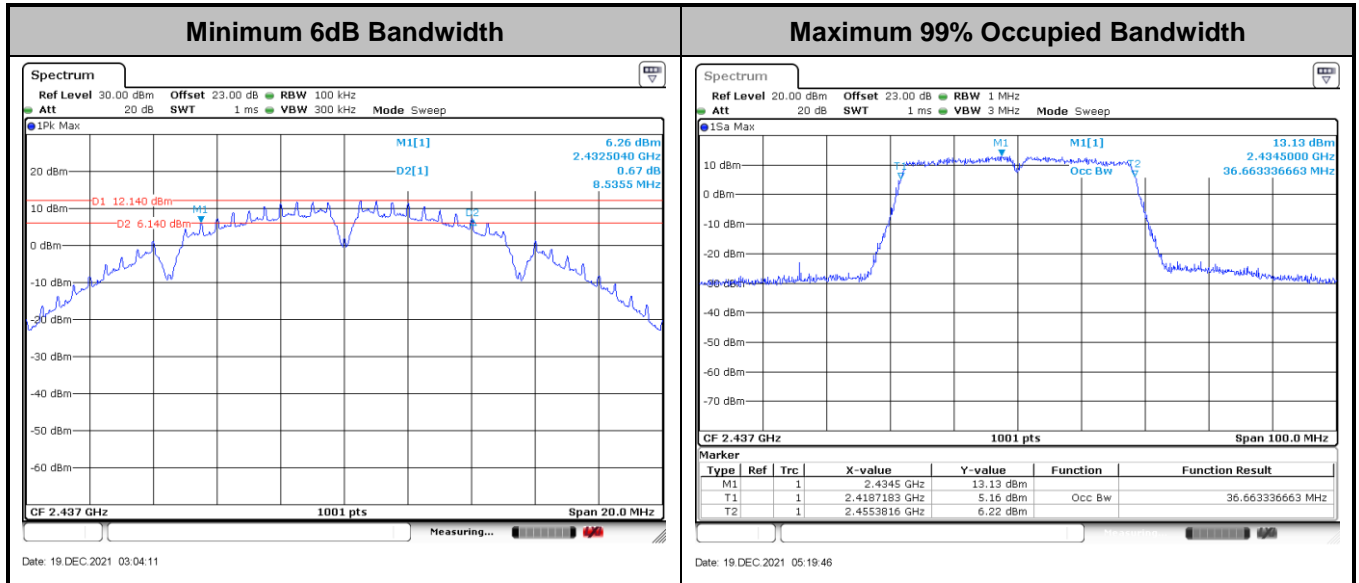

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output.

3.2.4 Test Setup

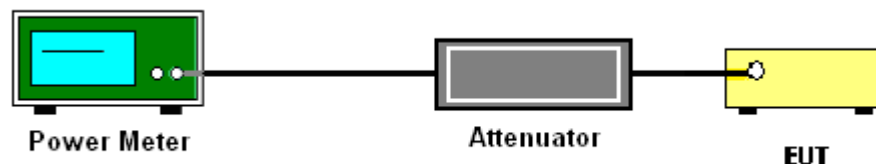

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

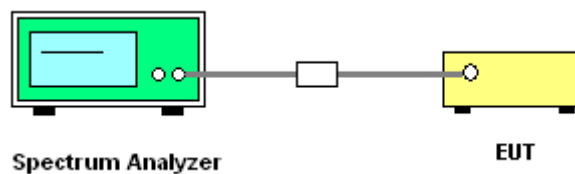



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

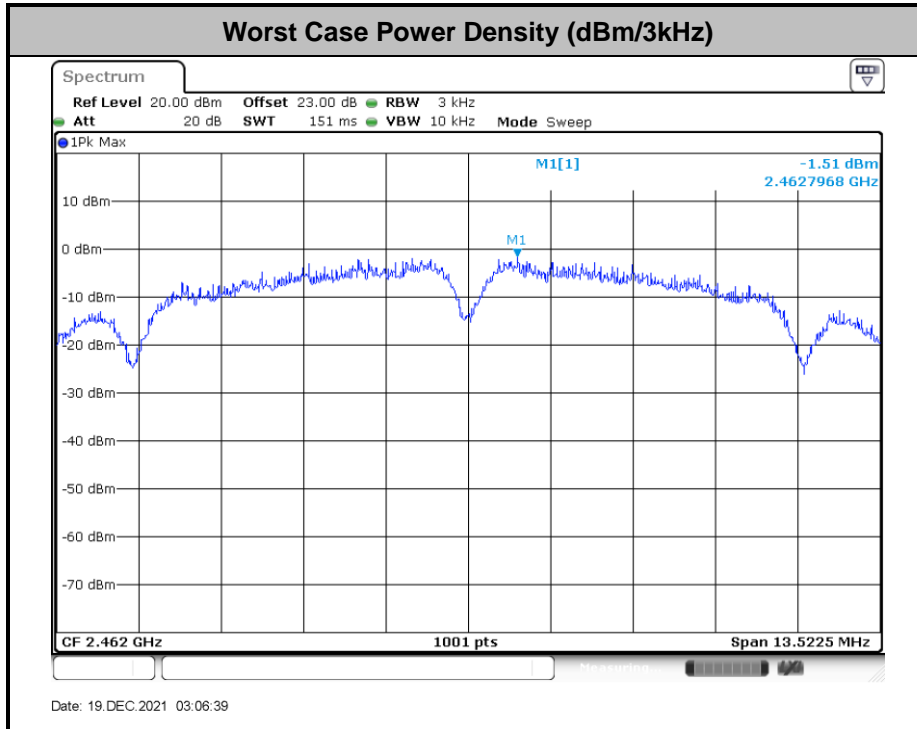

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


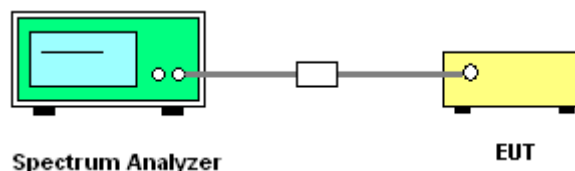




3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Test Engineer : Zhang Xue Yi	Temperature : 21~25°C
	Relative Humidity : 51~54%

Test Mode : 802.11b	Test Channel : 01
---------------------	-------------------

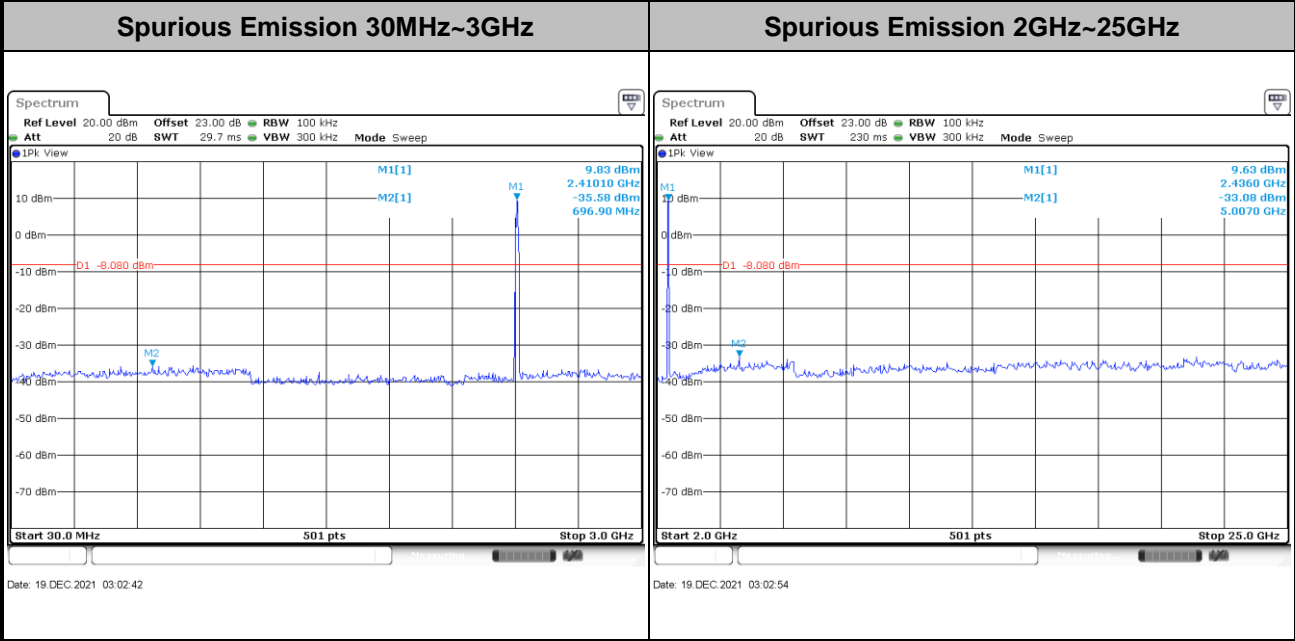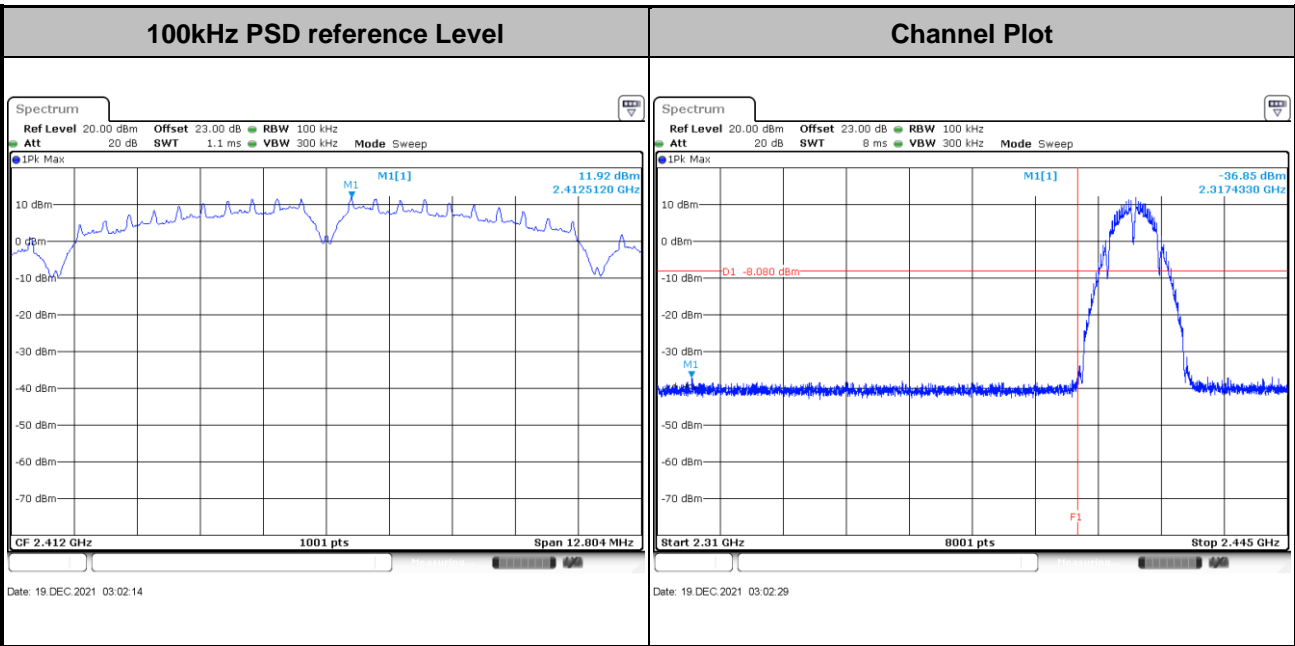





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

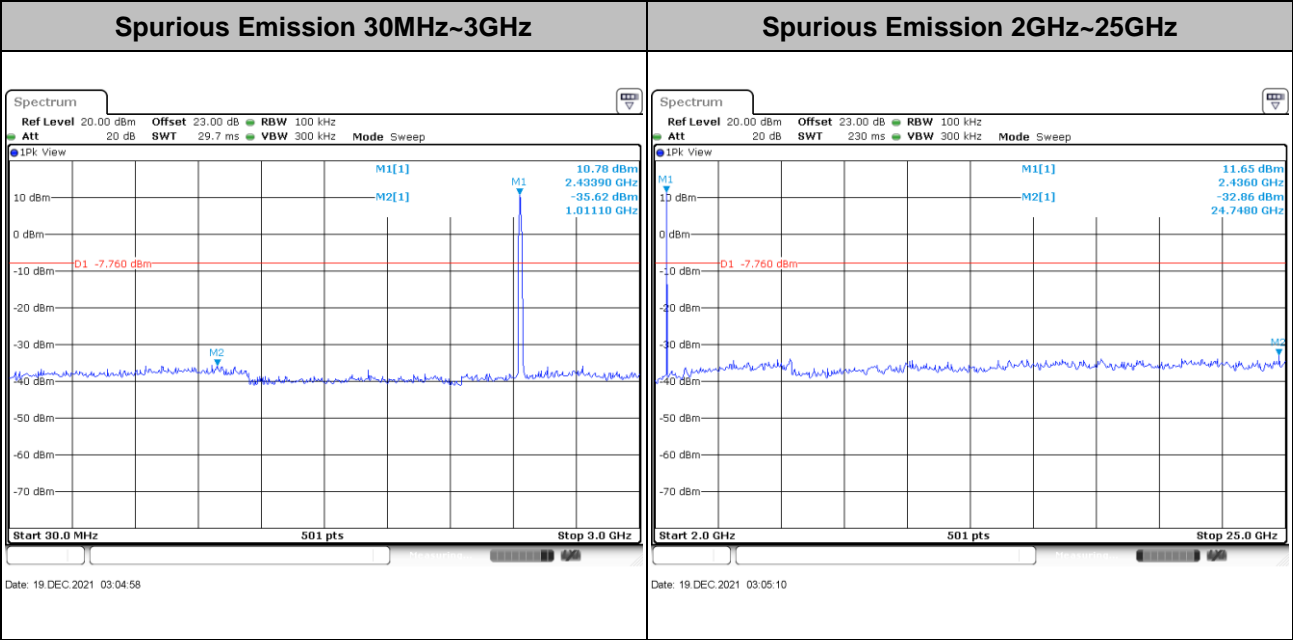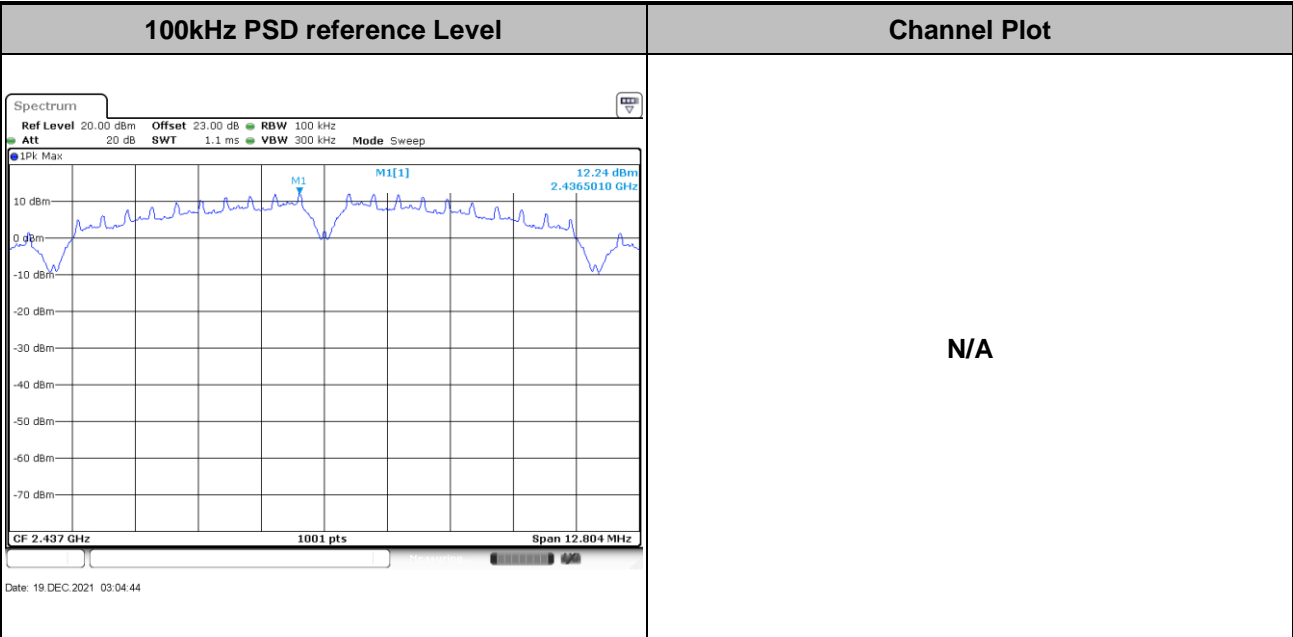





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

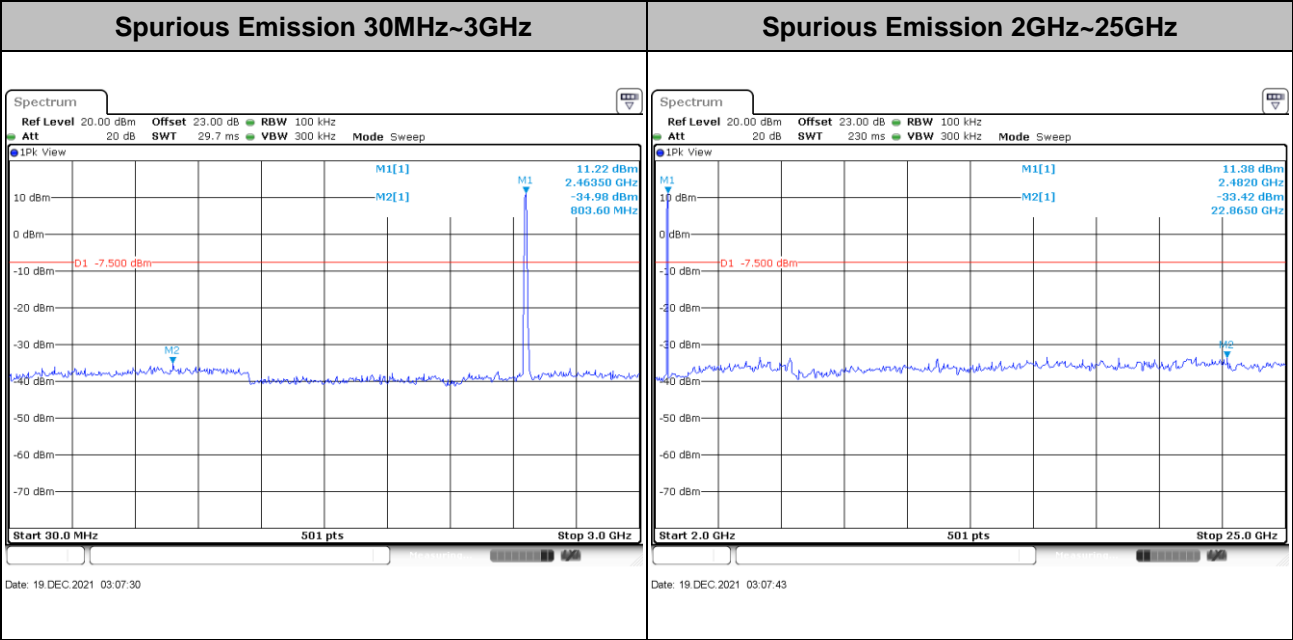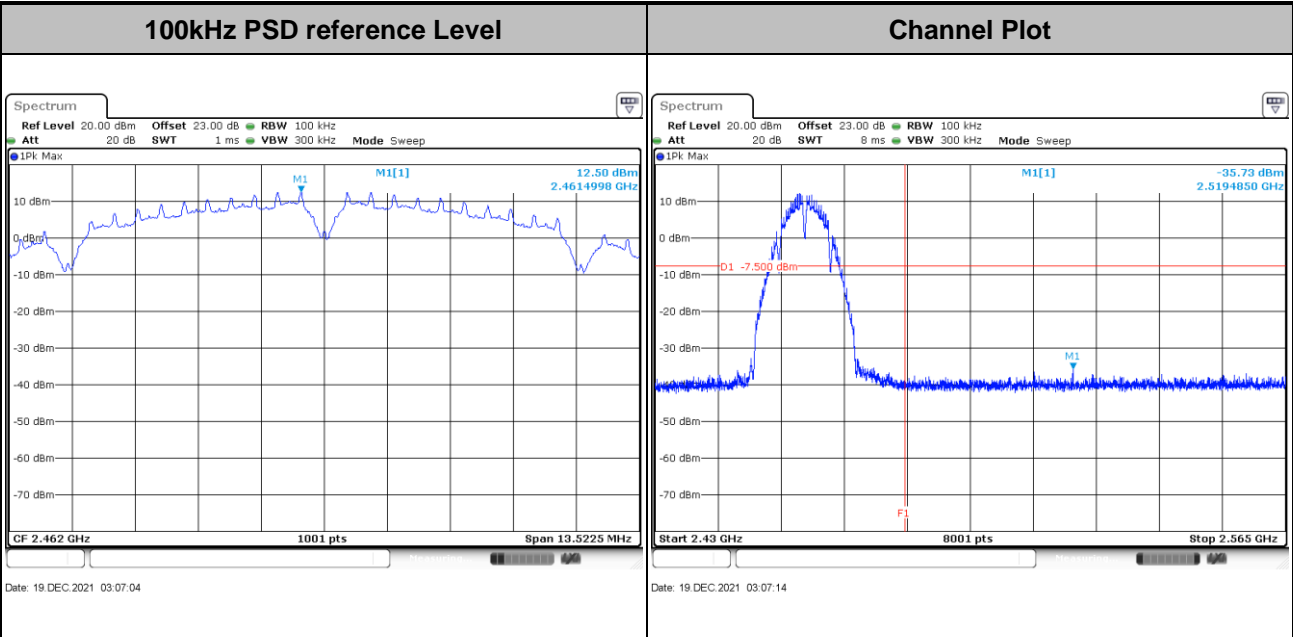




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

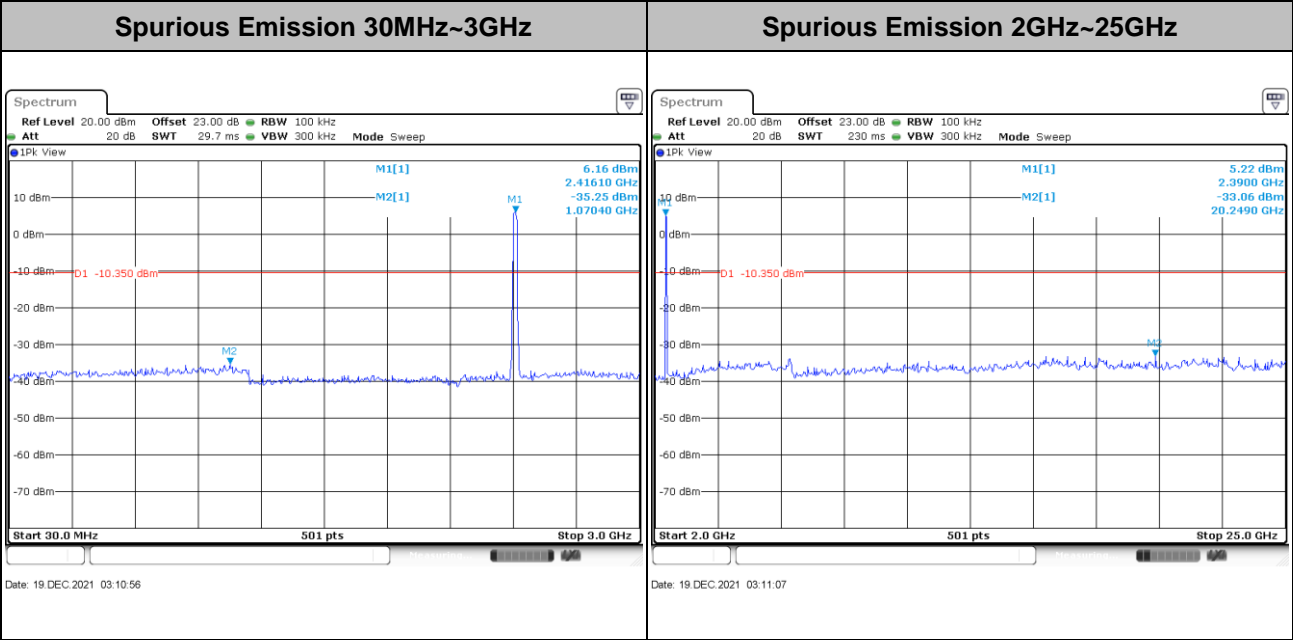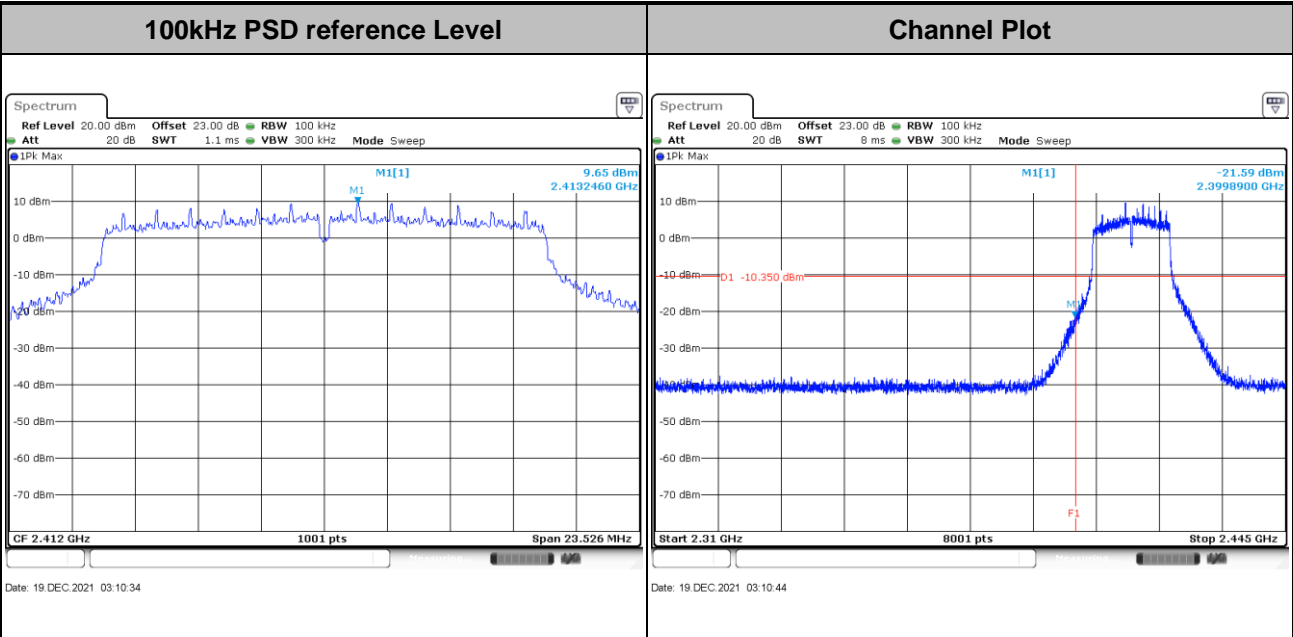





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

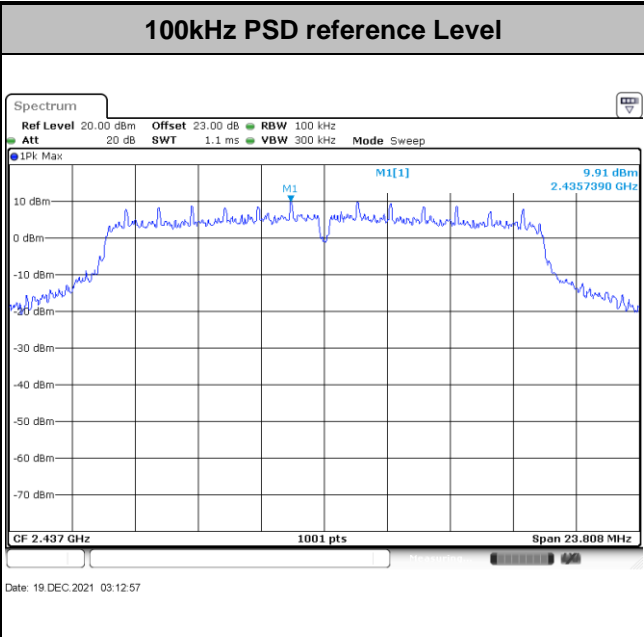



Channel Plot

N/A

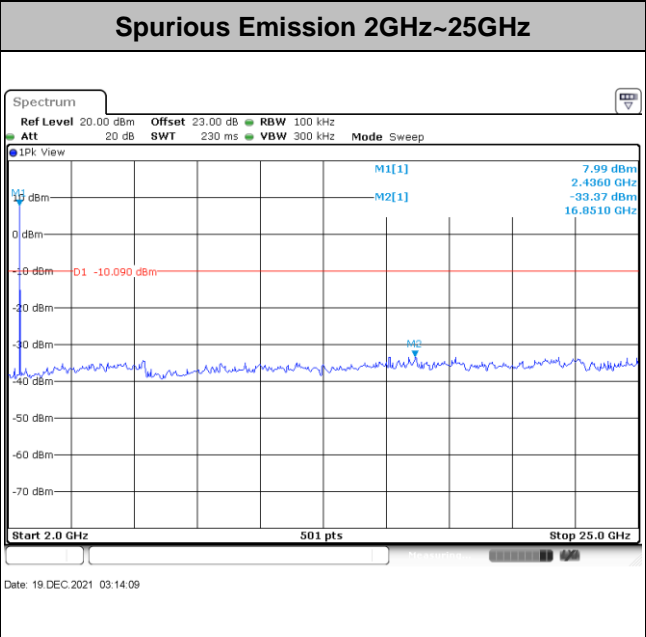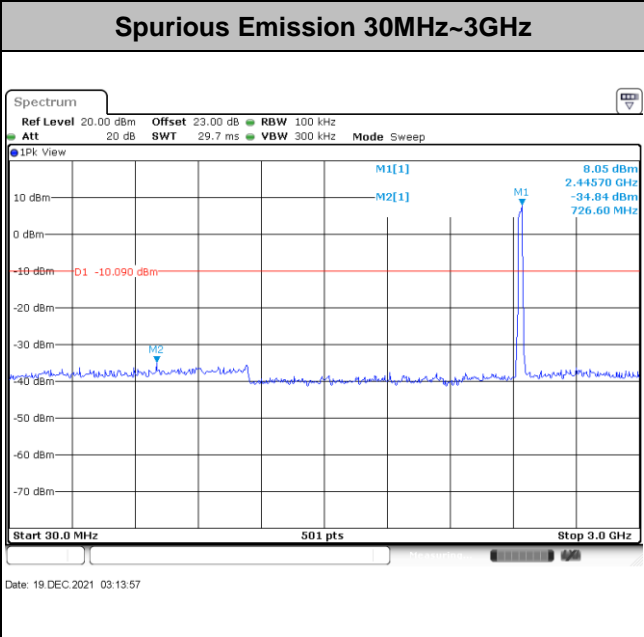





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

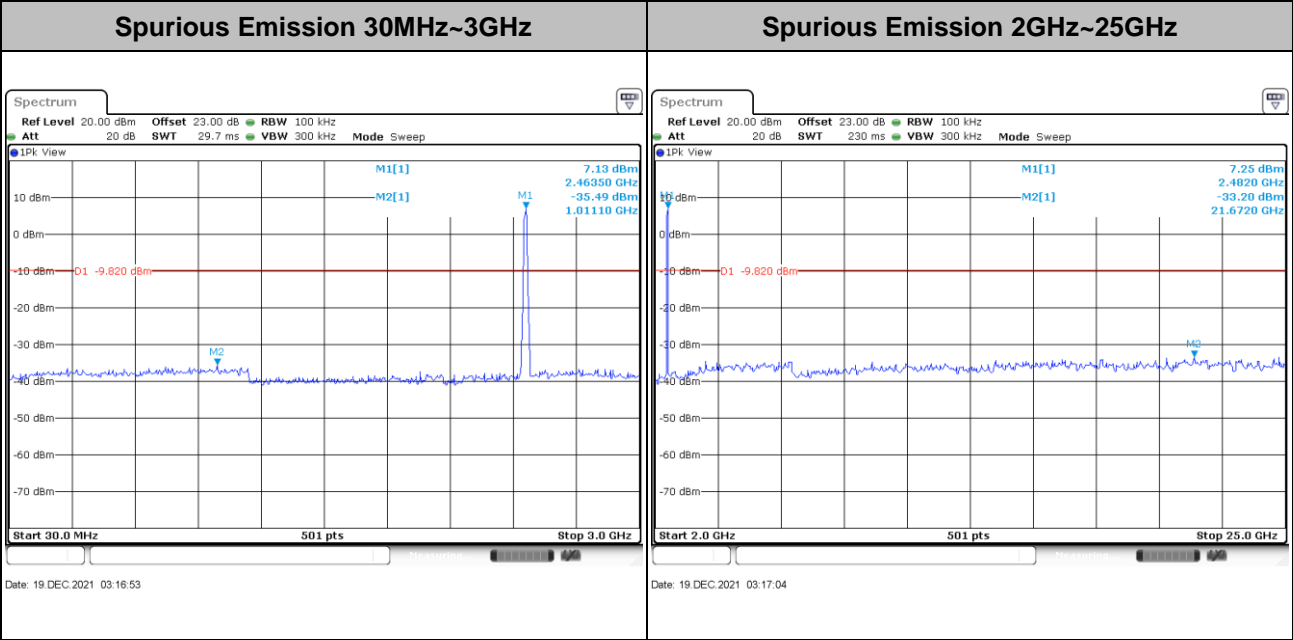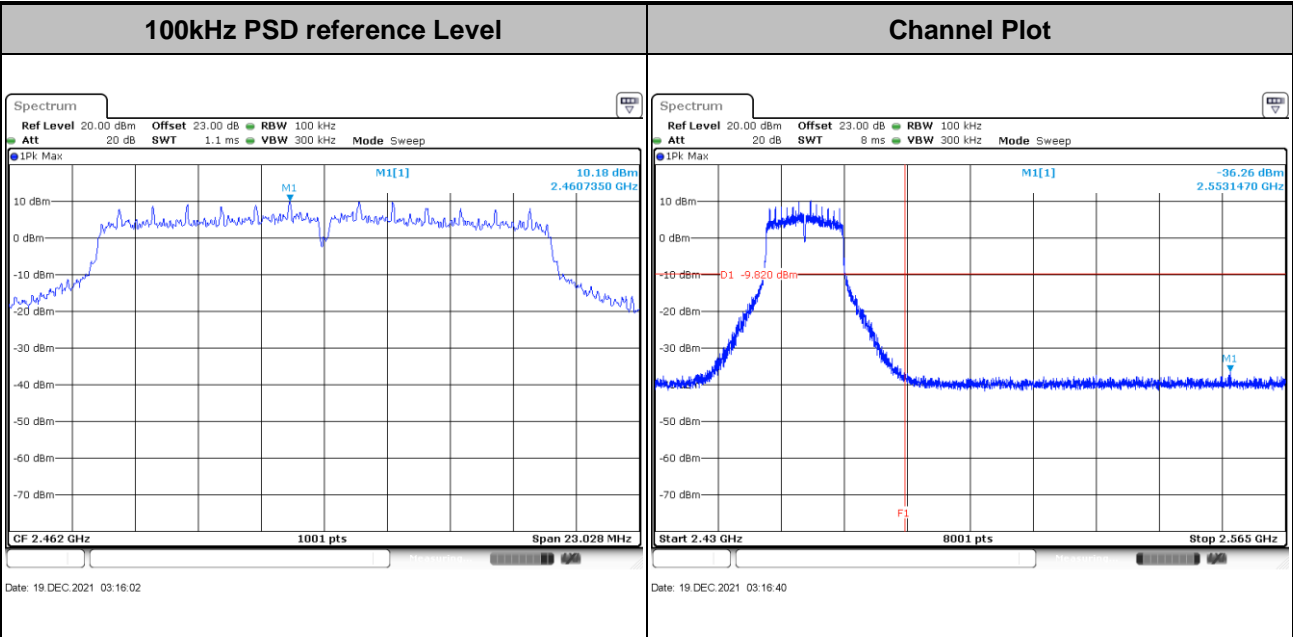




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

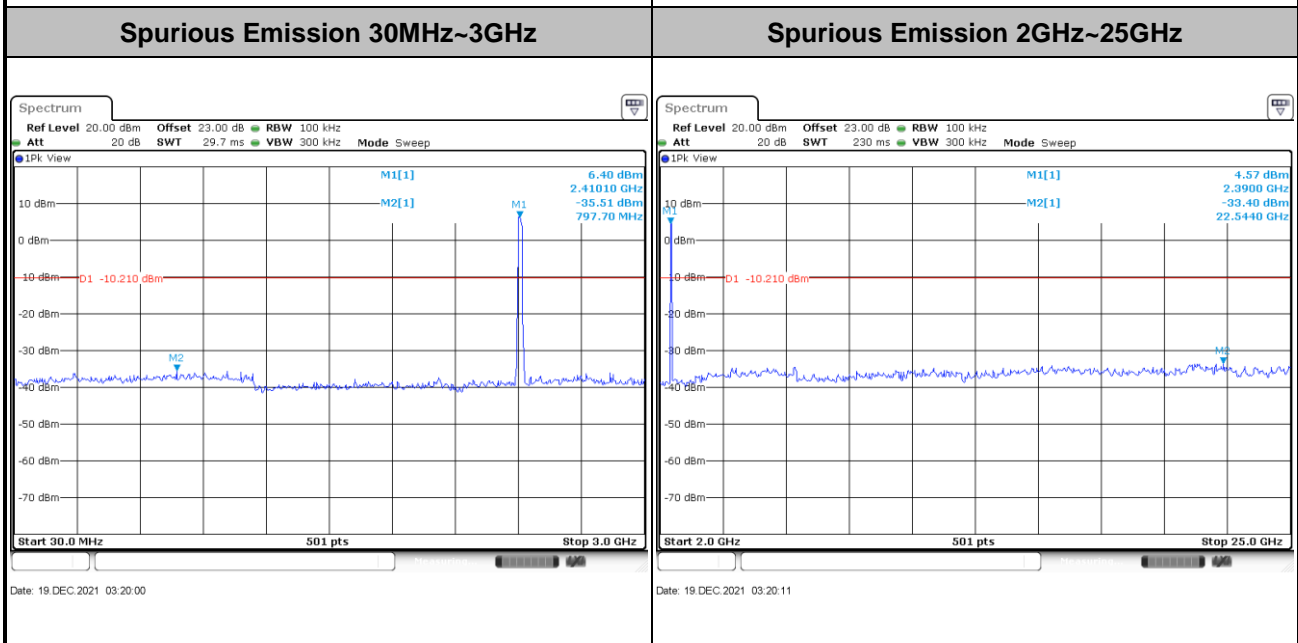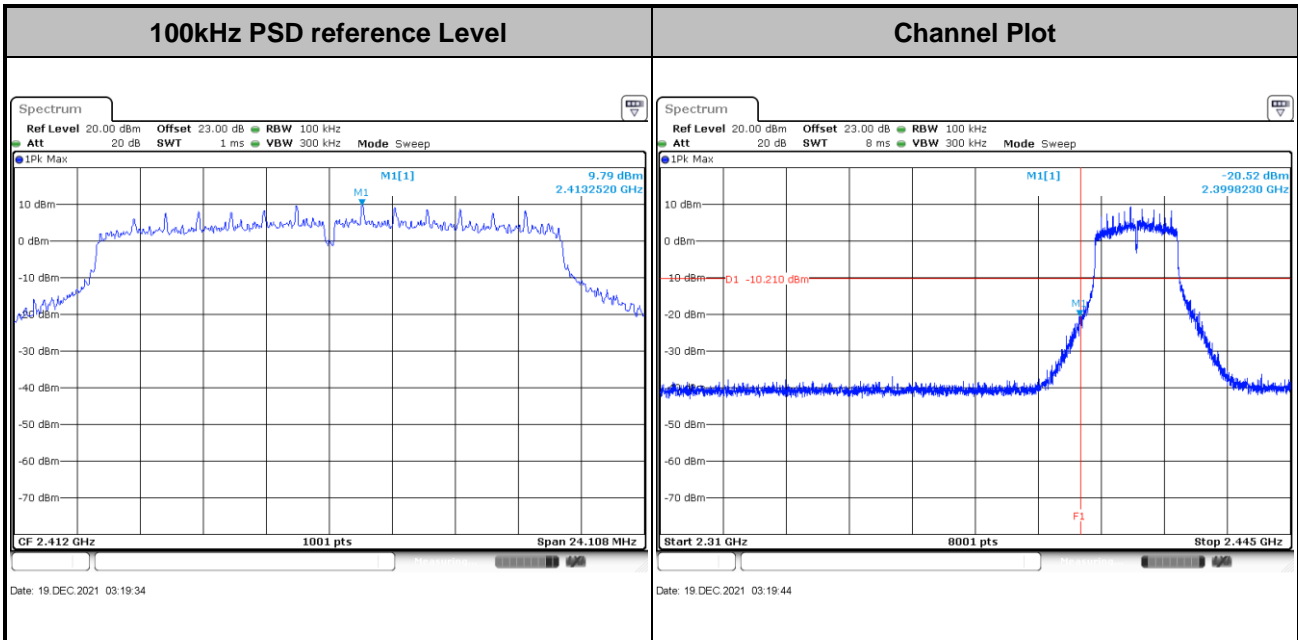





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

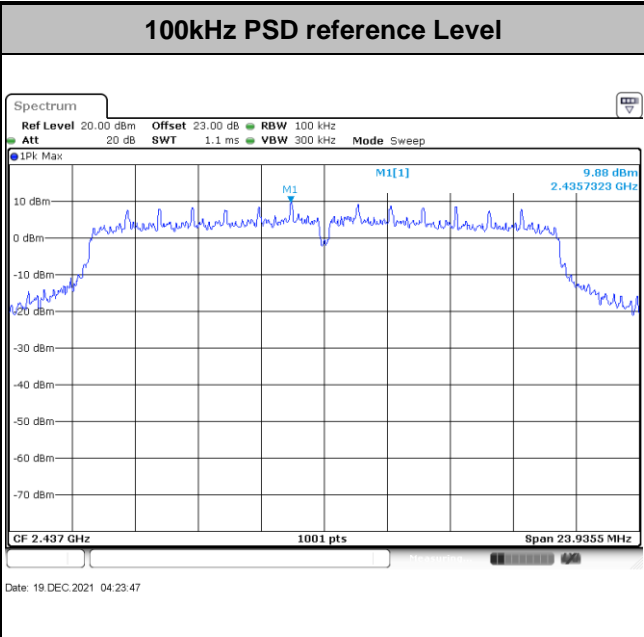



Channel Plot

N/A

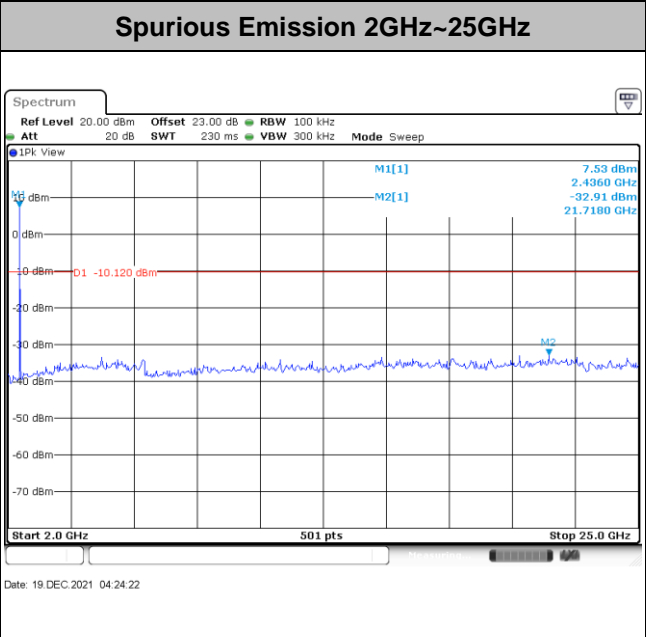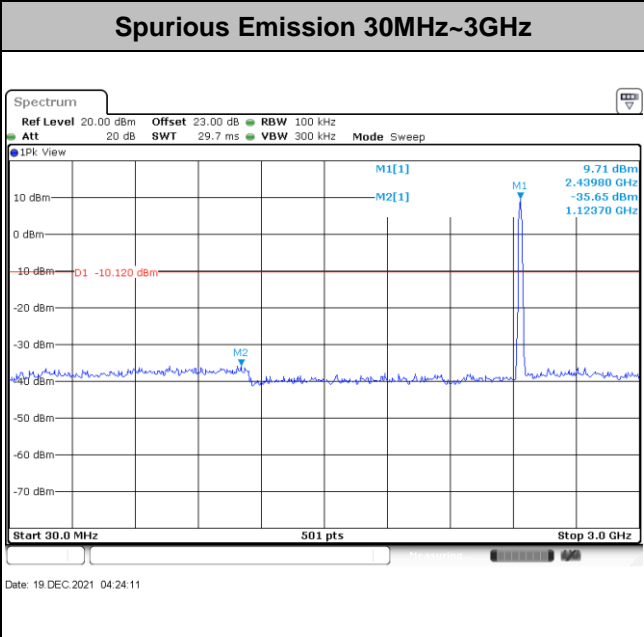





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

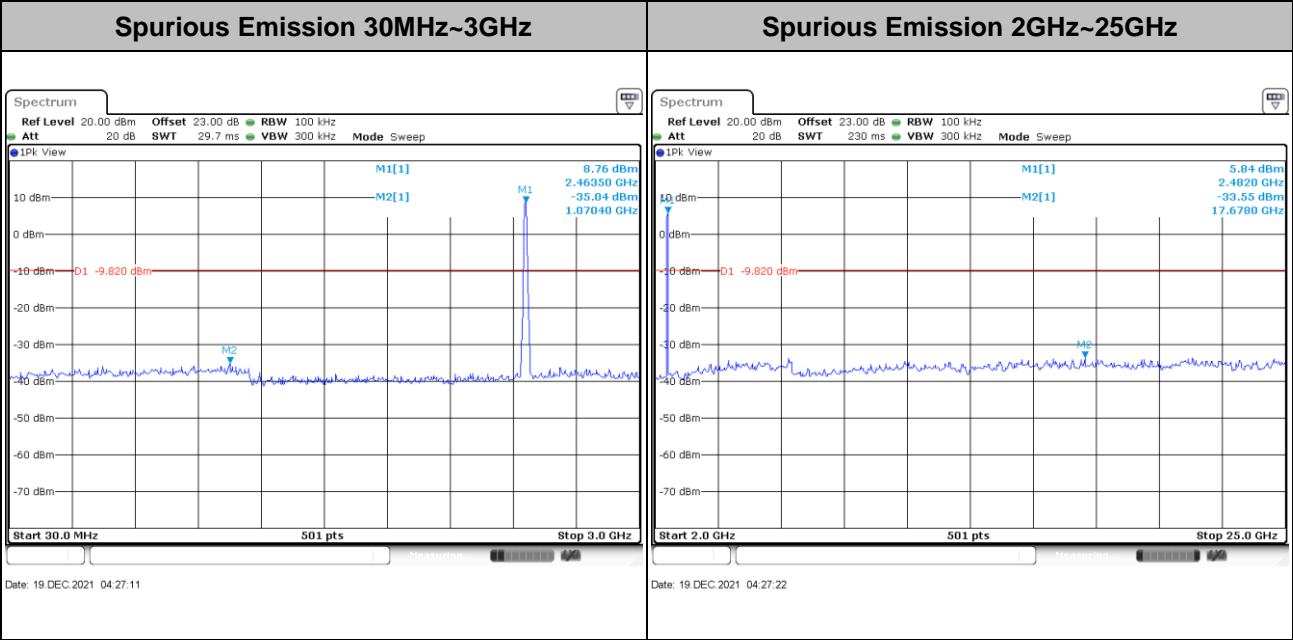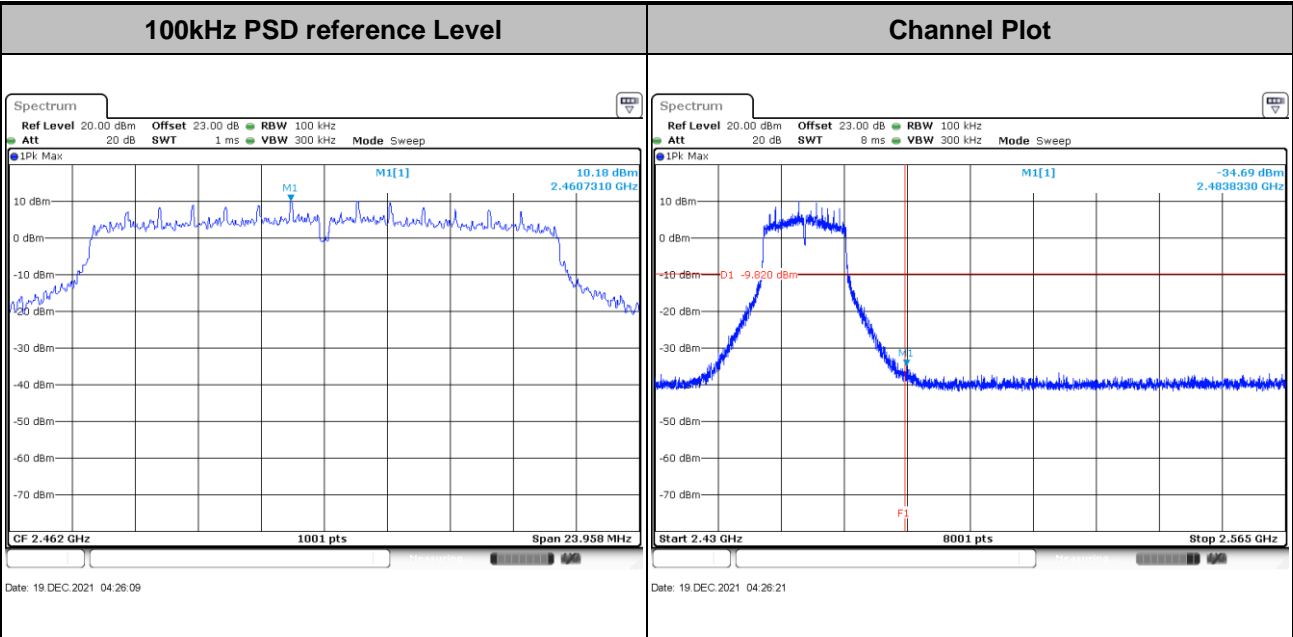





Test Mode : 802.11n HT40 Test Channel : 03

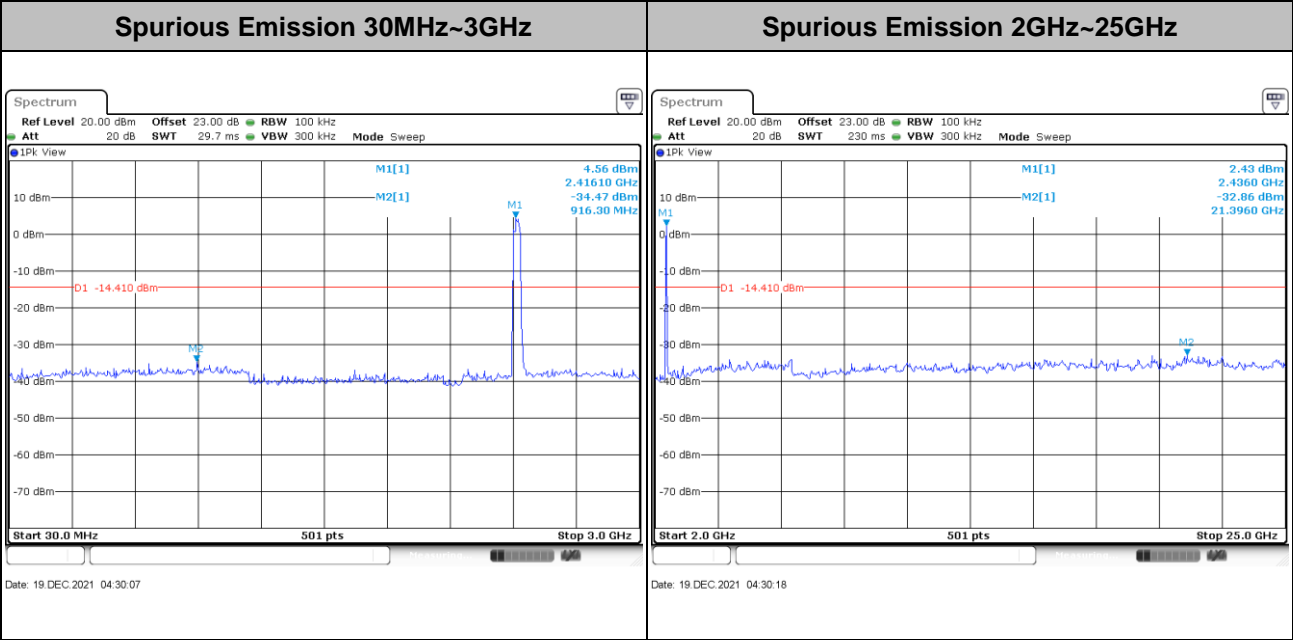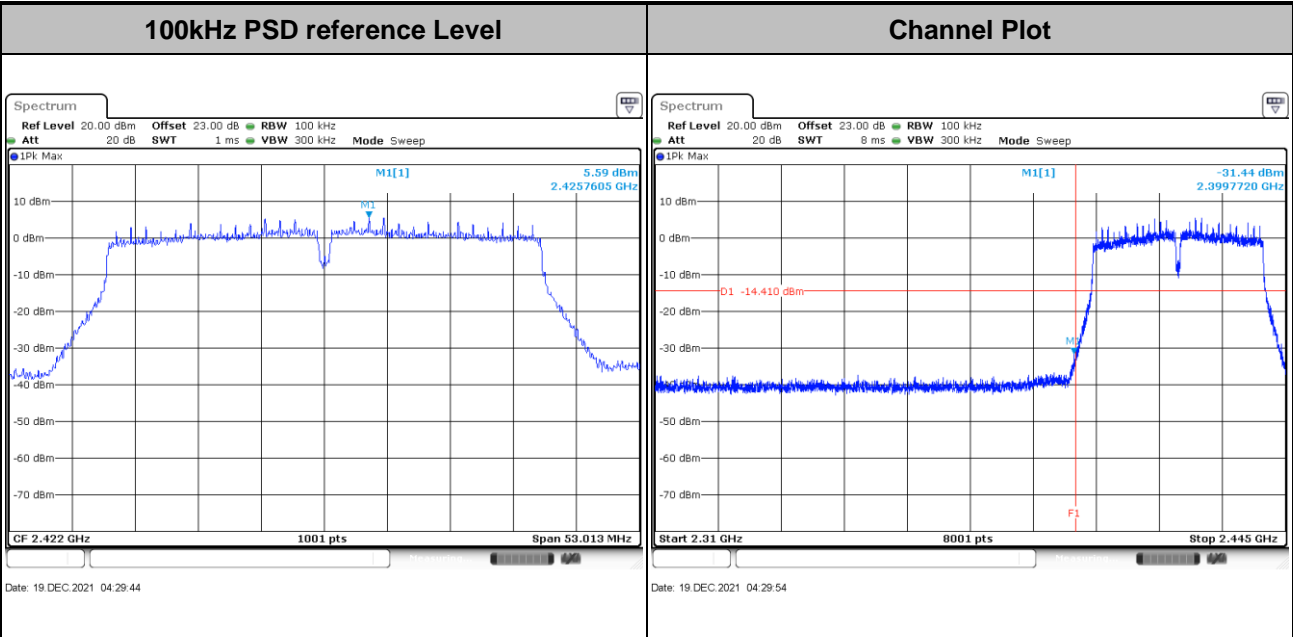







Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

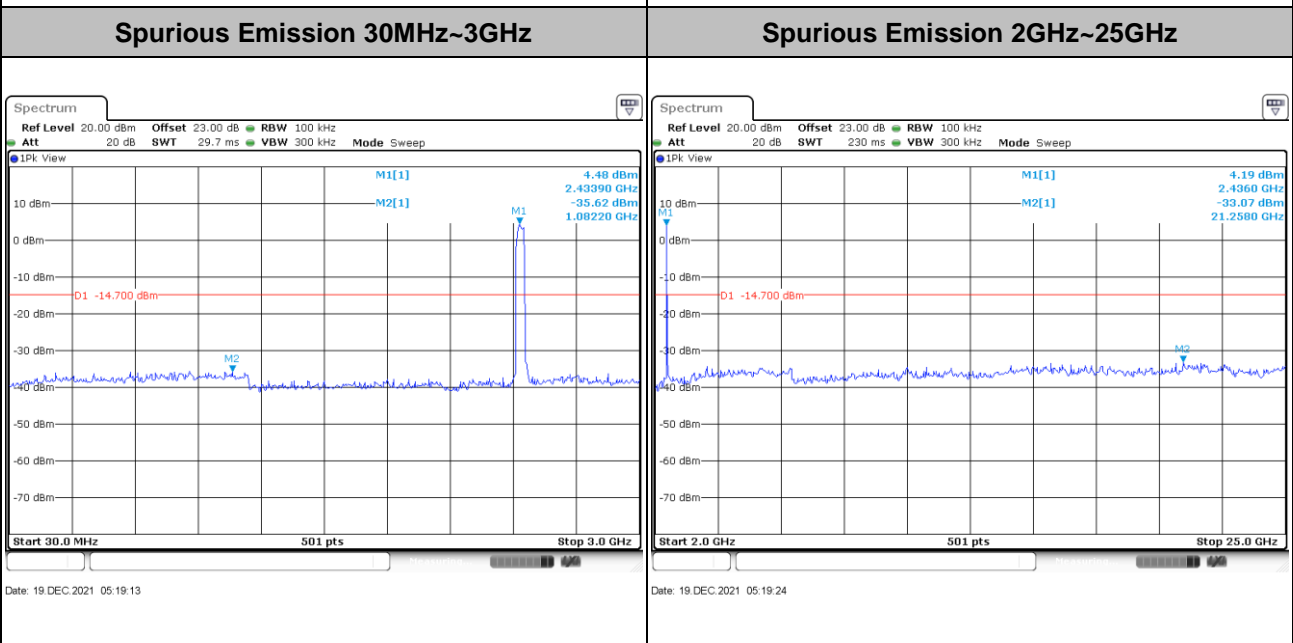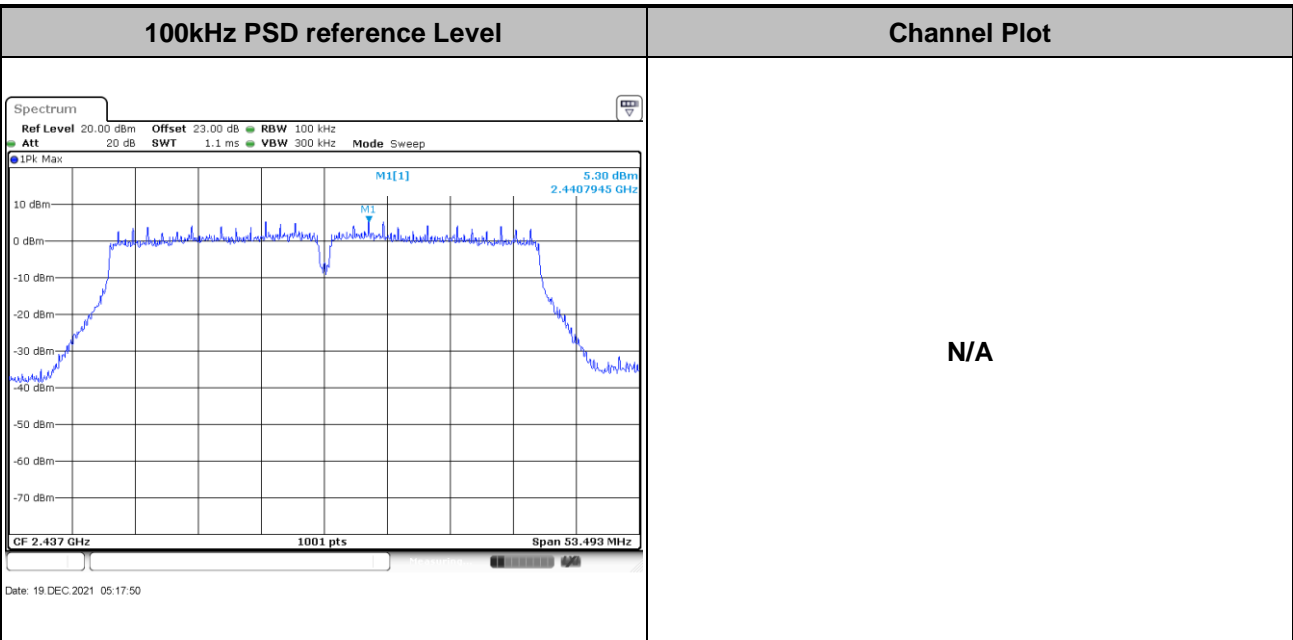



Test Mode : 802.11n HT40 Test Channel : 09

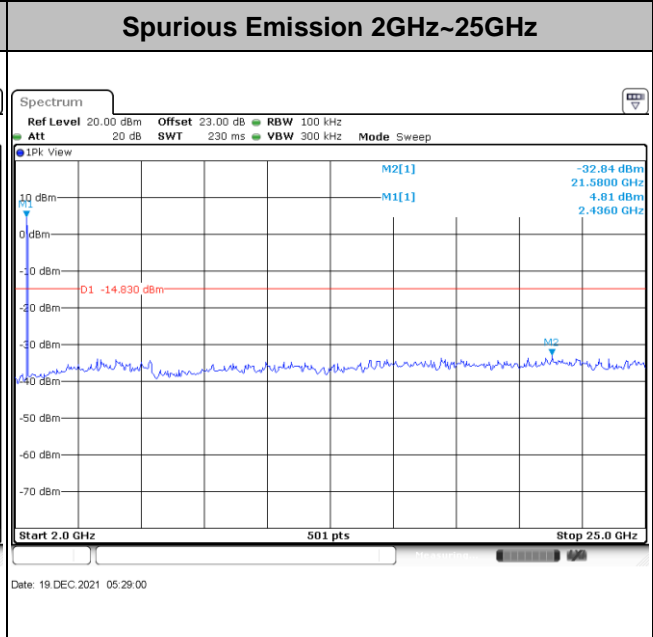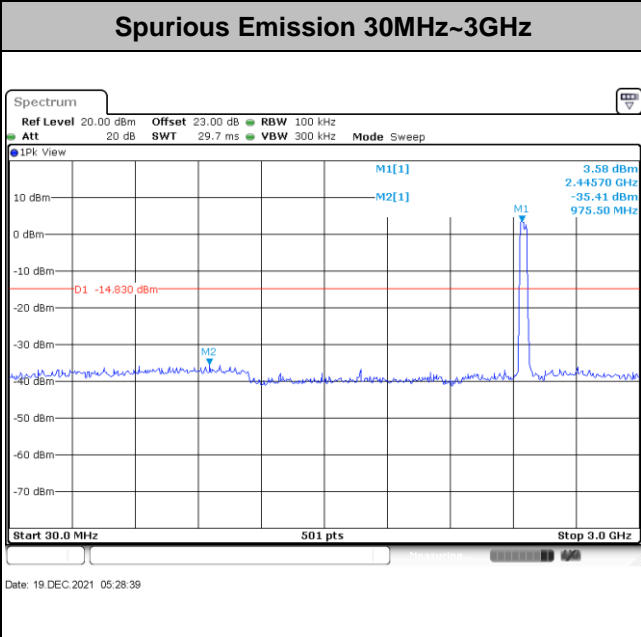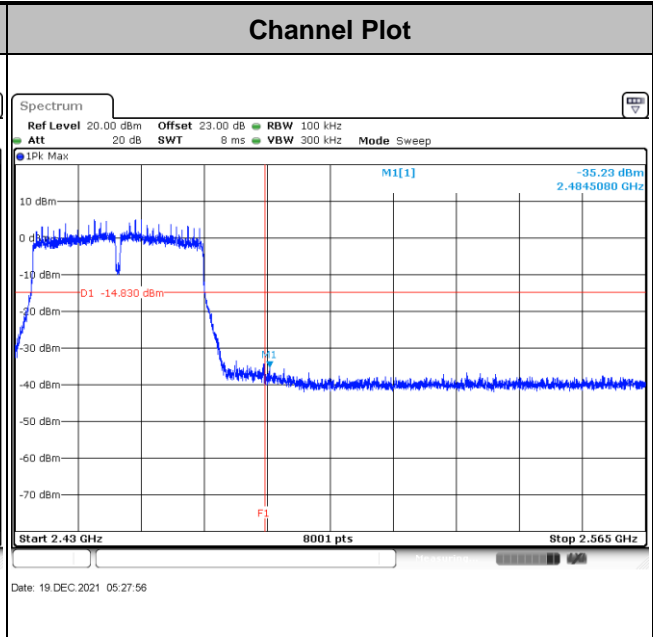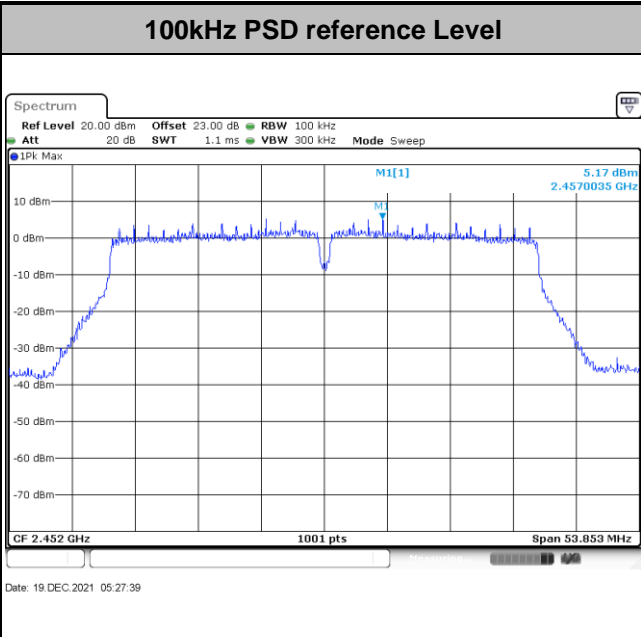



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

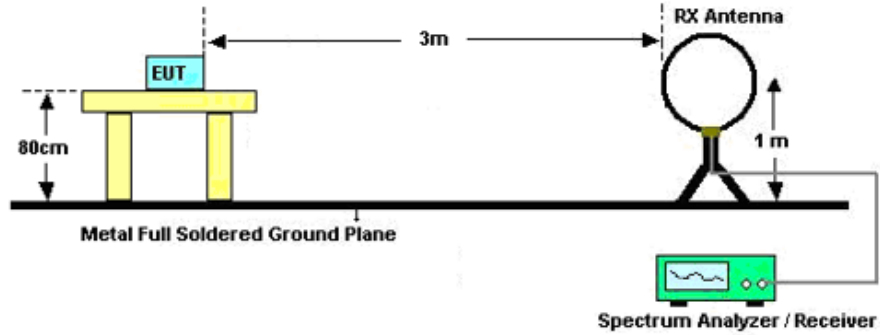

For radiated emissions from 30MHz to 1GHz

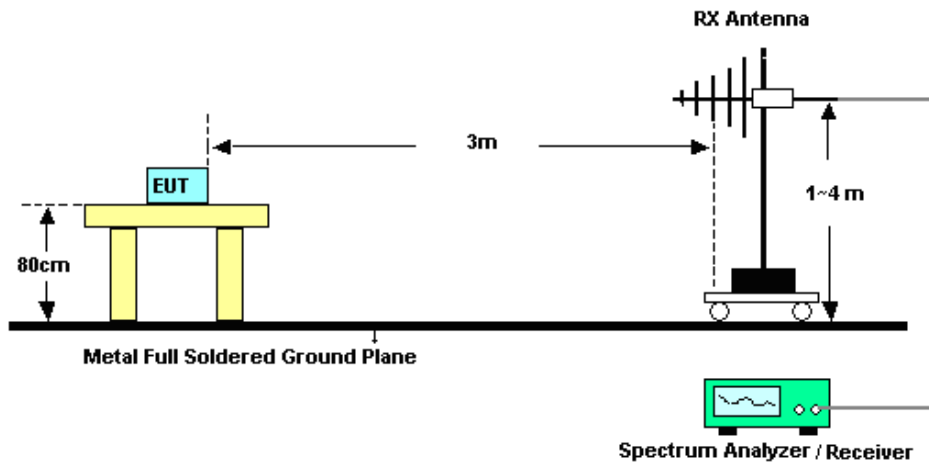

For radiated emissions above 1GHz

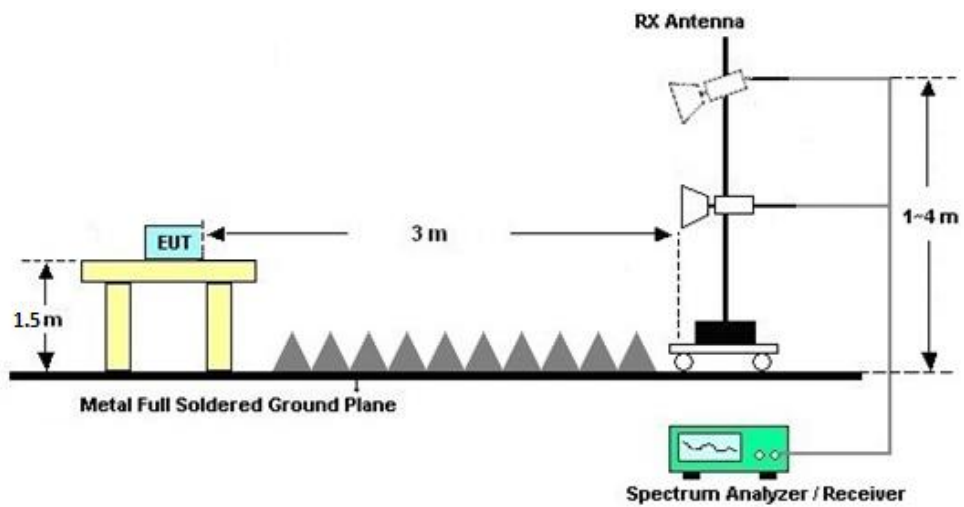



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

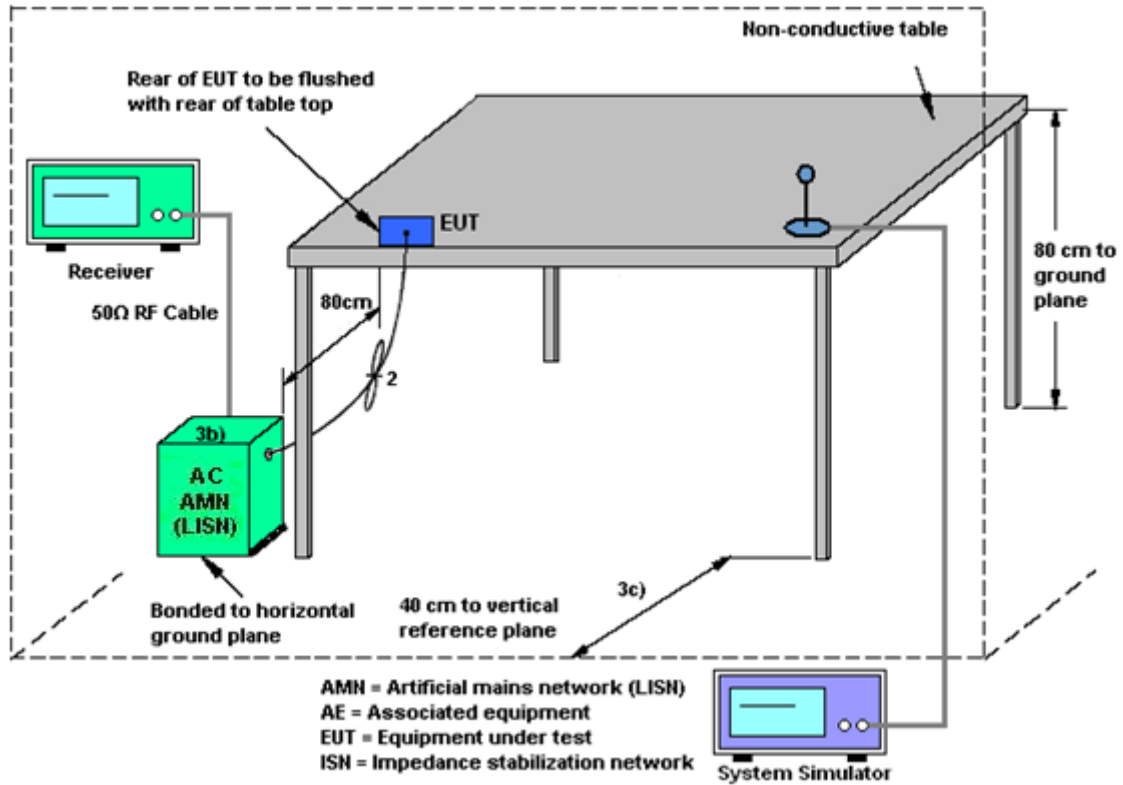

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Dec. 19, 2021 ~ Dec. 22, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Dec. 19, 2021 ~ Dec. 22, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Dec. 19, 2021 ~ Dec. 22, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 13, 2021	Jan. 16, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jan. 16, 2022	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Jan. 16, 2022	Jul. 14, 2022	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Jan. 16, 2022	Jul. 24, 2022	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 11, 2021	Jan. 16, 2022	Apr. 10, 2022	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 22, 2021	Jan. 16, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jan. 16, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 22, 2021	Jan. 16, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jan. 16, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002 470	N/A	NCR	Jan. 16, 2022	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jan. 16, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jan. 16, 2022	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 08, 2021	Dec. 23, 2021	Mar. 07, 2022	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 01, 2021	Dec. 23, 2021	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 28, 2021	Dec. 23, 2021	Oct. 27, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 14, 2021	Dec. 23, 2021	Jul. 13, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2021/12/19~2021/12/22	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant1		
11b	1Mbps	1	1	2412	13.94	8.54	0.50	Pass
11b	1Mbps	1	6	2437	13.94	8.54	0.50	Pass
11b	1Mbps	1	11	2462	13.94	9.02	0.50	Pass
11g	6Mbps	1	1	2412	17.63	15.68	0.50	Pass
11g	6Mbps	1	6	2437	17.83	15.87	0.50	Pass
11g	6Mbps	1	11	2462	17.78	15.35	0.50	Pass
HT20	MCS0	1	1	2412	18.73	16.07	0.50	Pass
HT20	MCS0	1	6	2437	18.93	15.96	0.50	Pass
HT20	MCS0	1	11	2462	18.83	15.97	0.50	Pass
HT40	MCS0	1	3	2422	36.46	35.34	0.50	Pass
HT40	MCS0	1	6	2437	36.66	35.66	0.50	Pass
HT40	MCS0	1	9	2452	36.56	35.90	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conduct ed Power (dBm)	Conduct ed Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	22.92	30.00	-5.00	17.92	36.00	Pass
11b	1Mbps	1	6	2437	21.61	30.00	-5.00	16.61	36.00	Pass
11b	1Mbps	1	11	2462	22.28	30.00	-5.00	17.28	36.00	Pass
11g	6Mbps	1	1	2412	24.37	30.00	-5.00	19.37	36.00	Pass
11g	6Mbps	1	6	2437	23.65	30.00	-5.00	18.65	36.00	Pass
11g	6Mbps	1	11	2462	24.72	30.00	-5.00	19.72	36.00	Pass
HT20	MCS0	1	1	2412	24.29	30.00	-5.00	19.29	36.00	Pass
HT20	MCS0	1	6	2437	24.34	30.00	-5.00	19.34	36.00	Pass
HT20	MCS0	1	11	2462	23.46	30.00	-5.00	18.46	36.00	Pass
HT40	MCS0	1	3	2422	25.25	30.00	-5.00	20.25	36.00	Pass
HT40	MCS0	1	6	2437	25.17	30.00	-5.00	20.17	36.00	Pass
HT40	MCS0	1	9	2452	23.11	30.00	-5.00	18.11	36.00	Pass
VHT20	MCS0	1	1	2412	22.70	30.00	-5.00	17.70	36.00	Pass
VHT20	MCS0	1	6	2437	22.82	30.00	-5.00	17.82	36.00	Pass
VHT20	MCS0	1	11	2462	22.97	30.00	-5.00	17.97	36.00	Pass
VHT40	MCS0	1	3	2422	24.31	30.00	-5.00	19.31	36.00	Pass
VHT40	MCS0	1	6	2437	24.66	30.00	-5.00	19.66	36.00	Pass
VHT40	MCS0	1	9	2452	22.97	30.00	-5.00	17.97	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	21.00	30.00	-5.00	16.00	36.00	Pass
11b	1Mbps	1	6	2437	19.80	30.00	-5.00	14.80	36.00	Pass
11b	1Mbps	1	11	2462	20.40	30.00	-5.00	15.40	36.00	Pass
11g	6Mbps	1	1	2412	20.00	30.00	-5.00	15.00	36.00	Pass
11g	6Mbps	1	6	2437	19.30	30.00	-5.00	14.30	36.00	Pass
11g	6Mbps	1	11	2462	20.20	30.00	-5.00	15.20	36.00	Pass
HT20	MCS0	1	1	2412	20.00	30.00	-5.00	15.00	36.00	Pass
HT20	MCS0	1	6	2437	20.10	30.00	-5.00	15.10	36.00	Pass
HT20	MCS0	1	11	2462	19.00	30.00	-5.00	14.00	36.00	Pass
HT40	MCS0	1	3	2422	19.20	30.00	-5.00	14.20	36.00	Pass
HT40	MCS0	1	6	2437	19.20	30.00	-5.00	14.20	36.00	Pass
HT40	MCS0	1	9	2452	17.00	30.00	-5.00	12.00	36.00	Pass
VHT20	MCS0	1	1	2412	18.00	30.00	-5.00	13.00	36.00	Pass
VHT20	MCS0	1	6	2437	18.10	30.00	-5.00	13.10	36.00	Pass
VHT20	MCS0	1	11	2462	18.20	30.00	-5.00	13.20	36.00	Pass
VHT40	MCS0	1	3	2422	18.00	30.00	-5.00	13.00	36.00	Pass
VHT40	MCS0	1	6	2437	18.30	30.00	-5.00	13.30	36.00	Pass
VHT40	MCS0	1	9	2452	16.90	30.00	-5.00	11.90	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	-2.12	-5.00	8.00	Pass
11b	1Mbps	1	6	2437	-2.45	-5.00	8.00	Pass
11b	1Mbps	1	11	2462	-1.51	-5.00	8.00	Pass
11g	6Mbps	1	1	2412	-4.67	-5.00	8.00	Pass
11g	6Mbps	1	6	2437	-4.81	-5.00	8.00	Pass
11g	6Mbps	1	11	2462	-4.36	-5.00	8.00	Pass
HT20	MCS0	1	1	2412	-4.71	-5.00	8.00	Pass
HT20	MCS0	1	6	2437	-5.88	-5.00	8.00	Pass
HT20	MCS0	1	11	2462	-5.59	-5.00	8.00	Pass
HT40	MCS0	1	3	2422	-8.59	-5.00	8.00	Pass
HT40	MCS0	1	6	2437	-8.88	-5.00	8.00	Pass
HT40	MCS0	1	9	2452	-8.34	-5.00	8.00	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

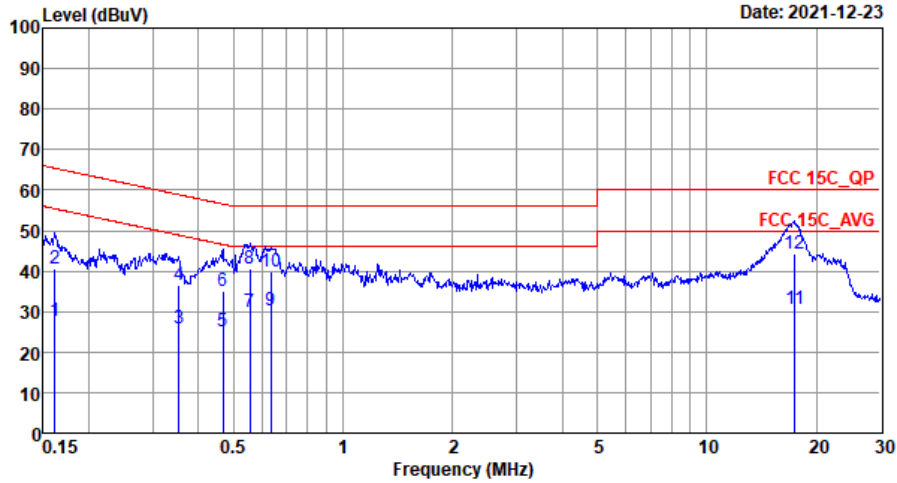


Site : CO01-SZ
Condition: FCC 15C_QP LISN_20210901_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	27.77	-27.61	55.38	6.90	10.20	10.67	Average
2	0.16	40.47	-24.91	65.38	19.60	10.20	10.67	QP
3	0.35	25.71	-23.16	48.87	4.41	10.08	11.22	Average
4	0.35	36.51	-22.36	58.87	15.21	10.08	11.22	QP
5	0.47	25.05	-21.49	46.54	3.20	10.11	11.74	Average
6	0.47	34.95	-21.59	56.54	13.10	10.11	11.74	QP
7	0.56	29.82	-16.18	46.00	8.10	10.11	11.61	Average
8 *	0.56	40.52	-15.48	56.00	18.80	10.11	11.61	QP
9	0.63	30.33	-15.67	46.00	8.90	10.12	11.31	Average
10	0.63	39.93	-16.07	56.00	18.50	10.12	11.31	QP
11	17.47	30.72	-19.28	50.00	10.50	9.87	10.35	Average
12	17.47	44.42	-15.58	60.00	24.20	9.87	10.35	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

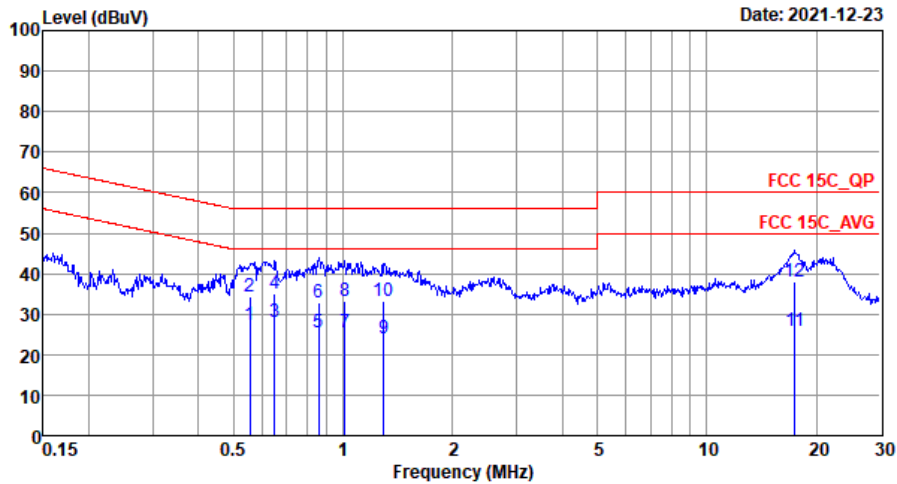

Site : C001-SZ
 Condition: FCC 15C_QP LISN_20210901_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.56	27.23	-18.77	46.00	5.40	10.22	11.61	Average
2	0.56	34.43	-21.57	56.00	12.60	10.22	11.61	QP
3 *	0.65	28.08	-17.92	46.00	6.60	10.23	11.25	Average
4	0.65	34.88	-21.12	56.00	13.40	10.23	11.25	QP
5	0.86	25.42	-20.58	46.00	4.60	10.23	10.59	Average
6	0.86	33.02	-22.98	56.00	12.20	10.23	10.59	QP
7	1.01	25.35	-20.65	46.00	4.90	10.22	10.23	Average
8	1.01	33.35	-22.65	56.00	12.90	10.22	10.23	QP
9	1.30	23.88	-22.12	46.00	3.40	10.25	10.23	Average
10	1.30	33.18	-22.82	56.00	12.70	10.25	10.23	QP
11	17.47	25.95	-24.05	50.00	5.80	9.80	10.35	Average
12	17.47	37.85	-22.15	60.00	17.70	9.80	10.35	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2385.81	51.63	-22.37	74	45.62	31.7	5.55	31.24	106	169	P	H
		2389.17	41.11	-12.89	54	35.09	31.7	5.55	31.23	106	169	A	H
		2412	105.22	-	-	99.01	31.8	5.57	31.16	106	169	P	H
		2412	101.32	-	-	95.11	31.8	5.57	31.16	106	169	A	H
		2348.325	51.39	-22.61	74	45.56	31.7	5.49	31.36	105	106	P	V
		2390	41.16	-12.84	54	32.22	32	9.64	32.7	105	106	A	V
		2412	110.65	-	-	104.44	31.8	5.57	31.16	105	106	P	V
		2412	106.9	-	-	100.69	31.8	5.57	31.16	105	106	A	V
802.11b CH 06 2437MHz		2323.16	51.08	-22.92	74	45.41	31.63	5.47	31.43	106	169	P	H
		2389.52	40.63	-13.37	54	34.61	31.7	5.55	31.23	106	169	A	H
		2437	104.66	-	-	98.14	32	5.61	31.09	106	169	P	H
		2437	99.72	-	-	93.32	31.9	5.59	31.09	106	169	A	H
		2485.37	52.62	-21.38	74	45.83	32.07	5.66	30.94	106	169	P	H
		2485.51	41.67	-12.33	54	34.88	32.07	5.66	30.94	106	169	A	H
		2385.32	50.92	-23.08	74	44.93	31.7	5.53	31.24	104	105	P	V
		2389.94	40.94	-13.06	54	34.92	31.7	5.55	31.23	104	105	A	V
		2437	109.78	-	-	103.26	32	5.61	31.09	104	105	P	V
		2437	105.96	-	-	99.44	32	5.61	31.09	104	105	A	V
		2490.83	53.15	-20.85	74	46.3	32.1	5.68	30.93	104	105	P	V
		2483.9	42.56	-11.44	54	35.78	32.07	5.66	30.95	104	105	A	V
802.11b CH 11 2462MHz		2462	103.97	-	-	97.31	32.03	5.64	31.01	104	359	P	H
		2462	100.11	-	-	93.45	32.03	5.64	31.01	104	359	A	H
		2497.52	52.26	-21.74	74	45.39	32.1	5.68	30.91	104	359	P	H
		2488.8	41.76	-12.24	54	34.91	32.1	5.68	30.93	104	359	A	H
		2462	109.37	-	-	102.71	32.03	5.64	31.01	104	104	P	V
		2462	105.57	-	-	98.91	32.03	5.64	31.01	104	104	A	V
		2488.76	53.35	-20.65	74	46.5	32.1	5.68	30.93	104	104	P	V
		2488.52	42.81	-11.19	54	35.96	32.1	5.68	30.93	104	104	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	51.02	-22.98	74	65.99	33.8	8.71	57.48	252	152	P	H
		4824	47.39	-6.61	54	62.36	33.8	8.71	57.48	252	152	A	H
		4824	51.68	-22.32	74	66.65	33.8	8.71	57.48	104	95	P	V
		4824	49.81	-4.19	54	64.78	33.8	8.71	57.48	104	95	A	V
802.11b CH 06 2437MHz		4874	52.46	-21.54	74	67.46	33.73	8.79	57.52	104	92	P	V
		4874	50.8	-3.2	54	65.8	33.73	8.79	57.52	104	92	A	V
		7311	45.9	-28.1	74	58.01	35.72	11.09	58.92			P	V
		4874	51.22	-22.78	74	66.22	33.73	8.79	57.52	262	110	P	H
		4874	47.4	-6.6	54	62.4	33.73	8.79	57.52	262	110	A	H
		7311	44.98	-29.02	74	57.09	35.72	11.09	58.92			P	H
802.11b CH 11 2462MHz		4924	53.26	-20.74	74	68.21	33.7	8.9	57.55	123	84	P	V
		4924	50.86	-3.14	54	65.81	33.7	8.9	57.55	123	84	A	V
		7386	45.15	-28.85	74	57.26	35.76	11.08	58.95			P	V
		4924	52.06	-21.94	74	67.01	33.7	8.9	57.55	218	120	P	H
		4924	48.06	-5.94	54	63.01	33.7	8.9	57.55	218	120	A	H
		7386	44.93	-29.07	74	57.04	35.76	11.08	58.95			P	H
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency, Level, Over Limit, Limit Line, Read Level, Antenna Factor, Path Loss, Preamp Factor, Ant Pos, Table Pos, Peak Avg., Pol. It contains three main sections of data for channels 01, 06, and 11, each with multiple frequency entries and their corresponding test results.



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency, Level, Over Limit, Limit Line, Read Level, Antenna Factor, Path Loss, Preamp Factor, Ant Pos, Table Pos, Peak Avg., Pol. It contains test data for three channels (CH 01, CH 06, CH 11) and a Remark section.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	47.37	-26.63	74	62.34	33.8	8.71	57.48	-	-	P	H
		4824	48.15	-25.85	74	63.12	33.8	8.71	57.48	-	-	P	V
802.11n HT20 CH 06 2437MHz		4874	47.33	-26.67	74	62.33	33.73	8.79	57.52	-	-	P	H
		7311	45.25	-28.75	74	57.36	35.72	11.09	58.92	-	-	P	H
		4874	48.15	-25.85	74	63.15	33.73	8.79	57.52	-	-	P	V
		7311	45.28	-28.72	74	57.39	35.72	11.09	58.92	-	-	P	V
802.11n HT20 CH 11 2462MHz		4924	47.22	-26.78	74	62.17	33.7	8.9	57.55	-	-	P	H
		7386	45.46	-28.54	74	57.57	35.76	11.08	58.95	-	-	P	H
		4924	49.28	-24.72	74	64.23	33.7	8.9	57.55	-	-	P	V
		7386	44.77	-29.23	74	56.88	35.76	11.08	58.95	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.66	52.16	-21.84	74	46.14	31.7	5.55	31.23	131	124	P	H
		2389.38	44.98	-9.02	54	38.96	31.7	5.55	31.23	131	124	A	H
		2422	102.47	-	-	96.11	31.9	5.59	31.13	131	124	P	H
		2422	92.82	-	-	86.46	31.9	5.59	31.13	131	124	A	H
		2500	52.4	-21.6	74	45.52	32.1	5.68	30.9	131	124	P	H
		2487.75	43.57	-10.43	54	36.73	32.1	5.68	30.94	131	124	A	H
		2389.1	55.47	-18.53	74	49.45	31.7	5.55	31.23	104	134	P	V
		2389.66	47.25	-6.75	54	41.23	31.7	5.55	31.23	104	134	A	V
		2422	106.51	-	-	100.15	31.9	5.59	31.13	104	134	P	V
		2422	96.95	-	-	90.59	31.9	5.59	31.13	104	134	A	V
		2488.73	53.26	-20.74	74	46.41	32.1	5.68	30.93	104	134	P	V
	2484.46	44.12	-9.88	54	37.34	32.07	5.66	30.95	104	134	A	V	
802.11n HT40 CH 06 2437MHz		2388.4	50.98	-23.02	74	44.96	31.7	5.55	31.23	132	124	P	H
		2389.24	42.27	-11.73	54	36.25	31.7	5.55	31.23	132	124	A	H
		2437	101.62	-	-	95.1	32	5.61	31.09	132	124	P	H
		2437	92.23	-	-	85.71	32	5.61	31.09	132	124	A	H
		2497.55	52.18	-21.82	74	45.31	32.1	5.68	30.91	132	124	P	H
		2483.97	43.72	-10.28	54	36.94	32.07	5.66	30.95	132	124	A	H
		2389.66	52.54	-21.46	74	46.52	31.7	5.55	31.23	127	106	P	V
		2383.36	42.32	-11.68	54	36.34	31.7	5.53	31.25	127	106	A	V
		2437	106	-	-	99.48	32	5.61	31.09	127	106	P	V
		2437	96.52	-	-	90	32	5.61	31.09	127	106	A	V
		2483.58	57.12	-16.88	74	47.9	32.17	9.75	32.7	127	106	P	V
	2483.62	46.14	-7.86	54	39.36	32.07	5.66	30.95	127	106	A	V	
802.11n HT40 CH 09 2452MHz		2367.68	51.63	-22.37	74	45.72	31.7	5.51	31.3	122	185	P	H
		2360.68	42.18	-11.82	54	36.29	31.7	5.51	31.32	122	185	A	H
		2452	99.19	-	-	92.62	32	5.61	31.04	122	185	P	H
		2452	89.87	-	-	83.3	32	5.61	31.04	122	185	A	H
		2483.62	55.39	-18.61	74	48.61	32.07	5.66	30.95	122	185	P	H
		2484.25	46.37	-7.63	54	39.59	32.07	5.66	30.95	122	185	A	H
		2341.36	51.27	-22.73	74	45.46	31.7	5.49	31.38	119	122	P	V
		2386.16	42.2	-11.8	54	36.19	31.7	5.55	31.24	119	122	A	V
		2452	105.37	-	-	98.8	32	5.61	31.04	119	122	P	V
		2452	95.84	-	-	89.27	32	5.61	31.04	119	122	A	V
		2483.62	59.77	-14.23	74	52.99	32.07	5.66	30.95	119	122	P	V
	2484.46	50.71	-3.29	54	43.93	32.07	5.66	30.95	119	122	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 13 columns: WIFI Ant., Note, Frequency, Level, Over Limit, Limit Line, Read Level, Antenna Factor, Path Loss, Preamp Factor, Ant Pos, Table Pos, Peak Avg., Pol. Rows include data for 802.11n HT40 CH 03, CH 06, and CH 09.



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
2.4GHz 802.11n HT40 LF		106.63	20.14	-23.36	43.5	36.99	15.87	2.47	35.19	-	-	P	H
		187.14	31.78	-11.72	43.5	47	17.18	2.7	35.1	175	216	P	H
		278.32	24	-22	46	36.63	19.27	3.04	34.94	-	-	P	H
		450.01	24.39	-21.61	46	32.64	23.15	3.3	34.7	-	-	P	H
		560.59	23.85	-22.15	46	29.71	25.02	3.7	34.58	-	-	P	H
		595.51	25.36	-20.64	46	30.3	25.7	3.87	34.51	-	-	P	H
		30	25.08	-14.92	40	39.38	18.85	1.85	35	-	-	P	V
		184.23	30.13	-13.37	43.5	45.06	17.48	2.69	35.1	148	253	P	V
		285.11	21.29	-24.71	46	33.65	19.48	3.09	34.93	-	-	P	V
		380.17	20.48	-25.52	46	30.38	21.66	3.28	34.84	-	-	P	V
		469.41	22.98	-23.02	46	30.86	23.45	3.37	34.7	-	-	P	V
		603.27	25.33	-20.67	46	30.12	25.82	3.89	34.5	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.29	-	-	10Hz
802.11g	98.25	-	-	10Hz
802.11n HT20	98.12	-	-	10Hz
802.11n HT40	94.82	0.928	1.078	3KHz



802.11b

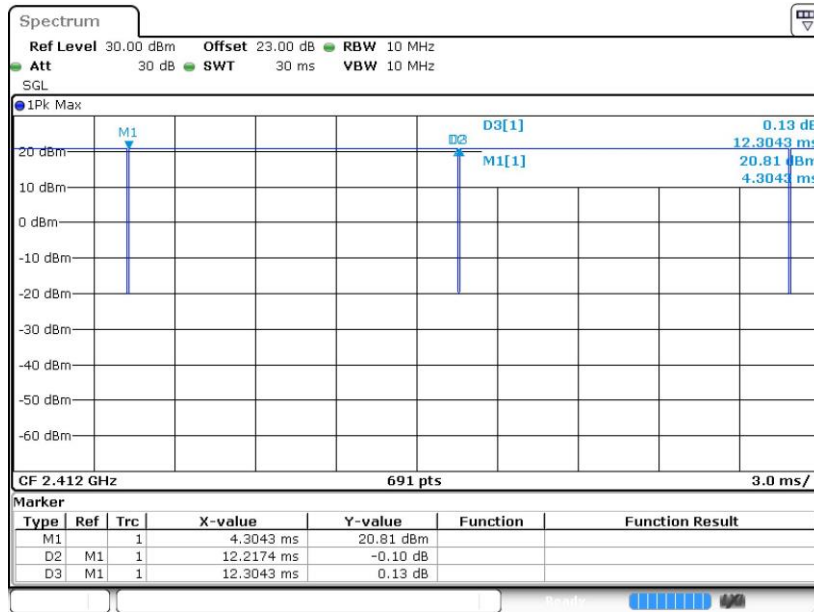


802.11g

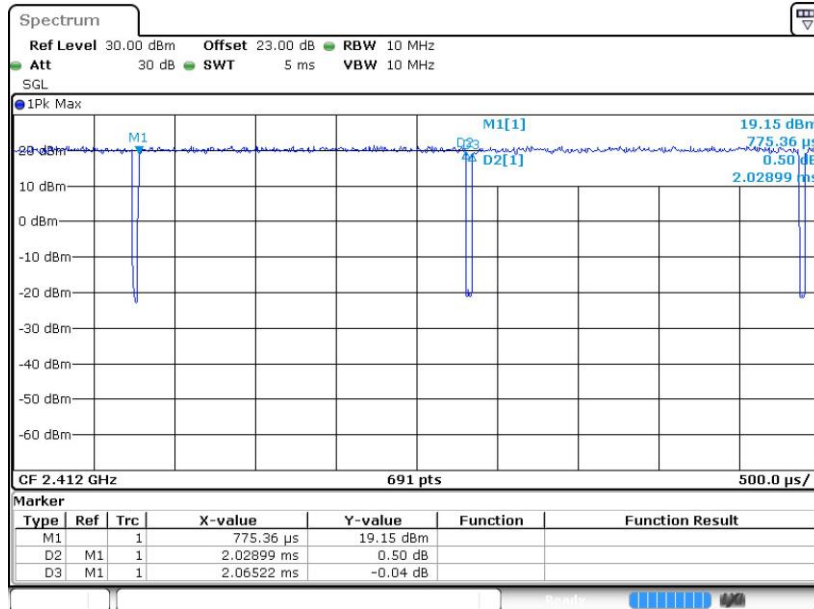



802.11n HT20

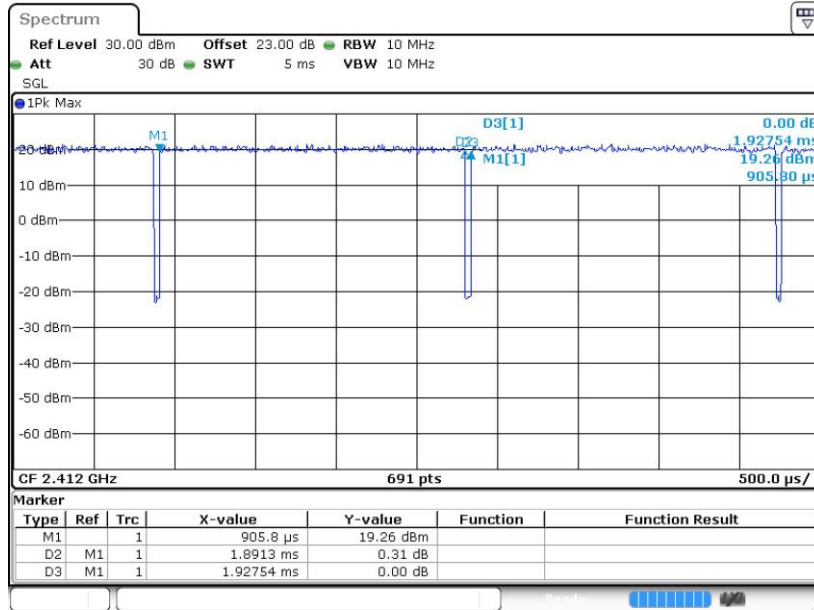

802.11n HT40

