

38_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch42


Communication System: UID 0, WIFI (0); Frequency: 5210 MHz; Duty Cycle: 1:1.029
Medium: HSL_5250_220110 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.544$ S/m; $\epsilon_r = 36.713$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.02, 5.02, 5.02); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.889 W/kg

Ch42/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.097 W/kg
Maximum value of SAR (measured) = 0.973 W/kg

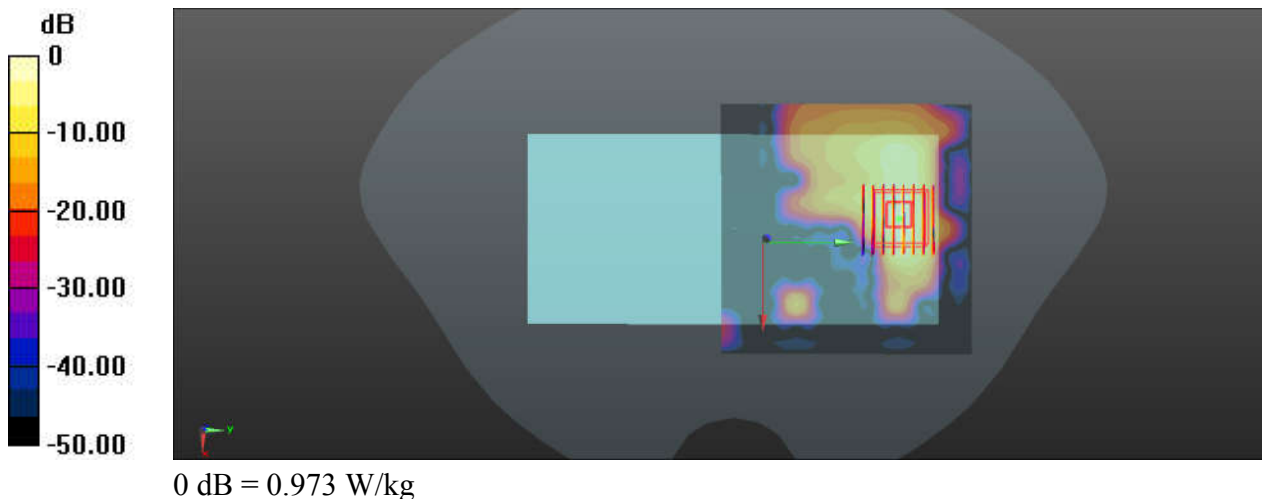

39_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155


Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.081
Medium: HSL_5750_220112 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.192$ S/m; $\epsilon_r = 35.843$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.62, 4.62, 4.62); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.16 W/kg

Ch155/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.096 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

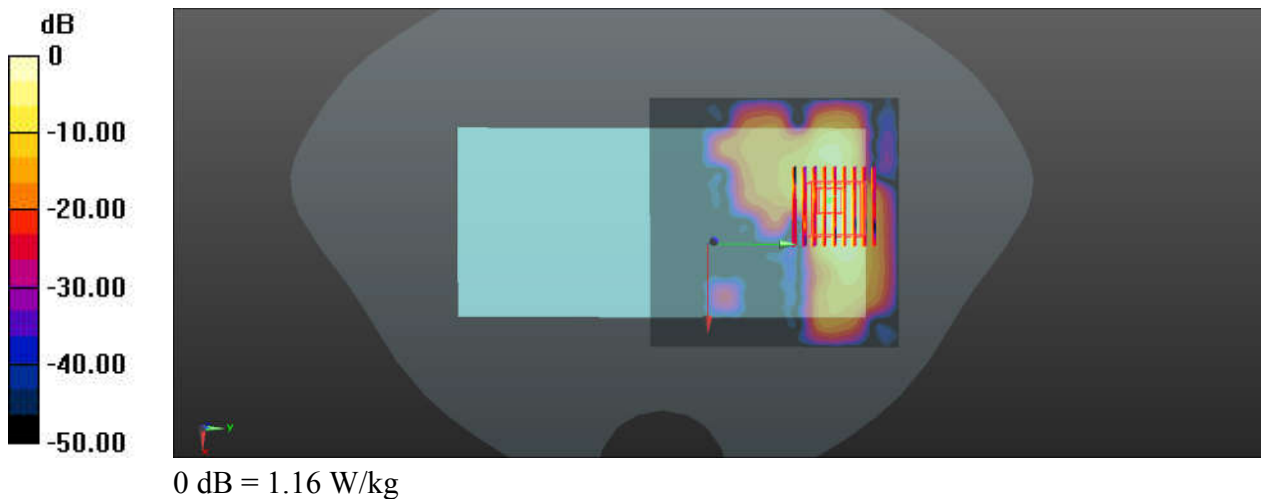

40_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251


Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_211230 Medium parameters used: $f = 849$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.729$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.57, 9.57, 9.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.32 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.29 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.380 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

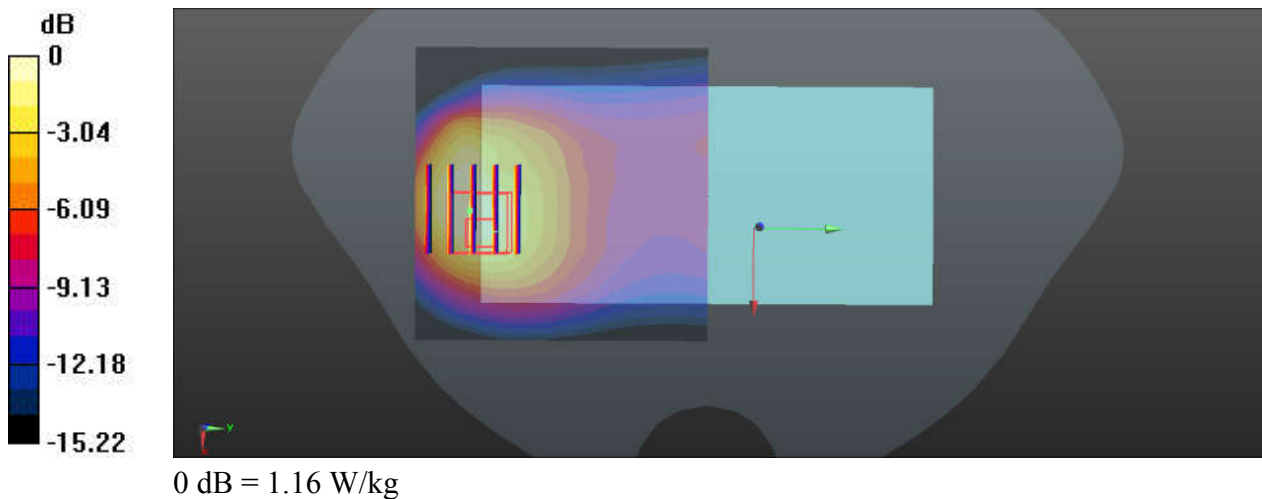

41_GSM1900_GPRS 3 Tx slots_Back_5mm_Ch810


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_220103 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.465$ S/m; $\epsilon_r = 40.025$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Ch810/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.081 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.499 W/kg
Maximum value of SAR (measured) = 1.51 W/kg

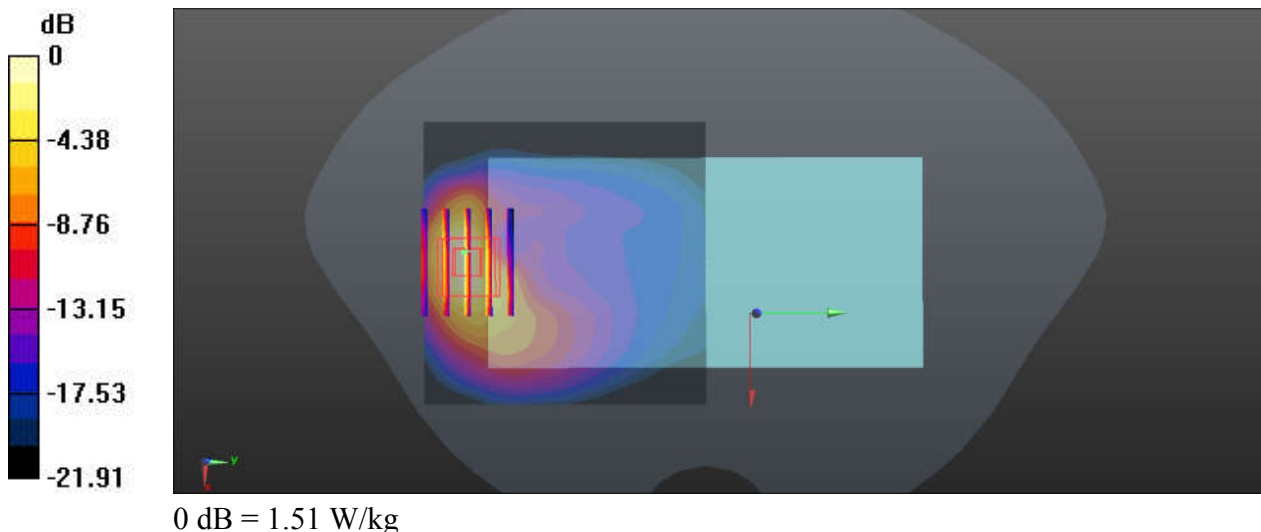

42_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182


Communication System: UID 0, Generic WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_835_211230 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.855$ S/m;
 $\epsilon_r = 41.353$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.57, 9.57, 9.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4182/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.92 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.14 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.494 W/kg
Maximum value of SAR (measured) = 1.56 W/kg

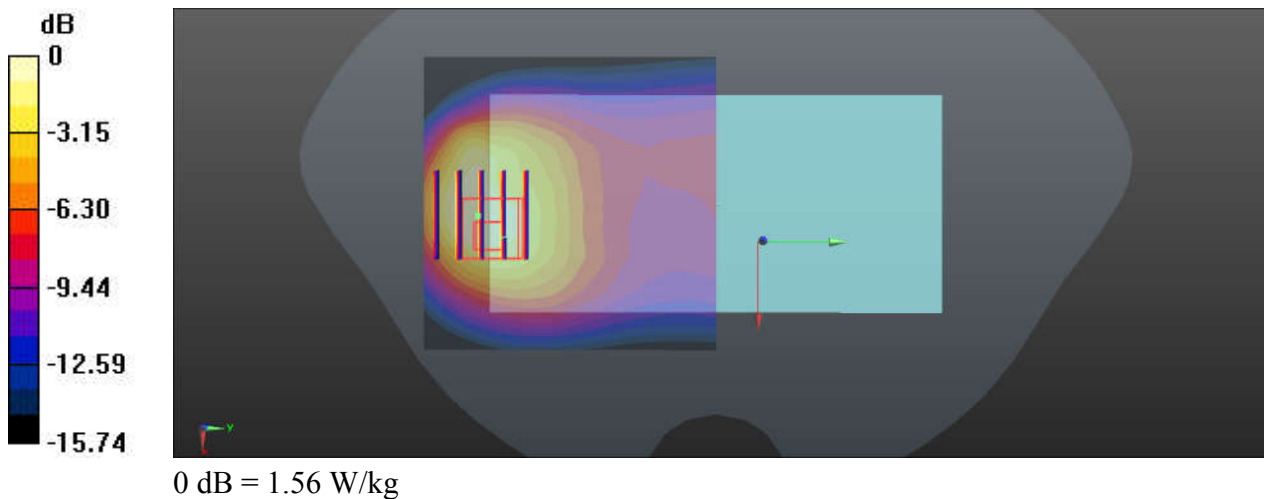

43_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9538


Communication System: UID 0, Generic WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 40.033$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9538/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.67 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.220 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.506 W/kg
Maximum value of SAR (measured) = 1.69 W/kg

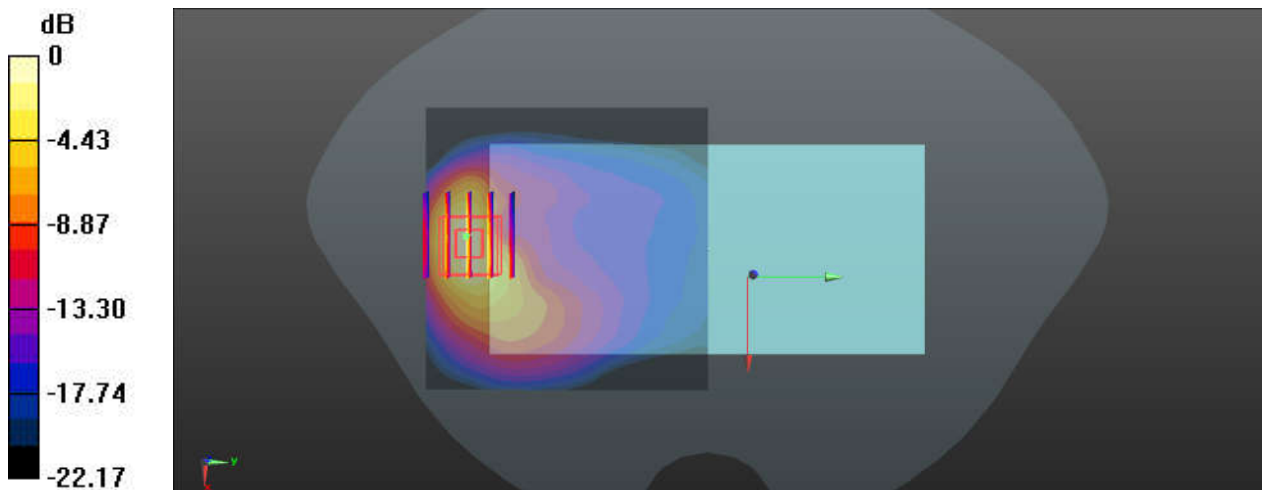

0 dB = 1.69 W/kg

44_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095


Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_220107 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.44$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.79, 9.79, 9.79); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23095/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.31 W/kg

Ch23095/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.35 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.85 W/kg
SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 1.41 W/kg

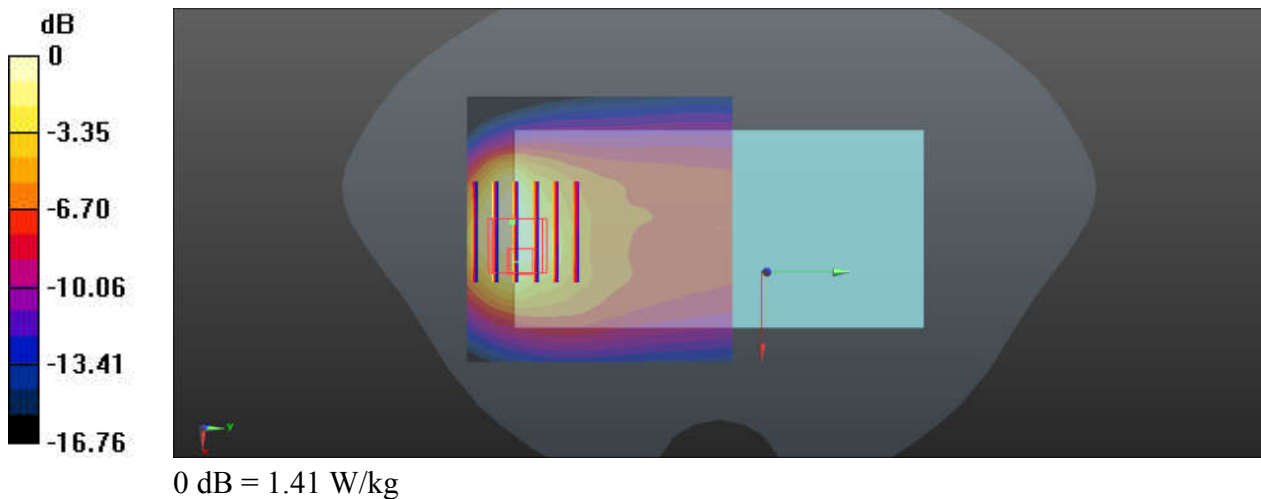

45_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_220107 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 40.826$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.79, 9.79, 9.79); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23230/Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.02 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.66 V/m ; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.443 W/kg
Maximum value of SAR (measured) = 1.24 W/kg

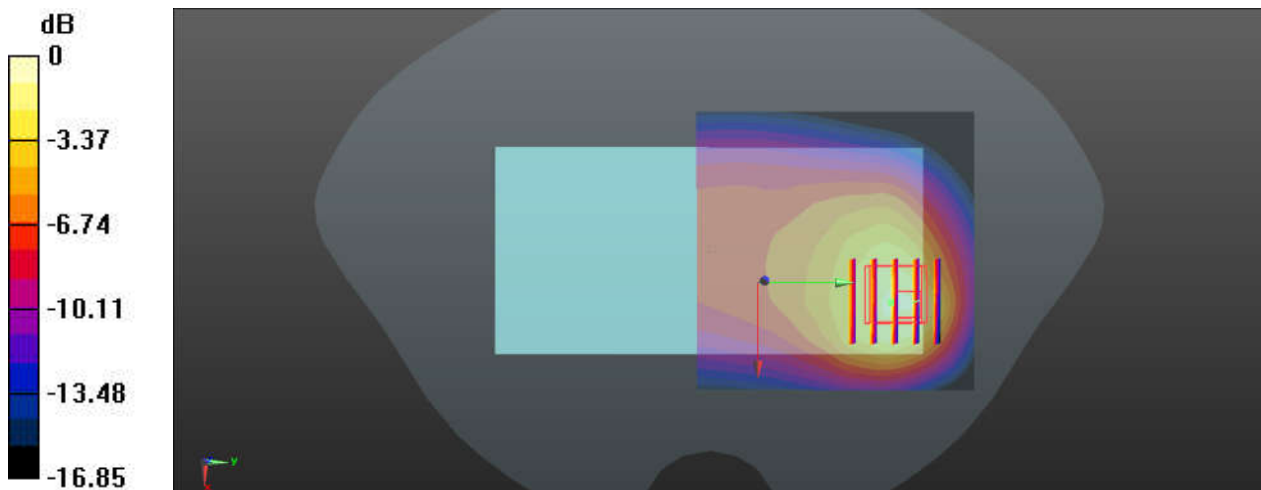

0 dB = 1.24 W/kg

46_LTE Band 5_10M_QPSK_1RB_0Offset_Back_5mm_Ch20525


Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_211230 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.892$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.57, 9.57, 9.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20525/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.80 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.59 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 2.06 W/kg
SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.491 W/kg
Maximum value of SAR (measured) = 1.54 W/kg

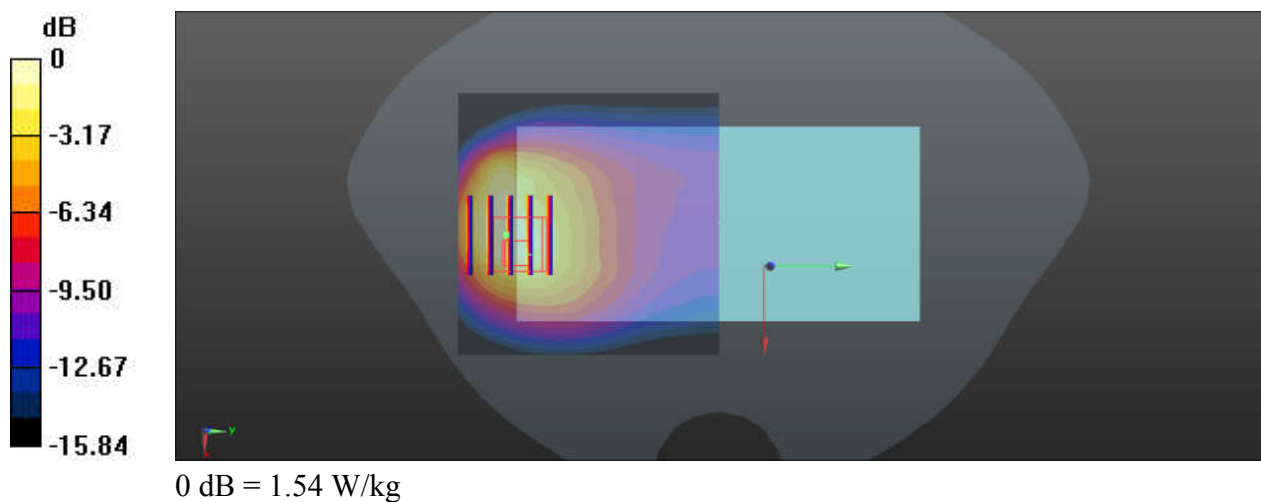

47_LTE Band 66_20M_QPSK1RB_0Offset_Back_5mm_Ch132072


Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1750_220104 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 41.477$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.53, 8.53, 8.53); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132072/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.55 W/kg

Ch132072/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.707 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.515 W/kg
Maximum value of SAR (measured) = 1.61 W/kg

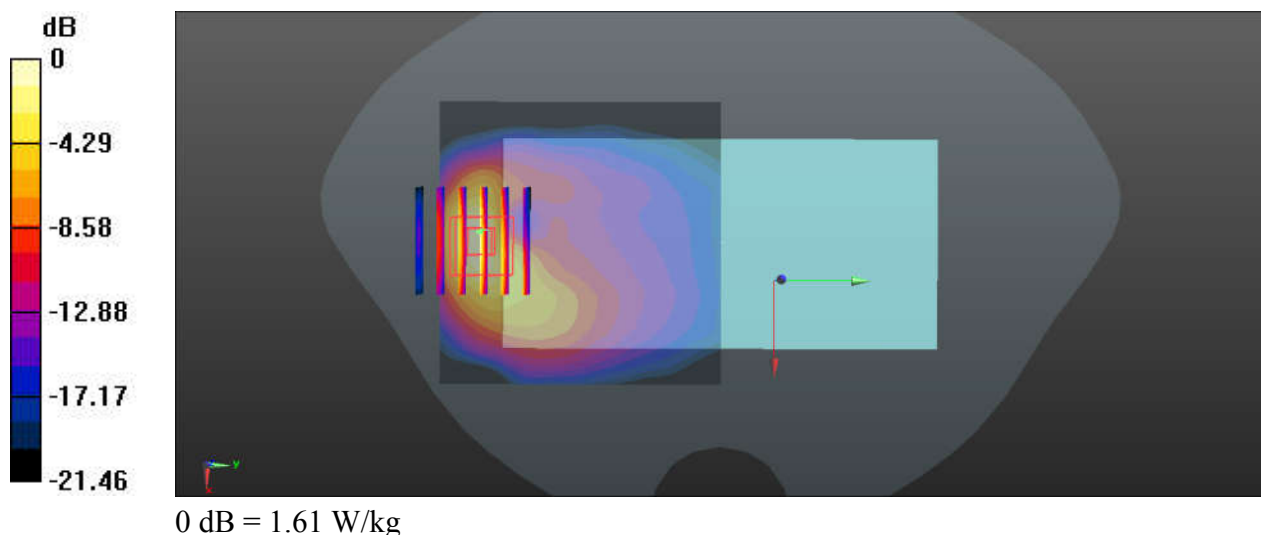

48_LTE Band 2_20M_QPSK_1RB_0Offset_Back_5mm_Ch19100


Communication System: UID 0, Generic LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.455$ S/m; $\epsilon_r = 40.068$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch19100/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Ch19100/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

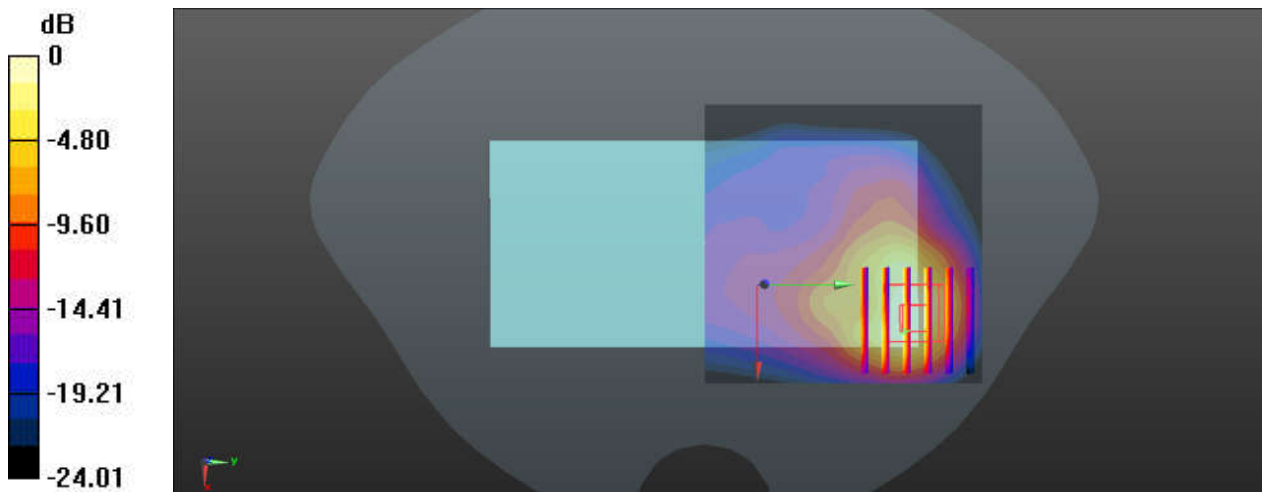

49_LTE Band 7_20M_QPSK_1RB_0Offset_Back_5mm_Ch20850


Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_211229 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 38.311$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20850/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.96 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.082 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 2.32 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.438 W/kg
Maximum value of SAR (measured) = 1.85 W/kg

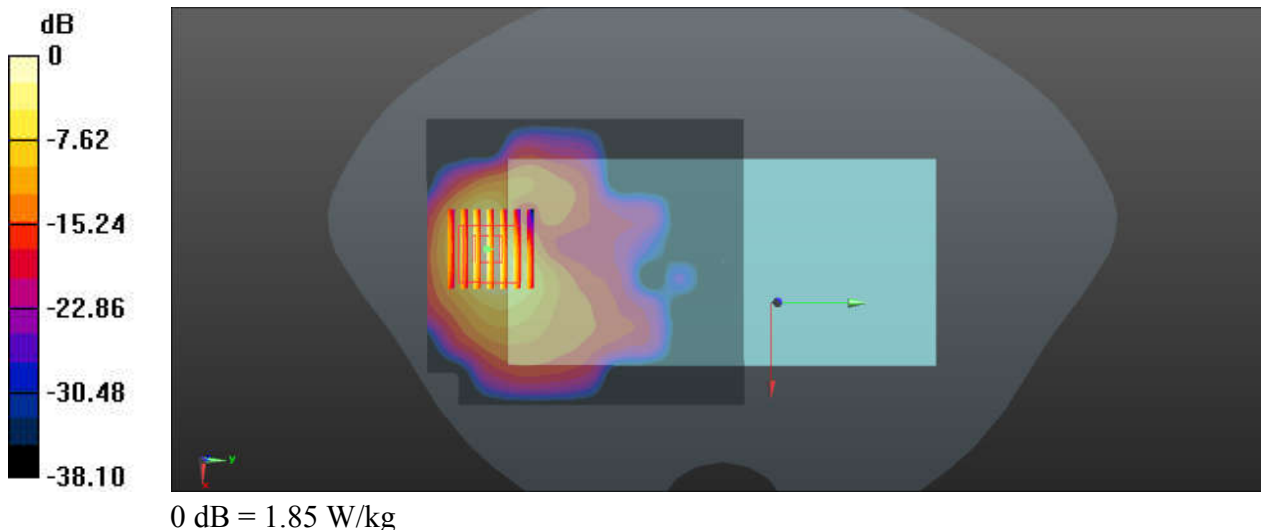

50_LTE Band 48_20M_QPSK_1RB_99Offset_Back_5mm_Ch56640


Communication System: UID 0, LTE (0); Frequency: 3690 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_211228 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.03$ S/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.74, 6.74, 6.74); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch56640/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.05 W/kg

Ch56640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 2.73 W/kg
SAR(1 g) = 1.10 W/kg; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 2.07 W/kg

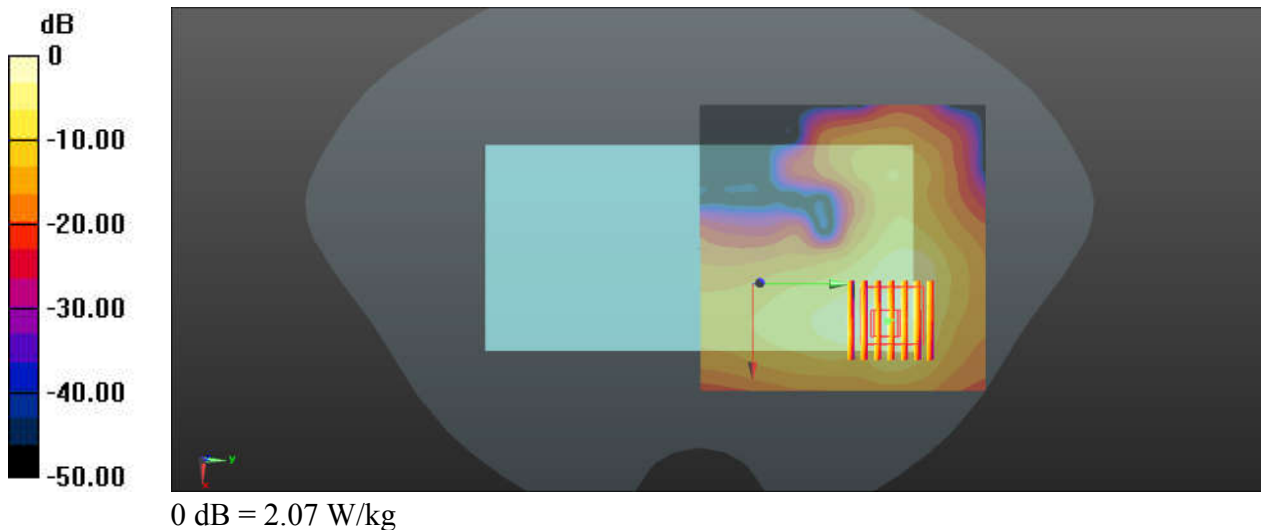

51_N5_20M_BPSK_50RB_28Offset_DFT-15_Back_5mm_Ch167300


Communication System: UID 0, 5GNR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_211230 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.892$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.57, 9.57, 9.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch167300/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.05 W/kg

Ch167300/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.80 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.418 W/kg
Maximum value of SAR (measured) = 1.24 W/kg

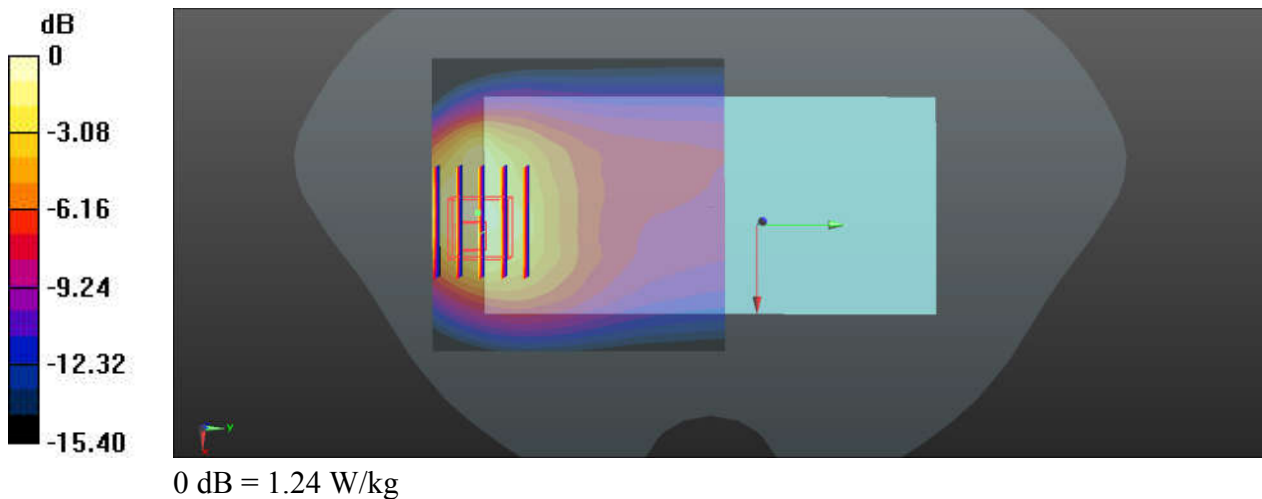

52_N66_40M_BPSK_1RB_1Offset_DFT-15_Back_5mm_Ch349000


Communication System: UID 0, 5GNR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_220104 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 41.35$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.53, 8.53, 8.53); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch349000/Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.56 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.689 V/m ; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.00 W/kg
SAR(1 g) = 1.01 W/kg ; SAR(10 g) = 0.499 W/kg
Maximum value of SAR (measured) = 1.61 W/kg

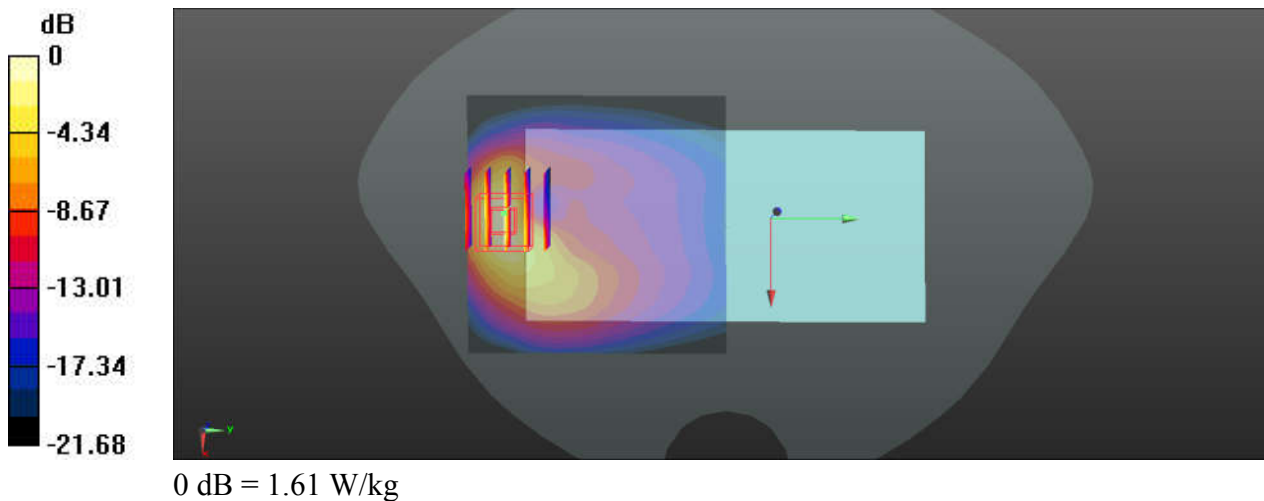

53_N2_20M_BPSK_50RB_28Offset_DFT-15_Back_5mm_Ch376000


Communication System: UID 0, 5GNR (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.161$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch376000/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.99 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.475 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.18 W/kg
SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.479 W/kg
Maximum value of SAR (measured) = 1.67 W/kg

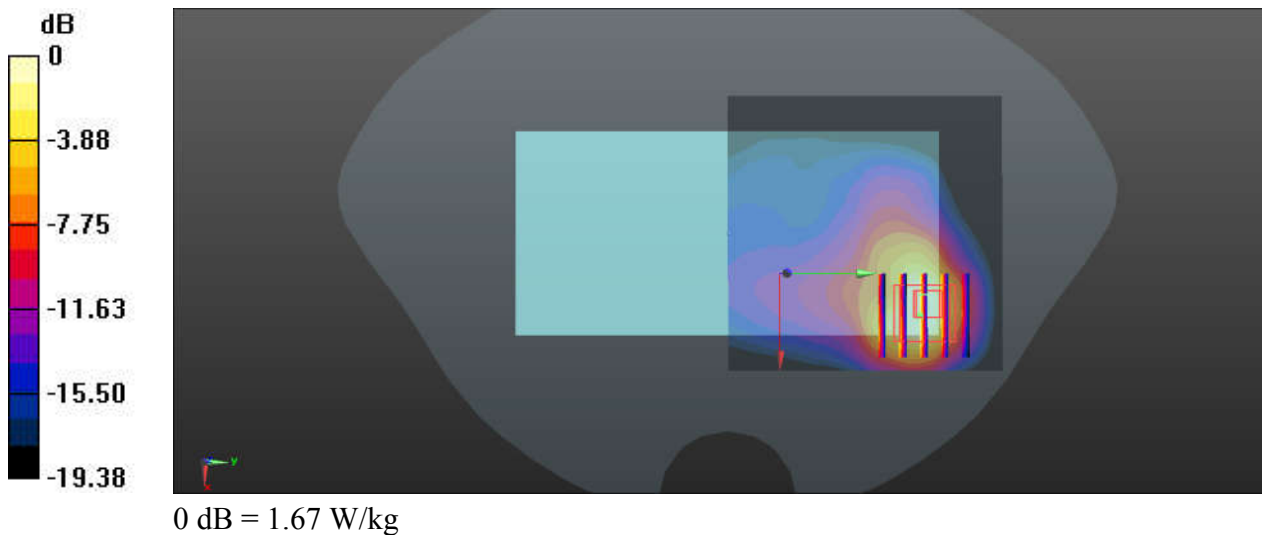

54_N77_100M_BPSK_135RB_69Offset_DFT-30_Back_5mm_Ch633334


Communication System: UID 0, 5GNR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1
Medium: HSL_3500_211227 Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.887$ S/m; $\epsilon_r = 38.374$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.77, 6.77, 6.77); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.90 W/kg

Ch633334/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 3.18 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.312 W/kg
Maximum value of SAR (measured) = 2.15 W/kg

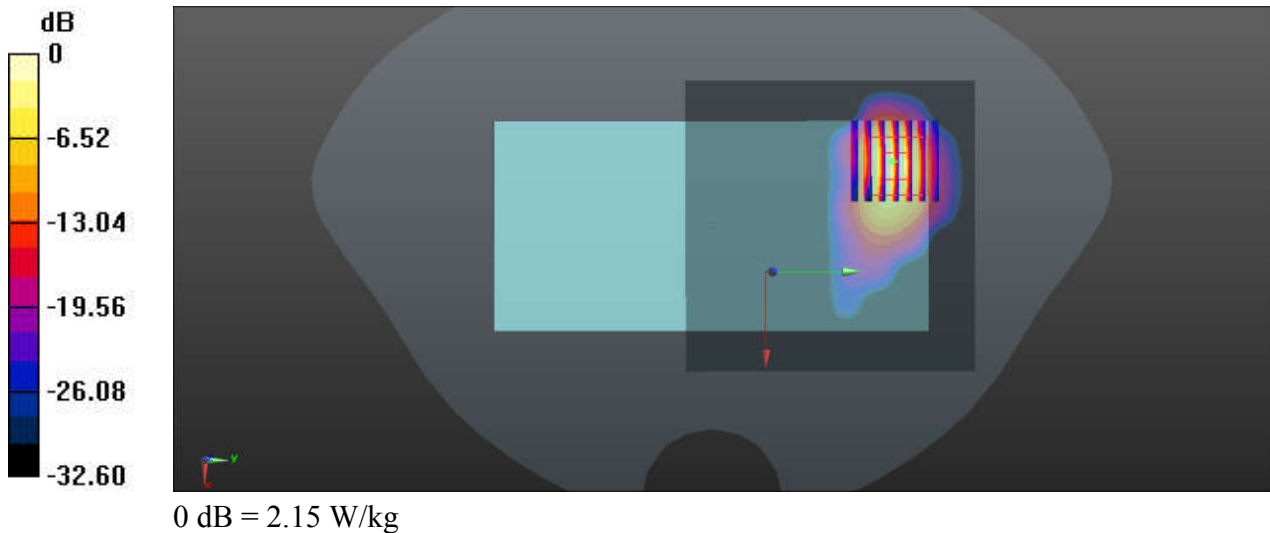

55_Bluetooth_DH5 1Mbps_Back_5mm_Ch78


Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.301
Medium: HSL_2450_220108 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 37.755$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.57, 7.57, 7.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch78/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.176 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.9670 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.269 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.038 W/kg
Maximum value of SAR (measured) = 0.159 W/kg

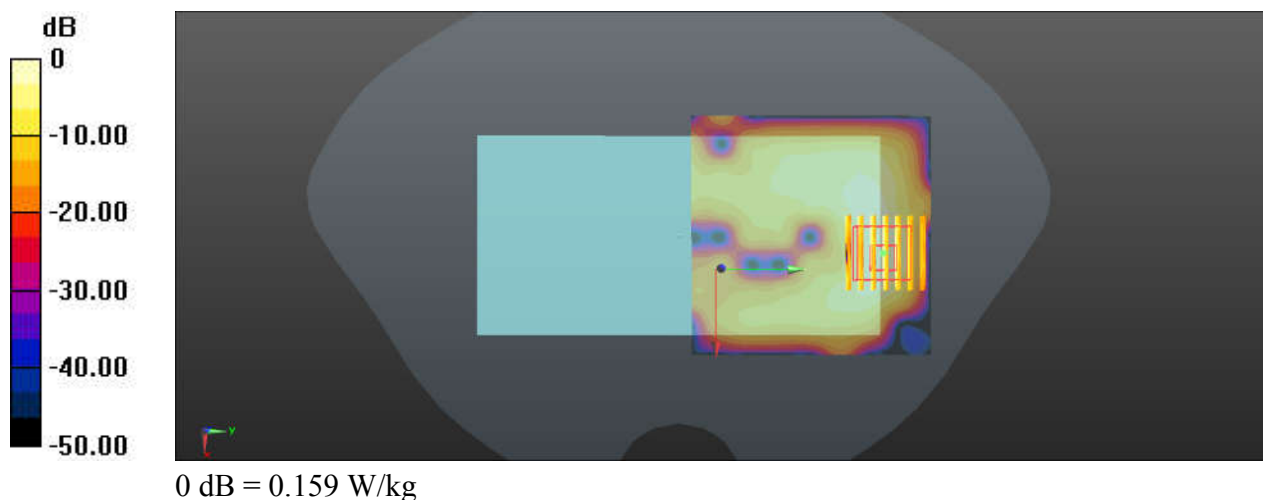

56_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6


Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.005
Medium: HSL_2450_220108 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 37.718$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.57, 7.57, 7.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.09 W/kg

Ch6/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.192 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

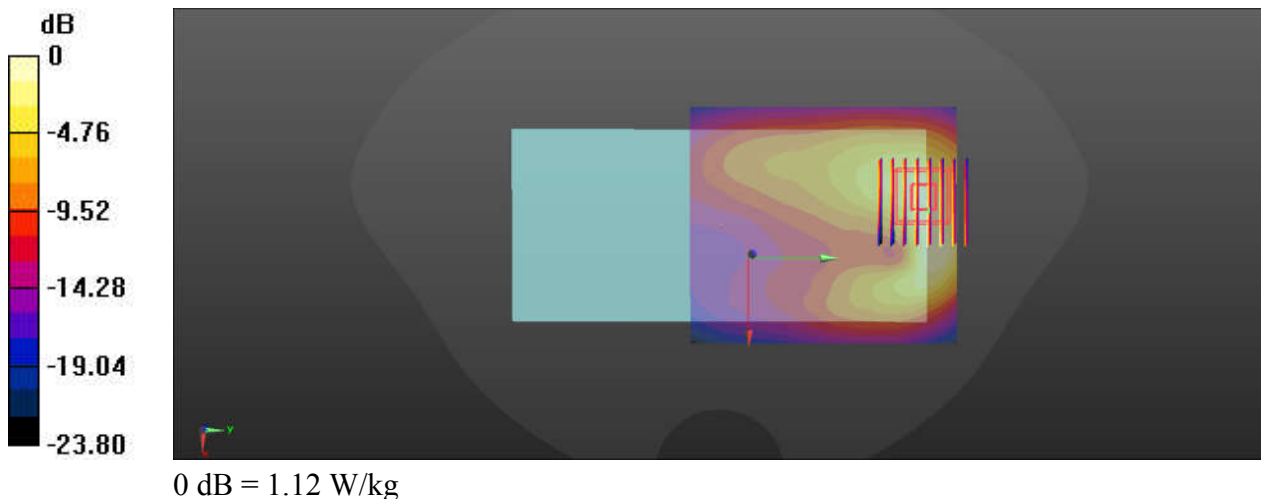

57_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch58


Communication System: UID 0, WIFI (0); Frequency: 5290 MHz; Duty Cycle: 1:1.081
Medium: HSL_5250_220110 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.633$ S/m; $\epsilon_r = 36.626$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.02, 5.02, 5.02); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch58/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.66 W/kg

Ch58/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.73 W/kg
SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.153 W/kg
Maximum value of SAR (measured) = 1.51 W/kg

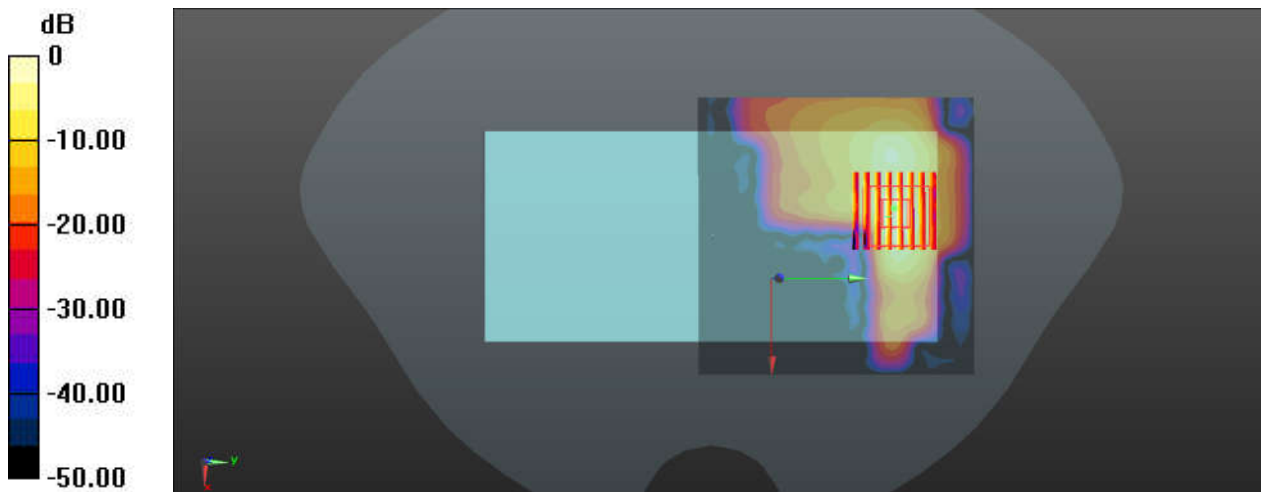

0 dB = 1.51 W/kg

58_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch106


Communication System: UID 0, WIFI (0); Frequency: 5530 MHz; Duty Cycle: 1:1.081
Medium: HSL_5600_220111 Medium parameters used: $f = 5530$ MHz; $\sigma = 4.911$ S/m; $\epsilon_r = 36.237$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.51, 4.51, 4.51); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch106/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.19 W/kg

Ch106/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.08 W/kg
SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.183 W/kg
Maximum value of SAR (measured) = 1.98 W/kg

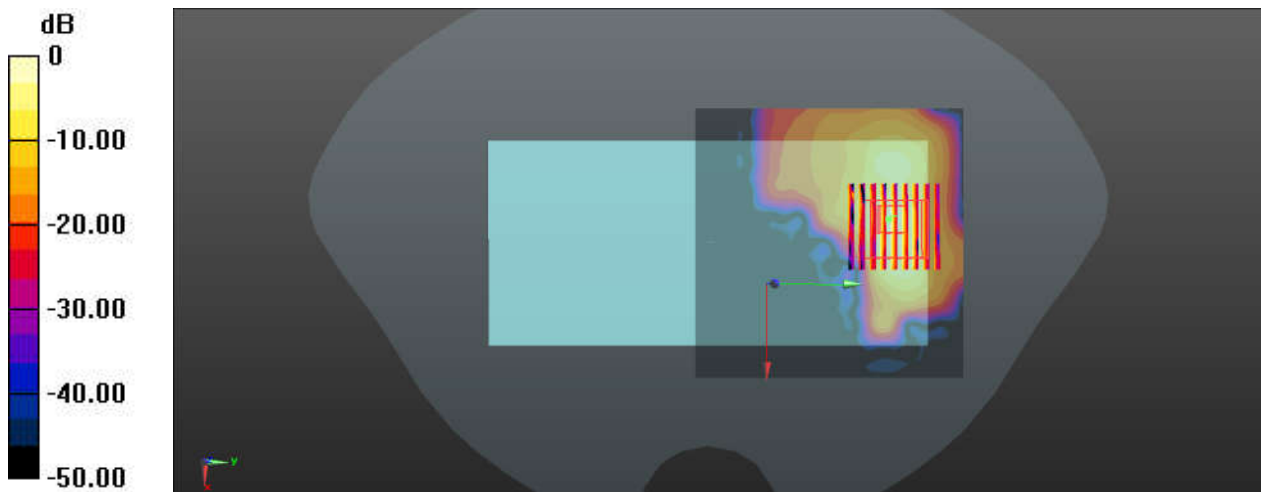

0 dB = 1.98 W/kg

59_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155


Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.081
Medium: HSL_5750_220112 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.192$ S/m; $\epsilon_r = 35.843$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.62, 4.62, 4.62); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.09 W/kg

Ch155/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 3.35 W/kg
SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.203 W/kg
Maximum value of SAR (measured) = 1.88 W/kg

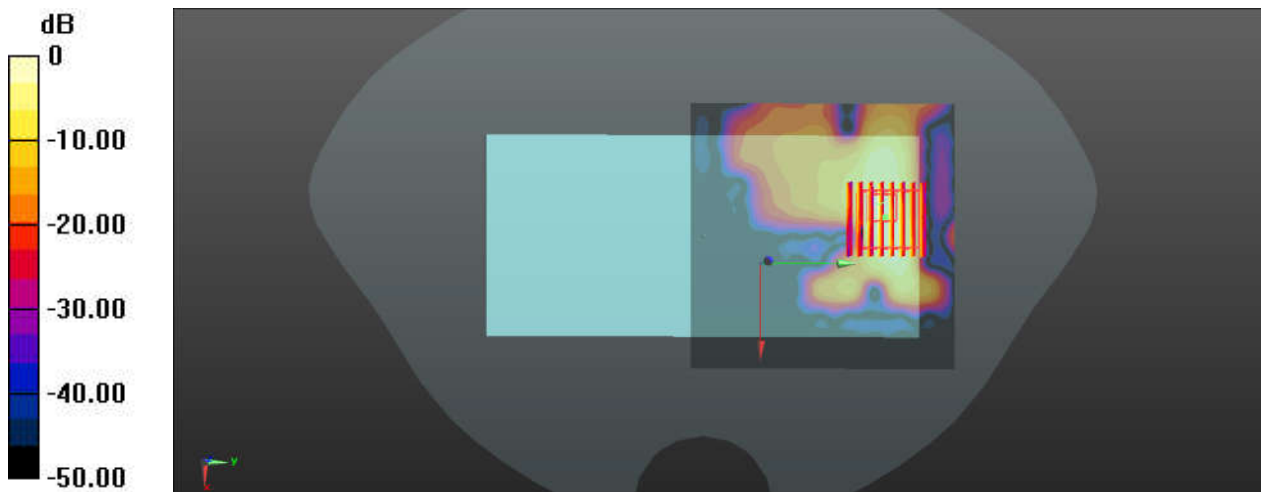

0 dB = 1.88 W/kg

60_GSM850_GPRS 4 Tx slots_Back_0mm_Ch128


Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_211230 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.045$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.57, 9.57, 9.57); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch128/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.48 W/kg

Ch128/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.282 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 7.06 W/kg
SAR(1 g) = 1.8 W/kg; SAR(10 g) = 0.759 W/kg
Maximum value of SAR (measured) = 4.50 W/kg

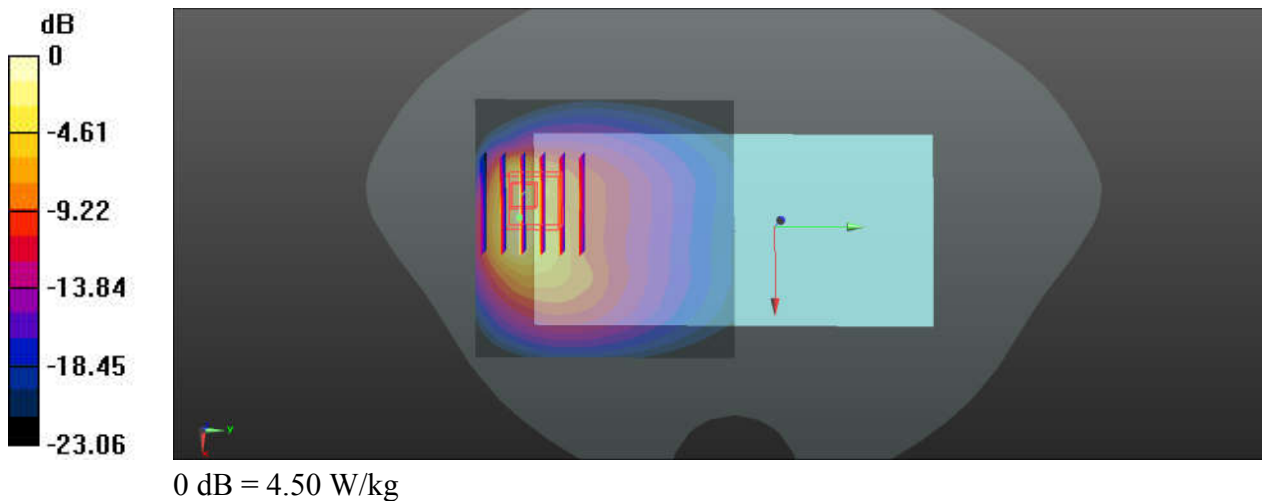

61_GSM1900_GPRS 3 Tx slots_Back_0mm_Ch810

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_220103 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.465$ S/m; $\epsilon_r = 40.025$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 11.4 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4240 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 5.91 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

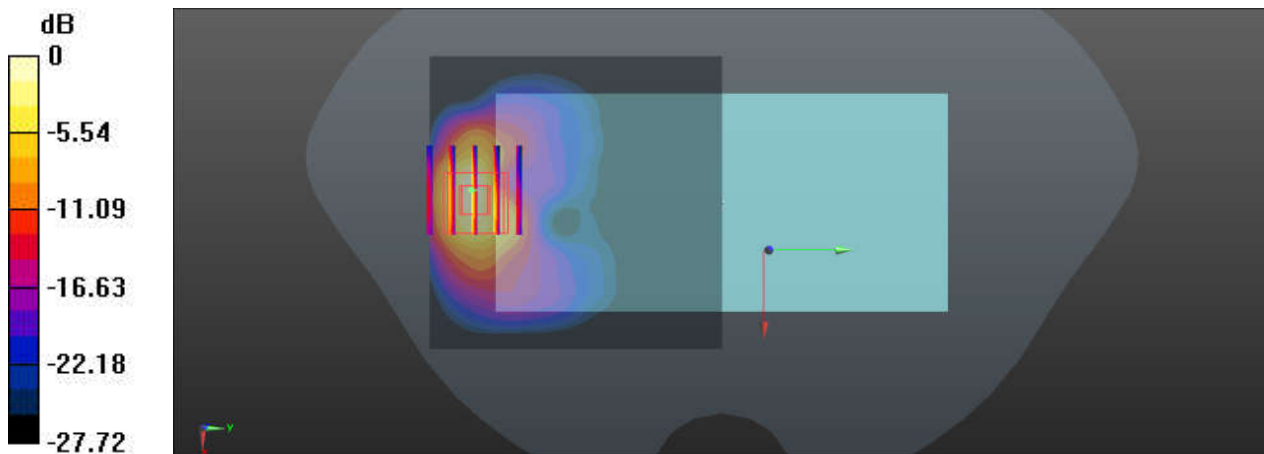

0 dB = 11.8 W/kg

62_WCDMA II_RMC 12.2Kbps_Back_0mm_Ch9400


Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.161$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9400/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 9.50 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.7770 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 12.8 W/kg
SAR(1 g) = 5.29 W/kg; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 9.96 W/kg

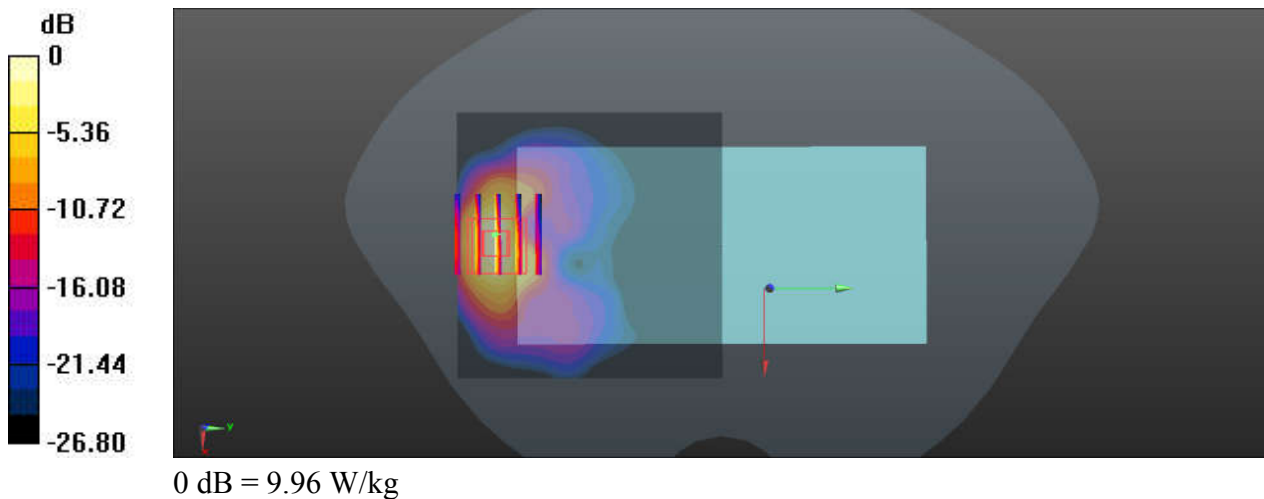

63_LTE Band 66_20M_QPSK_1RB_0Offset_Left Side_0mm_Ch132572


Communication System: UID 0, Generic LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: HSL_1750_220104 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 41.226$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.53, 8.53, 8.53); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132572/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 11.5 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.89 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 15.8 W/kg
SAR(1 g) = 5.46 W/kg; SAR(10 g) = 2.31 W/kg
Maximum value of SAR (measured) = 12.1 W/kg

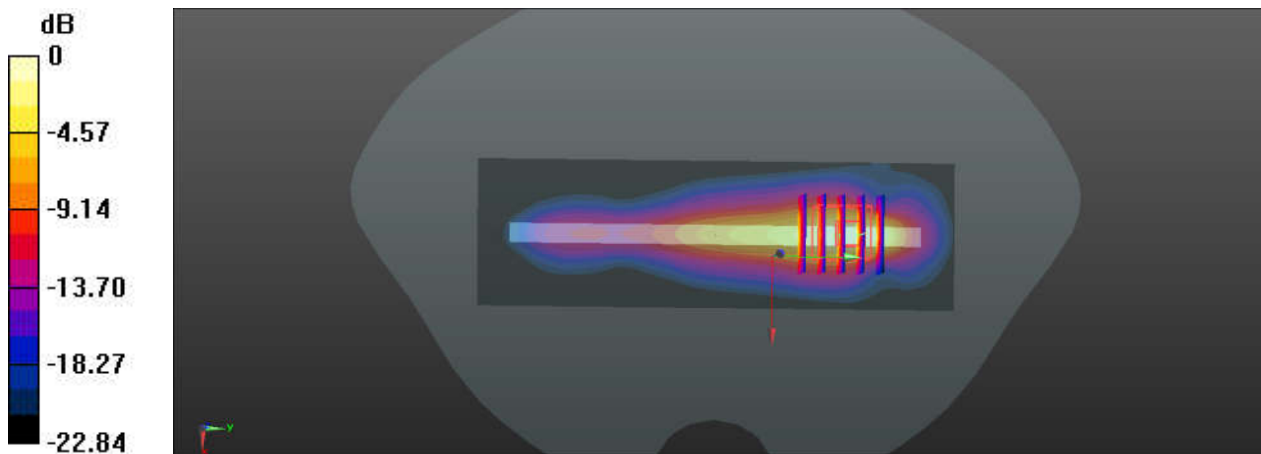

0 dB = 12.1 W/kg

64_LTE Band 2_20M_QPSK_1RB_0Offset_Left Side_0mm_Ch19100


Communication System: UID 0, Generic LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.455$ S/m; $\epsilon_r = 40.068$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch19100/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.3 W/kg

Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 38.18 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 15.6 W/kg
SAR(1 g) = 5.6 W/kg; SAR(10 g) = 2.31 W/kg
Maximum value of SAR (measured) = 12.2 W/kg

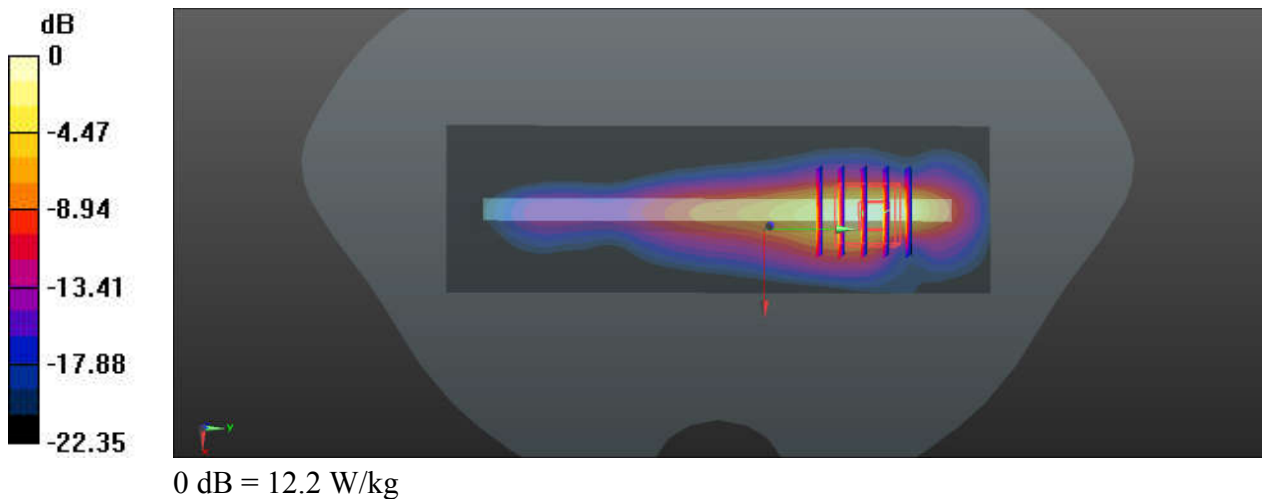

65_LTE Band 7_20M_QPSK_1RB_0Offset_Back_0mm_Ch21100


Communication System: UID 0, Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600_211229 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 38.253$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch21100/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 7.82 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 13.0 W/kg
SAR(1 g) = 4.64 W/kg; SAR(10 g) = 1.9 W/kg
Maximum value of SAR (measured) = 9.48 W/kg

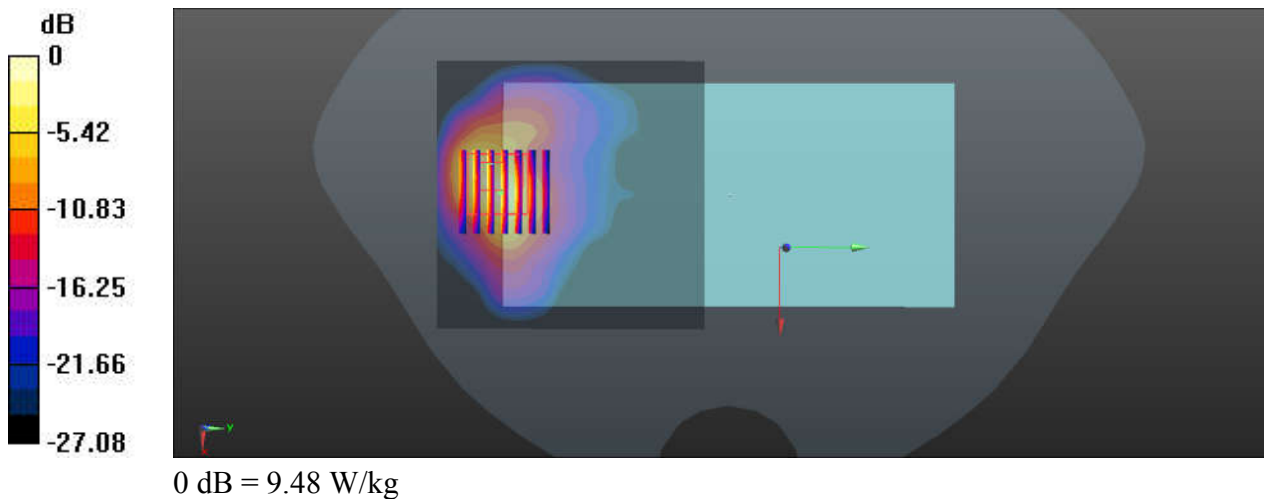

66_LTE Band 48_20M_QPSK_1RB_99Offset_Back_0mm_Ch56640


Communication System: UID 0, LTE (0); Frequency: 3690 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_211228 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.03$ S/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.74, 6.74, 6.74); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch56640/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 38.2 W/kg

Ch56640/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 0.4910 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 63.7 W/kg
SAR(1 g) = 12 W/kg; SAR(10 g) = 2.74 W/kg
Maximum value of SAR (measured) = 38.5 W/kg

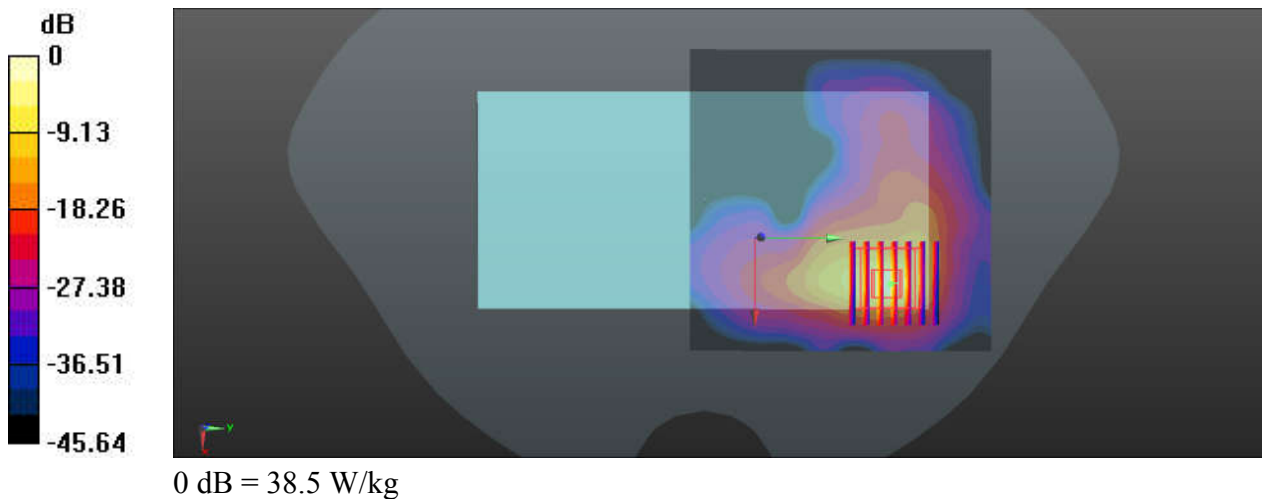

67_N66_40M_BPSK_1RB_1Offset_DFT-15_Bottom Side_0mm_Ch349000


Communication System: UID 0, 5GNR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_220104 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 41.35$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.53, 8.53, 8.53); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch349000/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.6 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 89.74 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 12.6 W/kg
SAR(1 g) = 5.23 W/kg; SAR(10 g) = 2.24 W/kg
Maximum value of SAR (measured) = 9.94 W/kg

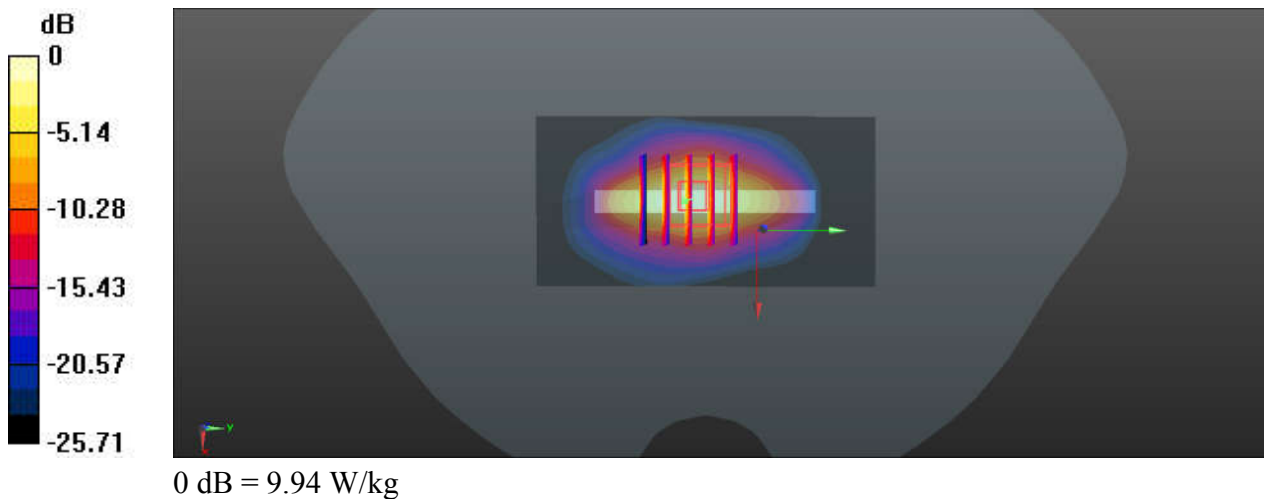

68_N2_20M_BPSK_1RB_1Offset_DFT-15_Back_0mm_Ch376000


Communication System: UID 0, 5GNR (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_220103 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.161$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.24, 8.24, 8.24); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch376000/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 14.6 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.463 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 6.45 W/kg; SAR(10 g) = 2.7 W/kg
Maximum value of SAR (measured) = 12.7 W/kg

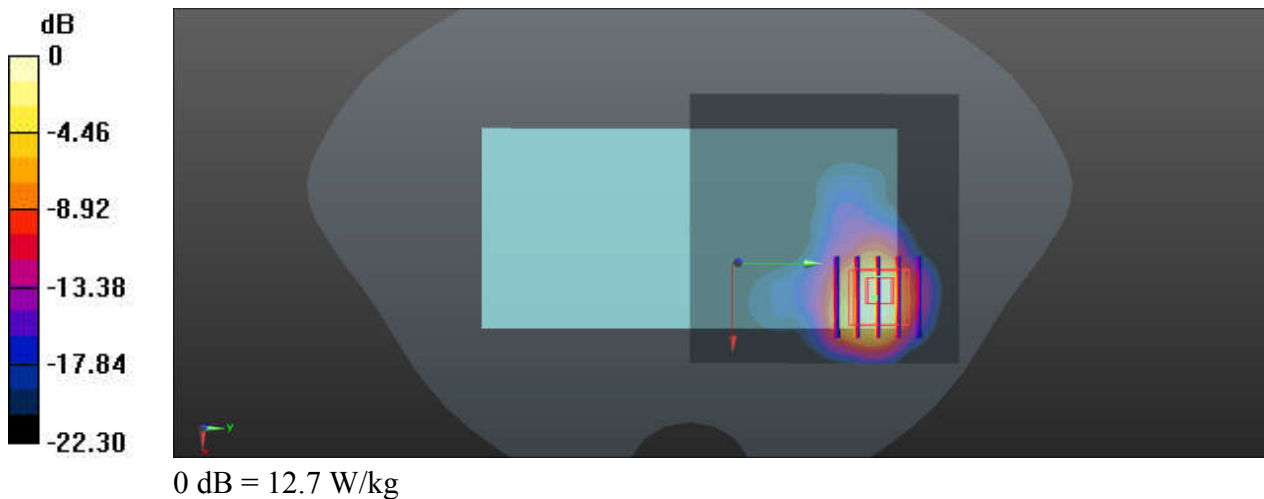

69_N77_100M_BPSK_135RB_69Offset_DFT-30_Back_0mm_Ch633334


Communication System: UID 0, 5GNR (0); Frequency: 3500.01 MHz; Duty Cycle: 1:1
Medium: HSL_3500_211227 Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.887$ S/m; $\epsilon_r = 38.374$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.77, 6.77, 6.77); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch633334/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 14.0 W/kg

Ch633334/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 29.7 W/kg
SAR(1 g) = 8.49 W/kg; SAR(10 g) = 2.48 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

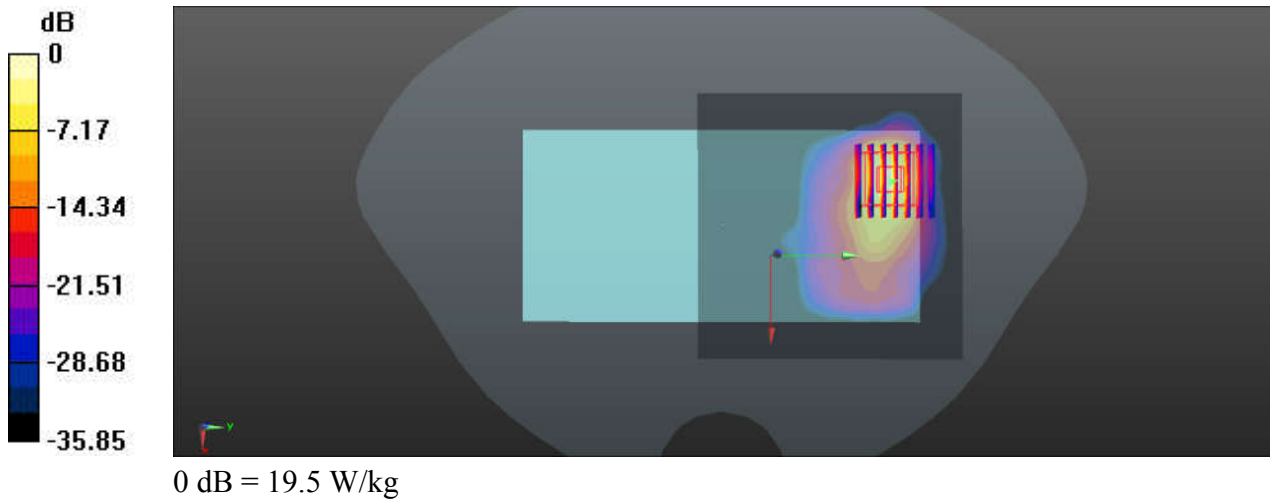

70_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch40


Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1.029
Medium: HSL_5250_220110 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.02, 5.02, 5.02); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 15.1 W/kg

Ch40/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.3650 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 46.0 W/kg
SAR(1 g) = 8.32 W/kg; SAR(10 g) = 1.87 W/kg
Maximum value of SAR (measured) = 23.0 W/kg

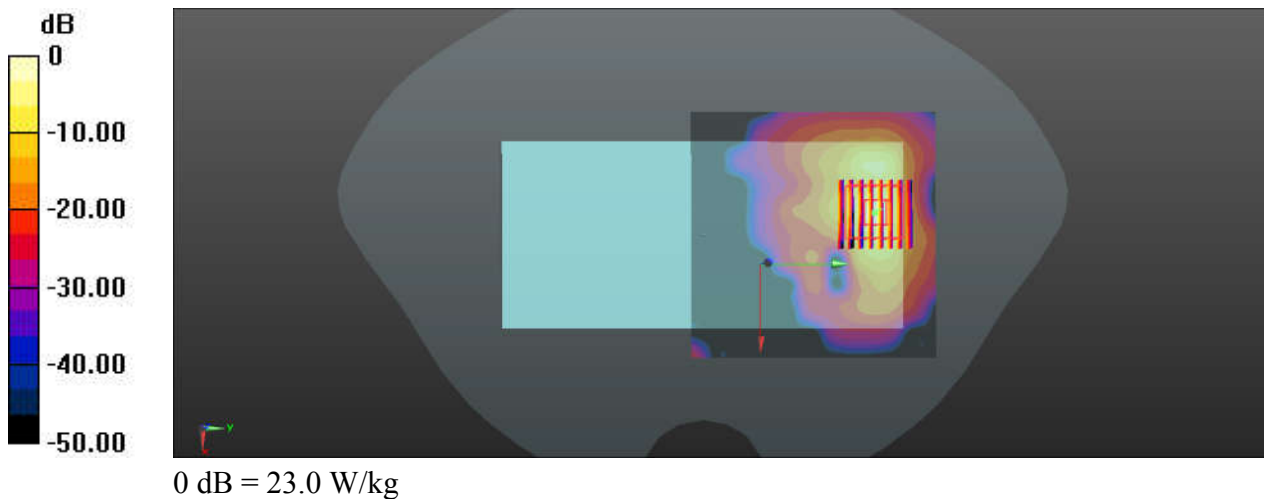

71_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch56


Communication System: UID 0, WIFI (0); Frequency: 5280 MHz; Duty Cycle: 1:1.029
Medium: HSL_5250_220110 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.626$ S/m; $\epsilon_r = 36.632$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.02, 5.02, 5.02); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch56/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 17.2 W/kg

Ch56/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.6510 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 47.1 W/kg
SAR(1 g) = 8.64 W/kg; SAR(10 g) = 1.95 W/kg
Maximum value of SAR (measured) = 25.2 W/kg

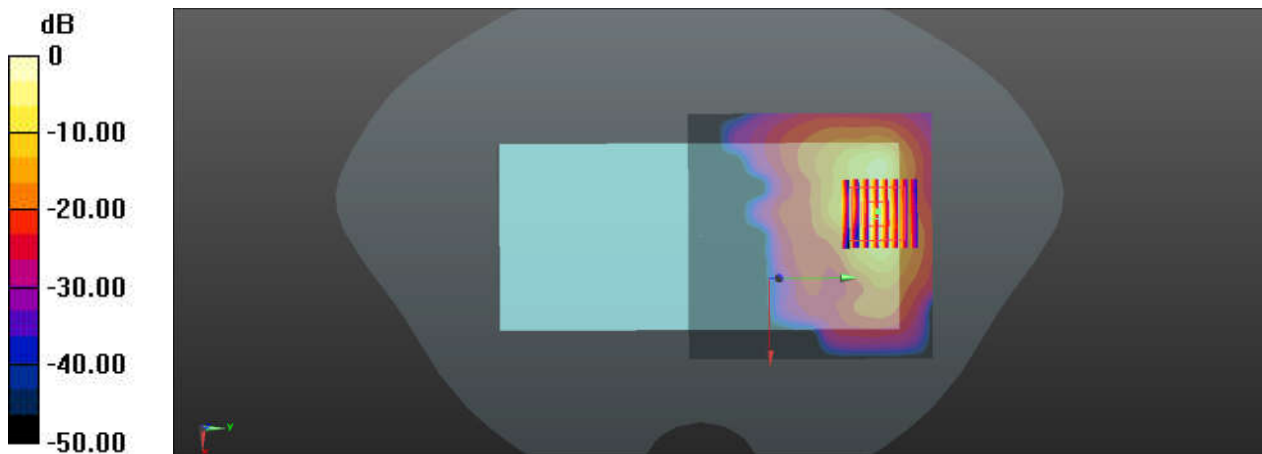

0 dB = 25.2 W/kg

72_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch100


Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.029
Medium: HSL_5600_220111 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.879$ S/m; $\epsilon_r = 36.299$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.51, 4.51, 4.51); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch100/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 17.9 W/kg

Ch100/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 49.2 W/kg
SAR(1 g) = 8.97 W/kg; SAR(10 g) = 2.02 W/kg
Maximum value of SAR (measured) = 25.5 W/kg

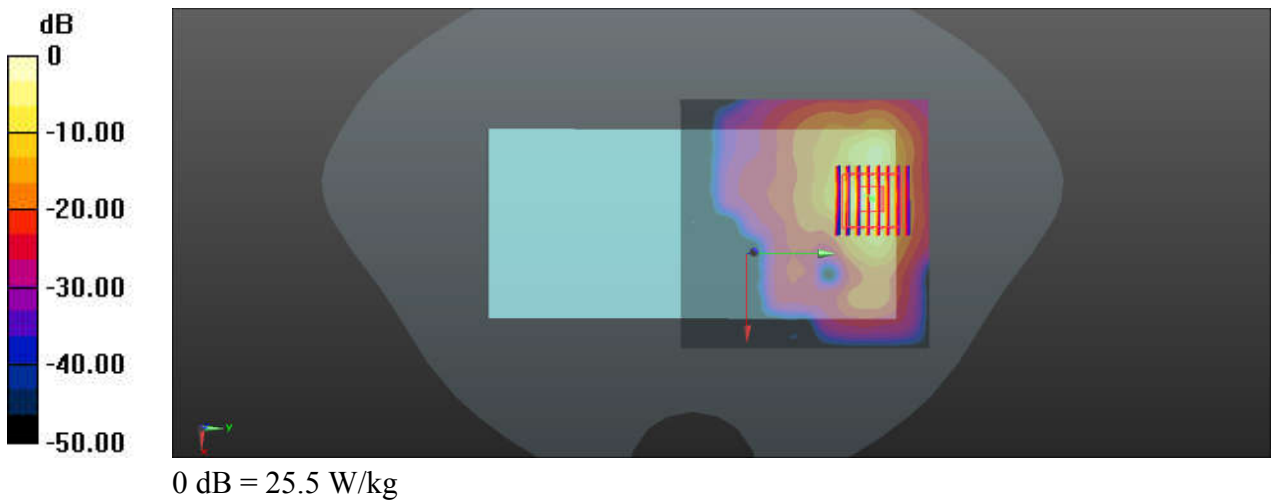

73_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.029
Medium: HSL_5750_220112 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.155 \text{ S/m}$; $\epsilon_r = 35.879$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.62, 4.62, 4.62); Calibrated: 2021/4/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2021/8/25
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP: 1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch149/Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 18.9 W/kg

Ch149/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 51.7 W/kg
SAR(1 g) = 9.4 W/kg ; SAR(10 g) = 2.05 W/kg
Maximum value of SAR (measured) = 27.1 W/kg

