



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2231-1, XT2231-5
FCC ID : IHDT56AC2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Dec. 12, 2021 ~ Jan. 17, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 7

 1.9 Specification of Accessory..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 27

 3.6 AC Conducted Emission Measurement..... 31

 3.7 Antenna Requirements 33

4 LIST OF MEASURING EQUIPMENT 34

5 UNCERTAINTY OF EVALUATION 35

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.04 dB at 2389.800 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.32 dB at 10.680 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2231-1, XT2231-5
FCC ID	IHDT56AC2
IMEI Code	Conducted: 359986690032831/359986690038317 Conduction: 359986690052110/359986690053951 Radiation: 359986690042913/359986690045437 for Sample 1 359986690034720/359986690040206 for Sample 2 359986690053365/359986690055204 for Sample 3 359986690060196 for Sample 4
HW Version	PVT2
SW Version	STA32.48
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two models XT2231-1 and XT2231-5. The detailed differences between two models can be referred to the XT2231-1, XT2231-5_Operational Description of Product Equality Declaration exhibit separately

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	802.11b : 19.42 dBm (0.0875 W) 802.11g : 24.26 dBm (0.2667 W) 802.11n HT20 : 24.65 dBm (0.2917 W)
Antenna Type / Gain	PIFA Antenna type with gain -5.0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Location Site	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-202
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-206
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-202
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	MC-206
AC Adapter 2(CHILE)	Brand Name	Motorola (Acbel)	Model Name	MC-209
AC Adapter 3(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 4(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 5(BR)	Brand Name	Motorola (Flex)	Model Name	MC-207
AC Adapter 6(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207
AC Adapter 7(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 7(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 7(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 7(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 8(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 8(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 8(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 8(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 9(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 9(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 9(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 10(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-104
AC Adapter 11(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-104
AC Adapter 12(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 13(EU)	Brand Name	Motorola (Salom)	Model Name	SC-42
AC Adapter 14(UK)	Brand Name	Motorola (Chenyang)	Model Name	SC-43
Earphone 1	Brand Name	Motorola (Iyand)	Model Name	LYM239-76C-003
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MEND1432B875000
Earphone 3	Brand Name	Motorola (New Leader)	Model Name	MH202
USB Cable 1	Brand Name	Motorola(Yihuaxing)	Model Name	T365-011B
USB Cable 2	Brand Name	Motorola(SUNTOPS)	Model Name	336258
USB Cable 3	Brand Name	Motorola(SUNTOPS)	Model Name	336281
USB Cable 4	Brand Name	Motorola(I SHENG)	Model Name	SC18D33506
USB Cable 5	Brand Name	Motorola(Yihuaxing)	Model Name	T365-012B
Battery 1	Brand Name	Motorola(Sunwoda)	Model Name	NH50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	NH50



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1 (Charging from Adapter6) + Earphone 1+Battery 1


Simultaneous transmission
802.11g HT20 CH01(2412MHz)+LTE Band38 Link

2.3 Connection Diagram of Test System

< Radiated Emission >

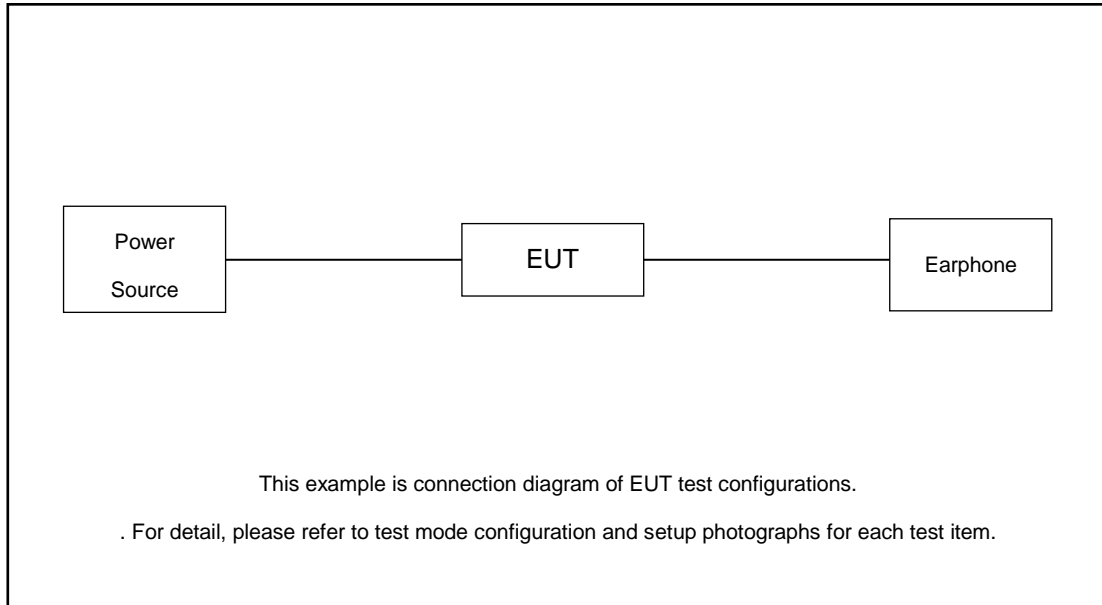

< AC Conducted Emission >

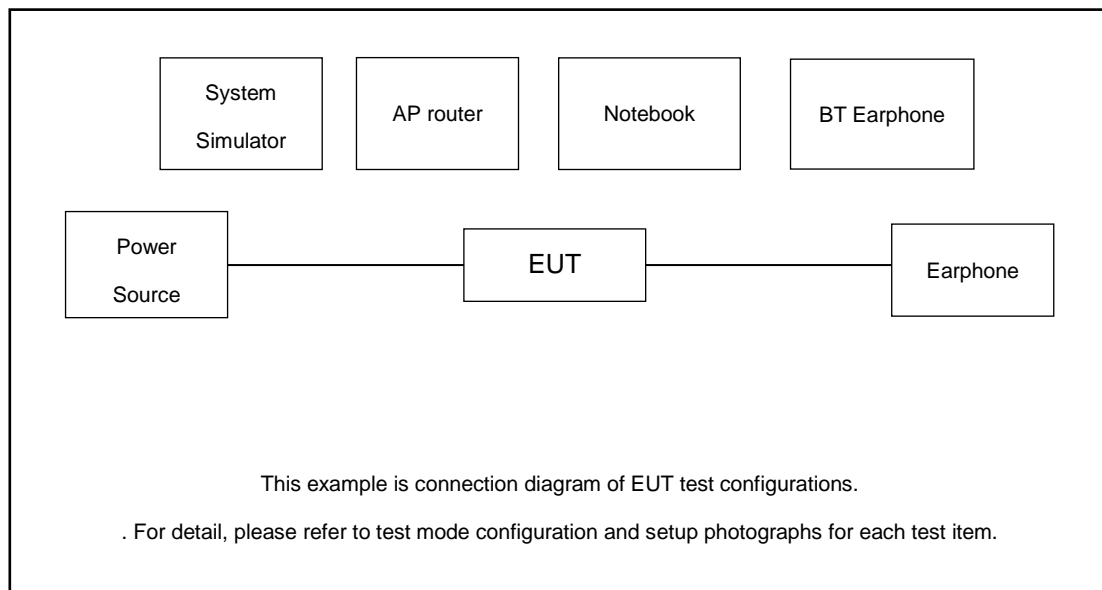

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Sony	MBH22	N/A	N/A	N/A
4.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.20 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.20 + 10 = 11.20 (dB)

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

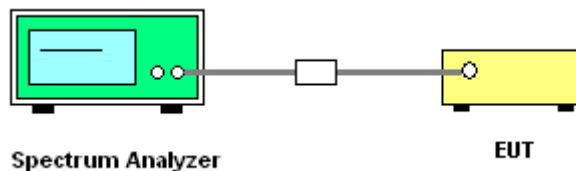



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

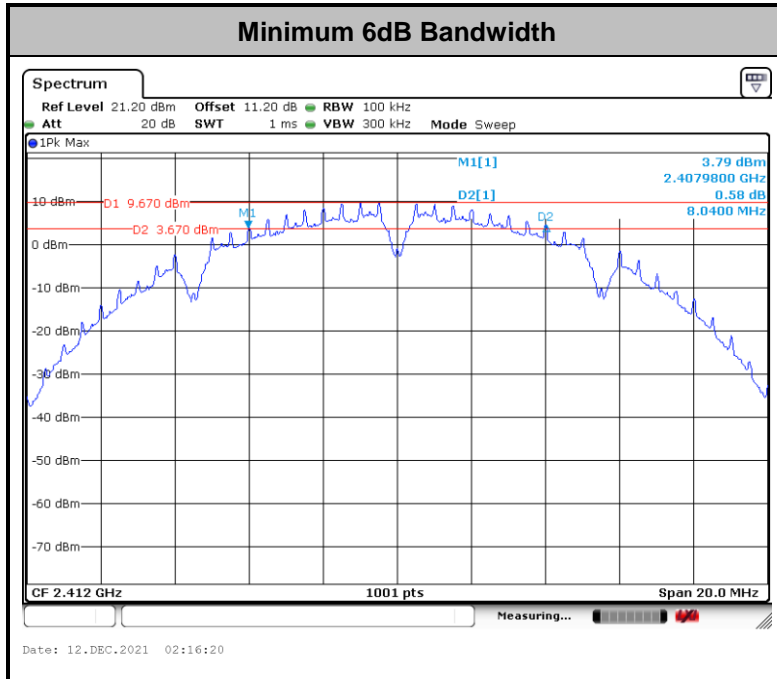

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

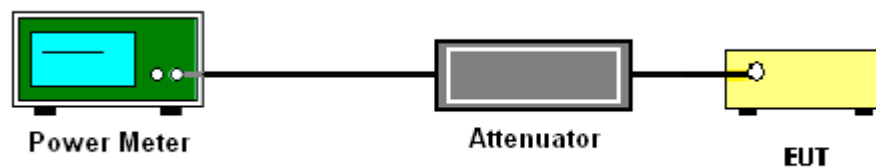

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

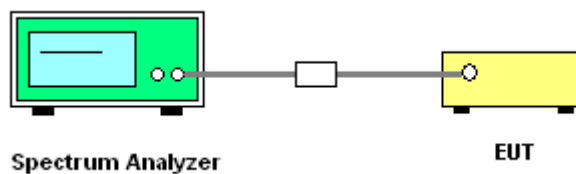



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

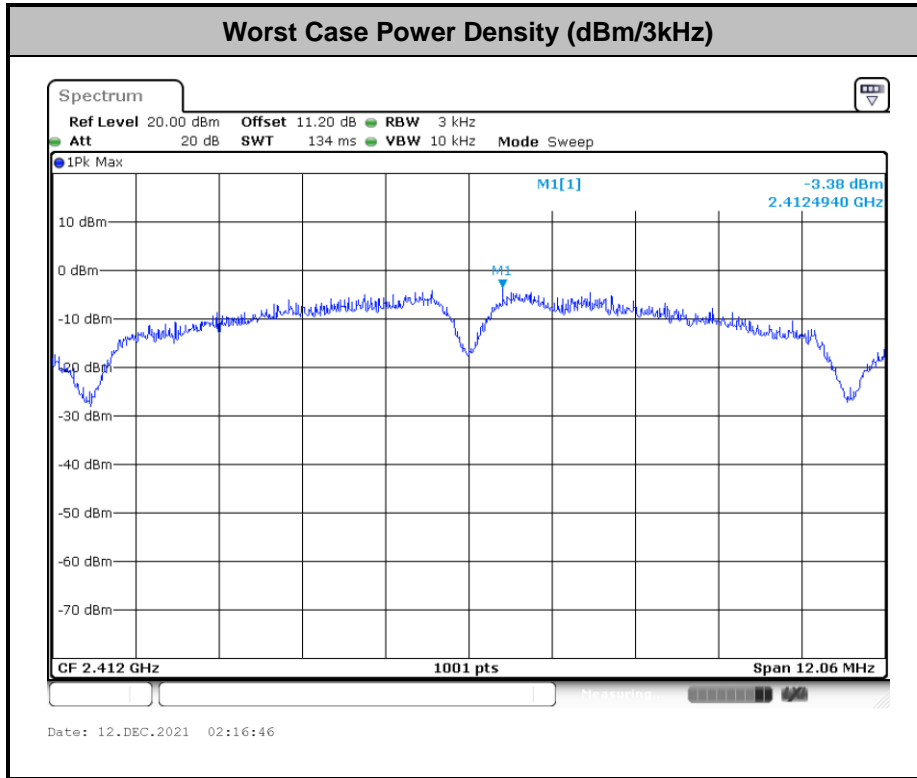

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

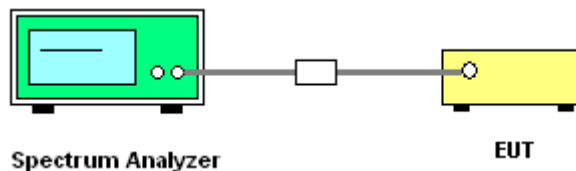




3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Test Engineer : Ma Jie	Temperature :	21~25°C
	Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

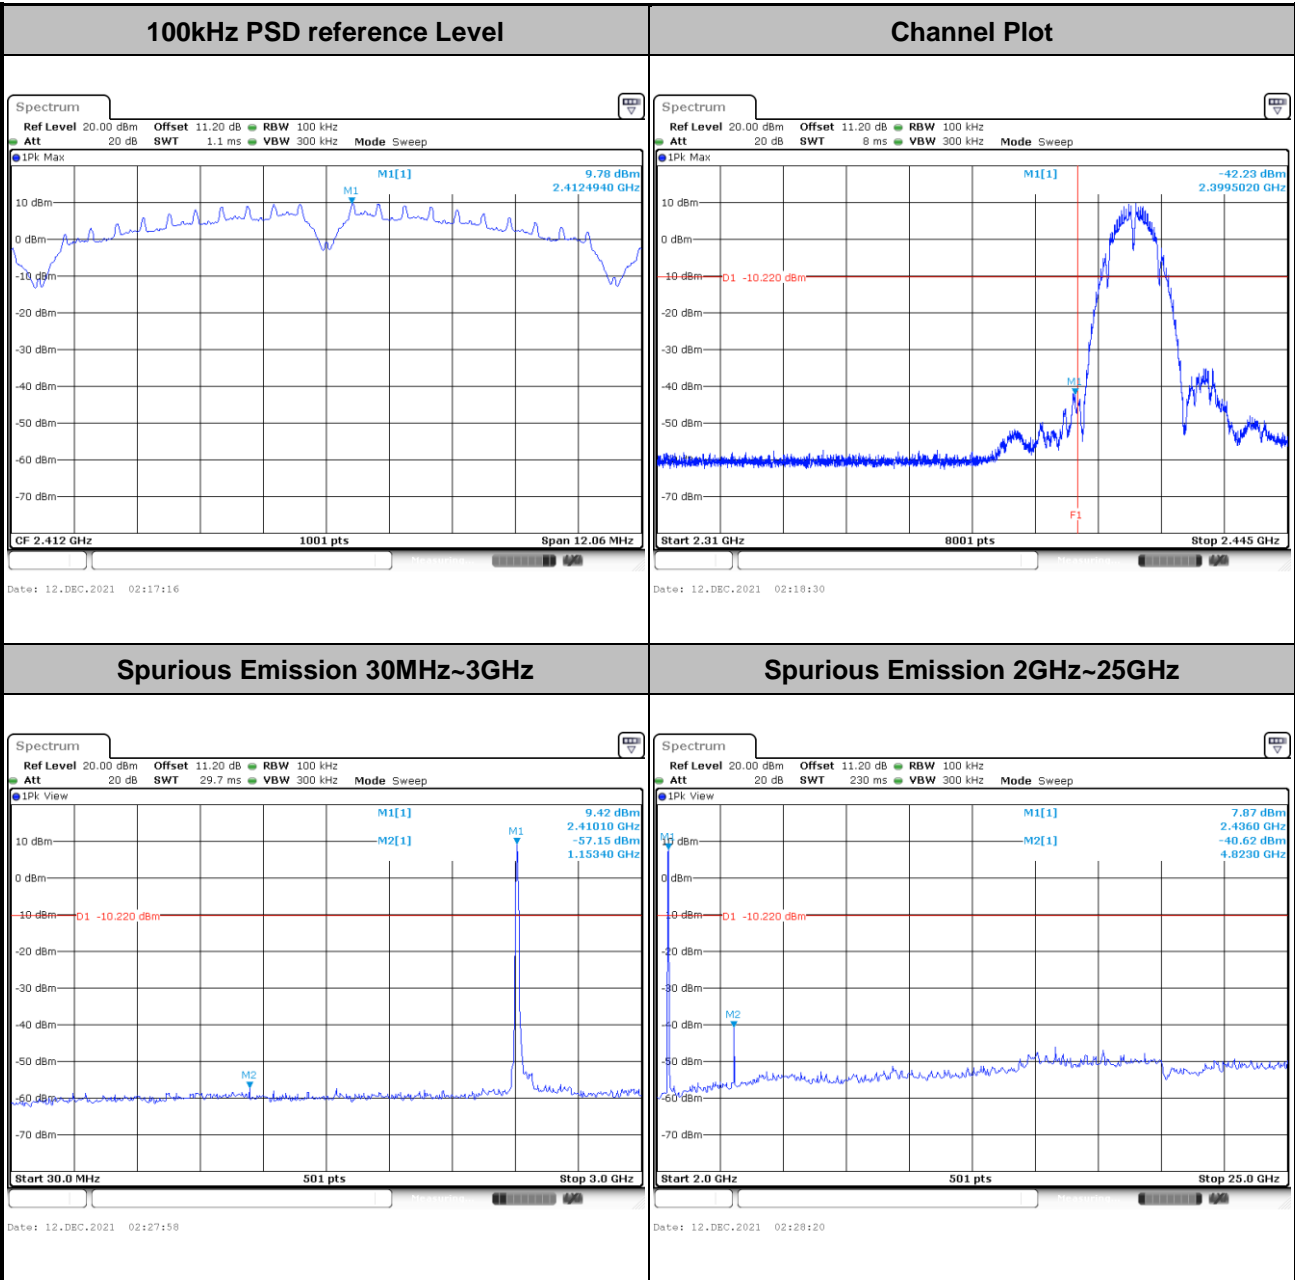





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

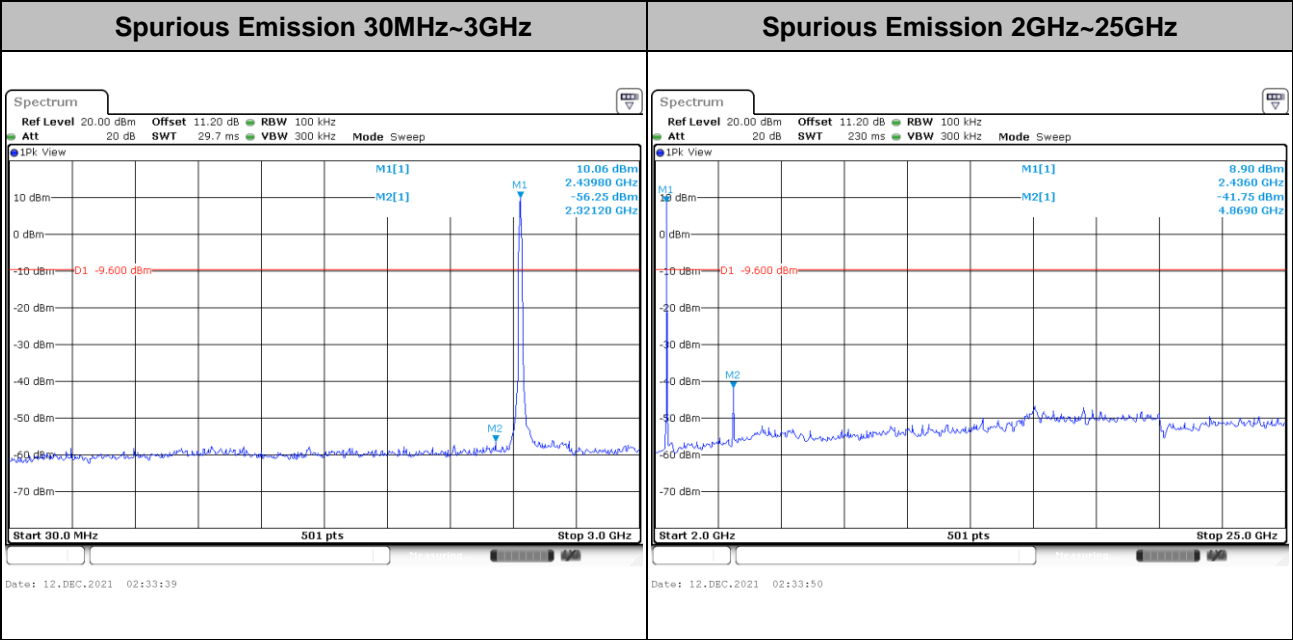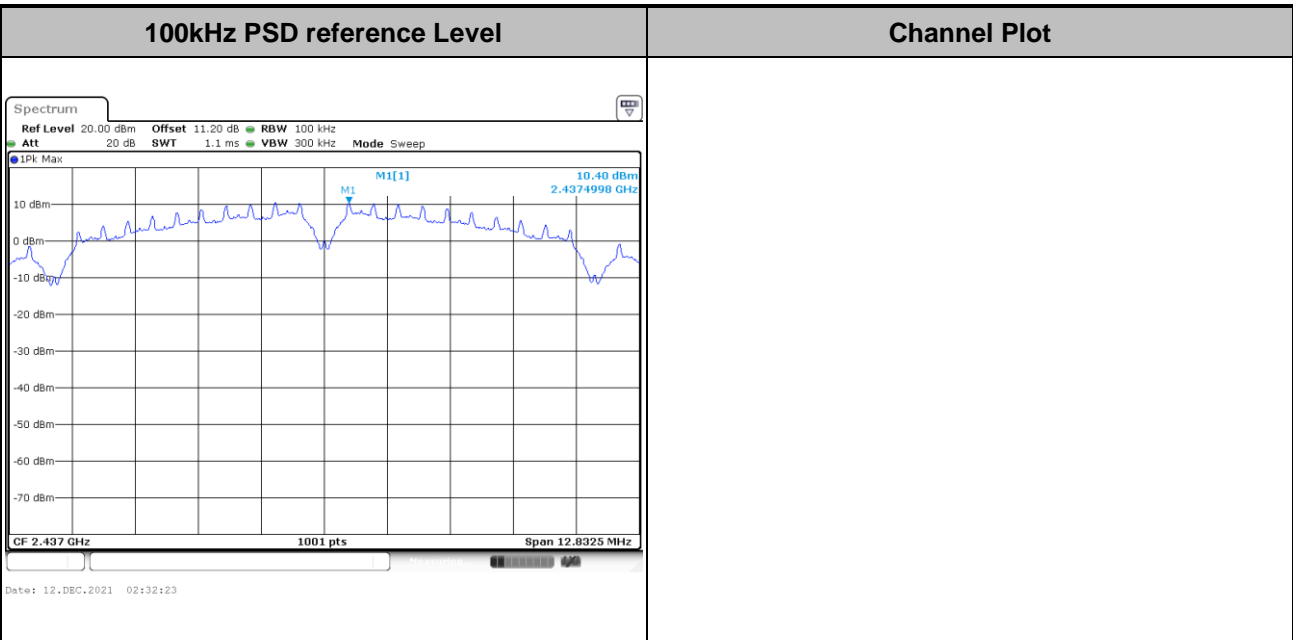





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

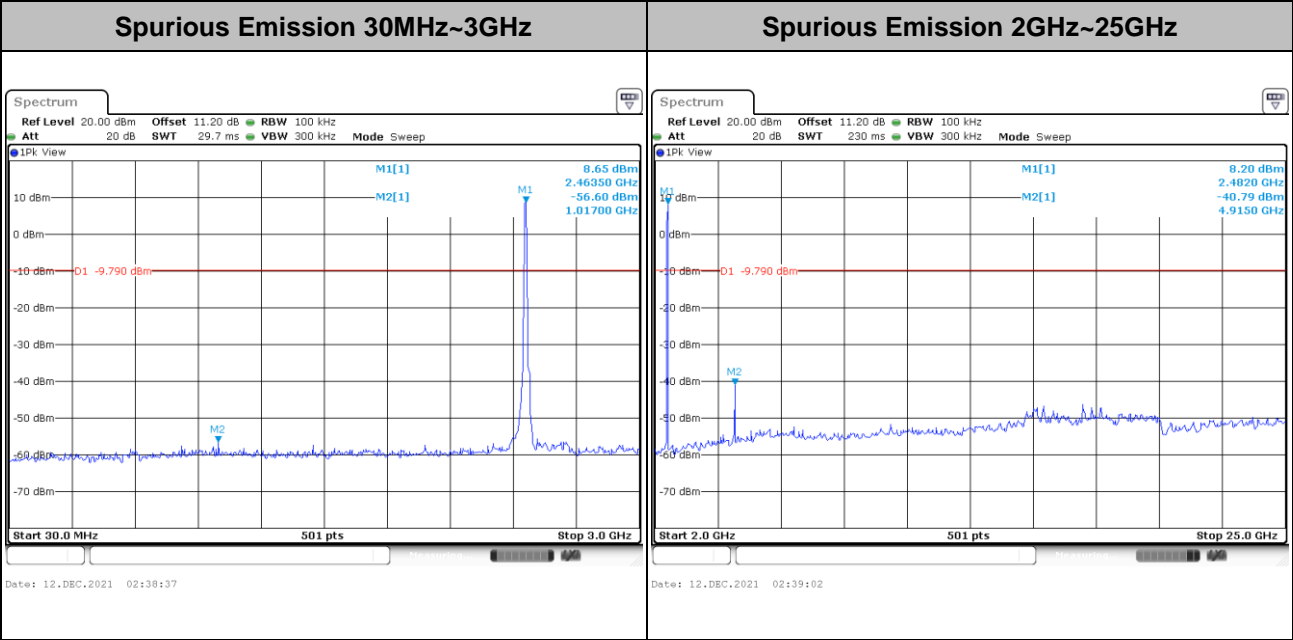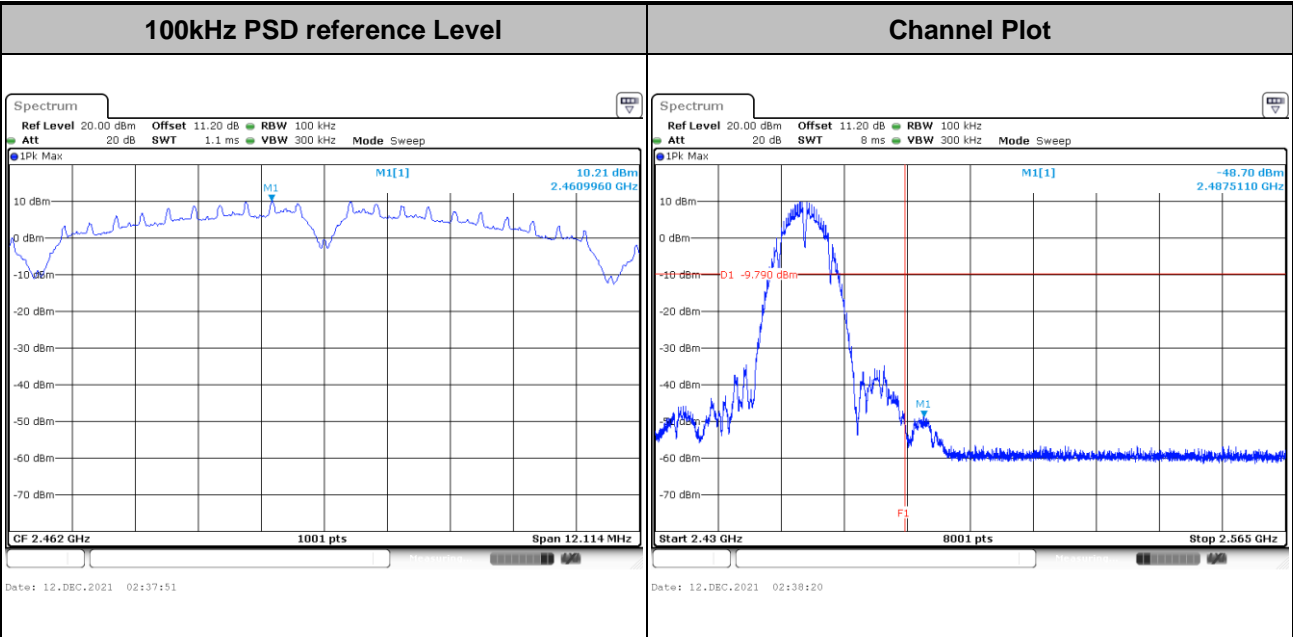





Test Mode : 802.11g Test Channel : 01

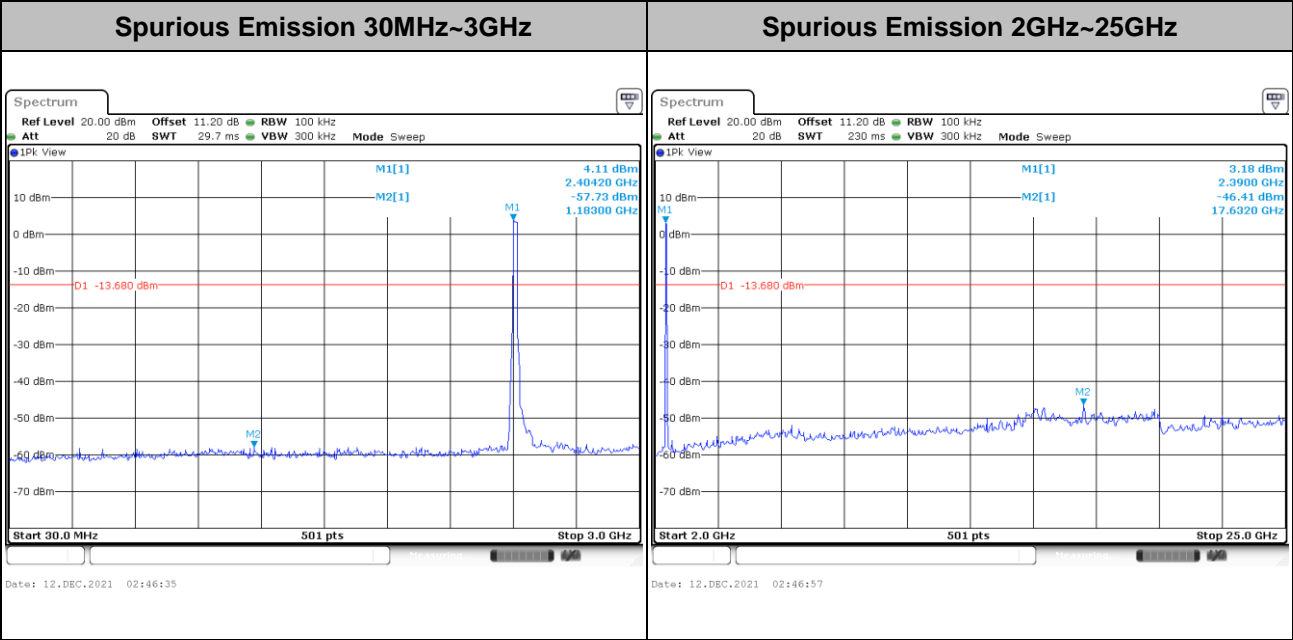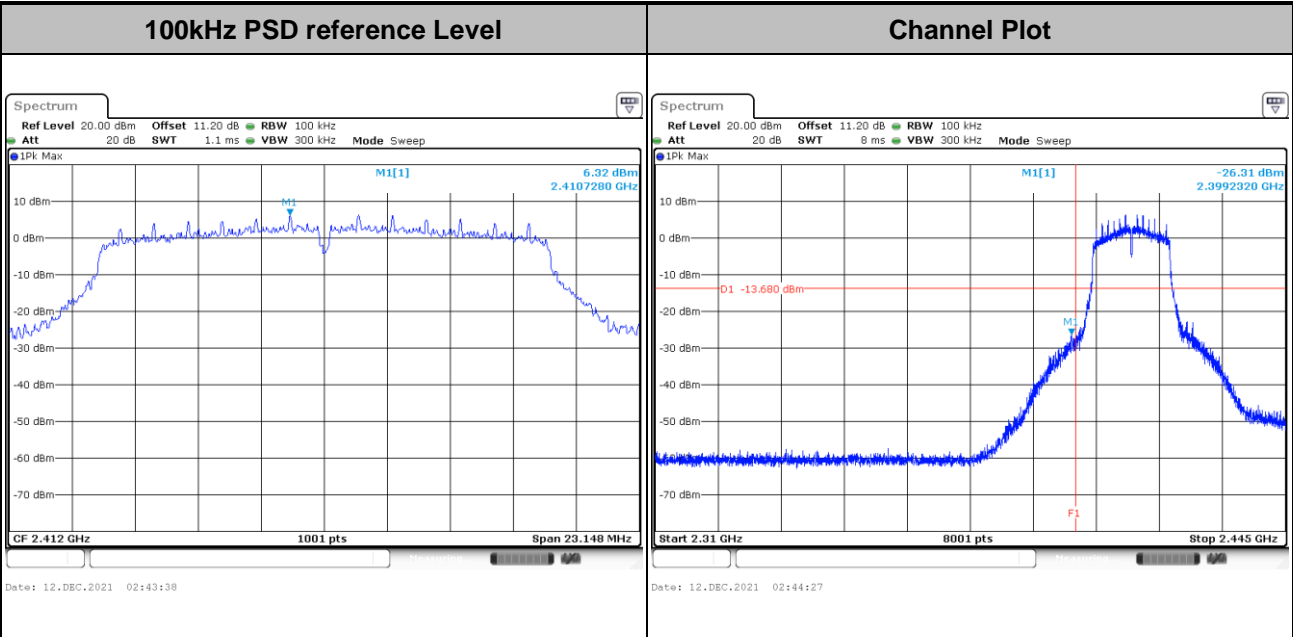





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

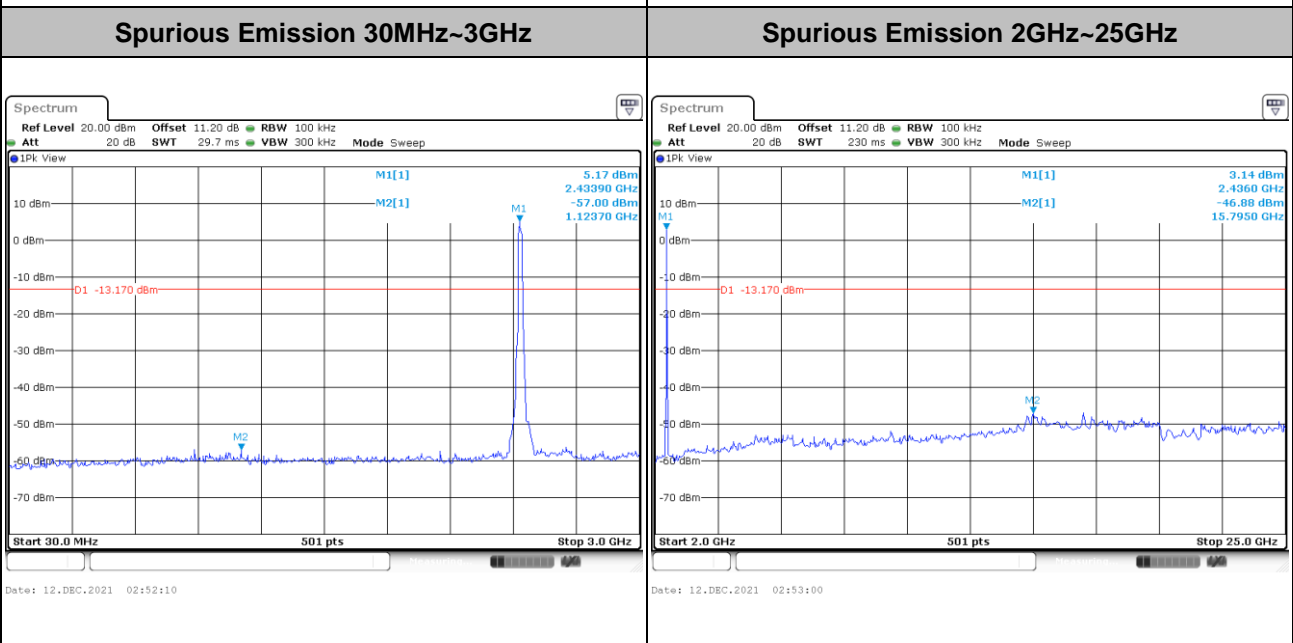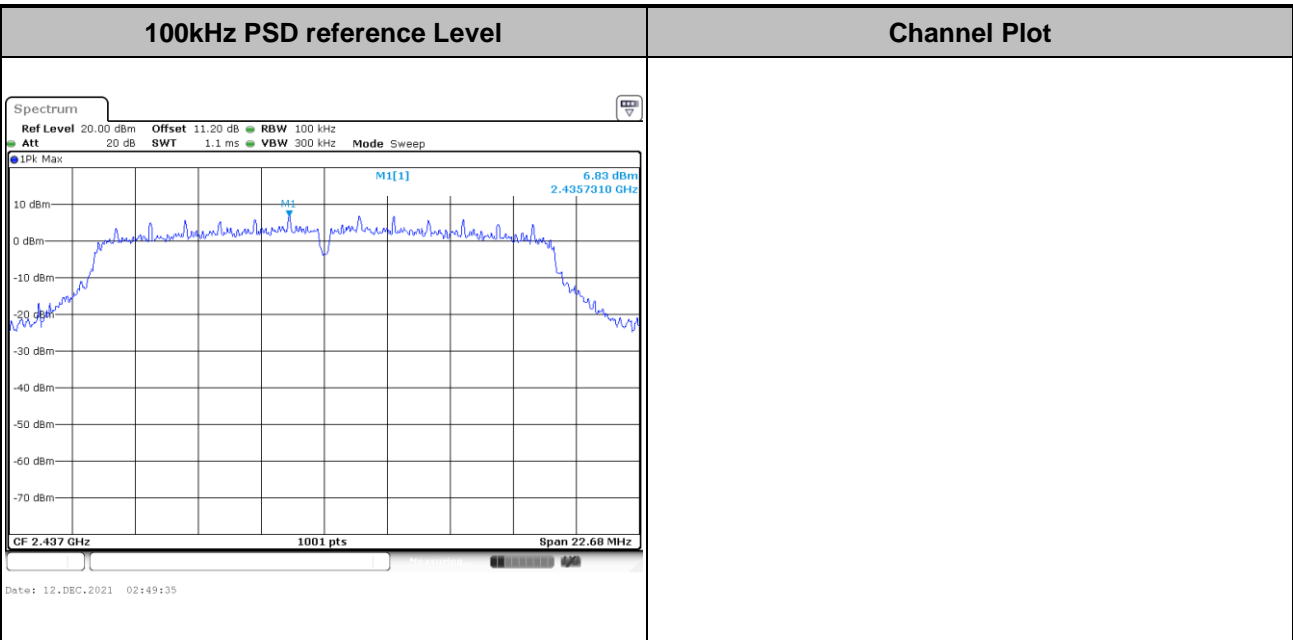





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

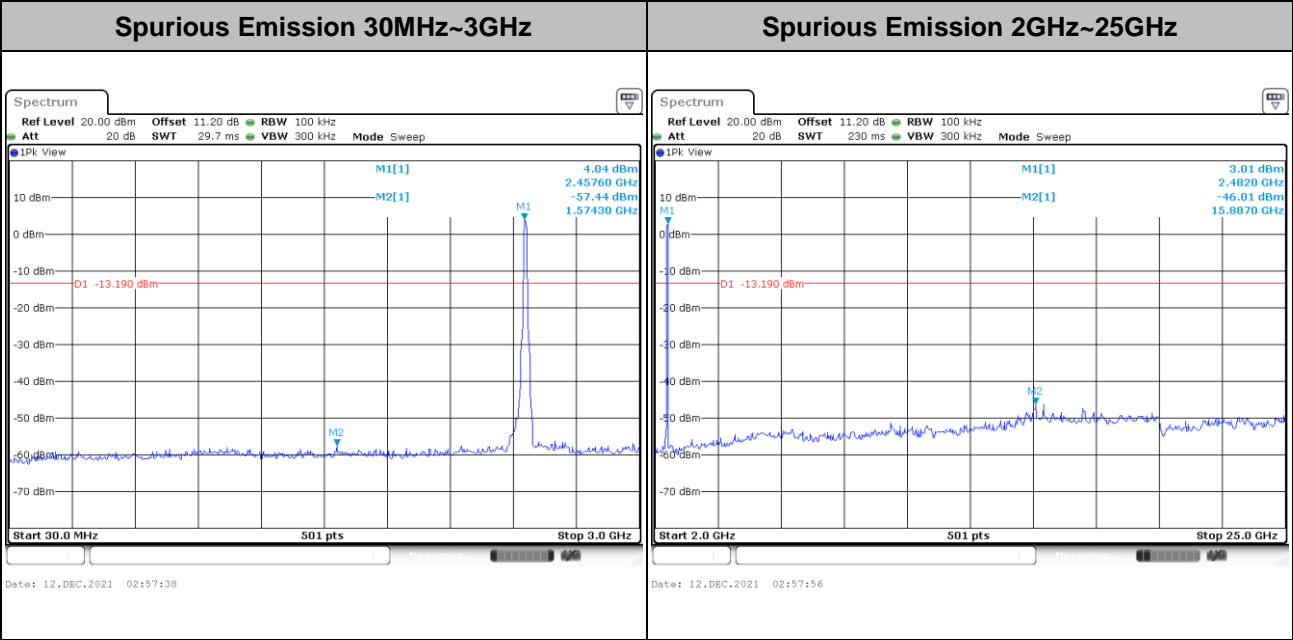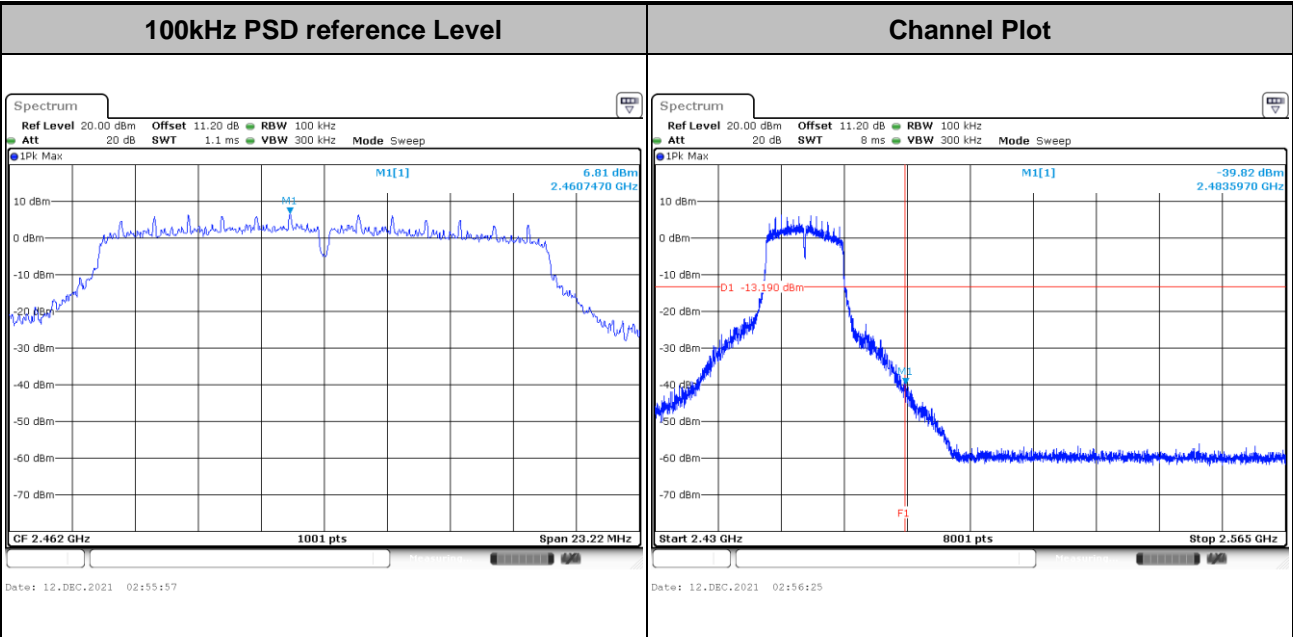





Test Mode : 802.11n HT20 Test Channel : 01

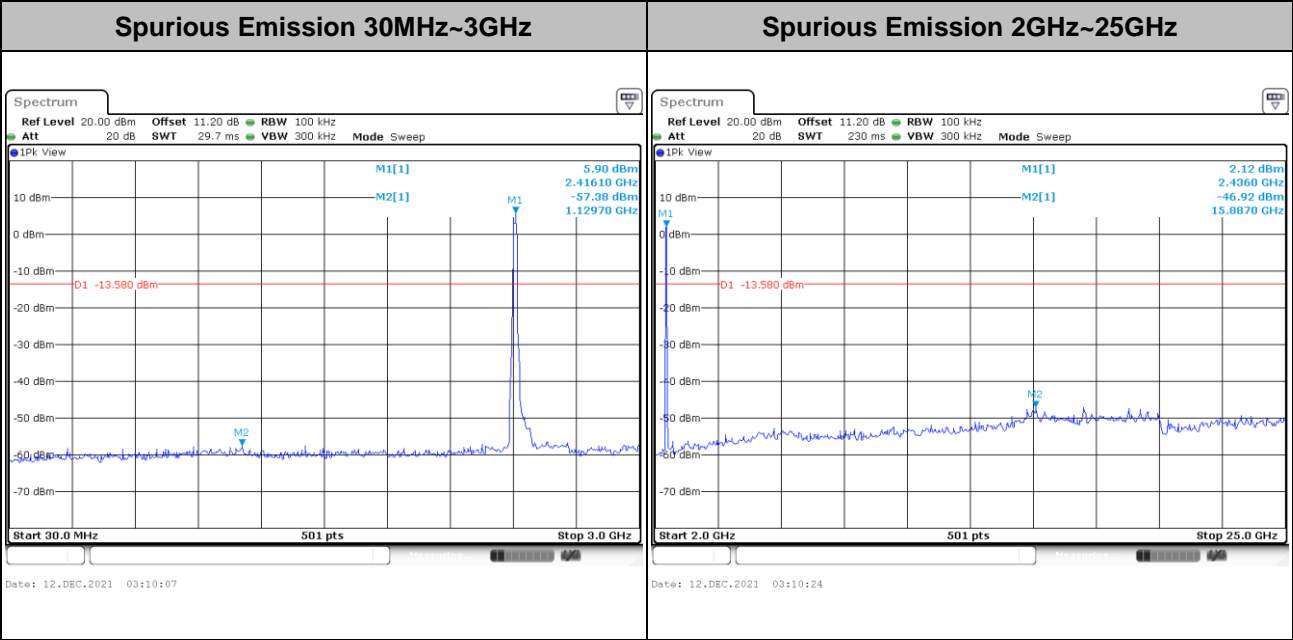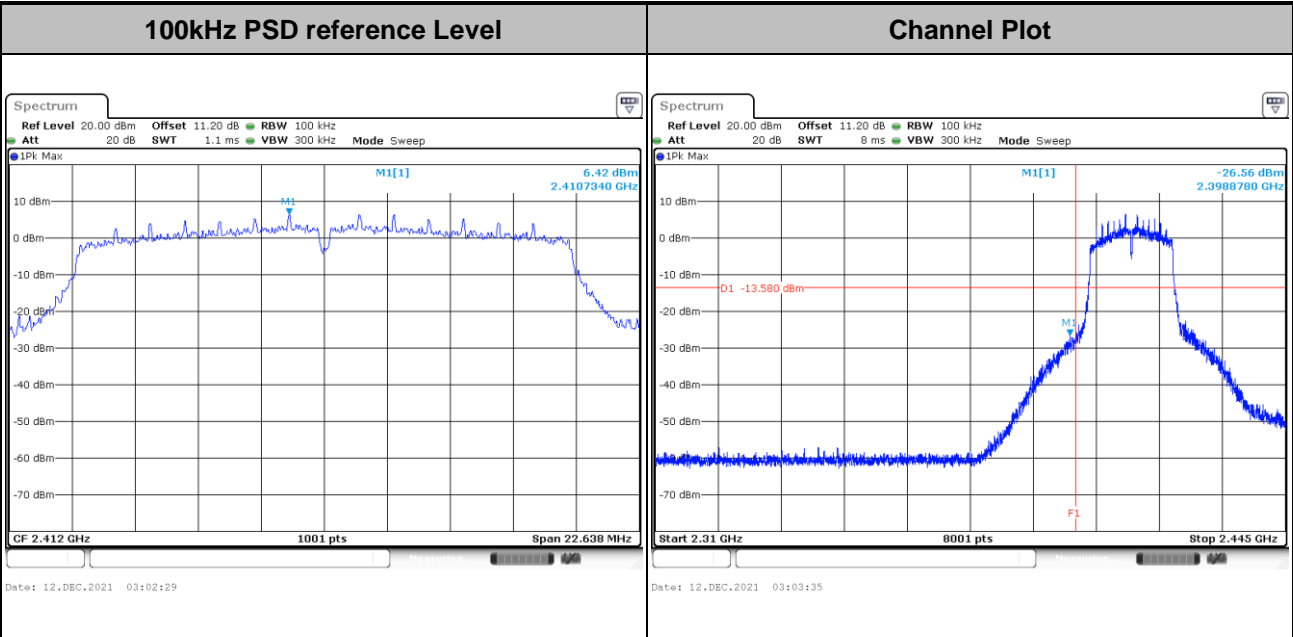





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

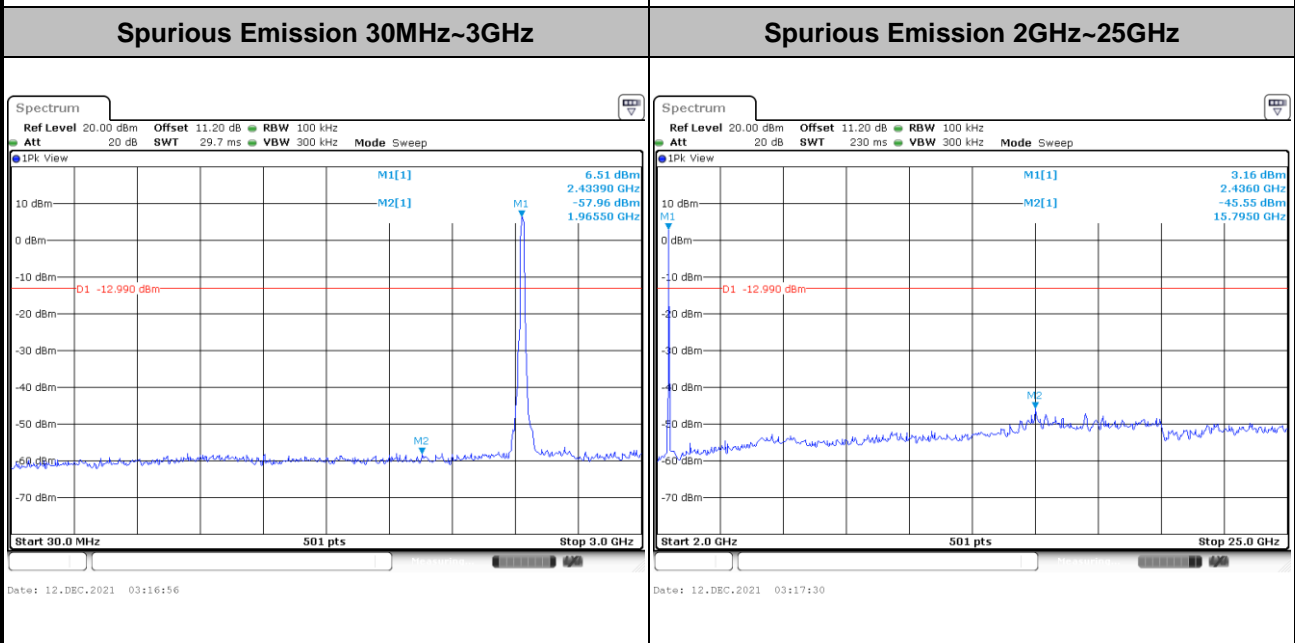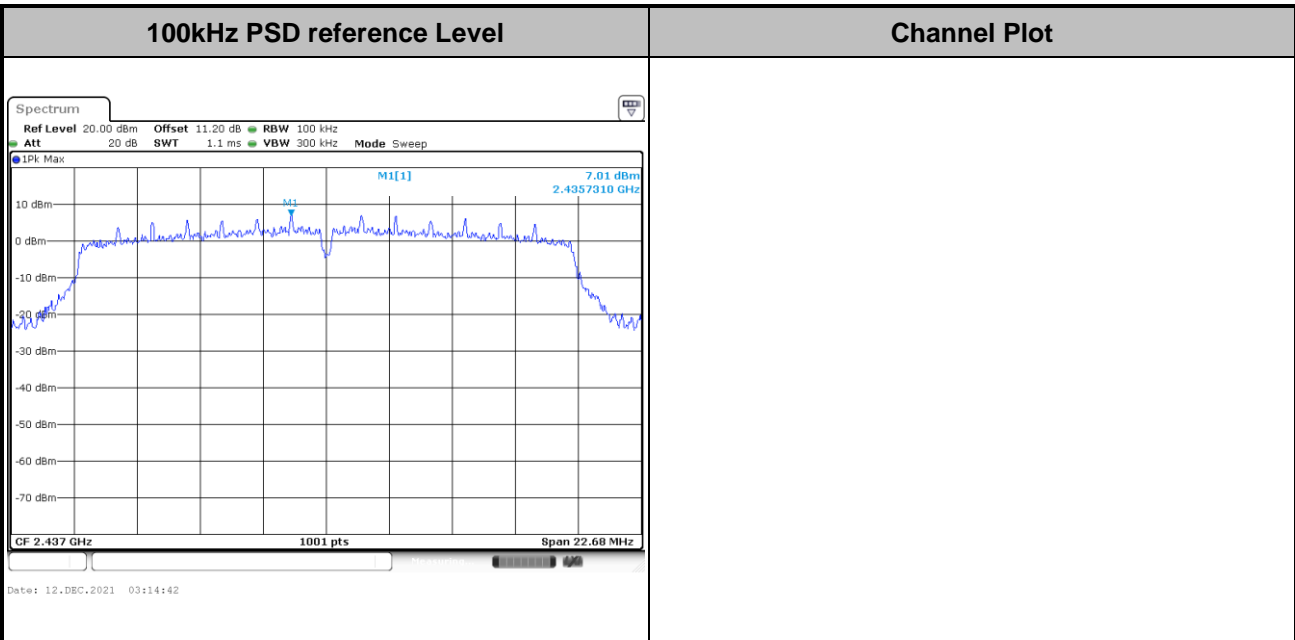



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

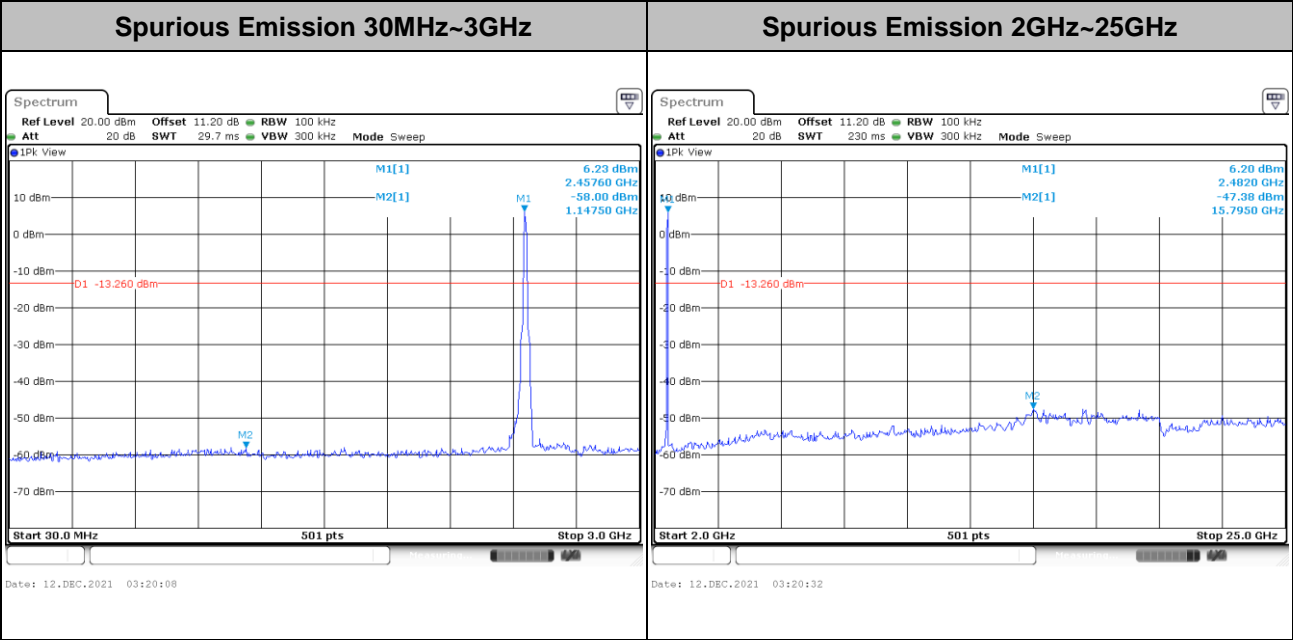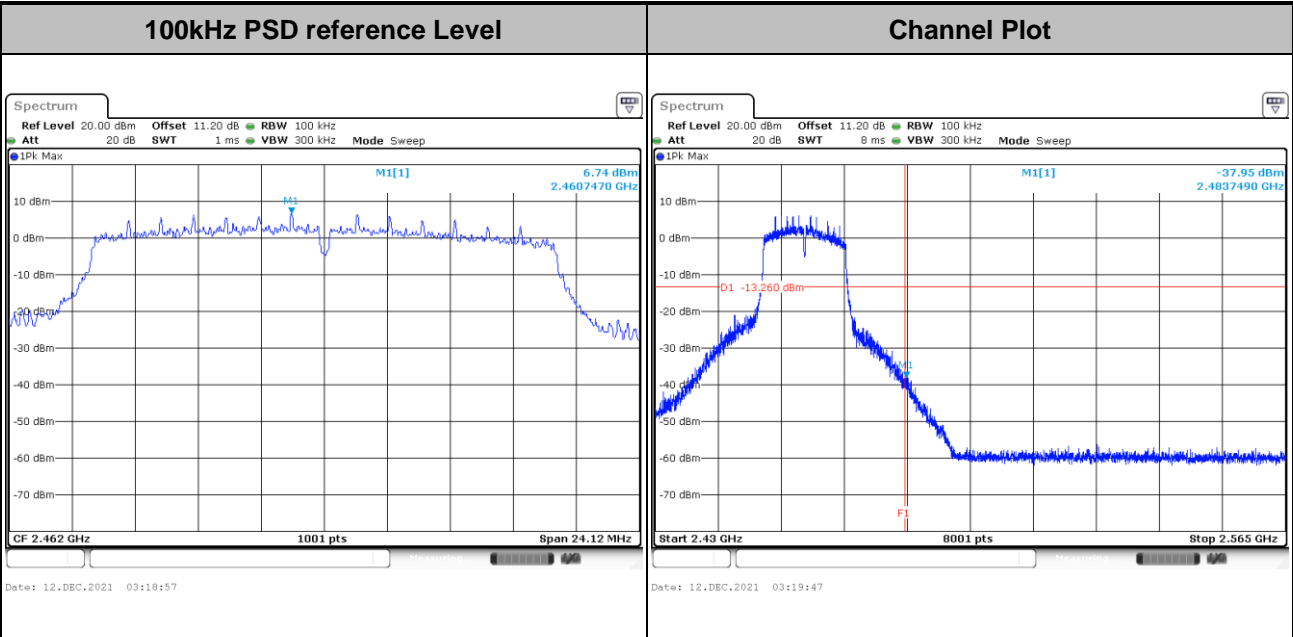



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

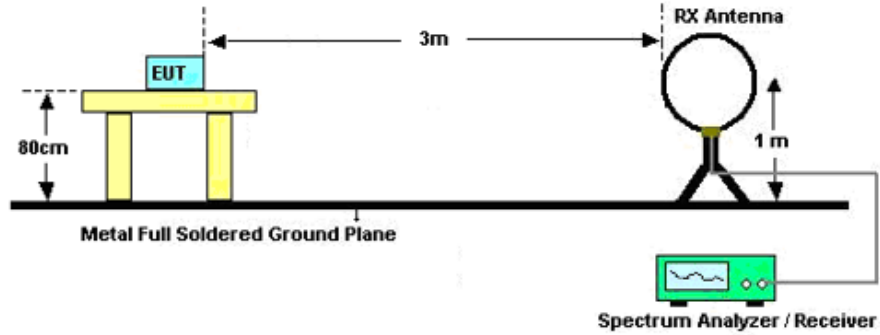

For radiated emissions from 30MHz to 1GHz

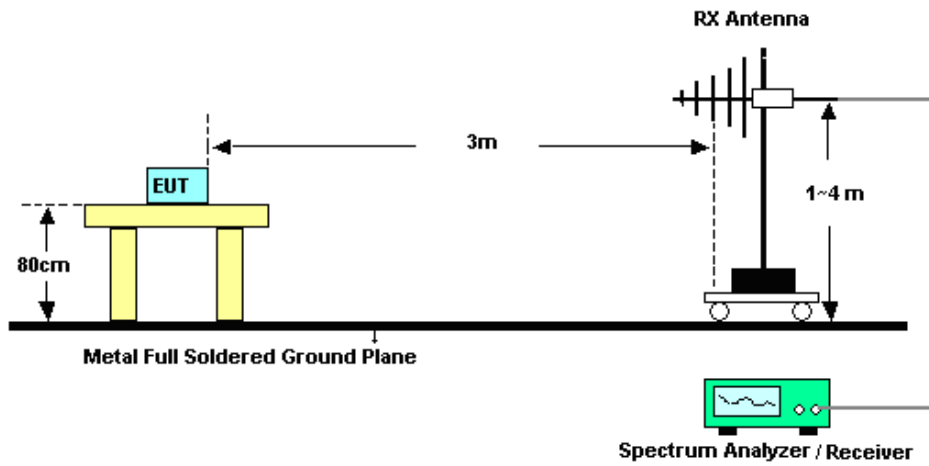

For radiated emissions above 1GHz

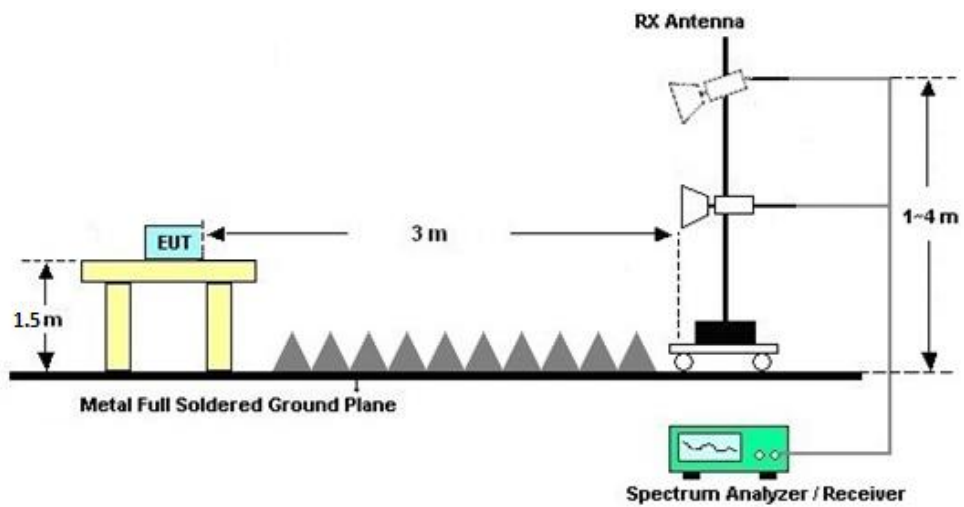



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

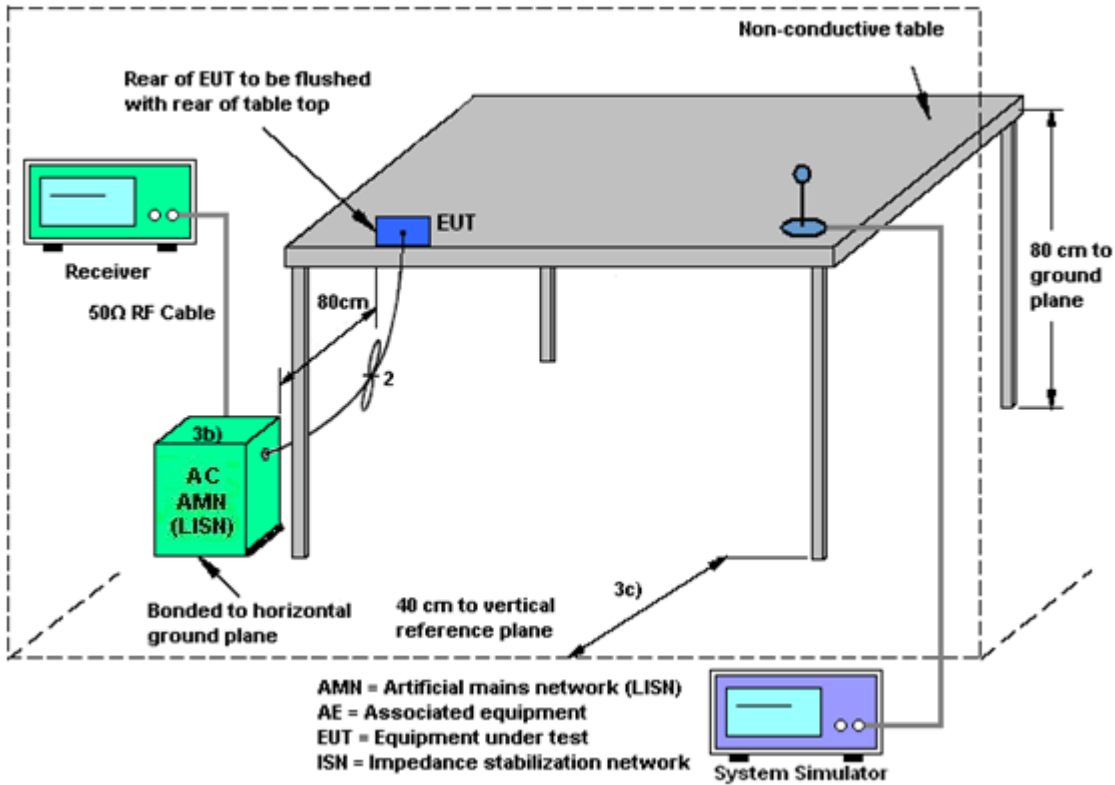

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Dec. 12, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Dec. 12, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Dec. 12, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 03, 2021	Dec. 27, 2021~Jan. 17, 2022	Dec. 02, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2021	Dec. 27, 2021~Jan. 17, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2021	Dec. 27, 2021~Jan. 17, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Dec. 27, 2021~Jan. 17, 2022	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Dec. 27, 2021~Jan. 17, 2022	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 11, 2021	Dec. 27, 2021~Jan. 17, 2022	Apr. 10, 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 07, 2021	Dec. 27, 2021~Jan. 17, 2022	Apr. 06, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 16, 2021	Dec. 27, 2021~Jan. 17, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16, 2021	Dec. 27, 2021~Jan. 17, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2021	Dec. 27, 2021~Jan. 17, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Dec. 27, 2021~Jan. 17, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 27, 2021~Jan. 17, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 27, 2021~Jan. 17, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 08, 2021	Dec. 21, 2021	Mar. 07, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Dec. 21, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2021	Dec. 21, 2021	Oct. 14, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 14, 2021	Dec. 21, 2021	Jul. 13, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR1N1011C

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2021/12/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1		
11b	1Mbps	1	1	2412	18.60	30.00	-5.00	13.60	36.00	Pass	
11b	1Mbps	1	6	2437	19.10	30.00	-5.00	14.10	36.00	Pass	
11b	1Mbps	1	11	2462	18.90	30.00	-5.00	13.90	36.00	Pass	
11g	6Mbps	1	1	2412	14.90	30.00	-5.00	9.90	36.00	Pass	
11g	6Mbps	1	6	2437	15.80	30.00	-5.00	10.80	36.00	Pass	
11g	6Mbps	1	11	2462	14.30	30.00	-5.00	9.30	36.00	Pass	
HT20	MCS0	1	1	2412	13.80	30.00	-5.00	8.80	36.00	Pass	
HT20	MCS0	1	6	2437	16.00	30.00	-5.00	11.00	36.00	Pass	
HT20	MCS0	1	11	2462	15.00	30.00	-5.00	10.00	36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	19.00	30.00	-5.00	14.00	36.00	Pass
11b	1Mbps	1	6	2437	19.42	30.00	-5.00	14.42	36.00	Pass
11b	1Mbps	1	11	2462	19.07	30.00	-5.00	14.07	36.00	Pass
11g	6Mbps	1	1	2412	23.80	30.00	-5.00	18.80	36.00	Pass
11g	6Mbps	1	6	2437	24.26	30.00	-5.00	19.26	36.00	Pass
11g	6Mbps	1	11	2462	23.78	30.00	-5.00	18.78	36.00	Pass
HT20	MCS0	1	1	2412	24.12	30.00	-5.00	19.12	36.00	Pass
HT20	MCS0	1	6	2437	24.65	30.00	-5.00	19.65	36.00	Pass
HT20	MCS0	1	11	2462	24.20	30.00	-5.00	19.20	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	12.99	8.04	0.50	Pass
11b	1Mbps	1	6	2437	13.19	8.56	0.50	Pass
11b	1Mbps	1	11	2462	13.44	8.08	0.50	Pass
11g	6Mbps	1	1	2412	18.03	15.43	0.50	Pass
11g	6Mbps	1	6	2437	17.98	15.12	0.50	Pass
11g	6Mbps	1	11	2462	18.33	15.48	0.50	Pass
HT20	MCS0	1	1	2412	19.03	15.09	0.50	Pass
HT20	MCS0	1	6	2437	18.78	15.12	0.50	Pass
HT20	MCS0	1	11	2462	19.18	16.08	0.50	Pass

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band								
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-3.38	-5.00	8.00	Pass
11b	1Mbps	1	6	2437	-3.60	-5.00	8.00	Pass
11b	1Mbps	1	11	2462	-4.09	-5.00	8.00	Pass
11g	6Mbps	1	1	2412	-8.27	-5.00	8.00	Pass
11g	6Mbps	1	6	2437	-5.89	-5.00	8.00	Pass
11g	6Mbps	1	11	2462	-6.08	-5.00	8.00	Pass
HT20	MCS0	1	1	2412	-7.03	-5.00	8.00	Pass
HT20	MCS0	1	6	2437	-6.43	-5.00	8.00	Pass
HT20	MCS0	1	11	2462	-7.31	-5.00	8.00	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

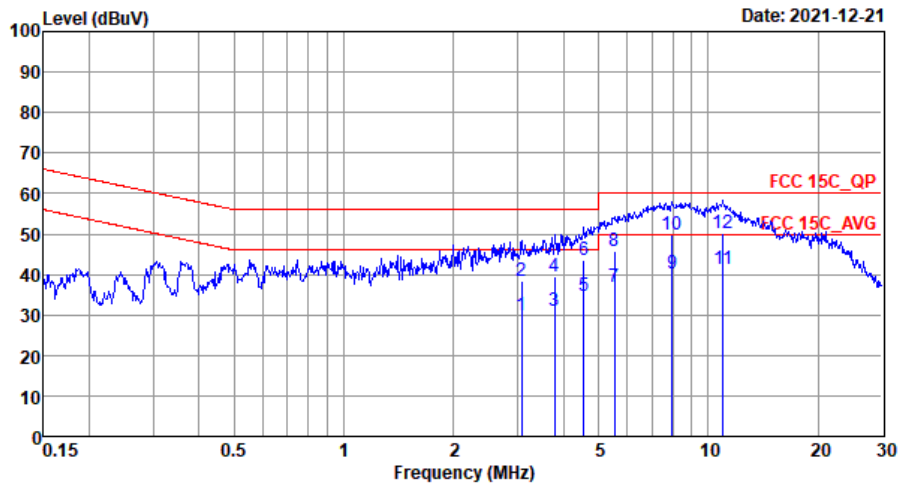


Site : C001-SZ
 Condition: FCC 15C QP LISN 20210901 L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	3.07	30.03	-15.97	46.00	9.70	10.09	10.24	Average
2	3.07	38.23	-17.77	56.00	17.90	10.09	10.24	QP
3	3.78	31.06	-14.94	46.00	10.80	10.02	10.24	Average
4	3.78	39.66	-16.34	56.00	19.40	10.02	10.24	QP
5	4.55	34.53	-11.47	46.00	14.30	9.99	10.24	Average
6	4.55	43.43	-12.57	56.00	23.20	9.99	10.24	QP
7	5.53	37.02	-12.98	50.00	16.80	9.97	10.25	Average
8	5.53	45.82	-14.18	60.00	25.60	9.97	10.25	QP
9	7.98	40.28	-9.72	50.00	20.10	9.90	10.28	Average
10	7.98	49.78	-10.22	60.00	29.60	9.90	10.28	QP
11 *	10.96	41.21	-8.79	50.00	21.10	9.80	10.31	Average
12	10.96	50.11	-9.89	60.00	30.00	9.80	10.31	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

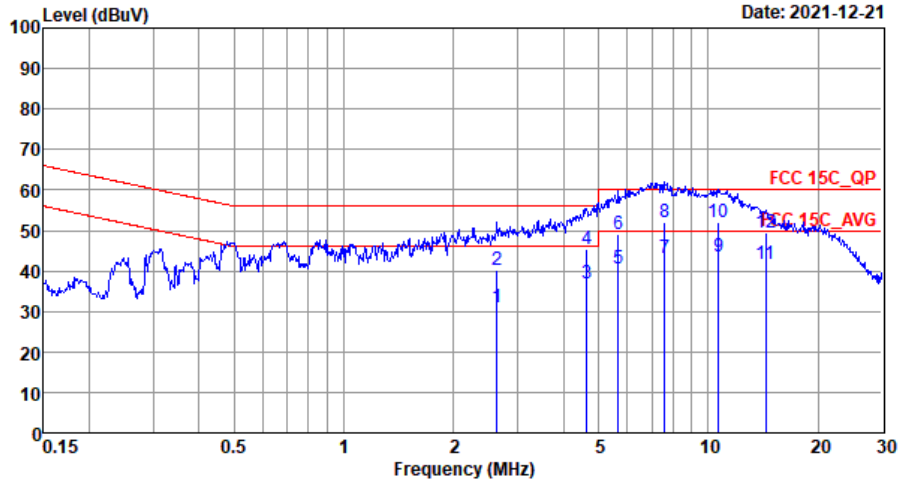

Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20210901_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.64	30.89	-15.11	46.00	10.50	10.15	10.24	Average
2	2.64	40.29	-15.71	56.00	19.90	10.15	10.24	QP
3	4.65	36.78	-9.22	46.00	16.40	10.14	10.24	Average
4	4.65	45.48	-10.52	56.00	25.10	10.14	10.24	QP
5	5.65	40.44	-9.56	50.00	20.10	10.09	10.25	Average
6	5.65	49.14	-10.86	60.00	28.80	10.09	10.25	QP
7	7.61	43.19	-6.81	50.00	22.90	10.01	10.28	Average
8	7.61	52.19	-7.81	60.00	31.90	10.01	10.28	QP
9 *	10.68	43.68	-6.32	50.00	23.40	9.97	10.31	Average
10	10.68	51.88	-8.12	60.00	31.60	9.97	10.31	QP
11	14.36	41.72	-8.28	50.00	21.50	9.88	10.34	Average
12	14.36	49.62	-10.38	60.00	29.40	9.88	10.34	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)---Sample 1

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2326.27	54.59	-19.41	74	45.73	32	9.56	32.7	330	28	P	H
		2389.48	43.43	-10.57	54	34.49	32	9.64	32.7	330	28	A	H
		2412	100.54	-	-	91.48	32.1	9.66	32.7	330	28	P	H
		2412	99.02	-	-	89.96	32.1	9.66	32.7	330	28	A	H
		2374.89	53.89	-20.11	74	44.94	32.03	9.62	32.7	194	193	P	V
		2389.69	43.72	-10.28	54	34.78	32	9.64	32.7	194	193	A	V
		2412	98.94	-	-	89.88	32.1	9.66	32.7	194	193	P	V
		2412	97.3	-	-	88.24	32.1	9.66	32.7	194	193	A	V
802.11b CH 06 2437MHz		2339.82	54.71	-19.29	74	45.73	32.1	9.58	32.7	325	29	P	H
		2363.76	43.56	-10.44	54	34.58	32.07	9.61	32.7	325	29	A	H
		2437	103.86	-	-	94.67	32.2	9.69	32.7	325	29	P	H
		2437	102.07	-	-	92.88	32.2	9.69	32.7	325	29	A	H
		2485.51	54.35	-19.65	74	45.13	32.17	9.75	32.7	325	29	P	H
		2483.76	43.6	-10.4	54	34.38	32.17	9.75	32.7	325	29	A	H
		2359.7	54.24	-19.76	74	45.27	32.07	9.6	32.7	185	192	P	V
		2389.24	43.69	-10.31	54	34.75	32	9.64	32.7	185	192	A	V
		2437	102.66	-	-	93.47	32.2	9.69	32.7	185	192	P	V
		2437	100.92	-	-	91.73	32.2	9.69	32.7	185	192	A	V
		2499.23	54.05	-19.95	74	44.88	32.1	9.77	32.7	185	192	P	V
	2484.18	43.66	-10.34	54	34.44	32.17	9.75	32.7	185	192	A	V	



802.11b CH 11 2462MHz	2462	103.81	-	-	94.56	32.23	9.72	32.7	316	22	P	H
	2462	101.98	-	-	92.73	32.23	9.72	32.7	316	22	A	H
	2484.92	54.6	-19.4	74	45.38	32.17	9.75	32.7	316	22	P	H
	2486.08	44.24	-9.76	54	35.02	32.17	9.75	32.7	316	22	A	H
	2462	102.9	-	-	93.65	32.23	9.72	32.7	202	186	P	V
	2462	101.19	-	-	91.94	32.23	9.72	32.7	202	186	A	V
	2484.88	54.76	-19.24	74	45.54	32.17	9.75	32.7	202	186	P	V
	2486.8	44.34	-9.66	54	35.12	32.17	9.75	32.7	202	186	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)---Sample 1

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	50.33	-23.67	74	56.61	33.85	12.01	52.14	-	-	P	H
		4824	48.82	-25.18	74	55.1	33.85	12.01	52.14	-	-	P	V
802.11b CH 06 2437MHz		4874	49.79	-24.21	74	56.12	33.73	12.04	52.1	-	-	P	H
		7311	47.16	-26.84	74	49.03	35.76	14.16	51.79	-	-	P	H
		4874	46.39	-27.61	74	52.72	33.73	12.04	52.1	-	-	P	V
		7311	46.99	-27.01	74	48.86	35.76	14.16	51.79	-	-	P	V
802.11b CH 11 2462MHz		4924	49.65	-24.35	74	55.94	33.7	12.07	52.06	-	-	P	H
		7386	46.46	-27.54	74	48.17	35.78	14.21	51.7	-	-	P	H
		4924	46.41	-27.59	74	52.7	33.7	12.07	52.06	-	-	P	V
		7386	47.04	-26.96	74	48.75	35.78	14.21	51.7	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)---Sample 1

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2387.49	57.93	-16.07	74	49	32	9.63	32.7	264	9	P	H
		2389.8	46.99	-7.01	54	38.05	32	9.64	32.7	264	9	A	H
		2412	104.38	-	-	94.32	32.1	9.66	32.7	264	9	P	H
		2412	96.51	-	-	87.45	32.1	9.66	32.7	264	9	A	H
		2389.8	56.05	-17.95	74	47.11	32	9.64	32.7	264	238	P	V
		2389.59	45.18	-8.82	54	36.24	32	9.64	32.7	264	238	A	V
		2412	100.94	-	-	91.88	32.1	9.66	32.7	264	238	P	V
		2412	94.33	-	-	85.27	32.1	9.66	32.7	264	238	A	V
802.11g CH 06 2437MHz		2389.52	54.37	-19.63	74	45.43	32	9.64	32.7	365	26	P	H
		2389.52	44.7	-9.3	54	35.76	32	9.64	32.7	365	26	A	H
		2437	108.3	-	-	99.01	32.3	9.69	32.7	365	26	P	H
		2437	100.83	-	-	91.54	32.3	9.69	32.7	365	26	A	H
		2494.12	54.46	-19.54	74	45.3	32.1	9.76	32.7	365	26	P	H
		2484.88	45.02	-8.98	54	35.8	32.17	9.75	32.7	365	26	A	H
		2354.8	54.57	-19.43	74	45.6	32.07	9.6	32.7	161	176	P	V
		2389.52	44.63	-9.37	54	35.69	32	9.64	32.7	161	176	A	V
		2437	105.9	-	-	96.61	32.3	9.69	32.7	161	176	P	V
		2437	98.57	-	-	89.28	32.3	9.69	32.7	161	176	A	V
		2485.65	55.85	-18.15	74	46.63	32.17	9.75	32.7	161	176	P	V
		2485.58	45.78	-8.22	54	36.56	32.17	9.75	32.7	161	176	A	V



802.11g CH 11 2462MHz	2462	104.15	-	-	94.9	32.23	9.72	32.7	360	23	P	H
	2462	97.04	-	-	87.79	32.23	9.72	32.7	360	23	A	H
	2484.88	61.45	-12.55	74	52.23	32.17	9.75	32.7	360	23	P	H
	2483.52	47.16	-6.84	54	37.94	32.17	9.75	32.7	360	23	A	H
	2462	103.55	-	-	94.3	32.23	9.72	32.7	327	187	P	V
	2462	96.58	-	-	87.33	32.23	9.72	32.7	327	187	A	V
	2483.8	61.26	-12.74	74	52.04	32.17	9.75	32.7	327	187	P	V
	2483.52	47.68	-6.32	54	38.46	32.17	9.75	32.7	327	187	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)---Sample 1

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	47.22	-26.78	74	53.5	33.85	12.01	52.14	-	-	P	H
		4824	50.02	-23.98	74	56.3	33.85	12.01	52.14	-	-	P	V
802.11g CH 06 2437MHz		4874	47.77	-26.23	74	54.1	33.73	12.04	52.1	-	-	P	H
		7311	48.28	-25.72	74	50.15	35.76	14.16	51.79	-	-	P	H
		4874	49.77	-24.23	74	56.1	33.73	12.04	52.1	-	-	P	V
		7311	48.58	-25.42	74	50.45	35.76	14.16	51.79	-	-	P	V
802.11g CH 11 2462MHz		4924	44.86	-29.14	74	51.15	33.7	12.07	52.06	-	-	P	H
		7386	48.81	-25.19	74	50.52	35.78	14.21	51.7	-	-	P	H
		4924	45.2	-28.8	74	51.49	33.7	12.07	52.06	-	-	P	V
		7386	49.44	-24.56	74	51.15	35.78	14.21	51.7	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)---Sample 1

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.91	62.76	-11.24	74	53.82	32	9.64	32.7	372	25	P	H
		2389.8	48.96	-5.04	54	40.02	32	9.64	32.7	372	25	A	H
		2412	103.54	-	-	94.48	32.1	9.66	32.7	372	25	P	H
		2412	96.15	-	-	87.09	32.1	9.66	32.7	372	25	A	H
		2389.91	57.06	-16.94	74	48.12	32	9.64	32.7	379	183	P	V
		2389.69	45.69	-8.31	54	36.75	32	9.64	32.7	379	183	A	V
		2412	102.81	-	-	93.75	32.1	9.66	32.7	379	183	P	V
802.11n HT20 CH 06 2437MHz		2412	95.53	-	-	86.47	32.1	9.66	32.7	379	183	A	V
		2321.2	54.79	-19.21	74	45.93	32	9.56	32.7	328	30	P	H
		2389.1	44.71	-9.29	54	35.77	32	9.64	32.7	328	30	A	H
		2437	105.8	-	-	96.51	32.3	9.69	32.7	328	30	P	H
		2437	99.26	-	-	89.97	32.3	9.69	32.7	328	30	A	H
		2483.9	54.54	-19.46	74	45.32	32.17	9.75	32.7	328	30	P	H
		2487.4	44.85	-9.15	54	35.63	32.17	9.75	32.7	328	30	A	H
		2368.8	54.24	-19.76	74	45.3	32.03	9.61	32.7	373	182	P	V
		2389.66	44.51	-9.49	54	35.57	32	9.64	32.7	373	182	A	V
		2437	107.1	-	-	97.81	32.3	9.69	32.7	373	182	P	V
802.11n HT20 CH 11 2462MHz		2437	100.34	-	-	91.05	32.3	9.69	32.7	373	182	A	V
		2484.6	56.18	-17.82	74	46.96	32.17	9.75	32.7	373	182	P	V
		2483.76	45.25	-8.75	54	36.03	32.17	9.75	32.7	373	182	A	V
		2462	104.26	-	-	95.01	32.23	9.72	32.7	358	40	P	H
		2462	97.2	-	-	87.95	32.23	9.72	32.7	358	40	A	H
		2483.56	60.25	-13.75	74	51.03	32.17	9.75	32.7	358	40	P	H
		2483.52	47.73	-6.27	54	38.51	32.17	9.75	32.7	358	40	A	H
	2462	103.61	-	-	94.36	32.23	9.72	32.7	329	191	P	V	
	2462	96.37	-	-	87.12	32.23	9.72	32.7	329	191	A	V	
	2484	57.78	-16.22	74	48.56	32.17	9.75	32.7	329	191	P	V	
	2483.56	45.81	-8.19	54	36.59	32.17	9.75	32.7	329	191	A	V	



Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)---Sample 1

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	47.33	-26.67	74	53.61	33.85	12.01	52.14	-	-	P	H
		4824	50.24	-23.76	74	56.52	33.85	12.01	52.14	-	-	P	V
802.11n HT20 CH 06 2437MHz		4874	46.9	-27.1	74	53.23	33.73	12.04	52.1	-	-	P	H
		7311	47.87	-26.13	74	49.74	35.76	14.16	51.79	-	-	P	H
		4874	49.17	-24.83	74	55.5	33.73	12.04	52.1	-	-	P	V
		7311	48.52	-25.48	74	50.39	35.76	14.16	51.79	-	-	P	V
802.11n HT20 CH 11 2462MHz		4924	44.37	-29.63	74	50.66	33.7	12.07	52.06	-	-	P	H
		7386	47.95	-26.05	74	49.66	35.78	14.21	51.7	-	-	P	H
		4924	44.78	-29.22	74	51.07	33.7	12.07	52.06	-	-	P	V
		7386	48.09	-25.91	74	49.8	35.78	14.21	51.7	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)---Sample 1

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		106.63	20.44	-23.06	43.5	37.29	15.87	2.47	35.19	-	-	P	H
		159.01	26.04	-17.46	43.5	39.24	19.31	2.59	35.1	-	-	P	H
		193.93	26.04	-17.46	43.5	41.78	16.63	2.73	35.1	-	-	P	H
		338.46	21.35	-24.65	46	32.29	20.74	3.22	34.9	-	-	P	H
		594.54	25.91	-20.09	46	30.87	25.69	3.86	34.51	-	-	P	H
		850.62	28.37	-17.63	46	30	28.61	4.06	34.3	-	-	P	H
		47.46	28.23	-11.77	40	40.86	20.27	2.17	35.07	-	-	P	V
		178.41	27.41	-16.09	43.5	41.66	18.19	2.66	35.1	-	-	P	V
		278.32	20.79	-25.21	46	33.42	19.27	3.04	34.94	-	-	P	V
		443.22	23.17	-22.83	46	31.55	23.03	3.3	34.71	-	-	P	V
		592.6	25.9	-20.1	46	30.91	25.65	3.85	34.51	-	-	P	V
	742.95	28.36	-17.64	46	31.15	27.72	3.9	34.41	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)---Sample 2

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.905	61.17	-12.83	74	52.23	32	9.64	32.7	130	35	P	H
		2389.695	46.96	-7.04	54	38.02	32	9.64	32.7	130	35	A	H
		2412	103.66	-	-	94.6	32.1	9.66	32.7	130	35	P	H
		2412	96.88	-	-	87.82	32.1	9.66	32.7	130	35	A	H
		2389.59	57.7	-16.3	74	48.76	32	9.64	32.7	234	187	P	V
		2389.905	46.93	-7.07	54	37.99	32	9.64	32.7	234	187	A	V
		2412	103.77	-	-	94.71	32.1	9.66	32.7	234	187	P	V
		2412	96.43	-	-	87.37	32.1	9.66	32.7	234	187	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)---Sample 2

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	45.85	-28.15	74	52.13	33.85	12.01	52.14	-	-	P	H
		4824	45.51	-28.49	74	51.79	33.85	12.01	52.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)---Sample 3

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.275	61.1	-12.9	74	52.16	32	9.64	32.7	117	17	P	H
		2389.695	49.09	-5.21	54	40.15	32	9.64	32.7	117	17	A	H
		2412	102.5	-	-	93.44	32.1	9.66	32.7	117	17	P	H
		2412	96.12	-	-	87.06	32.1	9.66	32.7	117	17	A	H
		2388.96	63.67	-10.33	74	54.73	32	9.64	32.7	179	189	P	V
		2389.8	48.92	-5.08	54	39.98	32	9.64	32.7	179	189	A	V
		2412	103.23	-	-	94.17	32.1	9.66	32.7	179	189	P	V
	2412	95.88	-	-	86.82	32.1	9.66	32.7	179	189	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)---Sample 3

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	46.4	-27.6	74	52.68	33.85	12.01	52.14	-	-	P	H
		4824	46.41	-27.59	74	52.69	33.85	12.01	52.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)---Sample 4

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.275	62.48	-11.52	74	53.54	32	9.64	32.7	130	13	P	H
		2389.8	48.34	-5.66	54	39.4	32	9.64	32.7	130	13	A	H
		2412	102.2	-	-	93.14	32.1	9.66	32.7	130	13	P	H
		2412	94.86	-	-	85.8	32.1	9.66	32.7	130	13	A	H
		2389.695	60.84	-13.16	74	51.9	32	9.64	32.7	129	360	P	V
		2389.905	47.05	-6.95	54	38.11	32	9.64	32.7	129	360	A	V
		2412	101.01	-	-	91.95	32.1	9.66	32.7	129	360	P	V
	2412	93.73	-	-	84.67	32.1	9.66	32.7	129	360	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)---Sample 4

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	47.01	-26.99	74	53.29	33.85	12.01	52.14	-	-	P	H
		4824	46.02	-27.98	74	52.3	33.85	12.01	52.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<Simultaneous transmission>

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)---Sample 1

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g HT20 CH 01 2412MHz & LTE Band38	*	2388.855	61.85	-12.15	74	52.91	32	9.64	32.7	118	295	P	H
	*	2389.695	48.72	-5.28	54	39.78	32	9.64	32.7	118	295	A	H
		2412	103.24	-	-	94.18	32.1	9.66	32.7	118	295	P	H
		2412	96.29	-	-	87.23	32.1	9.66	32.7	118	295	A	H
	*	2389.065	63.49	-10.51	74	54.55	32	9.64	32.7	244	272	P	V
	*	2389.905	48.8	-5.2	54	39.86	32	9.64	32.7	244	272	A	V
		2412	105.32	-	-	96.26	32.1	9.66	32.7	244	272	P	V
		2412	97.74	-	-	88.68	32.1	9.66	32.7	244	272	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)---Sample 1

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g HT20 CH 01 2412MHz & LTE Band38		4824	44.95	-29.05	74	51.23	33.85	12.01	52.14	-	-	P	H
		4824	45.37	-28.63	74	51.65	33.85	12.01	52.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.27	-	-	10Hz
802.11g	96.97	1.392	0.718	1KHz
802.11n HT20	96.78	1.305	0.766	1KHz

802.11b

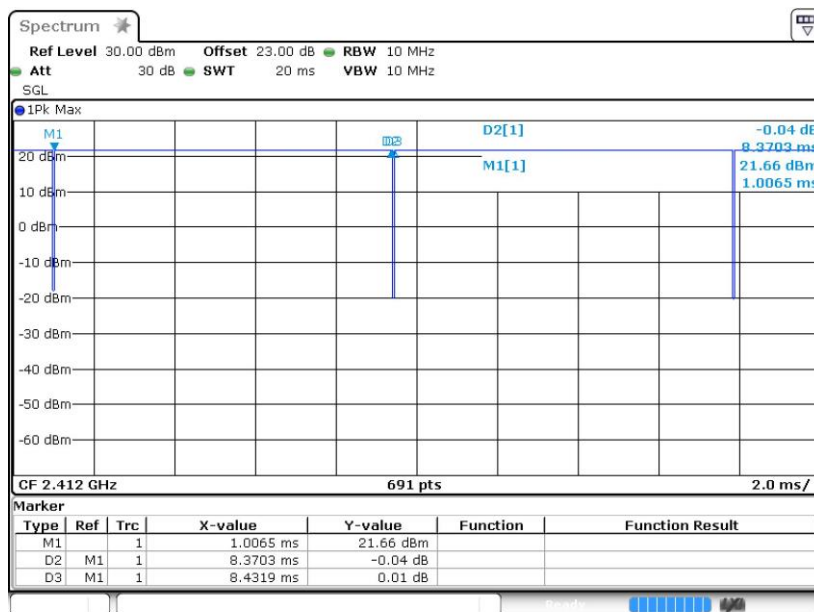



802.11g

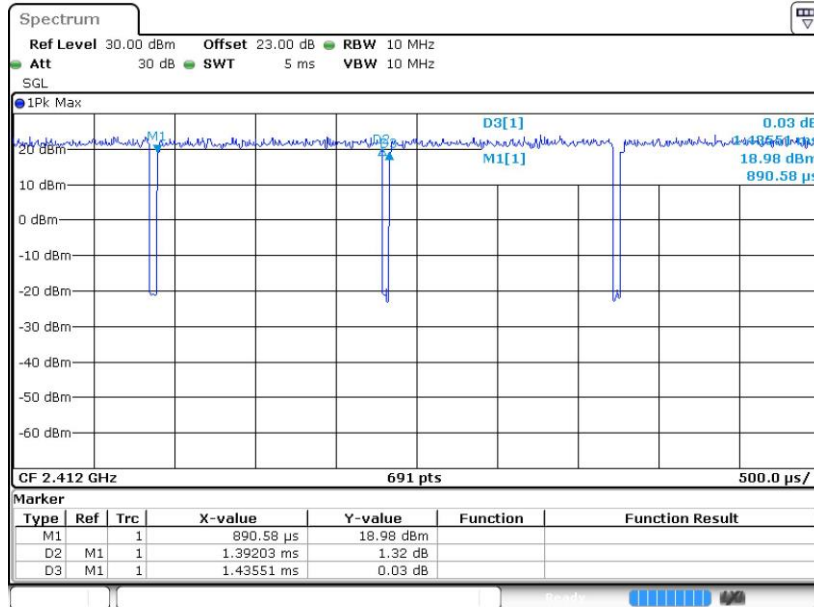

802.11n HT20

