





CSE Plot on Ch 39 between 30MHz ~ 3 GHz

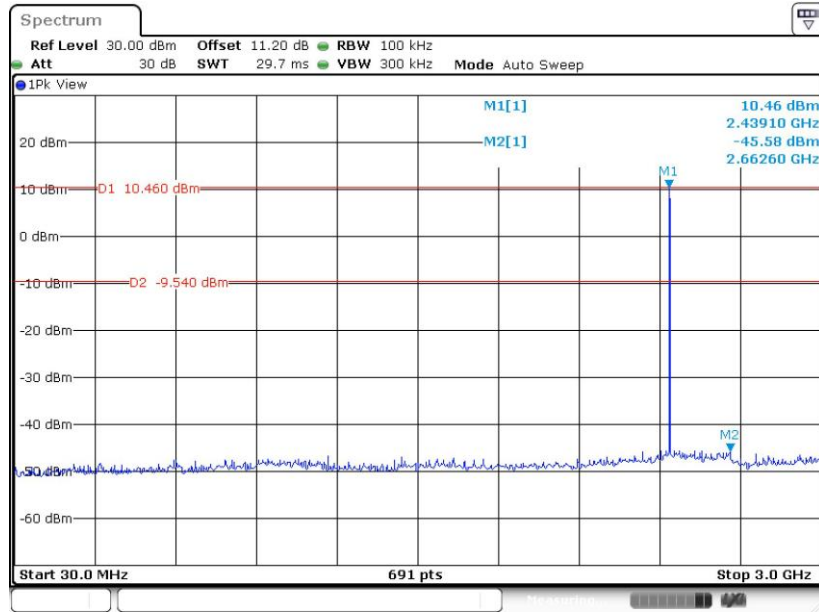

Date: 28.MAR.2022 02:14:06


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

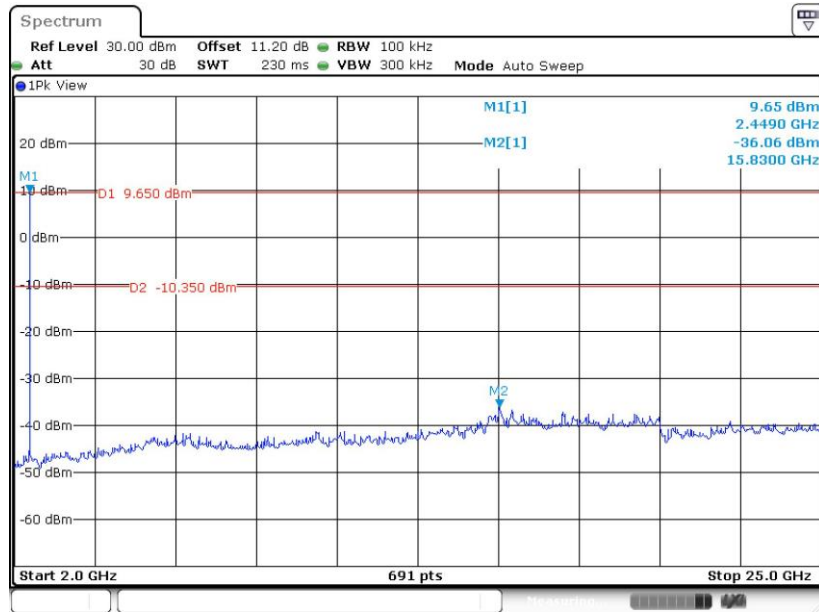

Date: 28.MAR.2022 02:14:46




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

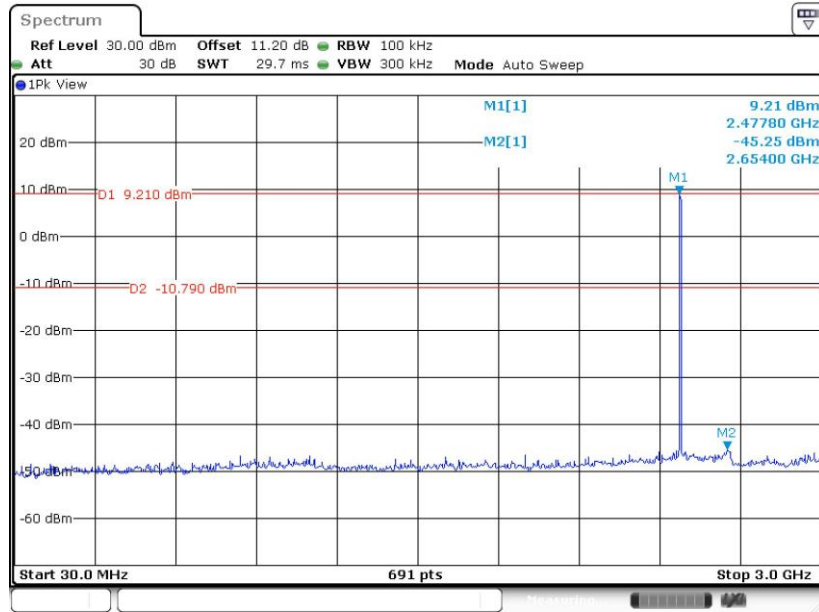

Date: 28.MAR.2022 02:22:57

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

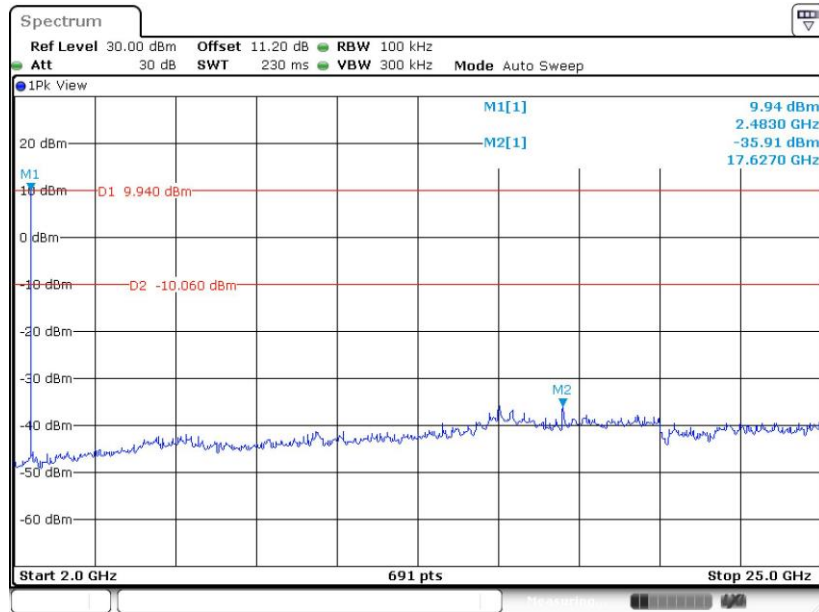

Date: 28.MAR.2022 02:23:34



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup

For radiated emissions below 30MHz

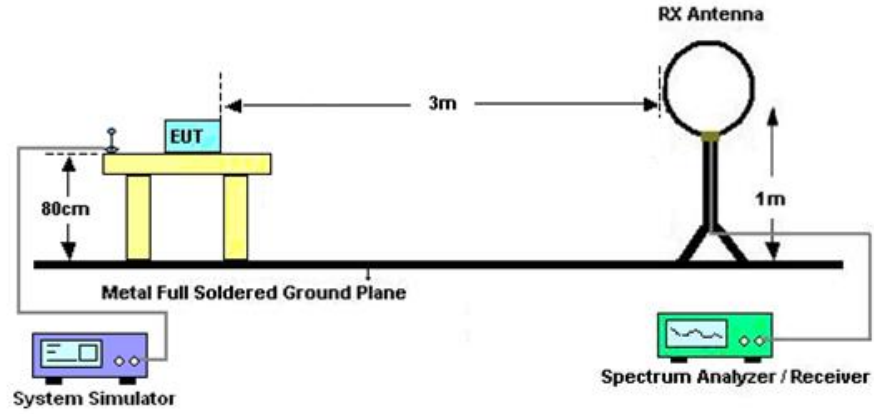

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz





3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup



3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Mar. 25, 2022~ Mar. 28, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Mar. 25, 2022~ Mar. 28, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Mar. 25, 2022~ Mar. 28, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 21, 2021	Apr. 01, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Apr. 01, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 15, 2021	Apr. 01, 2022	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Apr. 01, 2022	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 11, 2021	Apr. 01, 2022	Apr. 10, 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 07, 2021	Apr. 01, 2022	Apr. 06, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 16, 2021	Apr. 01, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 16, 2021	Apr. 01, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2021	Apr. 01, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Apr. 01, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 01, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 01, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 08, 2021	Feb. 24, 2022	Mar. 07, 2022	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 01, 2021	Feb. 24, 2022	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 28, 2021	Feb. 24, 2022	Oct. 27, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 14, 2021	Feb. 24, 2022	Jul. 13, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2022/3/25~2022/3/28	Relative Humidity:	51~54	%

TEST RESULTS DATA									
20dB and 99% Occupied Bandwidth and Hopping Channel Separation									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.949	0.865	0.999	0.6329	Pass
DH	1Mbps	1	39	2441	0.949	0.868	0.999	0.6329	Pass
DH	1Mbps	1	78	2480	0.947	0.865	0.999	0.6310	Pass
2DH	2Mbps	1	0	2402	1.285	1.175	0.999	0.8567	Pass
2DH	2Mbps	1	39	2441	1.311	1.187	0.999	0.8741	Pass
2DH	2Mbps	1	78	2480	1.281	1.192	0.999	0.8539	Pass
3DH	3Mbps	1	0	2402	1.285	1.178	0.999	0.8567	Pass
3DH	3Mbps	1	39	2441	1.311	1.192	0.999	0.8741	Pass
3DH	3Mbps	1	78	2480	1.316	1.192	1.003	0.8770	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA					
Peak Power Table					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	11.00	20.97	Pass
	39	1	11.90	20.97	Pass
	78	1	11.20	20.97	Pass
2DH5	0	1	10.30	20.97	Pass
	39	1	11.50	20.97	Pass
	78	1	11.10	20.97	Pass
3DH5	0	1	10.60	20.97	Pass
	39	1	11.50	20.97	Pass
	78	1	11.10	20.97	Pass


TEST RESULTS DATA				
Average Power Table (Reporting Only)				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH5	0	1	10.50	1.12
	39	1	11.40	1.12
	78	1	10.70	1.12
2DH5	0	1	8.00	1.11
	39	1	9.30	1.11
	78	1	9.00	1.11
3DH5	0	1	7.90	1.13
	39	1	9.30	1.13
	78	1	9.00	1.13

TEST RESULTS DATA			
Number of Hopping Frequency			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

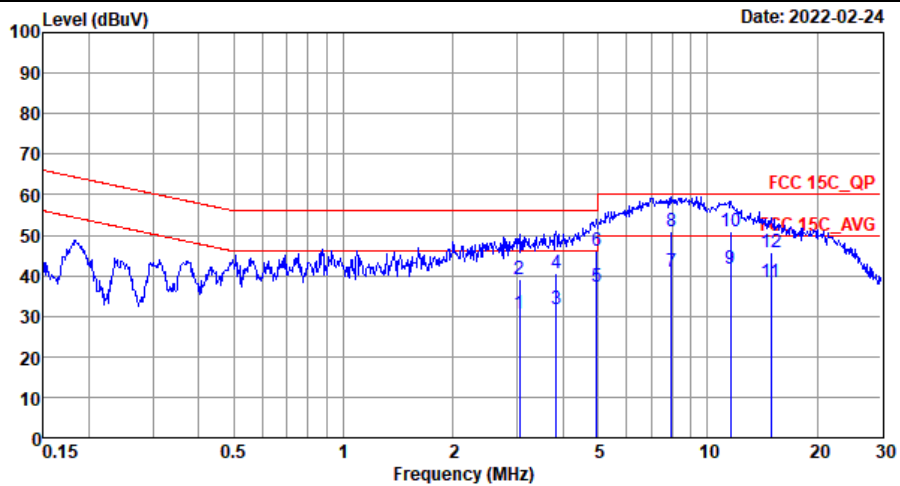


Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20210901_L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	3.04	30.53	-15.47	46.00	10.20	10.09	10.24	Average
2	3.04	39.13	-16.87	56.00	18.80	10.09	10.24	QP
3	3.84	31.75	-14.25	46.00	11.50	10.01	10.24	Average
4	3.84	40.75	-15.25	56.00	20.50	10.01	10.24	QP
5	4.95	37.13	-8.87	46.00	16.90	9.99	10.24	Average
6	4.95	46.23	-9.77	56.00	26.00	9.99	10.24	QP
7	7.98	41.08	-8.92	50.00	20.90	9.90	10.28	Average
8	7.98	50.78	-9.22	60.00	30.60	9.90	10.28	QP
9 *	11.56	41.85	-8.15	50.00	21.70	9.84	10.31	Average
10	11.56	50.85	-9.15	60.00	30.70	9.84	10.31	QP
11	14.91	38.31	-11.69	50.00	18.10	9.87	10.34	Average
12	14.91	45.81	-14.19	60.00	25.60	9.87	10.34	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

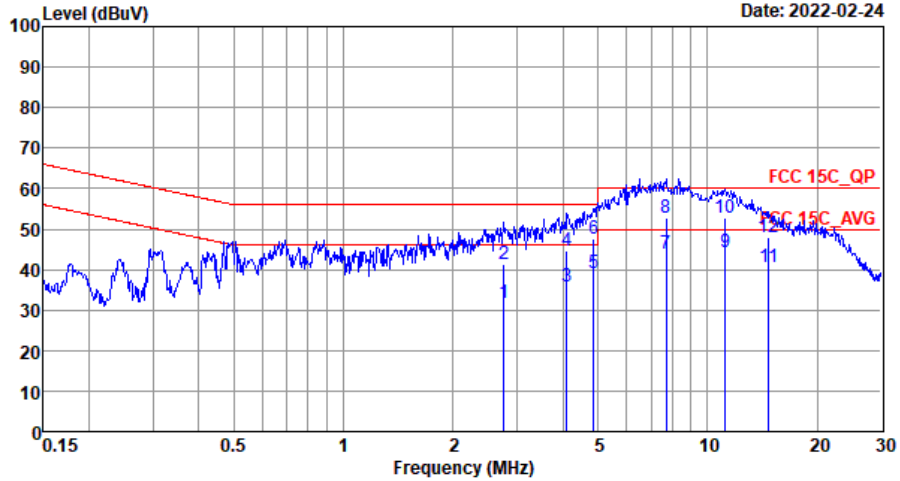

Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20210901_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	2.76	31.78	-14.22	46.00	11.40	10.14	10.24	Average
2	2.76	41.18	-14.82	56.00	20.80	10.14	10.24	QP
3	4.11	35.79	-10.21	46.00	15.40	10.15	10.24	Average
4	4.11	44.69	-11.31	56.00	24.30	10.15	10.24	QP
5	4.87	39.17	-6.83	46.00	18.80	10.13	10.24	Average
6	4.87	47.67	-8.33	56.00	27.30	10.13	10.24	QP
7	7.69	43.89	-6.11	50.00	23.60	10.01	10.28	Average
8	7.69	52.89	-7.11	60.00	32.60	10.01	10.28	QP
9 *	11.20	44.27	-5.73	50.00	24.00	9.96	10.31	Average
10	11.20	52.77	-7.23	60.00	32.50	9.96	10.31	QP
11	14.75	40.41	-9.59	50.00	20.19	9.88	10.34	Average
12	14.75	48.01	-11.99	60.00	27.79	9.88	10.34	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

For Sample 1:

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2371.005	50.55	-23.45	74	41.6	32.03	9.62	32.7	312	212	P	H
		2371.005	25.76	-28.24	54	-	-	-	-	-	-	A	H
	*	2402	106.58	-	-	97.63	32	9.65	32.7	312	212	P	H
	*	2402	81.79	-	-	-	-	-	-	-	-	A	H
		2388.54	50.89	-23.11	74	41.95	32	9.64	32.7	281	221	P	V
		2388.54	26.1	-27.9	54	-	-	-	-	-	-	A	V
	*	2402	108.24	-	-	99.29	32	9.65	32.7	281	221	P	V
	*	2402	83.45	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2382.66	49.36	-24.64	74	40.4	32.03	9.63	32.7	311	164	P	H
		2382.66	24.57	-29.43	54	-	-	-	-	-	-	A	H
	*	2441	106.59	-	-	97.29	32.3	9.7	32.7	311	164	P	H
	*	2441	81.8	-	-	-	-	-	-	-	-	A	H
		2485.65	50.71	-23.29	74	41.49	32.17	9.75	32.7	311	164	P	H
		2485.65	25.92	-28.08	54	-	-	-	-	-	-	A	H
		2351.02	50.03	-23.97	74	41.04	32.1	9.59	32.7	287	236	P	V
		2351.02	25.24	-28.76	54	-	-	-	-	-	-	A	V
	*	2441	109.62	-	-	100.32	32.3	9.7	32.7	287	236	P	V
	*	2441	84.83	-	-	-	-	-	-	-	-	A	V
		2486.42	50.73	-23.27	74	41.51	32.17	9.75	32.7	287	236	P	V
		2486.42	25.94	-28.06	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	106.15	-	-	96.93	32.17	9.75	32.7	311	164	P	H
	*	2480	81.36	-	-	-	-	-	-	-	-	A	H
		2483.52	61.94	-12.06	74	52.72	32.17	9.75	32.7	311	164	P	H
		2483.52	37.15	-16.85	54	-	-	-	-	-	-	A	H
	*	2480	108.91	-	-	99.69	32.17	9.75	32.7	287	277	P	V
	*	2480	84.12	-	-	-	-	-	-	-	-	A	V
		2483.56	63.24	-10.76	74	54.02	32.17	9.75	32.7	287	277	P	V
		2483.56	38.45	-15.55	54	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	46.24	-27.76	74	52.49	33.9	12	52.15	-	-	P	H
		4804	21.45	-32.55	54	-	-	-	-	-	-	A	H
		4804	46.36	-27.64	74	52.61	33.9	12	52.15	-	-	P	V
		4804	21.57	-32.43	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	47.05	-26.95	74	53.37	33.73	12.05	52.1	-	-	P	H
		4882	22.26	-31.74	54	-	-	-	-	-	-	A	H
		7323	49.02	-24.98	74	50.85	35.77	14.17	51.77	-	-	P	H
		7323	24.23	-29.77	54	-	-	-	-	-	-	A	H
		4882	45.77	-28.23	74	52.09	33.73	12.05	52.1	-	-	P	V
		4882	20.98	-33.02	54	-	-	-	-	-	-	A	V
		7323	48.05	-25.95	74	49.88	35.77	14.17	51.77	-	-	P	V
		7323	23.26	-30.74	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	45.76	-28.24	74	51.97	33.73	12.09	52.03	-	-	P	H
		4960	20.97	-33.03	54	-	-	-	-	-	-	A	H
		7440	47.74	-26.26	74	49.36	35.79	14.24	51.65	-	-	P	H
		7440	22.95	-31.05	54	-	-	-	-	-	-	A	H
		4960	47.94	-26.06	74	54.15	33.73	12.09	52.03	-	-	P	V
		4960	23.15	-30.85	54	-	-	-	-	-	-	A	V
		7440	48.74	-25.26	74	50.36	35.79	14.24	51.65	-	-	P	V
		7440	23.95	-30.05	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		43.58	24.12	-15.88	40	36.99	20.1	2.07	35.04	-	-	P	H
		119.24	31.93	-11.57	43.5	47.57	17.03	2.49	35.16	-	-	P	H
		216.24	25.34	-20.66	46	40.7	16.93	2.78	35.07	-	-	P	H
		316.15	34.63	-11.37	46	46.21	20.12	3.2	34.9	-	-	P	H
		387.93	30.12	-15.88	46	39.78	21.87	3.29	34.82	-	-	P	H
		636.25	25.68	-20.32	46	30.08	26.21	3.89	34.5	-	-	P	H
		43.58	35.73	-4.27	40	48.6	20.1	2.07	35.04	-	-	P	V
		122.15	28.42	-15.08	43.5	43.83	17.25	2.5	35.16	-	-	P	V
		150.28	29.72	-13.78	43.5	42.97	19.3	2.55	35.1	-	-	P	V
		217.21	27.29	-18.71	46	42.61	16.97	2.78	35.07	-	-	P	V
		312.27	33.95	-12.05	46	45.64	20.01	3.2	34.9	-	-	P	V
		393.75	28.55	-17.45	46	38.07	21.99	3.3	34.81	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Sample 2:

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH 78 2480MHz		2480	104.81	-	-	95.59	32.17	9.75	32.7	100	313	P	H	
		2480	80.02	-	-	-	-	-	-	-	-	A	H	
	*	2483.52	59.24	-14.76	74	50.02	32.17	9.75	32.7	100	313	P	H	
	*	2483.52	34.45	-19.55	54	-	-	-	-	-	-	A	H	
		2480	105.73	-	-	96.51	32.17	9.75	32.7	322	233	P	V	
		2480	80.94	-	-	-	-	-	-	-	-	-	A	V
	*	2483.52	59.87	-14.13	74	50.65	32.17	9.75	32.7	322	233	P	V	
	*	2483.52	35.08	-18.92	54	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													

2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 78 2480MHz		4960	45.35	-28.65	74	51.56	33.73	12.09	52.03	-	-	P	H
		4960	20.56	-33.44	54	-	-	-	-	-	-	A	H
		7440	47.74	-26.26	74	49.36	35.79	14.24	51.65	-	-	P	H
		7440	22.95	-31.05	54	-	-	-	-	-	-	A	H
		4960	46.49	-27.51	74	52.7	33.73	12.09	52.03	-	-	P	V
		4960	21.7	-32.3	54	-	-	-	-	-	-	A	V
		7440	48.43	-25.57	74	50.05	35.79	14.24	51.65	-	-	P	V
		7440	23.64	-30.36	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)


For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

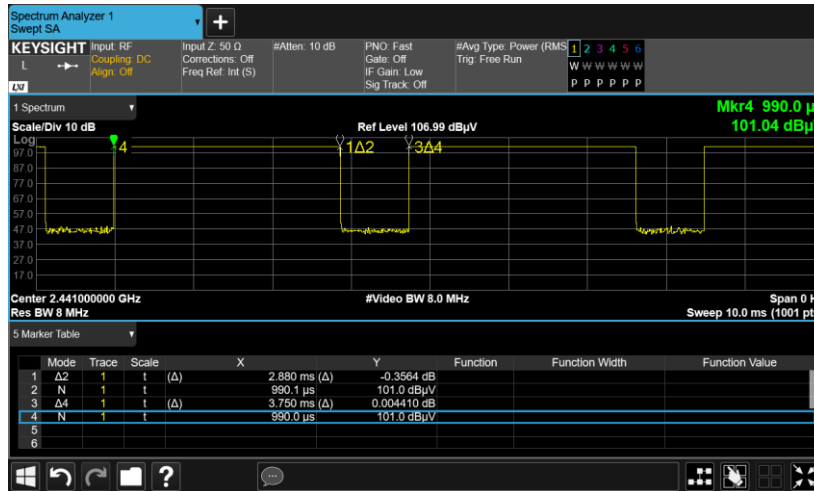

DH5 on time (Count Pulses) Plot on Channel 39

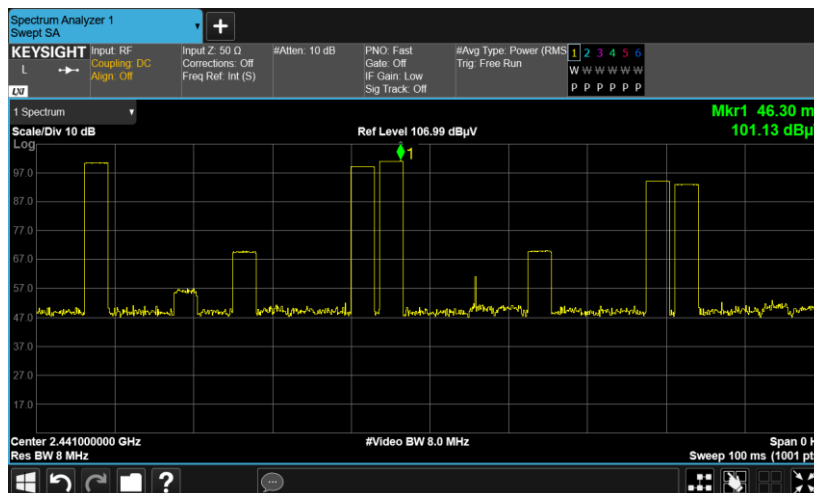

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.