






Test Graphs

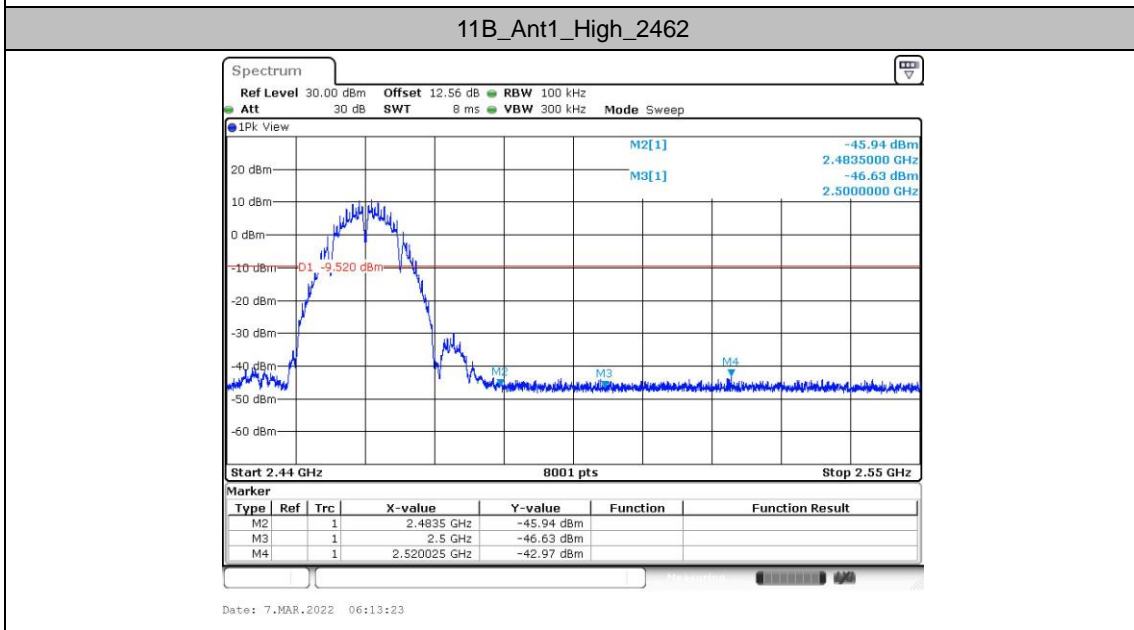

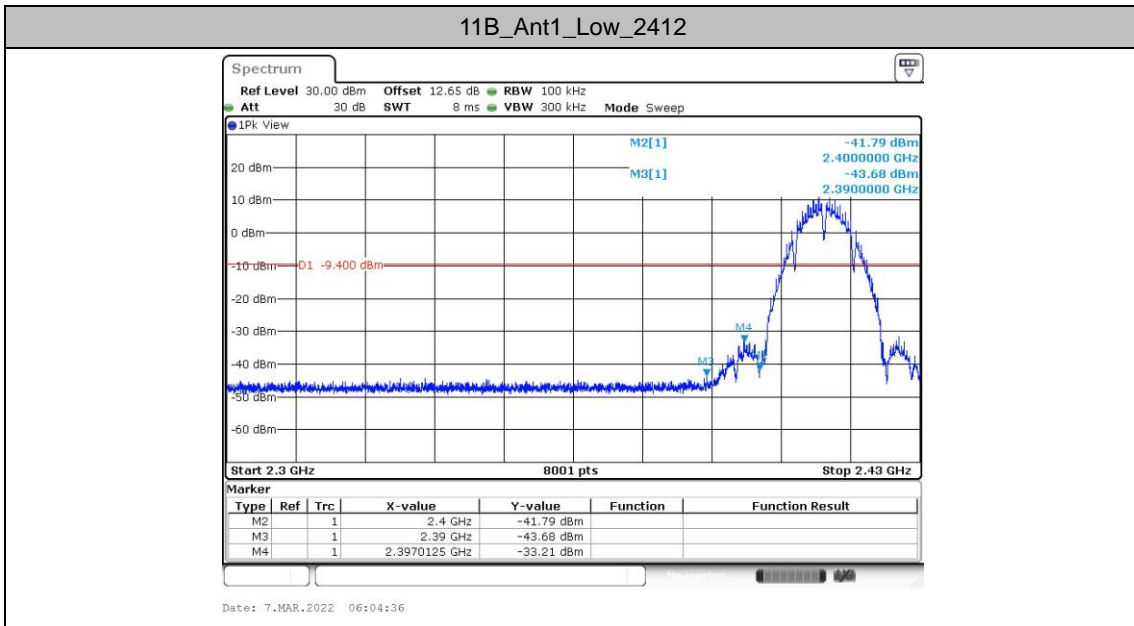


11G_Ant1_Low_2412

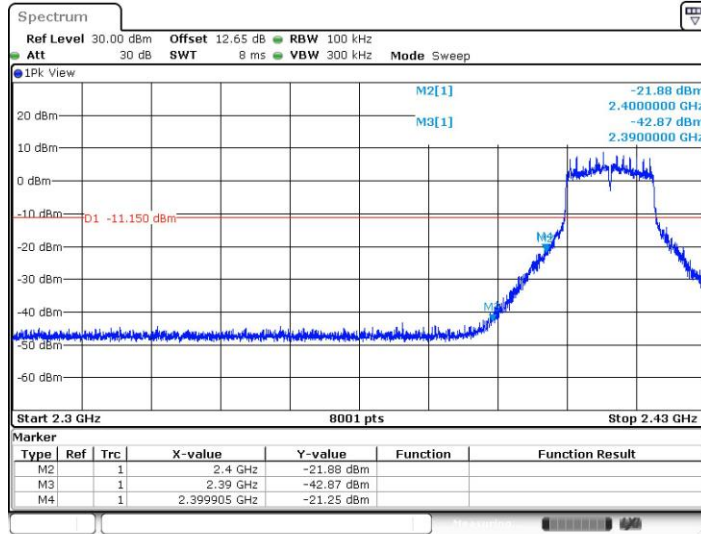

Date: 7.MAR.2022 06:15:40


11G_Ant1_Low_2417

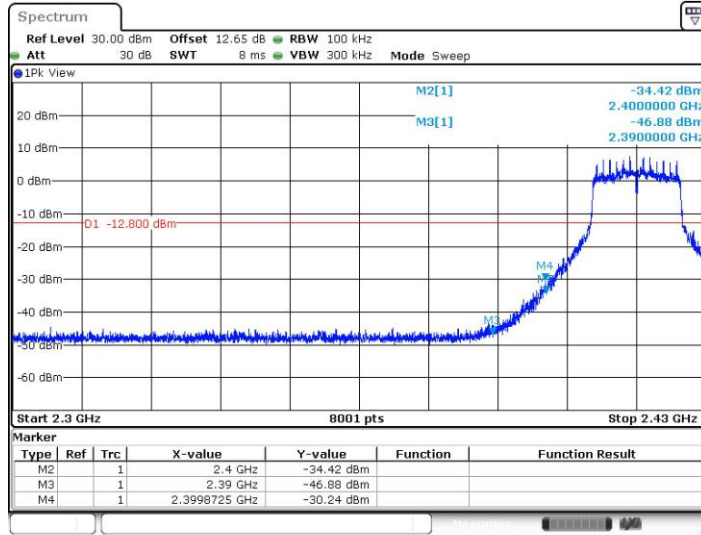

Date: 2.APR.2022 04:34:03




11G_Ant1_High_2457

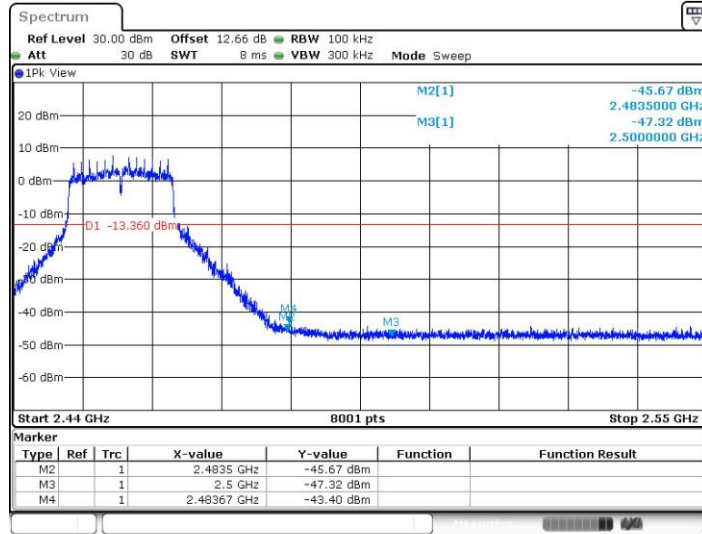

Date: 2.APR.2022 04:36:00


11G_Ant1_High_2462

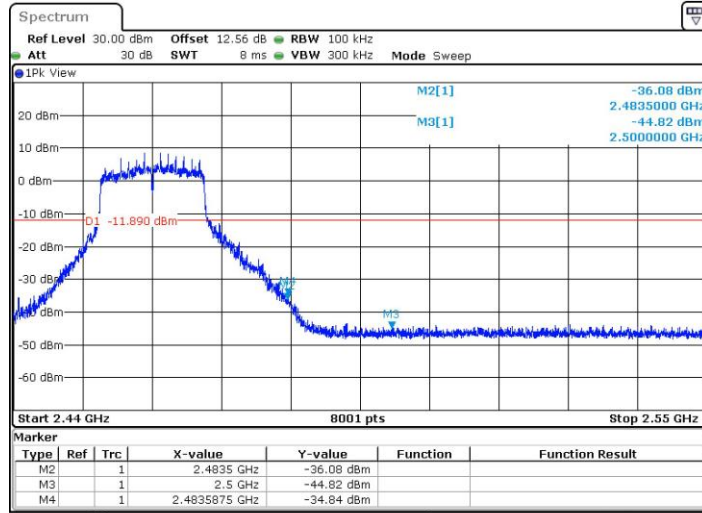

Date: 7.MAR.2022 06:19:31




11N20SISO_Ant1_Low_2412

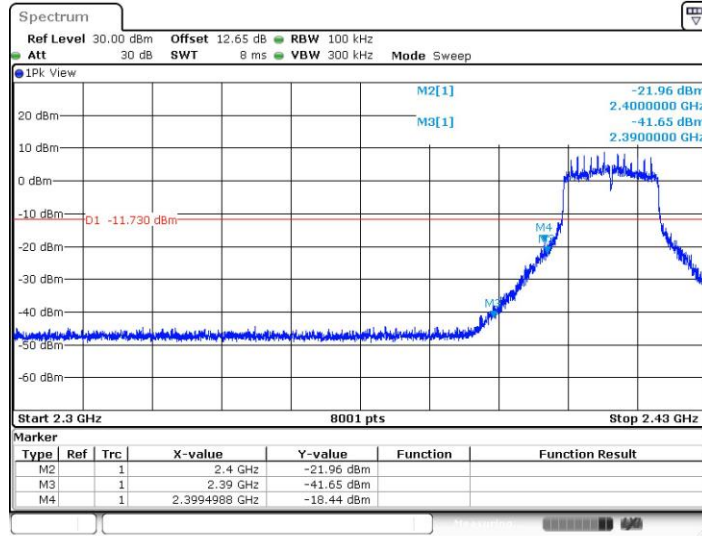

Date: 7.MAR.2022 06:21:36


11N20SISO_Ant1_Low_2417

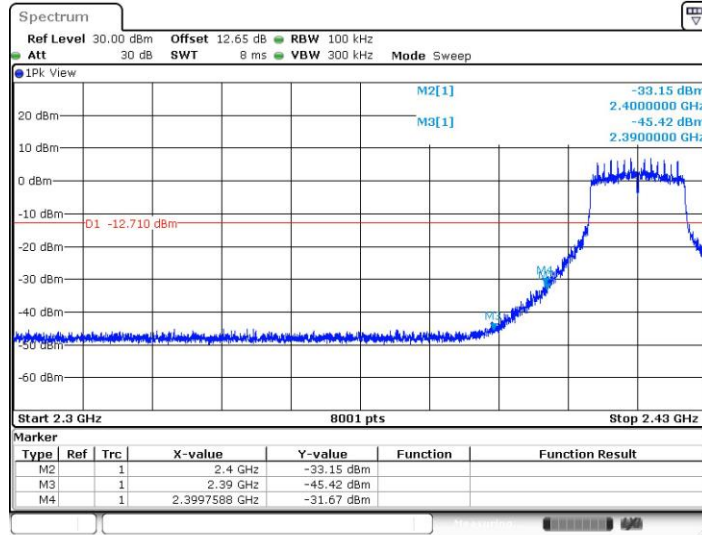

Date: 2.APR.2022 04:40:10




11N20SISO_Ant1_High_2457

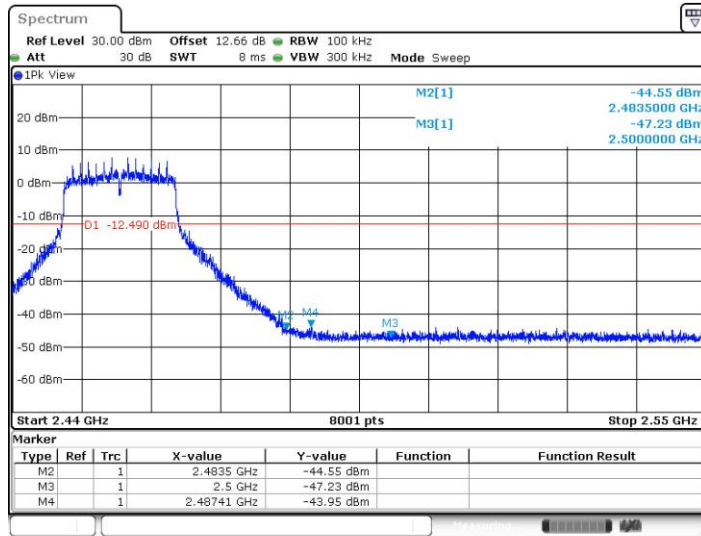

Date: 2.APR.2022 04:42:03


11N20SISO_Ant1_High_2462

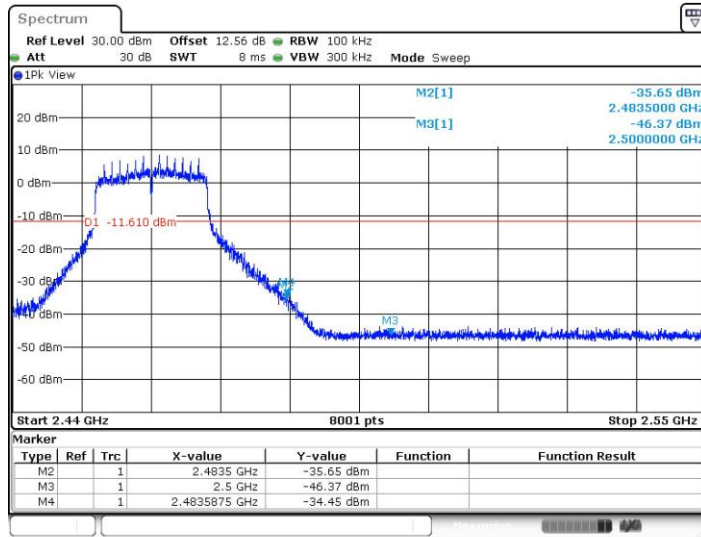

Date: 7.MAR.2022 06:25:14




11N40SISO_Ant1_Low_2422

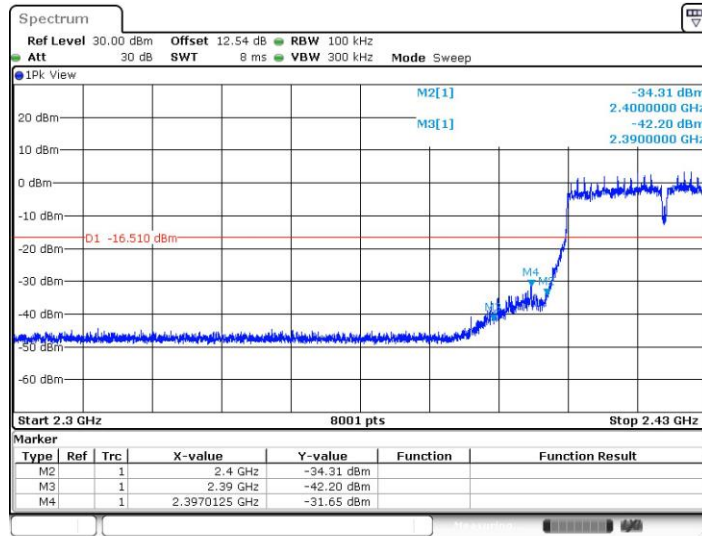

Date: 7.MAR.2022 06:27:39

11N40SISO_Ant1_High_2452

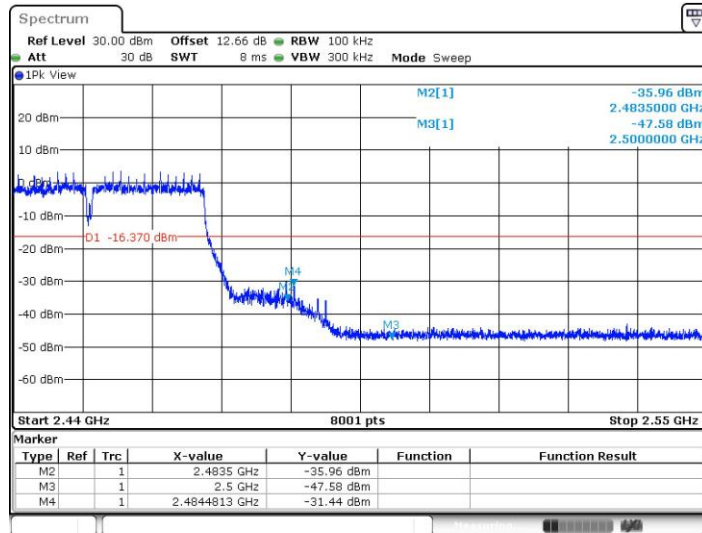

Date: 7.MAR.2022 06:31:18





Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict		
11B	Ant1	2412	30~1000	10.60	-55.33	≤-9.4	PASS		
			1000~26500	10.60	-43.39	≤-9.4	PASS		
		2437	30~1000	10.45	-54.74	≤-9.55	PASS		
			1000~26500	10.45	-45.68	≤-9.55	PASS		
		2462	30~1000	10.48	-55.34	≤-9.52	PASS		
			1000~26500	10.48	-44.46	≤-9.52	PASS		
11G	Ant1	2412	30~1000	8.85	-54.63	≤-11.15	PASS		
			1000~26500	8.85	-45.9	≤-11.15	PASS		
		2417	30~1000	7.20	-55.46	≤-12.8	PASS		
			1000~26500	7.20	-46.67	≤-12.8	PASS		
		2437	30~1000	8.42	-55.42	≤-11.58	PASS		
			1000~26500	8.42	-46.02	≤-11.58	PASS		
		2457	30~1000	6.64	-55.73	≤-13.36	PASS		
			1000~26500	6.64	-46.8	≤-13.36	PASS		
		2462	30~1000	8.11	-54.79	≤-11.89	PASS		
			1000~26500	8.11	-46.01	≤-11.89	PASS		
		11N20SISO	Ant1	2412	30~1000	8.27	-55.27	≤-11.73	PASS
					1000~26500	8.27	-46.24	≤-11.73	PASS
2417	30~1000			7.29	-55.4	≤-12.71	PASS		
	1000~26500			7.29	-46.73	≤-12.71	PASS		
2437	30~1000			8.59	-54.71	≤-11.41	PASS		
	1000~26500			8.59	-46.07	≤-11.41	PASS		
2457	30~1000			7.51	-54.64	≤-12.49	PASS		
	1000~26500			7.51	-46.53	≤-12.49	PASS		
2462	30~1000			8.39	-55.07	≤-11.61	PASS		
	1000~26500			8.39	-46.07	≤-11.61	PASS		
11N40SISO	Ant1			2422	30~1000	3.49	-54.46	≤-16.51	PASS
					1000~26500	3.49	-46.19	≤-16.51	PASS
		2437	30~1000	4.00	-55.21	≤-16	PASS		
			1000~26500	4.00	-45.27	≤-16	PASS		
		2452	30~1000	3.63	-54.48	≤-16.37	PASS		
			1000~26500	3.63	-45.82	≤-16.37	PASS		




Test Graphs

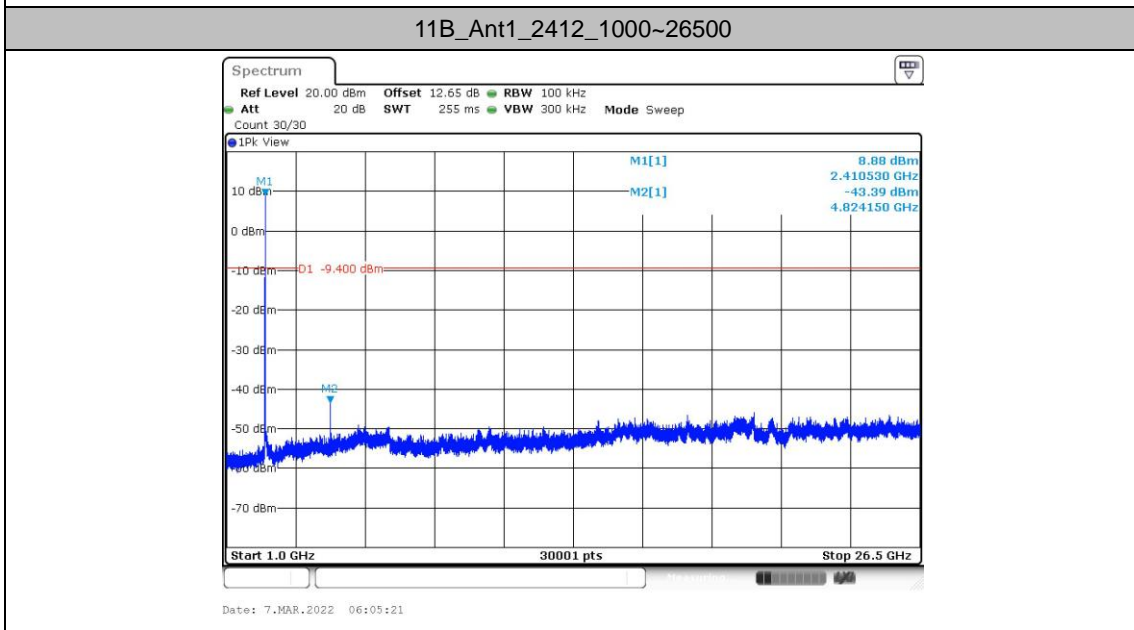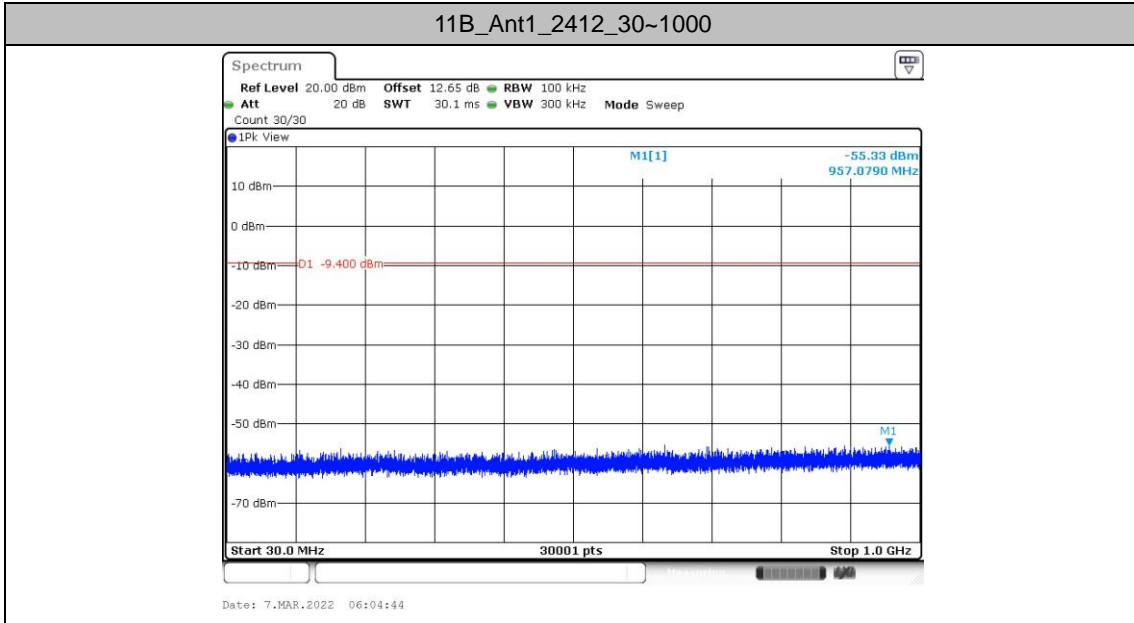




11B_Ant1_2437_30~1000

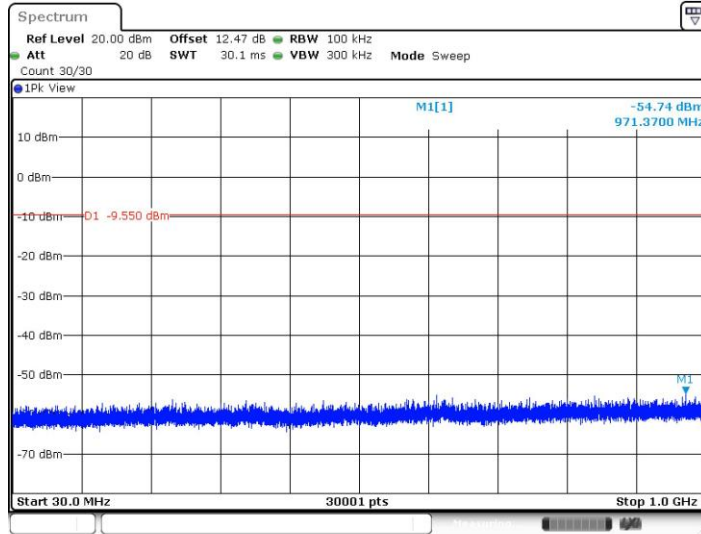

Date: 7.MAR.2022 06:07:08


11B_Ant1_2437_1000~26500

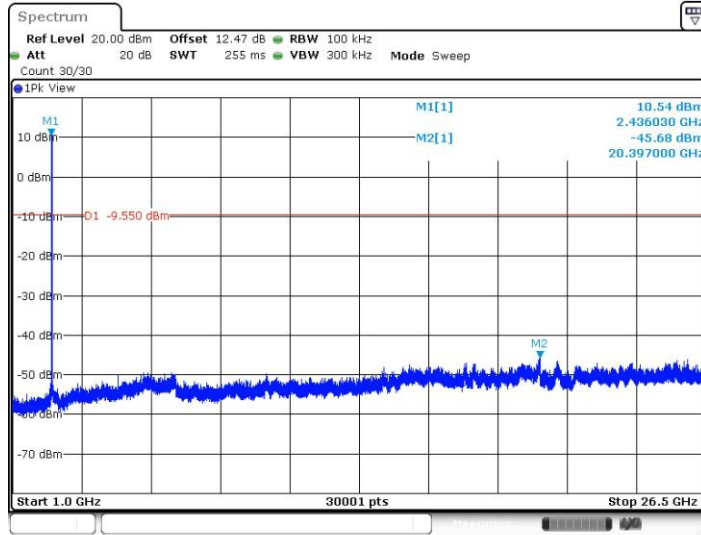

Date: 7.MAR.2022 06:08:26




11B_Ant1_2462_30~1000

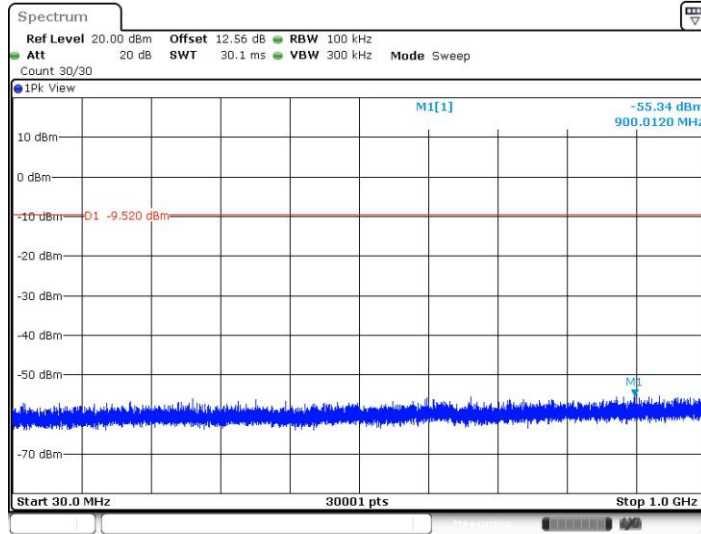

Date: 7.MAR.2022 06:13:30


11B_Ant1_2462_1000~26500

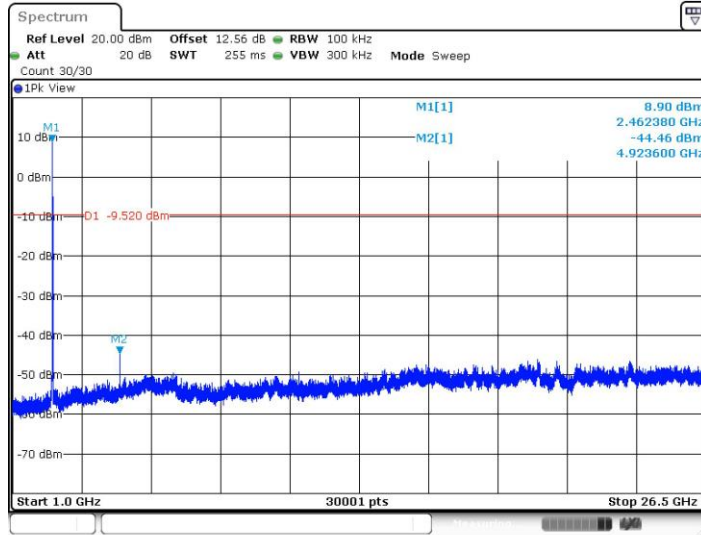

Date: 7.MAR.2022 06:14:07




11G_Ant1_2412_30~1000

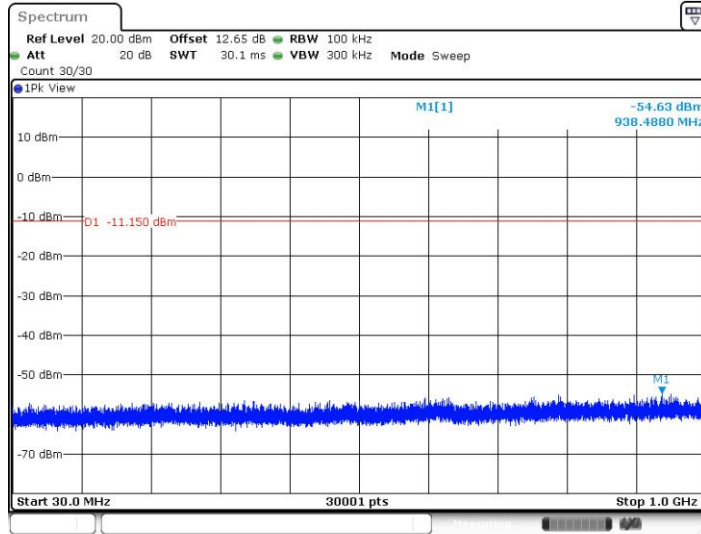

Date: 7.MAR.2022 06:15:48


11G_Ant1_2412_1000~26500

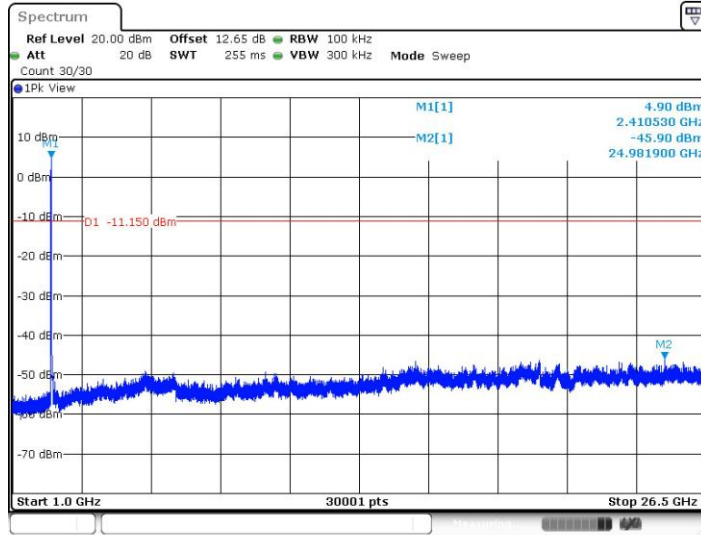

Date: 7.MAR.2022 06:16:25




11G_Ant1_2417_30~1000

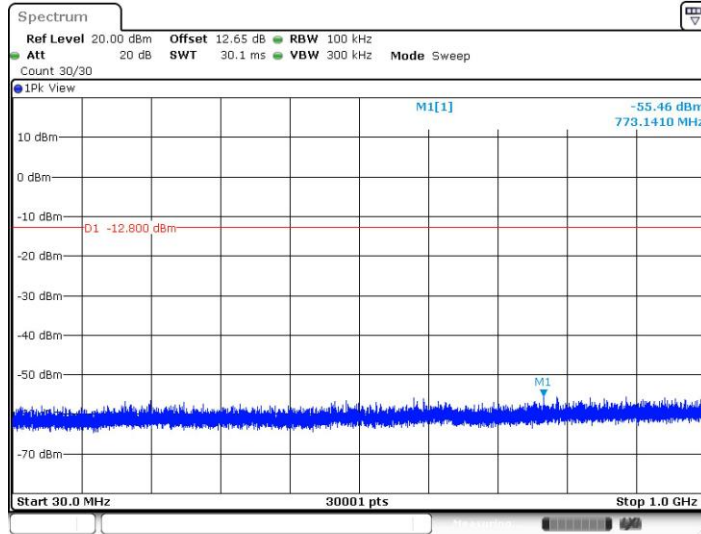

Date: 2.APR.2022 04:34:14


11G_Ant1_2417_1000~26500

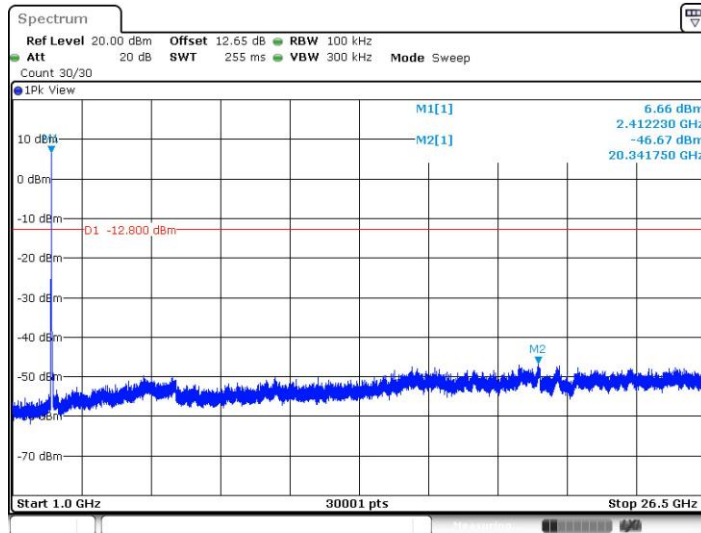

Date: 2.APR.2022 04:34:51




11G_Ant1_2437_30~1000

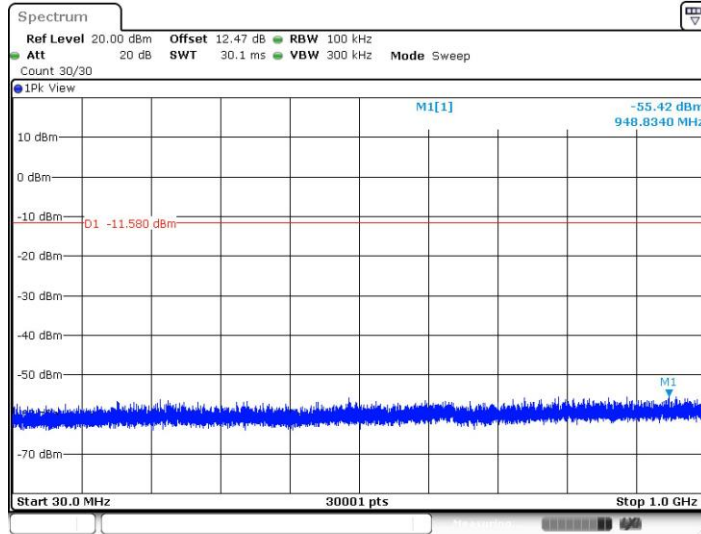

Date: 7.MAR.2022 06:17:53


11G_Ant1_2437_1000~26500

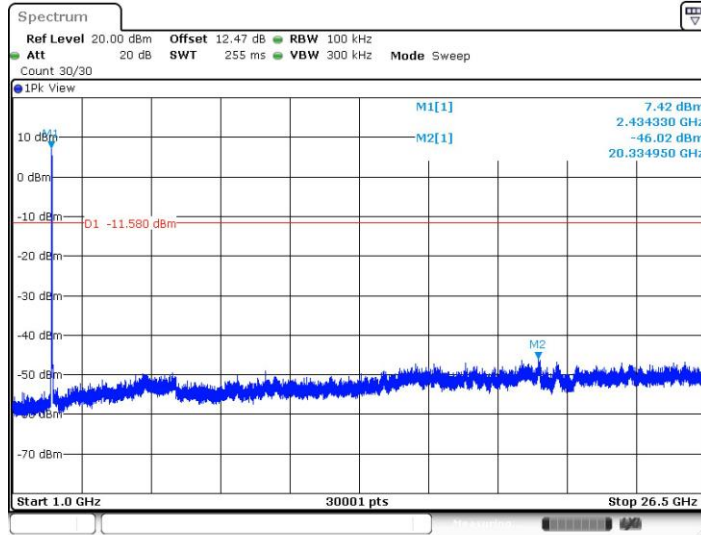

Date: 7.MAR.2022 06:18:30




11G_Ant1_2457_30~1000

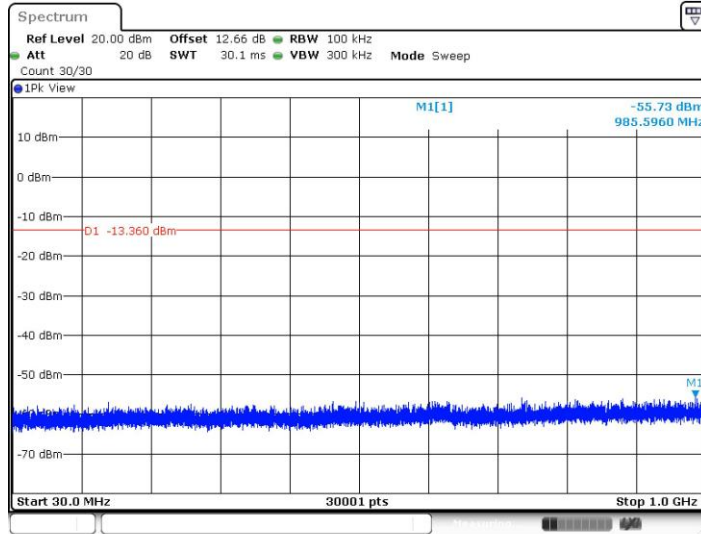

Date: 2.APR.2022 04:36:11


11G_Ant1_2457_1000~26500

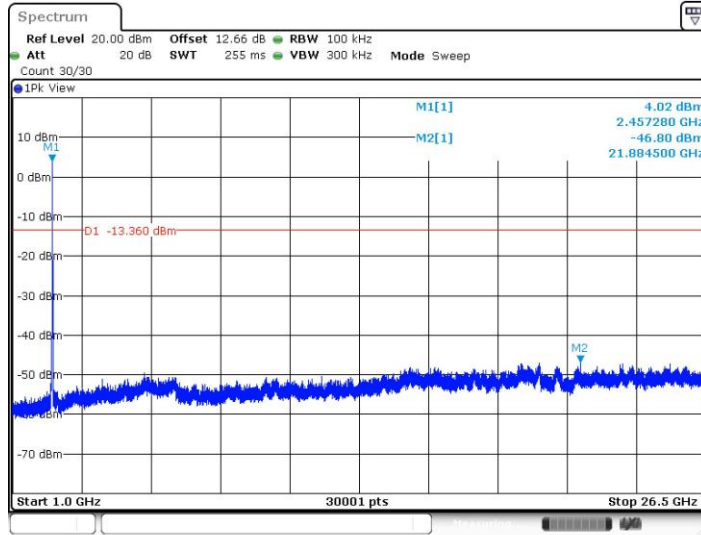

Date: 2.APR.2022 04:36:48




11G_Ant1_2462_30~1000

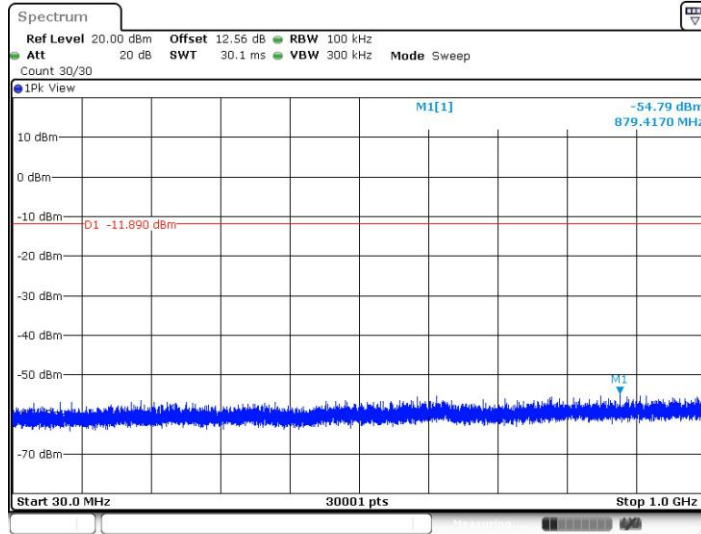

Date: 7.MAR.2022 06:19:39


11G_Ant1_2462_1000~26500

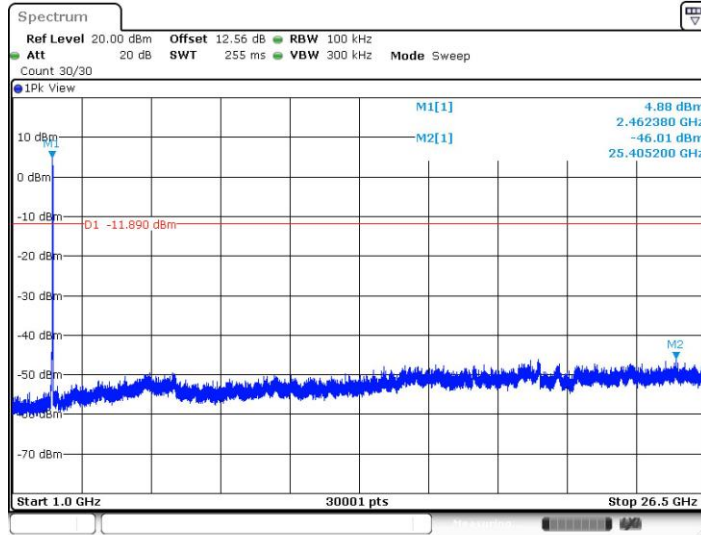

Date: 7.MAR.2022 06:20:16




11N20SISO_Ant1_2412_30~1000

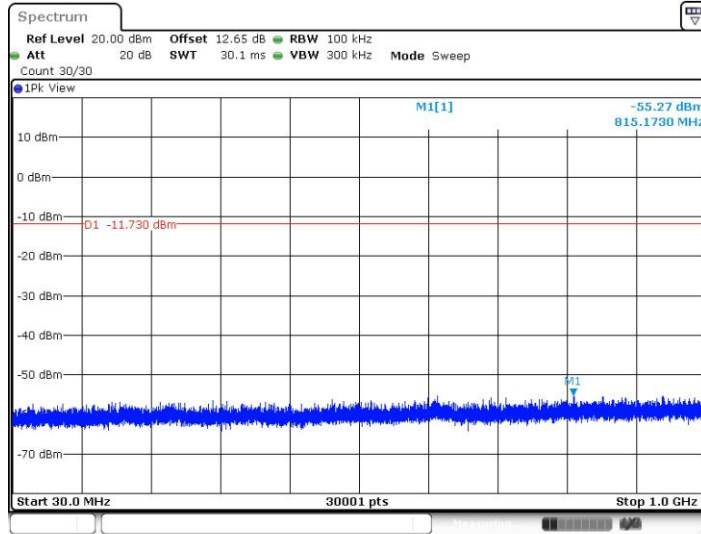

Date: 7.MAR.2022 06:21:44


11N20SISO_Ant1_2412_1000~26500

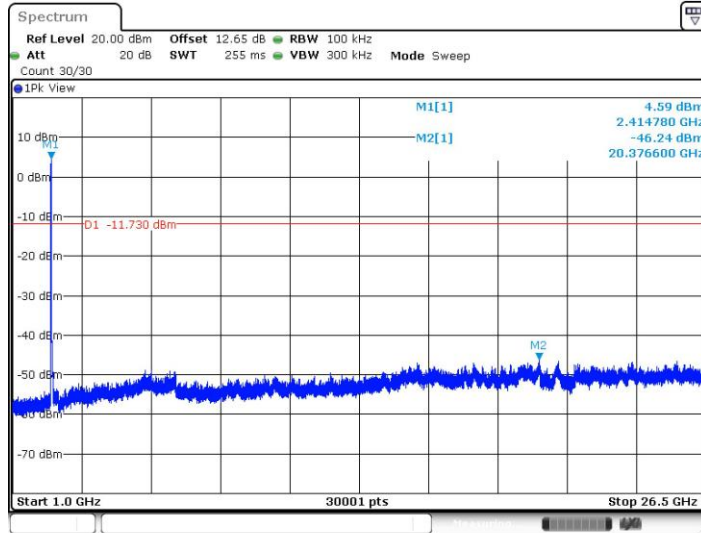

Date: 7.MAR.2022 06:22:21




11N20SISO_Ant1_2417_30~1000

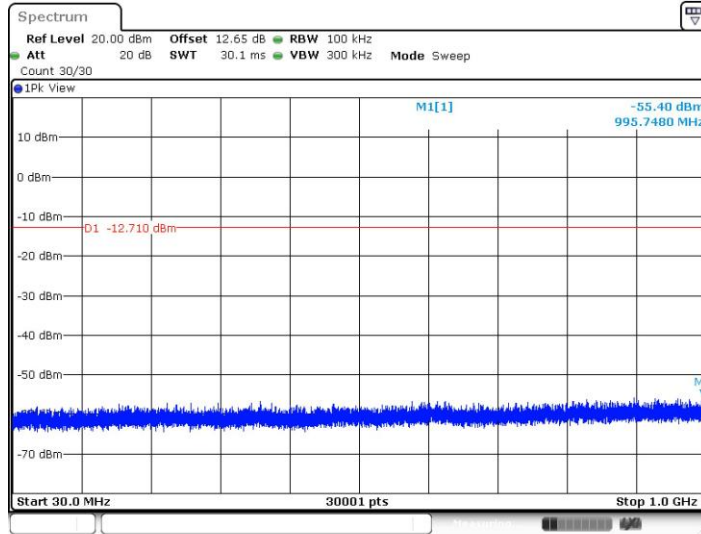

Date: 2.APR.2022 04:40:20


11N20SISO_Ant1_2417_1000~26500

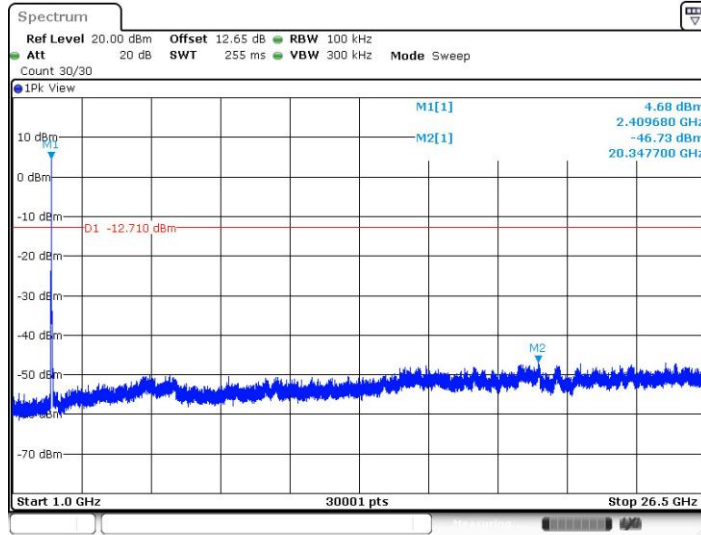

Date: 2.APR.2022 04:40:56




11N20SISO_Ant1_2437_30~1000

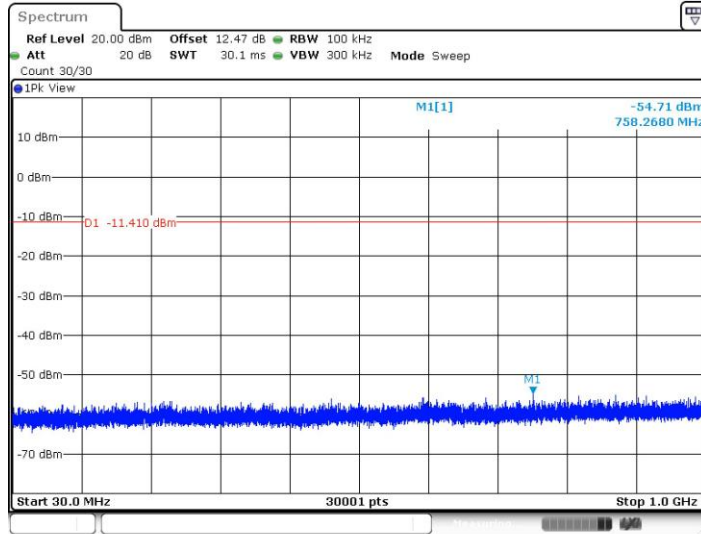

Date: 7.MAR.2022 06:23:19


11N20SISO_Ant1_2437_1000~26500

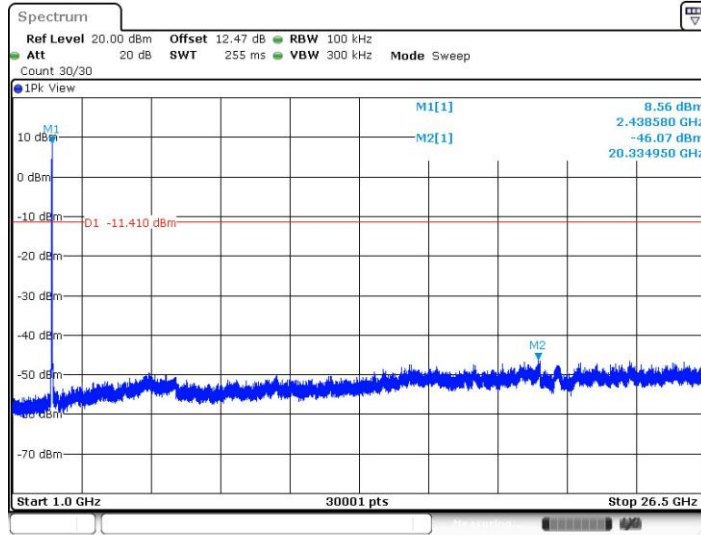

Date: 7.MAR.2022 06:23:56




11N20SISO_Ant1_2457_30~1000

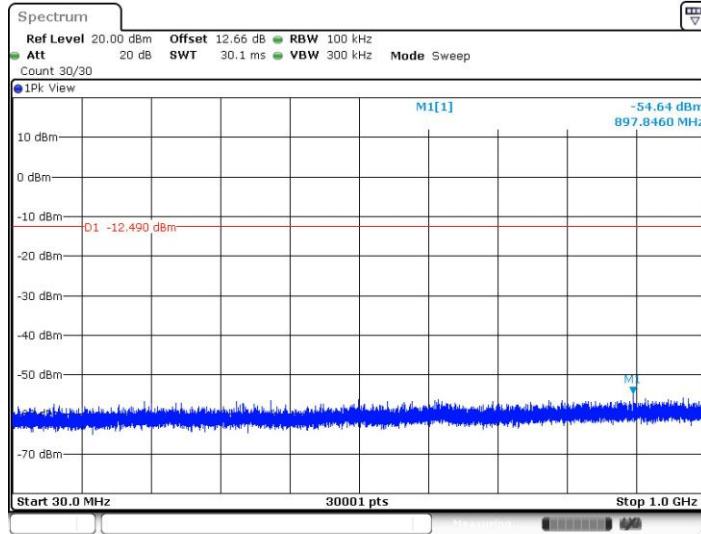

Date: 2.APR.2022 04:42:14


11N20SISO_Ant1_2457_1000~26500

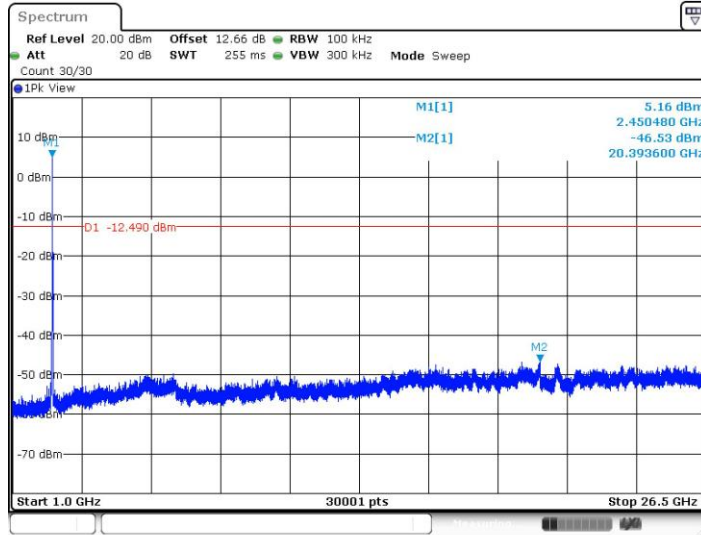

Date: 2.APR.2022 04:42:51




11N20SISO_Ant1_2462_30~1000

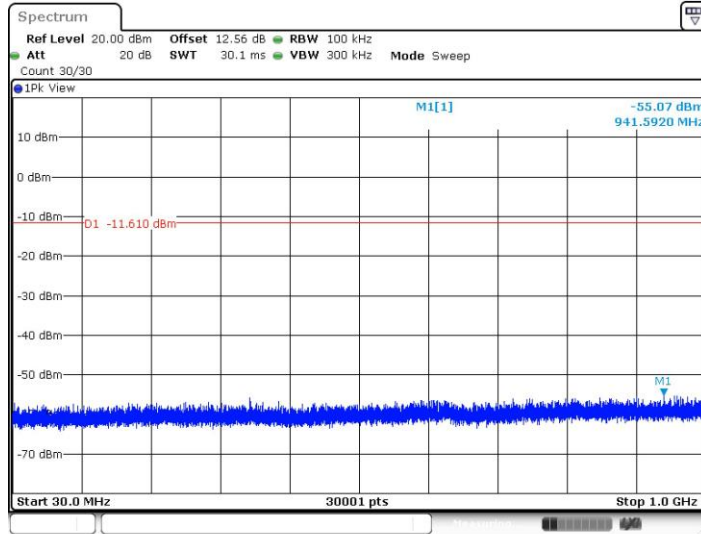

Date: 7.MAR.2022 06:25:22


11N20SISO_Ant1_2462_1000~26500

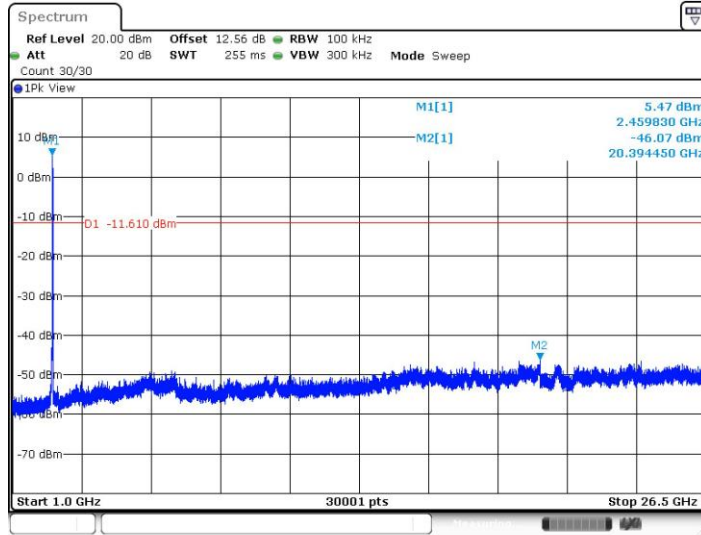

Date: 7.MAR.2022 06:25:58




11N40SISO_Ant1_2422_30~1000

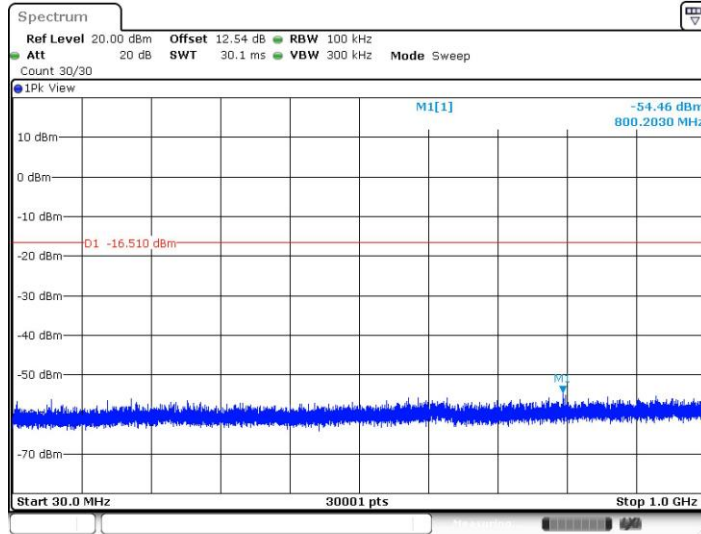

Date: 7.MAR.2022 06:27:47


11N40SISO_Ant1_2422_1000~26500

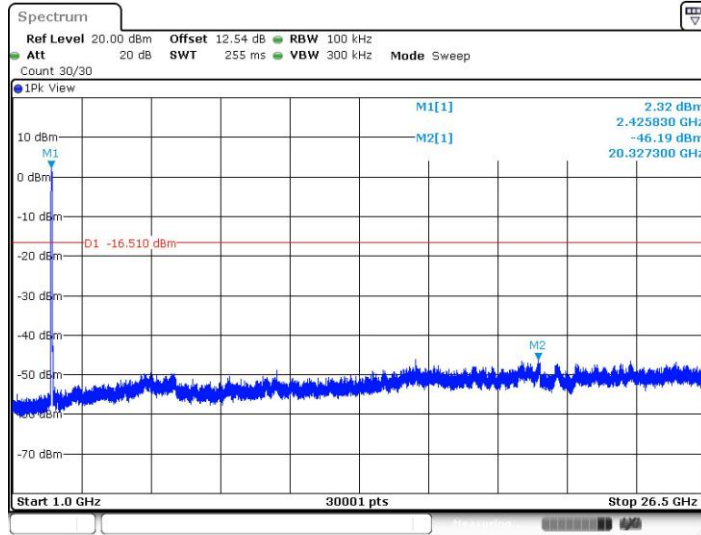

Date: 7.MAR.2022 06:28:23




11N40SISO_Ant1_2437_30~1000

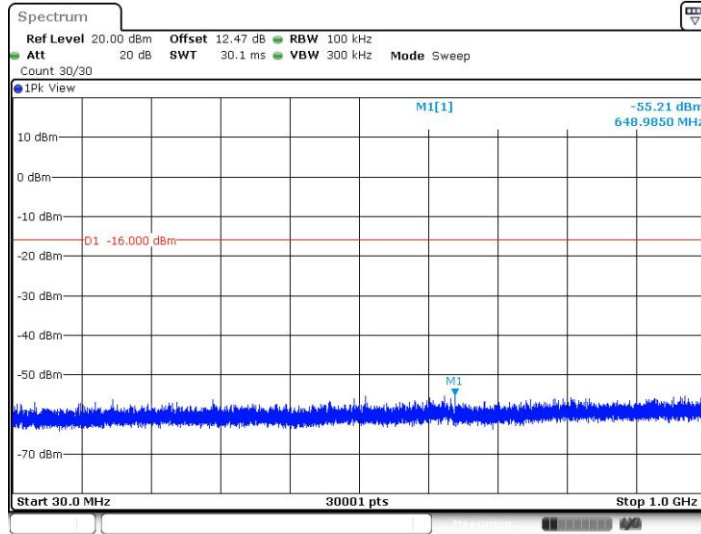

Date: 7.MAR.2022 06:29:26


11N40SISO_Ant1_2437_1000~26500

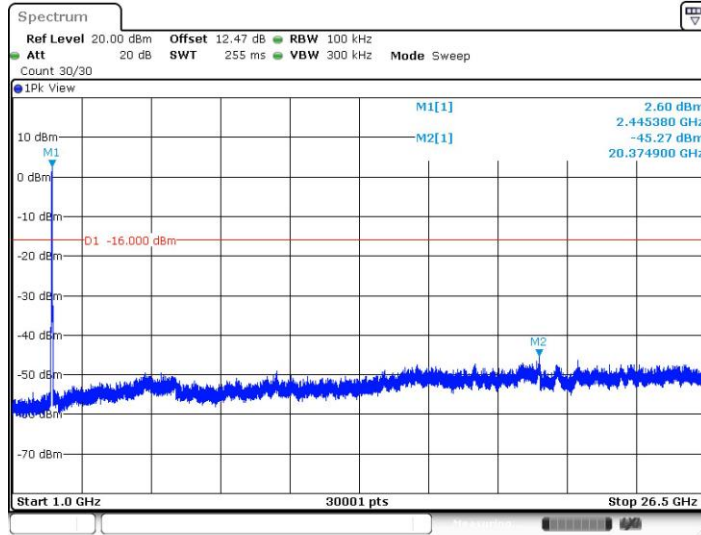

Date: 7.MAR.2022 06:30:03




11N40SISO_Ant1_2452_30~1000

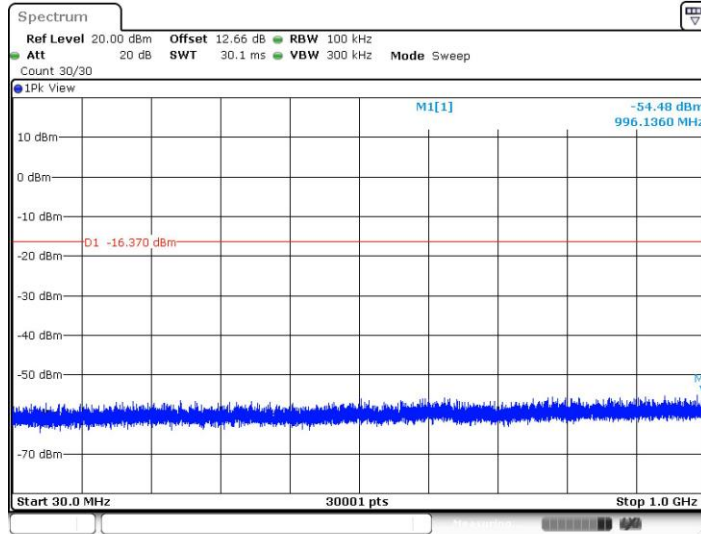

Date: 7.MAR.2022 06:31:26

11N40SISO_Ant1_2452_1000~26500

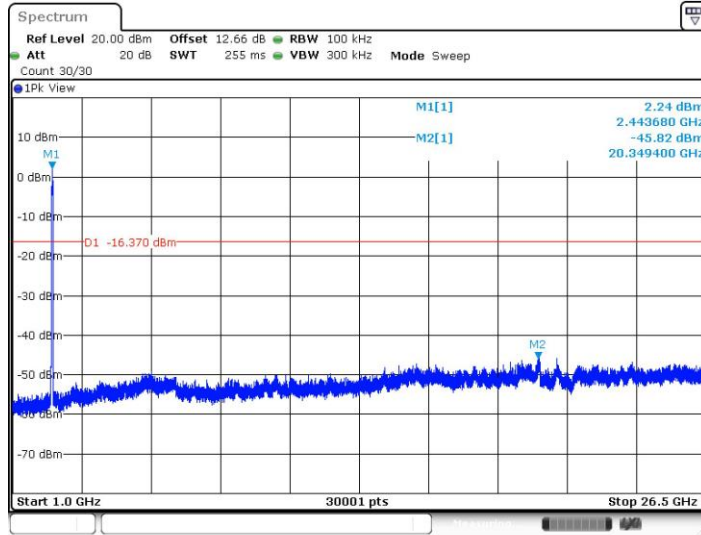


Date: 7.MAR.2022 06:32:03



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhao	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

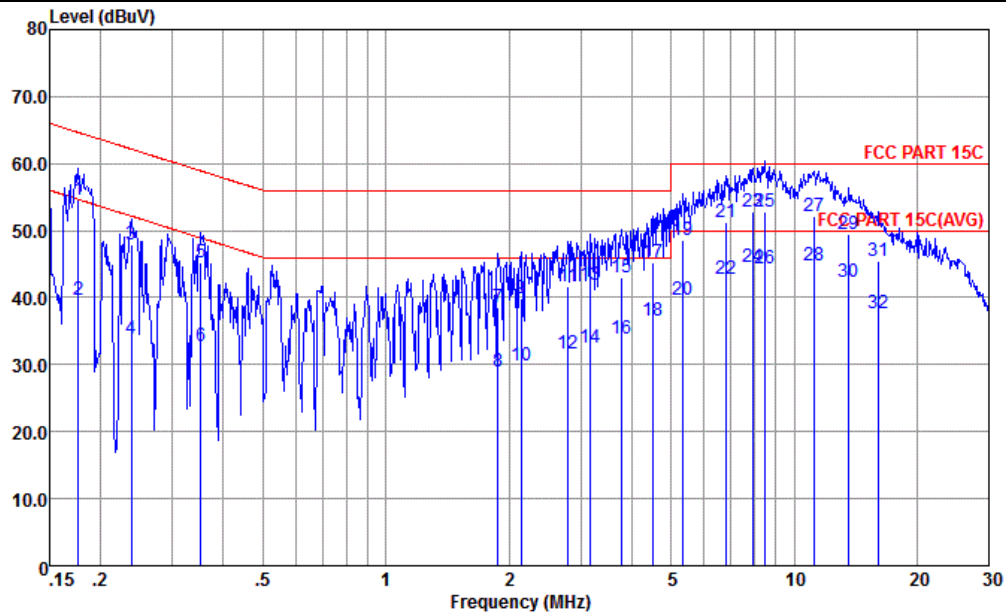


Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.177	54.65	-9.99	64.64	44.21	0.03	10.41	QP
2	0.177	39.75	-14.89	54.64	29.31	0.03	10.41	Average
3	0.238	47.89	-14.28	62.17	37.50	0.05	10.34	QP
4	0.238	33.89	-18.28	52.17	23.50	0.05	10.34	Average
5	0.352	45.16	-13.75	58.91	34.80	0.08	10.28	QP
6	0.352	32.66	-16.25	48.91	22.30	0.08	10.28	Average
7	1.878	38.57	-17.43	56.00	28.20	0.14	10.23	QP
8	1.878	28.97	-17.03	46.00	18.60	0.14	10.23	Average
9	2.144	39.97	-16.03	56.00	29.60	0.14	10.23	QP
10	2.144	29.87	-16.13	46.00	19.50	0.14	10.23	Average
11	2.794	41.59	-14.41	56.00	31.20	0.15	10.24	QP
12	2.794	31.69	-14.31	46.00	21.30	0.15	10.24	Average
13	3.173	42.00	-14.00	56.00	31.61	0.15	10.24	QP
14	3.173	32.50	-13.50	46.00	22.11	0.15	10.24	Average
15	3.779	43.01	-12.99	56.00	32.60	0.16	10.25	QP
16	3.779	33.91	-12.09	46.00	23.50	0.16	10.25	Average
17	4.501	45.34	-10.66	56.00	34.91	0.17	10.26	QP
18	4.501	36.64	-9.36	46.00	26.21	0.17	10.26	Average
19	5.333	48.56	-11.44	60.00	38.10	0.18	10.28	QP
20	5.333	39.76	-10.24	50.00	29.30	0.18	10.28	Average
21	6.805	51.29	-8.71	60.00	40.80	0.19	10.30	QP
22	6.805	42.69	-7.31	50.00	32.20	0.19	10.30	Average
23	7.935	52.72	-7.28	60.00	42.20	0.20	10.32	QP
24	7.935	44.62	-5.38	50.00	34.10	0.20	10.32	Average
25	8.456	52.73	-7.27	60.00	42.20	0.21	10.32	QP
26	8.456	44.43	-5.57	50.00	33.90	0.21	10.32	Average
27	11.198	52.20	-7.80	60.00	41.60	0.24	10.36	QP
28 *	11.198	44.70	-5.30	50.00	34.10	0.24	10.36	Average
29	13.623	49.56	-10.44	60.00	38.90	0.28	10.38	QP
30	13.623	42.26	-7.74	50.00	31.60	0.28	10.38	Average
31	16.055	45.36	-14.64	60.00	34.60	0.34	10.42	QP
32	16.055	37.66	-12.34	50.00	26.90	0.34	10.42	Average



Test Engineer :	Amos Zhao	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

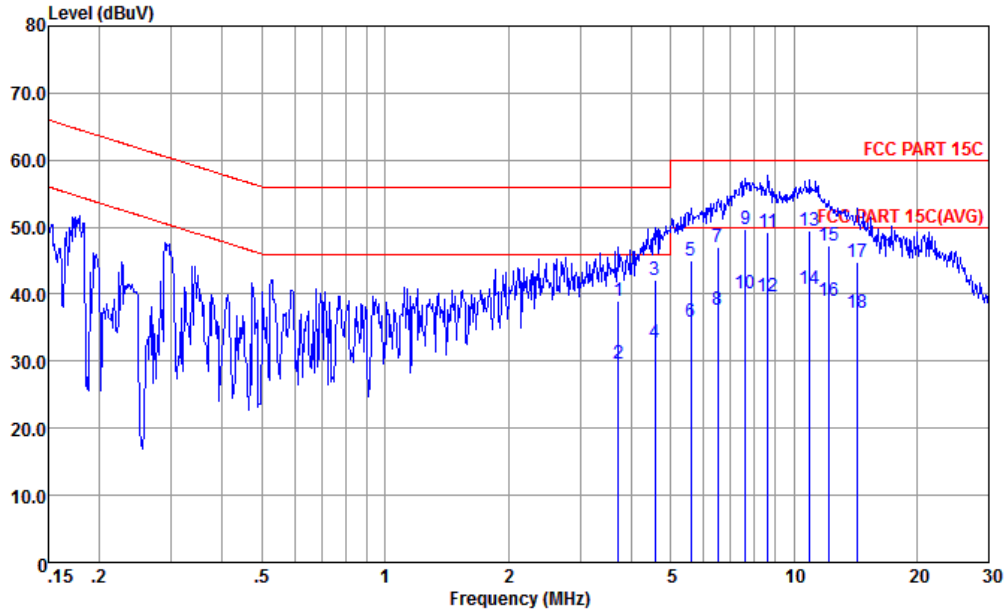

Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	3.720	38.91	-17.09	56.00	28.50	0.16	10.25	QP
2	3.720	29.71	-16.29	46.00	19.30	0.16	10.25	Average
3	4.574	42.04	-13.96	56.00	31.61	0.17	10.26	QP
4	4.574	32.74	-13.26	46.00	22.31	0.17	10.26	Average
5	5.594	45.07	-14.93	60.00	34.60	0.19	10.28	QP
6	5.594	35.97	-14.03	50.00	25.50	0.19	10.28	Average
7	6.523	47.09	-12.91	60.00	36.60	0.20	10.29	QP
8	6.523	37.59	-12.41	50.00	27.10	0.20	10.29	Average
9	7.606	49.72	-10.28	60.00	39.20	0.21	10.31	QP
10	7.606	40.12	-9.88	50.00	29.60	0.21	10.31	Average
11	8.637	49.14	-10.86	60.00	38.59	0.22	10.33	QP
12	8.637	39.74	-10.26	50.00	29.19	0.22	10.33	Average
13	10.963	49.50	-10.50	60.00	38.90	0.25	10.35	QP
14 *	10.963	40.80	-9.20	50.00	30.20	0.25	10.35	Average
15	12.188	47.24	-12.76	60.00	36.60	0.27	10.37	QP
16	12.188	38.94	-11.06	50.00	28.30	0.27	10.37	Average
17	14.288	44.89	-15.11	60.00	34.20	0.30	10.39	QP
18	14.288	37.19	-12.81	50.00	26.50	0.30	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	22~23°C
		Relative Humidity :	41~42%



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz		2485.12	56.57	-17.43	74	53.16	32.98	7.25	36.82	299	66	P	H
		2483.5	46.01	-7.99	54	42.6	32.98	7.25	36.82	299	66	A	H
		2464	108.18	-	-	104.83	32.96	7.22	36.83	299	66	P	H
		2464	105.42	-	-	102.07	32.96	7.22	36.83	299	66	A	H
		2485.3	59.52	-14.48	74	56.11	32.98	7.25	36.82	100	113	P	V
		2483.5	48.81	-5.19	54	45.4	32.98	7.25	36.82	100	113	A	V
		2464	112.05	-	-	108.7	32.96	7.22	36.83	100	113	P	V
		2464	108.32	-	-	104.97	32.96	7.22	36.83	100	113	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11b CH 11 at 2462MHz and a Remark section.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 11 2462MHz and a Remark section.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n HT20 CH 11 2462MHz and a Remark section.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 06 2437MHz and a Remark section.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n, HT40, CH 06, 2437MHz and a Remark section.



Co-location

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40& LTE_B13_BW_5M (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 06 2437MHz		2389.04	54.05	-19.95	74	50.93	32.88	7.1	36.86	267	61	P	H
		2389.95	44.11	-9.89	54	40.99	32.88	7.1	36.86	267	61	A	H
		2483.86	57.69	-16.31	74	54.28	32.98	7.25	36.82	267	61	P	H
		2483.5	47.09	-6.91	54	43.68	32.98	7.25	36.82	267	61	A	H
	*	2440	106.91	-	-	103.62	32.94	7.19	36.84	267	61	P	H
	*	2440	98.3	-	-	95.01	32.94	7.19	36.84	267	61	A	H
		2388.78	58.35	-15.65	74	55.23	32.88	7.1	36.86	111	106	P	V
		2389.82	46.69	-7.31	54	43.57	32.88	7.1	36.86	111	106	A	V
		2483.74	60.21	-13.79	74	56.8	32.98	7.25	36.82	111	106	P	V
		2483.56	49.93	-4.07	54	46.52	32.98	7.25	36.82	111	106	A	V
	*	2440	108.46	-	-	105.17	32.94	7.19	36.84	111	106	P	V
	*	2440	99.87	-	-	96.58	32.94	7.19	36.84	111	106	A	V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40& LTE_B13_BW_5M (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4875	40.31	-33.69	74	61.21	34.23	10.29	65.42	300	0	P	H
HT40		7311	42.87	-31.13	74	60.2	35.86	12.72	65.91	300	0	P	H
CH 06		4875	41.48	-32.52	74	62.38	34.23	10.29	65.42	100	0	P	V
2437MHz		7311	43.26	-30.74	74	60.59	35.86	12.72	65.91	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		100.81	20.26	-23.24	43.5	34.53	16.19	1.74	32.2	-	-	P	H
		124.09	27.21	-16.29	43.5	39.82	17.6	1.94	32.15	-	-	P	H
		159.98	25.11	-18.39	43.5	38.51	16.5	2.2	32.1	-	-	P	H
		213.33	29.67	-13.83	43.5	44.02	15.23	2.55	32.13	-	-	P	H
		239.52	27.38	-18.62	46	39.36	17.5	2.7	32.18	-	-	P	H
		828.31	30.29	-15.71	46	28.82	28.83	5	32.36	-	-	P	H
		35.82	33.85	-6.15	40	43.33	21.92	0.78	32.18	-	-	P	V
		127	27.47	-16.03	43.5	40.35	17.6	1.67	32.15	-	-	P	V
		213.33	25.29	-18.21	43.5	40.1	15.23	2.09	32.13	-	-	P	V
		363.68	22.71	-23.29	46	31.24	20.88	2.82	32.23	-	-	P	V
		440.31	23.7	-22.3	46	29.94	22.87	3.11	32.22	-	-	P	V
	832.19	29.8	-16.2	46	29	28.91	4.25	32.36	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.31	-	-	10Hz
802.11g	98.28	-	-	10Hz
802.11n HT20	97.42	1.919	0.521	0.56KHz
802.11n HT40	94.92	0.948	1.055	1.1KHz



802.11b

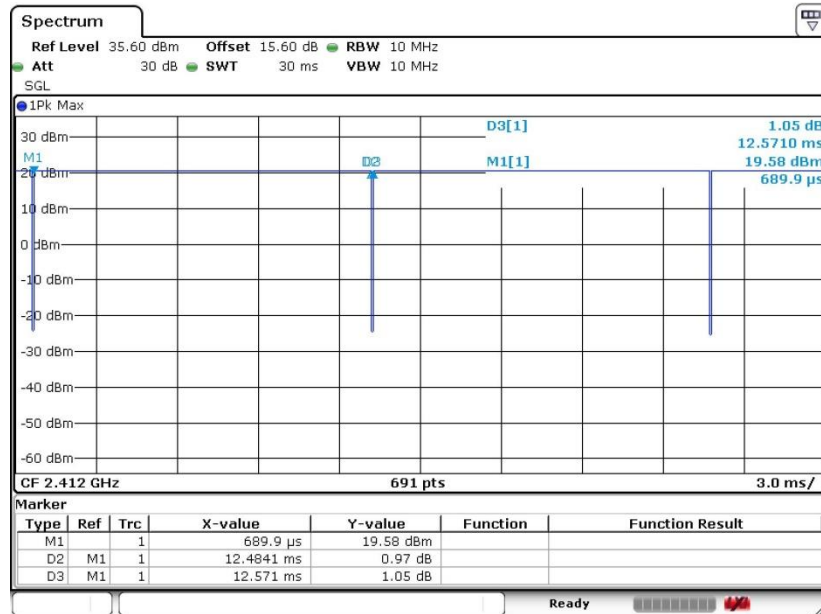


802.11g

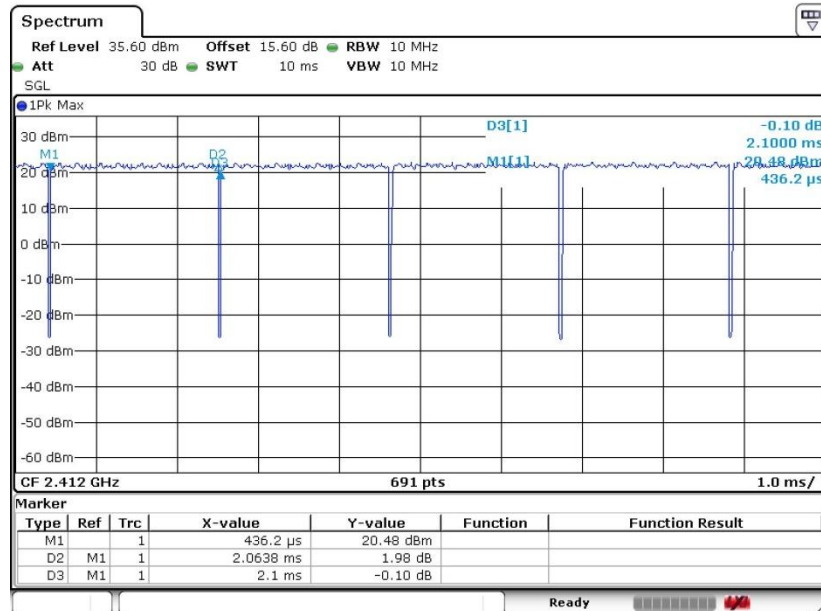



802.11n HT20

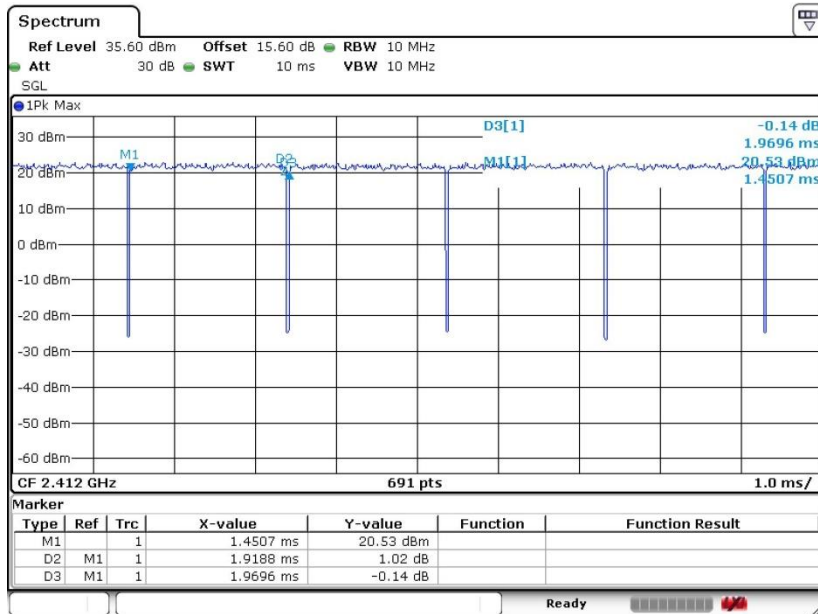

802.11n HT40

