



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2223-1
FCC ID : IHDT56AE3
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Mar. 11, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Specification of Accessory 8

 1.7. Test Location 9

 1.8. Test Software 9

 1.9. Applicable Standards 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 19

4. LIST OF MEASURING EQUIPMENT 24

5. UNCERTAINTY OF EVALUATION 25

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 5.50 dB at 11.317 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 7.42 dB at 34.850 MHz for Quasi-Peak

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2223-1
FCC ID	IHDT56AE3
EUT supports Radios application	GSM/WCDMA/LTE/NFC/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE, GNSS, FM
IMEI Code	Conduction: 359131420066110/359131420066128 Radiation: 359131420066110/359131420066128 359131420065617/359131420065625
HW Version	DVT2
SW Version	S1SS32.38
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



	5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : FPC Antenna Bluetooth : FPC Antenna GNSS: FPC Antenna NFC: Loop Antenna FM : External Earphone Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 1(AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-106
AC Adapter 1(CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-109
AC Adapter 2(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 2(AR)	Brand Name	Motorola (Aohai)	Model Name	MC-106
AC Adapter 3(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 3(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-106
AC Adapter 4(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 4(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 5(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 6(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 7(BR Local build)	Brand Name	Motorola (Salcomp)	Model Name	MC-207
AC Adapter 8(BR Local build)	Brand Name	Motorola (Flex)	Model Name	MC-207
Earphone 1	Brand Name	Motorola (NLD)	Model Name	MH202
Earphone 2	Brand Name	Motorola (NLD)	Model Name	MH191
Earphone 3	Brand Name	Motorola (Lyand)	Model Name	MH191
Earphone 4	Brand Name	Motorola (LCHSE)	Model Name	MH191
USB Cable 1	Brand Name	Motorola(HX)	Model Name	S928D43190
USB Cable 2	Brand Name	Motorola(NAEE)	Model Name	S928D43191
Battery	Brand Name	Motorola(ATL)	Model Name	ND50



1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS	CN1257	314309

1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle)+ Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery + USB Cable1 (Charging from Adapter1) + SIM 1
	Mode 2: WCDMA 1900 Rx+ Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery + USB Cable2 (Charging from Adapter2) + SIM 2
	Mode 3: LTE Band 12 Rx(Middle)+ Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable2(Charging from Adapter 3) + SIM 1
	Mode 4: LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 4 + Battery + USB Cable2(Charging from Adapter 4) + SIM 2
	Mode 5: LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98) + Earphone 3 + Battery + USB Cable2(Charging from Adapter 5) + SIM 1
	Mode 6: LTE Band 26 Rx(Low)+ Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 3 + Battery + USB Cable2(Charging from Adapter 6) + SIM 2
	Mode 7: LTE Band 41 Rx +Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable2(Charging from Adapter 7) + SIM 1
	Mode 8: EN-DC_7A_n5A(High)+ Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable2(Charging from Adapter 8) + SIM 2
	Mode 9: n78 Rx +Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM 1
	Mode 10 : LTE Band 41 Rx+ Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2
	Mode 11 : LTE Band 41 Rx +Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable 1(EUT (SD) USB Data Link to NB) + SIM 1
	Mode 12 : LTE Band 41 Rx+ Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable 1(NB USB Data Link to EUT (SD)) + SIM 2
	Mode 13 : LTE Band 41 Rx+ Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable 2(EUT (eMMC) USB Data Link to NB) + SIM 1




Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle) +Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery + USB Cable1 (Charging from Adapter1) + SIM 1</p> <p>Mode 2: WCDMA 1900 Rx +Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery + USB Cable2 (Charging from Adapter2) + SIM 2</p> <p>Mode 3: LTE Band 12 Rx(Middle)+ Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 3 + Battery + USB Cable1(Charging from Adapter 3) + SIM 1</p> <p>Mode 4: LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 4 + Battery + USB Cable1(Charging from Adapter 4) + SIM 2</p> <p>Mode 5: LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable1(Charging from Adapter 5) + SIM 1</p> <p>Mode 6: LTE Band 26 Rx(Low)+ Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone1 + Battery + USB Cable1(Charging from Adapter 6) + SIM 2</p> <p>Mode 7: LTE Band 41 Rx+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable1(Charging from Adapter 7) + SIM 1</p> <p>Mode 8: EN-DC_7A_n5A(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable1(Charging from Adapter 8) + SIM 2</p> <p>Mode 9: n78 Rx+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM 1</p> <p>Mode 10 : LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2</p> <p>Mode 11 : LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable 1(EUT (SD) USB Data Link to NB) + SIM 1</p> <p>Mode 12 : LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable 1(NB USB Data Link to EUT (SD)) + SIM 2</p> <p>Mode 13 : LTE Band 17 Rx(Low)+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88) + Earphone1 + Battery + USB Cable 2(NB USB Data Link to EUT (eMMC)) + SIM 1</p>
--------------------	--

Remark:

1. The worst case of AC is mode 7; only the test data of this mode is reported.
2. The worst case of RE is mode 5; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel for GSM 850/LTE Band 12/13/17/26/n5 and FM Rx, the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

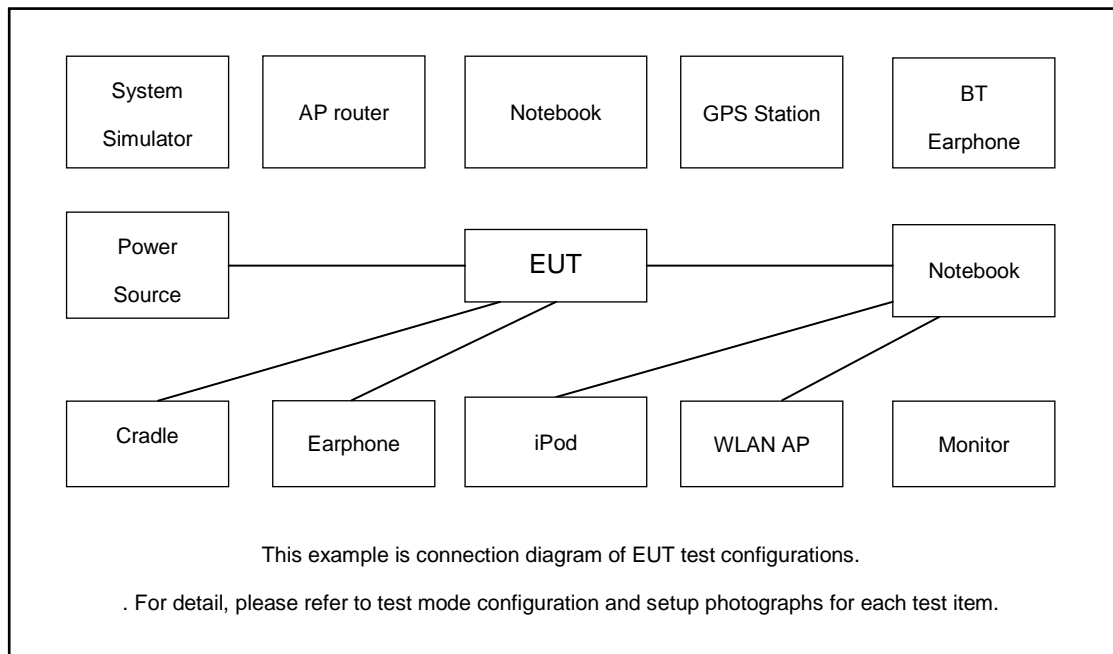

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8m
3.	Base Station	Anritus	MT8000A	N/A	N/A	Unshielded, 1.8m
4.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
5.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded, 1.8m
7.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
8.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
9.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	Notebook	Lenovo	S730-13IWL	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
11.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
12.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	Shielded, 1.2m	N/A



13.	SD Card	Kingston	8GB	N/A	N/A	N/A
14.	SD Card	SanDisk	Uitra	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

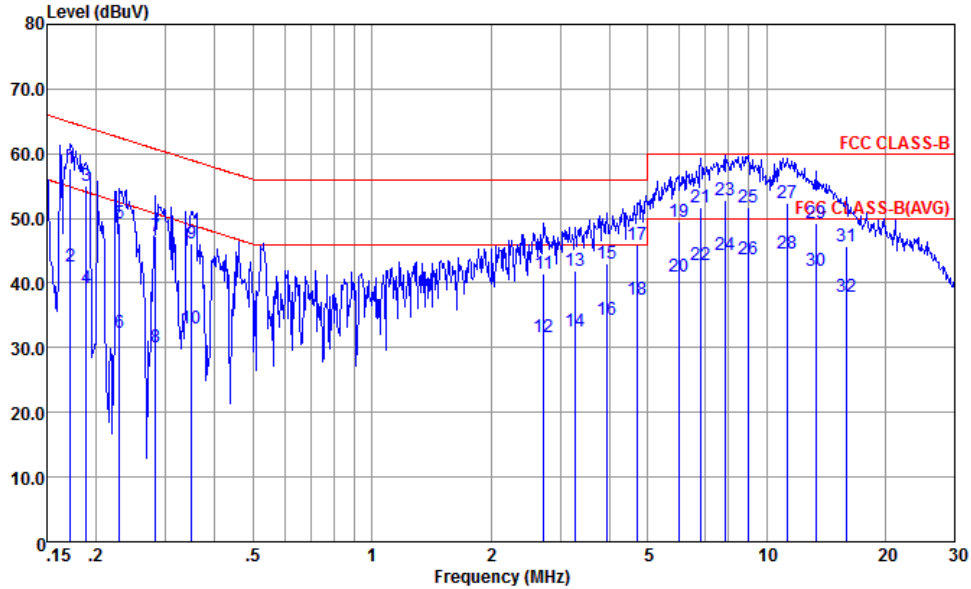


Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.172	57.65	-7.21	64.86	47.20	0.03	10.42	QP
2	0.172	42.65	-12.21	54.86	32.20	0.03	10.42	Average
3	0.188	55.02	-9.09	64.11	44.59	0.04	10.39	QP
4	0.188	39.22	-14.89	54.11	28.79	0.04	10.39	Average
5	0.229	49.30	-13.18	62.48	38.90	0.05	10.35	QP
6	0.229	32.30	-20.18	52.48	21.90	0.05	10.35	Average
7	0.283	47.28	-13.44	60.72	36.89	0.07	10.32	QP
8	0.283	29.98	-20.74	50.72	19.59	0.07	10.32	Average
9	0.348	46.16	-12.84	59.00	35.79	0.08	10.29	QP
10	0.348	32.96	-16.04	49.00	22.59	0.08	10.29	Average
11	2.721	41.49	-14.51	56.00	31.10	0.15	10.24	QP
12	2.721	31.59	-14.41	46.00	21.20	0.15	10.24	Average
13	3.276	41.90	-14.10	56.00	31.50	0.16	10.24	QP
14	3.276	32.50	-13.50	46.00	22.10	0.16	10.24	Average
15	3.943	43.02	-12.98	56.00	32.60	0.17	10.25	QP
16	3.943	34.22	-11.78	46.00	23.80	0.17	10.25	Average
17	4.721	45.94	-10.06	56.00	35.49	0.18	10.27	QP
18	4.721	37.34	-8.66	46.00	26.89	0.18	10.27	Average
19	5.993	49.37	-10.63	60.00	38.89	0.19	10.29	QP
20	5.993	41.07	-8.93	50.00	30.59	0.19	10.29	Average
21	6.805	51.59	-8.41	60.00	41.10	0.19	10.30	QP
22	6.805	42.69	-7.31	50.00	32.20	0.19	10.30	Average
23	7.893	52.71	-7.29	60.00	42.19	0.20	10.32	QP



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

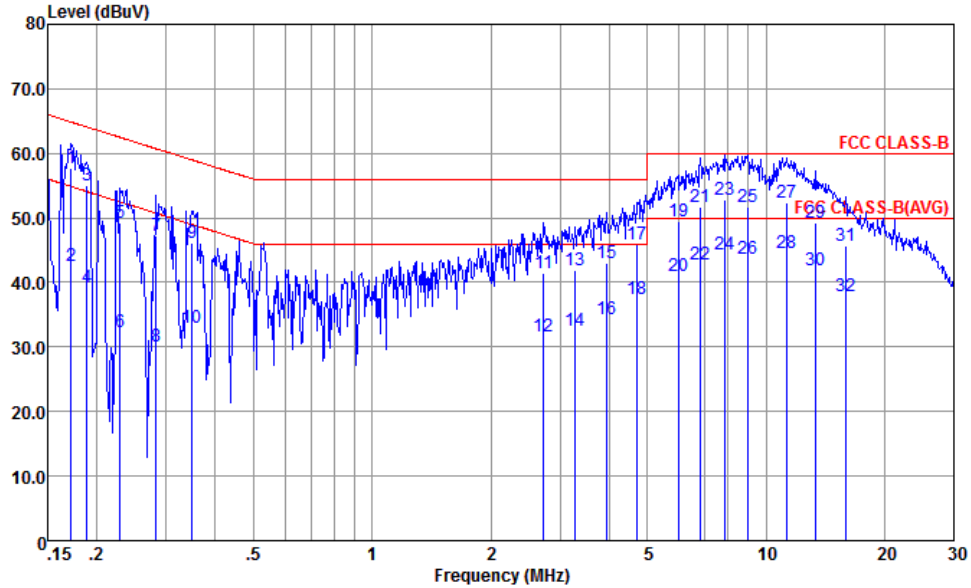


Site : CO01-KS
Condition : FCC CLASS-B LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
24	7.893	44.41	-5.59	50.00	33.89	0.20	10.32	Average
25	8.964	51.74	-8.26	60.00	41.20	0.21	10.33	QP
26	8.964	43.74	-6.26	50.00	33.20	0.21	10.33	Average
27	11.317	52.40	-7.60	60.00	41.80	0.24	10.36	QP
28 *	11.317	44.50	-5.50	50.00	33.90	0.24	10.36	Average
29	13.408	49.26	-10.74	60.00	38.60	0.28	10.38	QP
30	13.408	41.86	-8.14	50.00	31.20	0.28	10.38	Average
31	15.970	45.65	-14.35	60.00	34.89	0.34	10.42	QP
32	15.970	37.85	-12.15	50.00	27.09	0.34	10.42	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

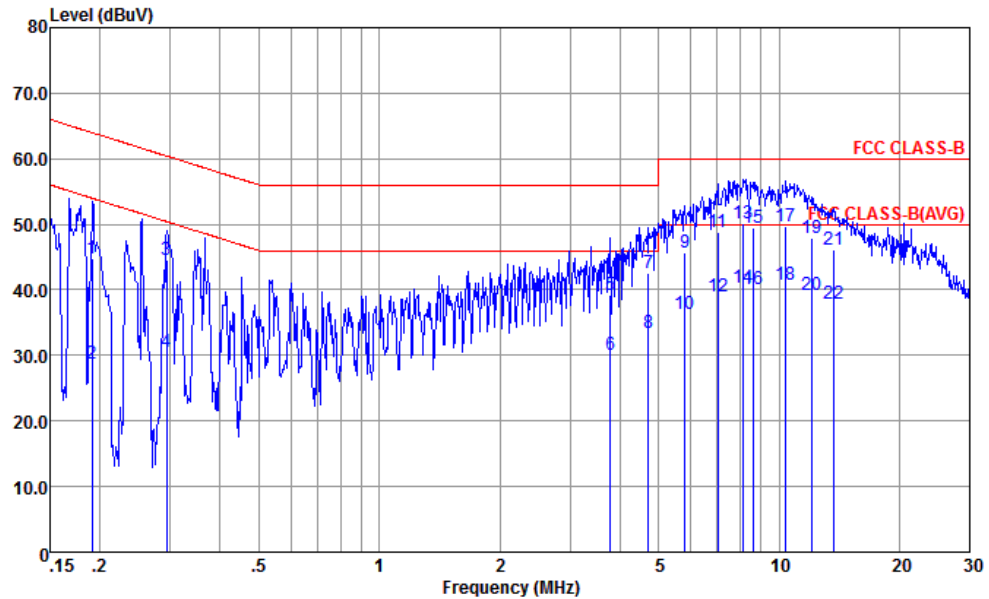

Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.191	44.68	-19.30	63.98	34.20	0.10	10.38	QP
2	0.191	28.68	-25.30	53.98	18.20	0.10	10.38	Average
3	0.294	44.61	-15.80	60.41	34.20	0.10	10.31	QP
4	0.294	30.61	-19.80	50.41	20.20	0.10	10.31	Average
5	3.779	39.31	-16.69	56.00	28.90	0.16	10.25	QP
6	3.779	30.01	-15.99	46.00	19.60	0.16	10.25	Average
7	4.721	42.64	-13.36	56.00	32.19	0.18	10.27	QP
8	4.721	33.34	-12.66	46.00	22.89	0.18	10.27	Average
9	5.805	45.67	-14.33	60.00	35.20	0.19	10.28	QP
10	5.805	36.37	-13.63	50.00	25.90	0.19	10.28	Average
11	7.025	48.70	-11.30	60.00	38.20	0.20	10.30	QP
12	7.025	39.00	-11.00	50.00	28.50	0.20	10.30	Average
13	8.148	50.13	-9.87	60.00	39.60	0.21	10.32	QP
14	8.148	40.43	-9.57	50.00	29.90	0.21	10.32	Average
15	8.592	49.44	-10.56	60.00	38.89	0.22	10.33	QP
16	8.592	40.14	-9.86	50.00	29.59	0.22	10.33	Average
17	10.397	49.78	-10.22	60.00	39.19	0.24	10.35	QP
18 *	10.397	40.78	-9.22	50.00	30.19	0.24	10.35	Average
19	12.060	47.83	-12.17	60.00	37.19	0.27	10.37	QP
20	12.060	39.13	-10.87	50.00	28.49	0.27	10.37	Average
21	13.695	46.17	-13.83	60.00	35.50	0.29	10.38	QP
22	13.695	37.97	-12.03	50.00	27.30	0.29	10.38	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

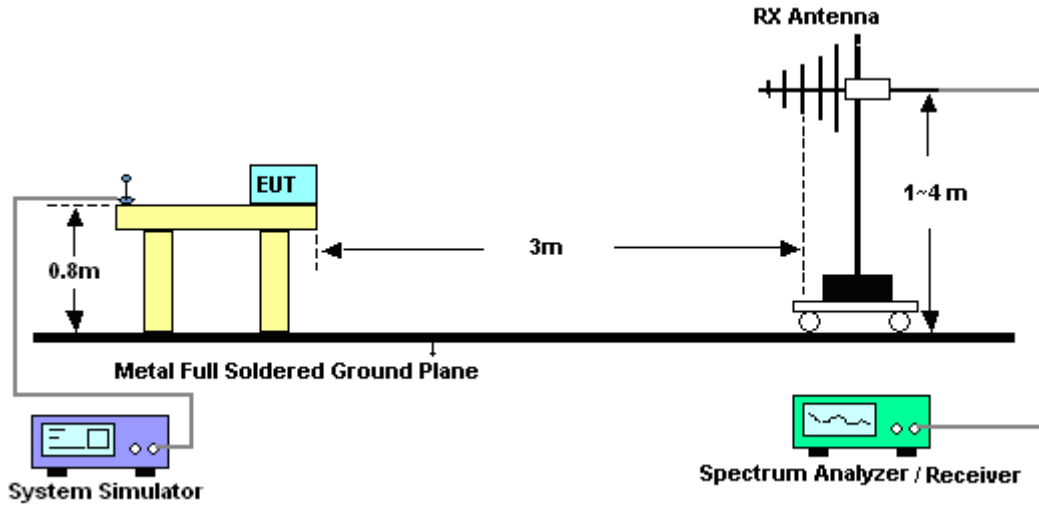


For radiated emissions above 1GHz

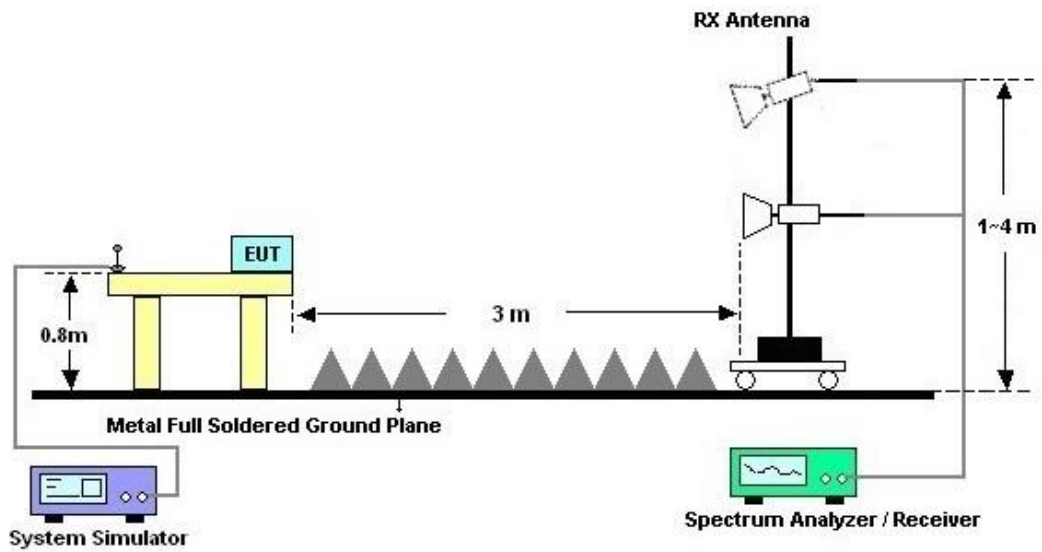



3.2.5. Test Result of Radiated Emission

Test Engineer :	Feng Zhang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#2, #8 is system simulator signal which can be ignored.		

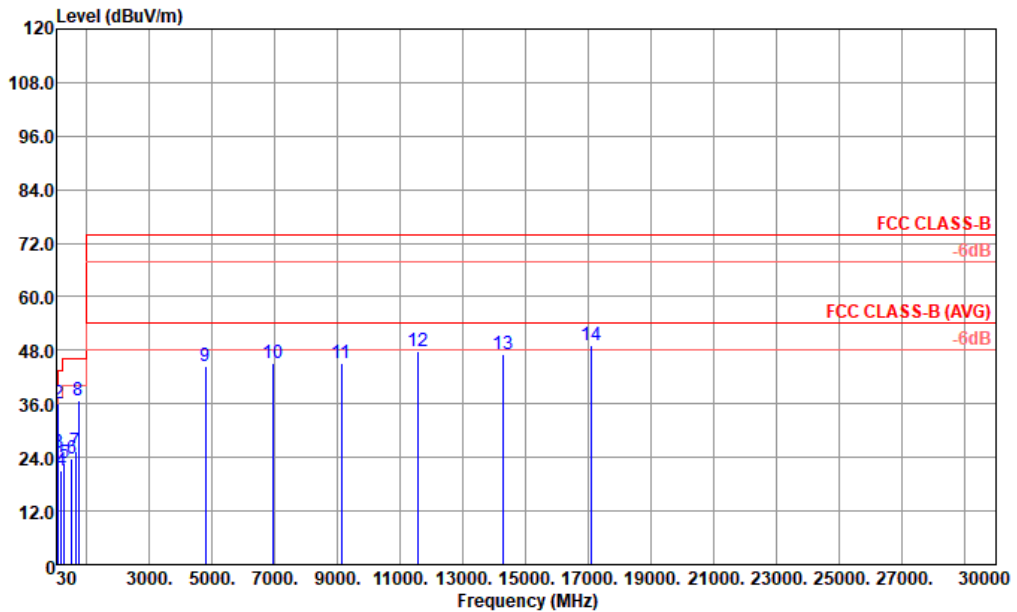


Site : 03CH07-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	31.940	24.88	-15.12	40.00	33.56	23.20	0.52	32.40	---	---	Peak
2	88.200	36.19			53.09	14.20	1.30	32.40	---	---	Peak
3	96.930	25.12	-18.38	43.50	40.70	15.40	1.42	32.40	---	---	Peak
4	178.410	21.13	-22.37	43.50	36.79	14.80	1.94	32.40	---	---	Peak
5	286.080	22.65	-23.35	46.00	33.64	18.94	2.47	32.40	---	---	Peak
6	518.880	23.61	-22.39	46.00	28.81	23.88	3.32	32.40	---	---	Peak
7	628.490	25.50	-20.50	46.00	28.07	26.17	3.66	32.40	---	---	Peak
8	735.190	36.68			38.36	26.70	3.95	32.33	---	---	Peak
9	4791.000	44.31	-29.69	74.00	64.55	34.32	10.80	65.36	---	---	Peak
10	6933.000	45.19	-28.81	74.00	61.30	35.97	13.01	65.09	---	---	Peak
11	9126.000	45.10	-28.90	74.00	60.32	36.40	15.16	66.78	---	---	Peak
12	11557.000	47.82	-26.18	74.00	58.82	38.27	17.16	66.43	---	---	Peak
13	14294.000	47.14	-26.86	74.00	53.61	39.27	19.16	64.90	---	---	Peak
14	17082.000	49.27	-24.73	74.00	50.66	42.45	21.06	64.90	---	---	Peak



Test Engineer :	Feng Zhang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#4, #8 is system simulator signal which can be ignored.		

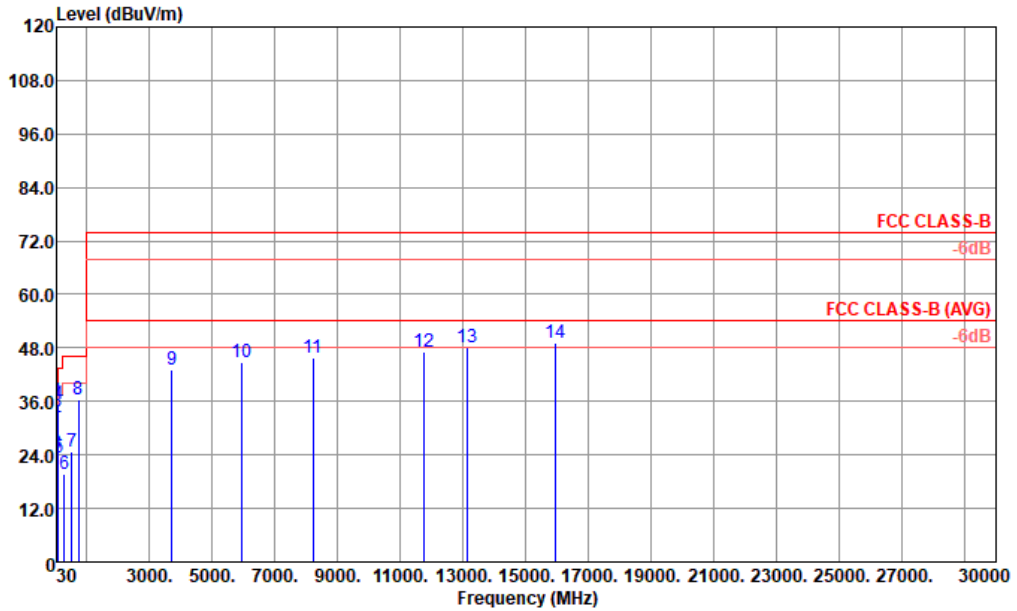

Site : 03CH07-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.970	36.25	-3.75	40.00	43.44	24.70	0.51	32.40	---	---	Peak
2	34.850	32.58	-7.42	40.00	42.12	22.30	0.56	32.40	100	123	QP
3	68.800	24.25	-15.75	40.00	43.61	12.00	1.04	32.40	---	---	Peak
4	88.200	35.53			52.43	14.20	1.30	32.40	---	---	Peak
5	100.810	23.43	-20.07	43.50	38.46	15.90	1.47	32.40	---	---	Peak
6	286.080	19.72	-26.28	46.00	30.71	18.94	2.47	32.40	---	---	Peak
7	519.850	24.57	-21.43	46.00	29.75	23.90	3.32	32.40	---	---	Peak
8	735.190	36.39			38.07	26.70	3.95	32.33	---	---	Peak
9	3703.000	43.11	-30.89	74.00	65.58	33.15	9.30	64.92	---	---	Peak
10	5947.000	44.92	-29.08	74.00	62.89	35.45	11.96	65.38	---	---	Peak
11	8225.000	45.67	-28.33	74.00	61.50	35.99	14.65	66.47	---	---	Peak
12	11744.000	47.13	-26.87	74.00	57.51	38.54	17.34	66.26	---	---	Peak
13	13121.000	48.17	-25.83	74.00	56.33	39.20	18.26	65.62	---	---	Peak
14	15926.000	49.11	-24.89	74.00	52.37	40.88	20.28	64.42	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Mar. 11, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Mar. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Mar. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Mar. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Mar. 11, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 10, 2021	Mar. 11, 2022	Oct. 09, 2022	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Dec. 29, 2021	Mar. 11, 2022	Dec. 28, 2022	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	218652	1GHz~18GHz	Nov. 01, 2021	Mar. 11, 2022	Oct. 30, 2022	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Mar. 11, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Mar. 11, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 13, 2022	Mar. 11, 2022	Jan. 12, 2023	Radiation (03CH07-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 14, 2021	Mar. 11, 2022	Apr. 13, 2022	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 11, 2022	NCR	Radiation (03CH07-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 11, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 11, 2022	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------