





Plot on Channel 6875MHz 52RU37

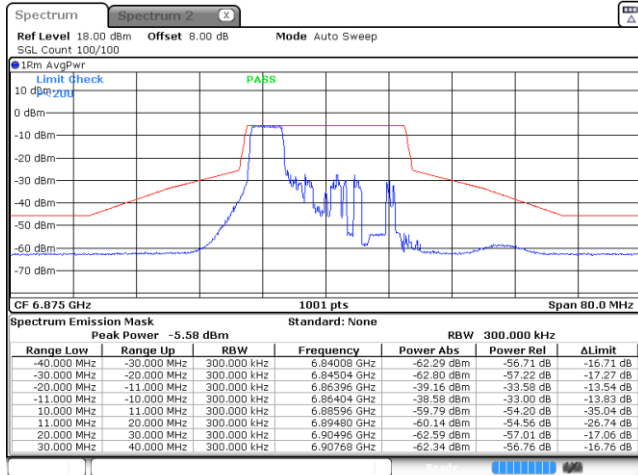


Date: 17.FEB.2022 10:10:35

Plot on Channel 6875MHz 106RU53

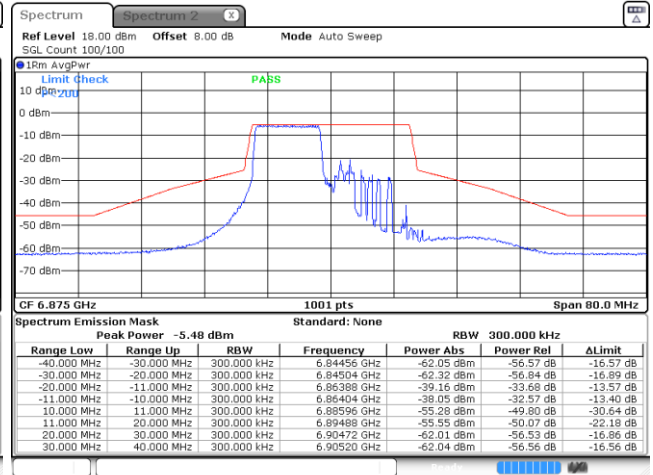


Date: 17.FEB.2022 10:13:51

Plot on Channel 6895MHz 26RU0

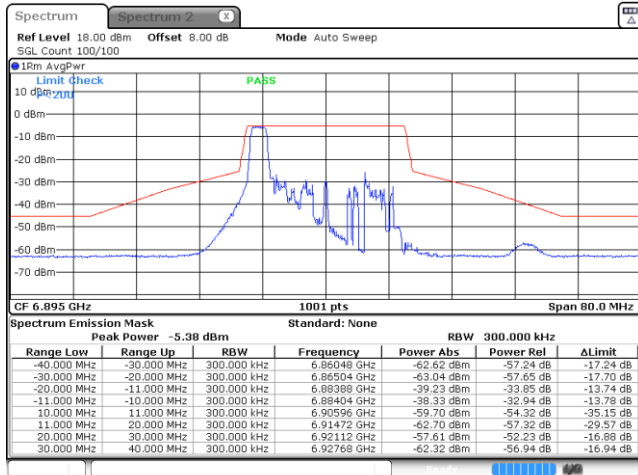

Date: 17.FEB.2022 10:17:44


Plot on Channel 6895MHz 52RU37

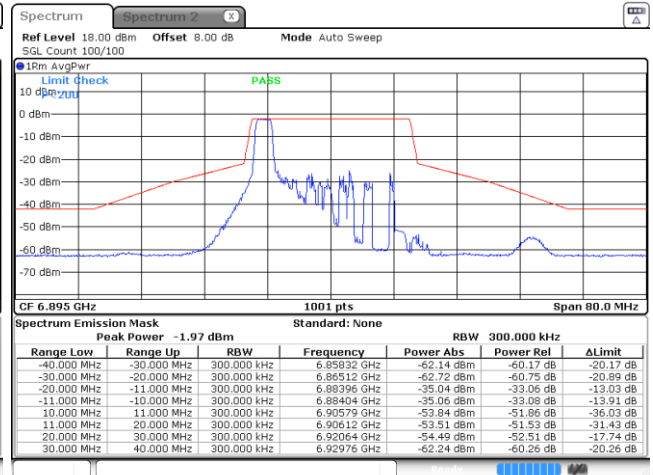

Date: 17.FEB.2022 10:20:46




Plot on Channel 6895MHz 106RU53

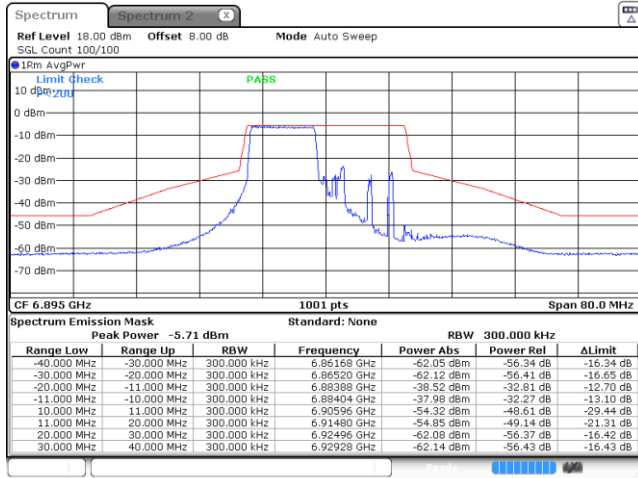


Date: 17 FEB 2022 10:23:30

Plot on Channel 6995MHz 26RU4

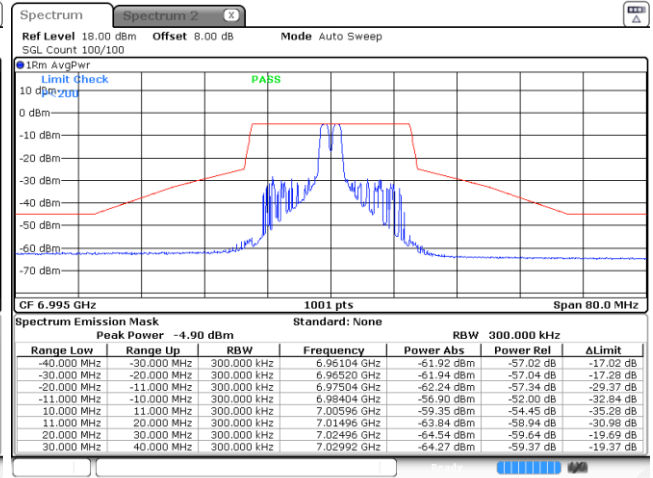


Date: 17 FEB 2022 10:26:37

Plot on Channel 6995MHz 52RU38

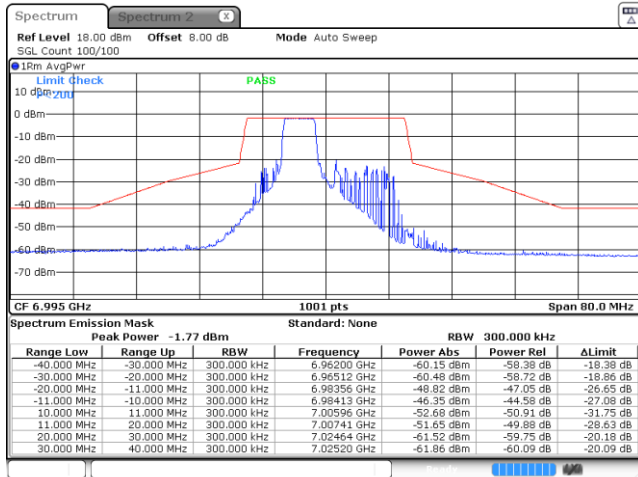

Date: 17 FEB 2022 10:29:59


Plot on Channel 6995MHz 106RU53

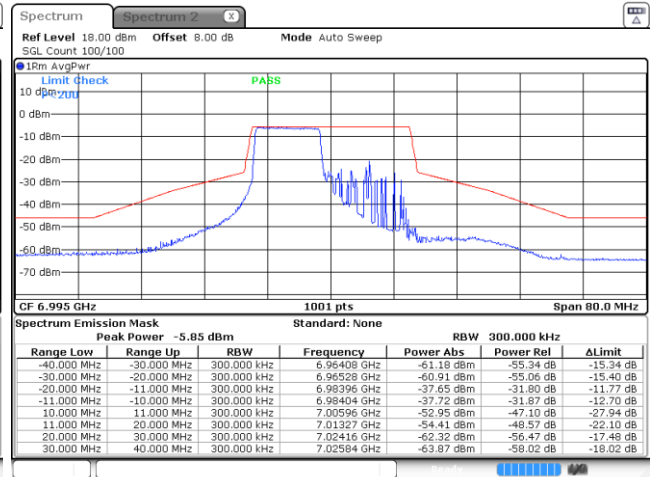

Date: 17 FEB 2022 10:33:32




Plot on Channel 7095MHz 26RU8

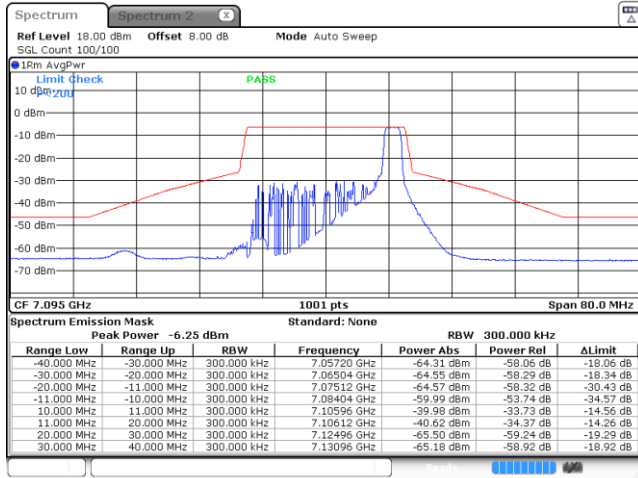


Date: 17 FEB 2022 10:38:48

Plot on Channel 7095MHz 52RU40

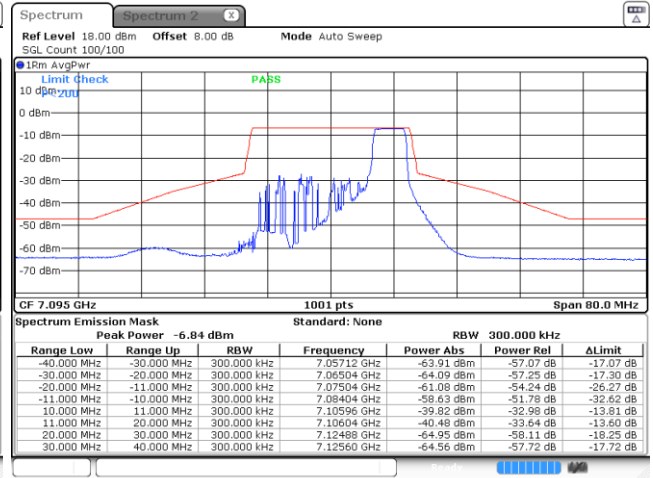

Date: 17 FEB 2022 10:42:29

Plot on Channel 7095MHz 106RU54

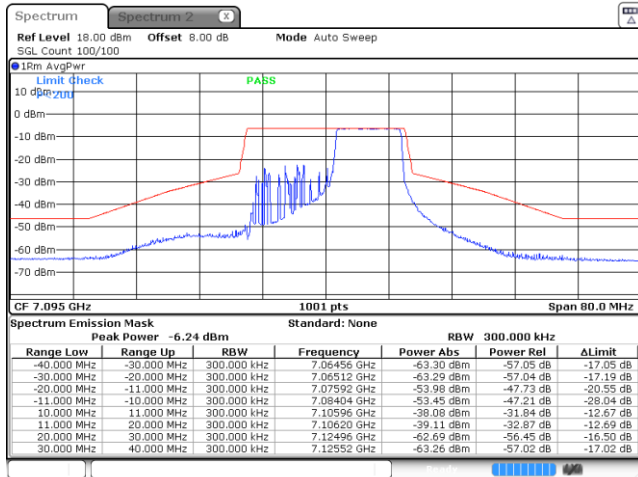


Date: 17 FEB 2022 10:44:52




EUT Mode : 802.11ax HE40

Plot on Channel 5965MHz

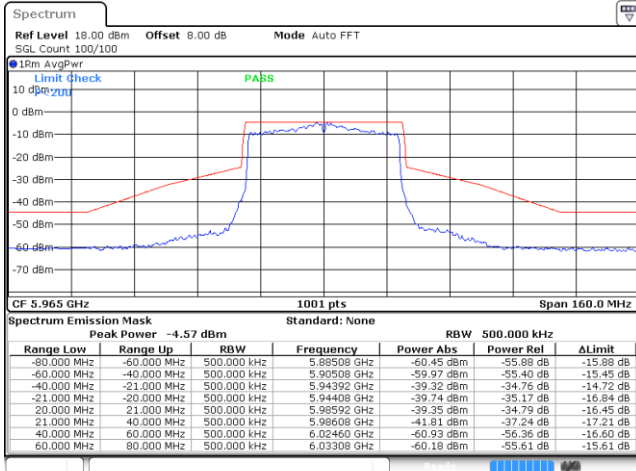


Date: 17 FEB 2022 01:06:39

Plot on Channel 6165MHz

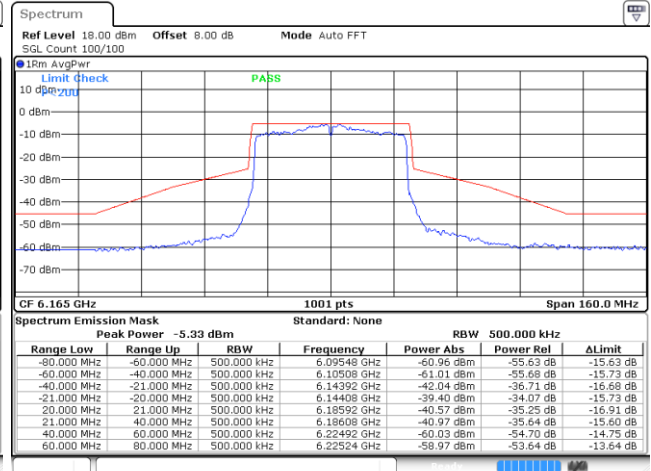


Date: 17 FEB 2022 01:09:07

Plot on Channel 6405MHz

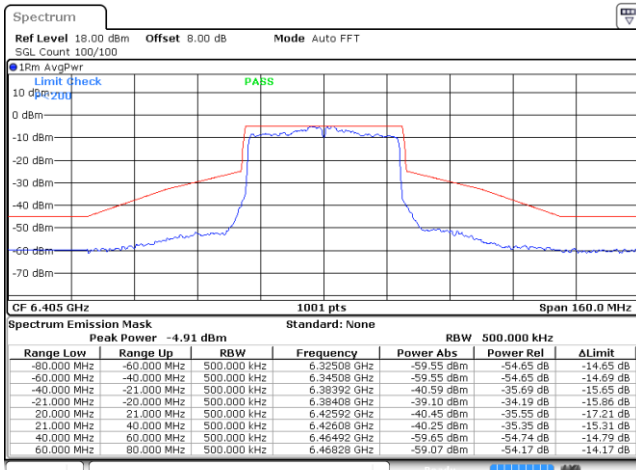

Date: 17 FEB 2022 01:11:07


Plot on Channel 6445MHz

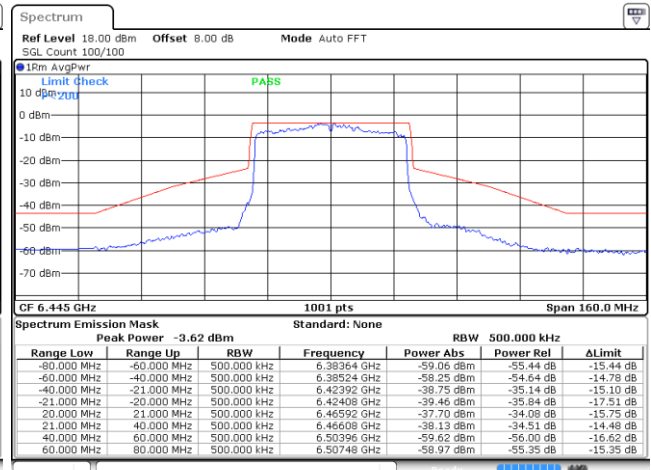

Date: 17 FEB 2022 01:13:23




Plot on Channel 6485MHz

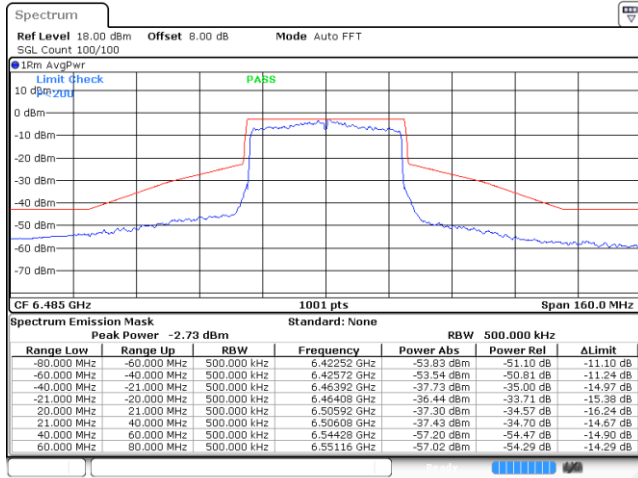


Date: 17.FEB.2022 01:15:06

Plot on Channel 6525MHz

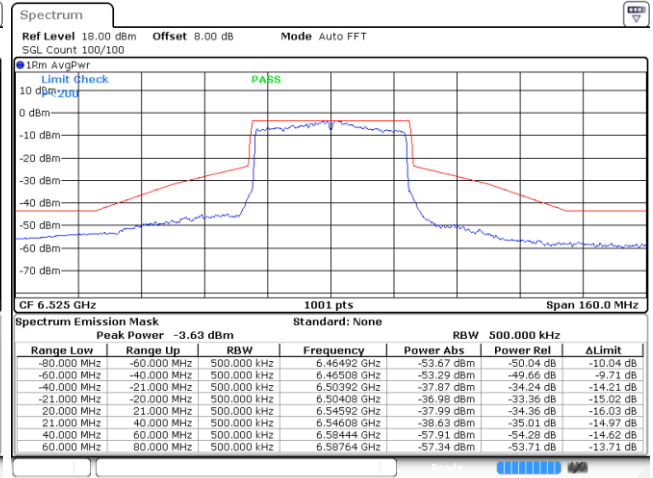


Date: 17.FEB.2022 01:16:40

Plot on Channel 6565MHz

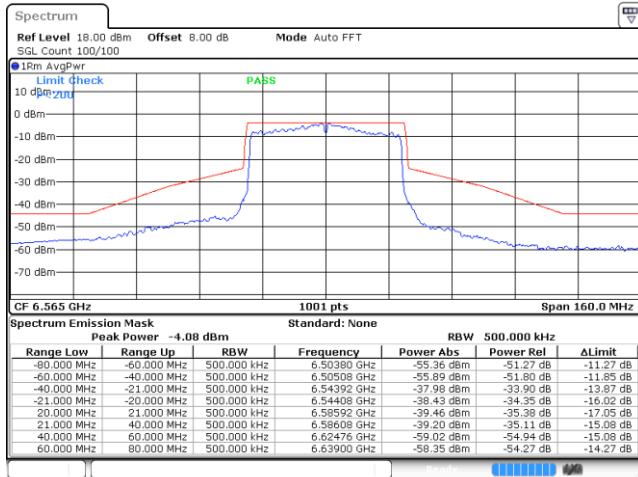

Date: 17.FEB.2022 01:18:53


Plot on Channel 6685MHz

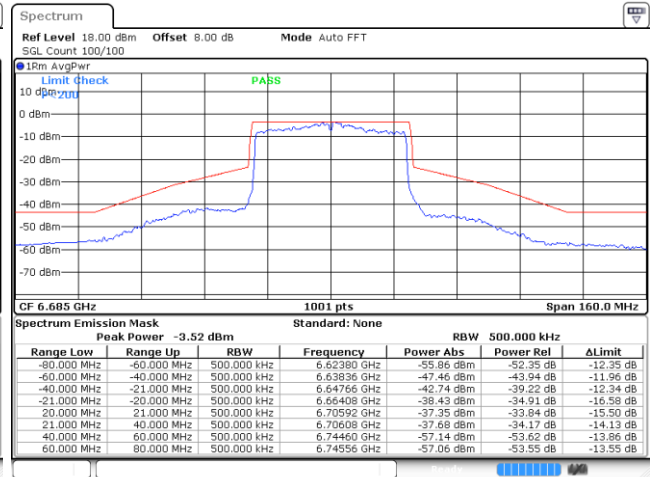

Date: 17.FEB.2022 01:20:39




Plot on Channel 6845MHz

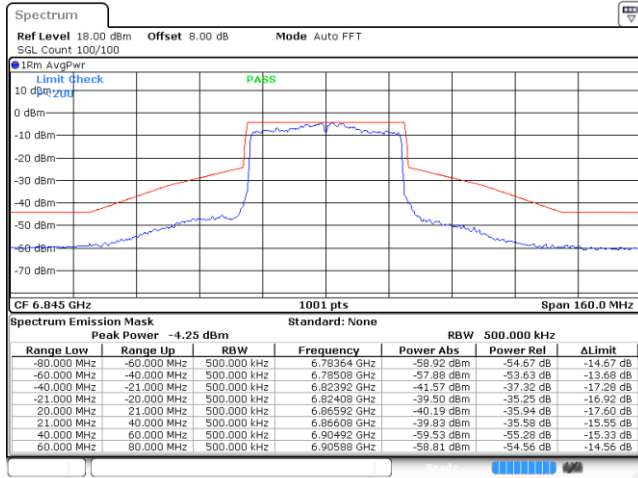


Date: 17.FEB.2022 01:23:43

Plot on Channel 6885MHz

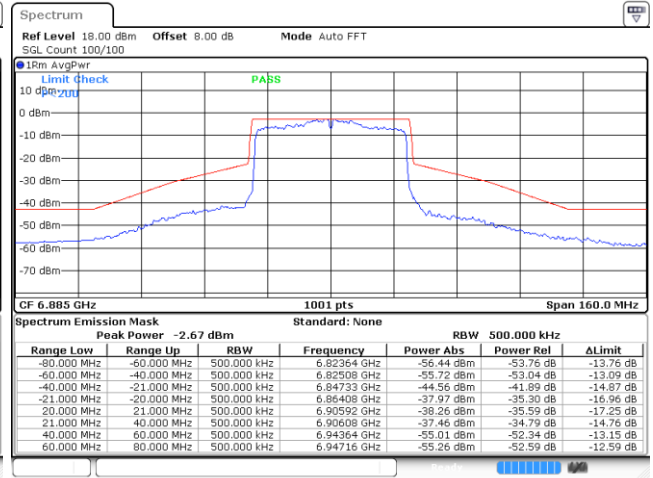


Date: 17.FEB.2022 01:25:59

Plot on Channel 6925MHz

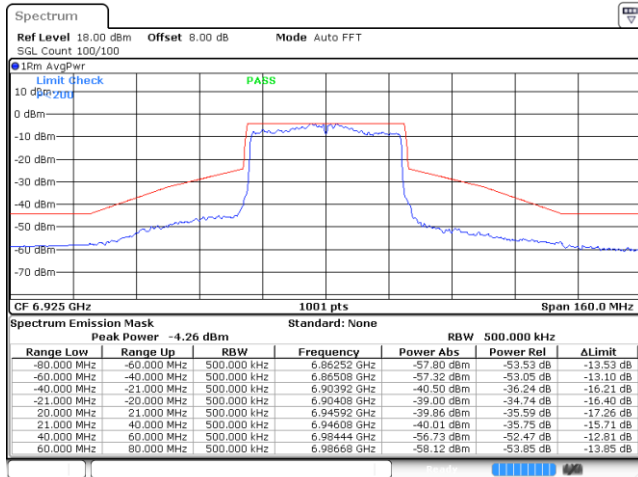


Date: 17.FEB.2022 01:28:17

Plot on Channel 6965MHz

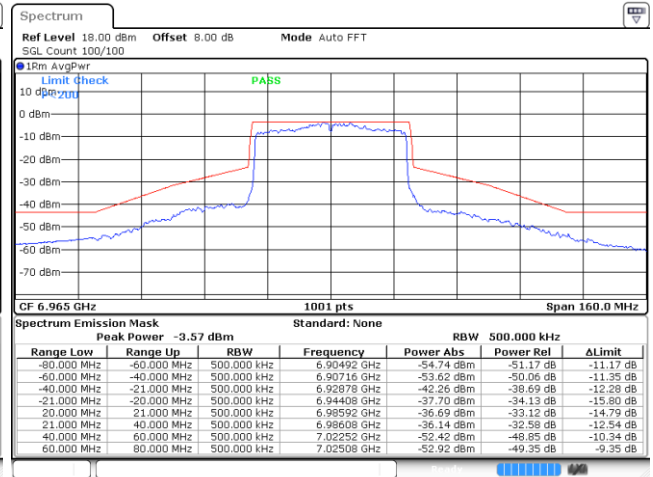

Date: 17.FEB.2022 01:30:00

Plot on Channel 7085MHz

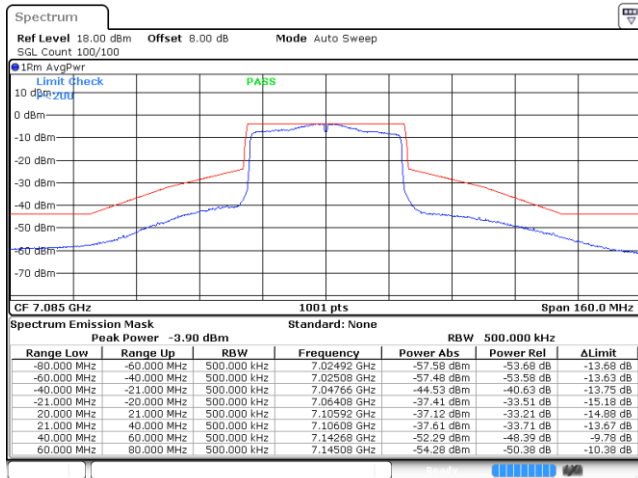


Date: 17.FEB.2022 01:31:34




EUT Mode : 802.11ax HE80

Plot on Channel 5985MHz

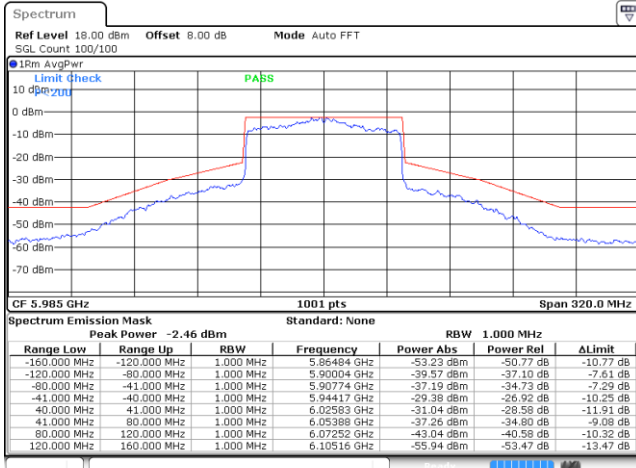


Date: 17 FEB 2022 01:34:46

Plot on Channel 6145MHz

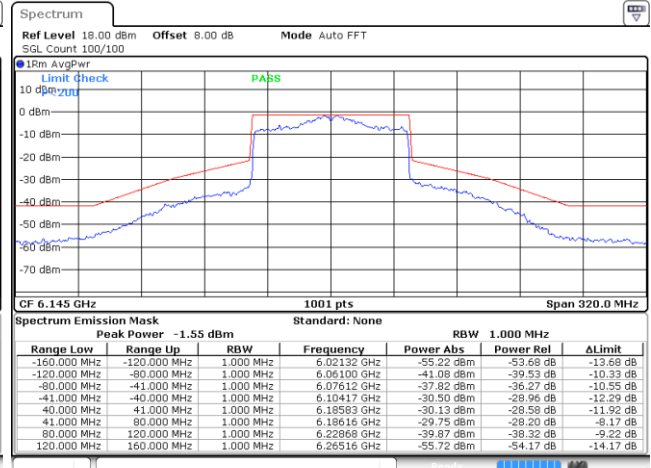


Date: 17 FEB 2022 01:54:40

Plot on Channel 6385MHz

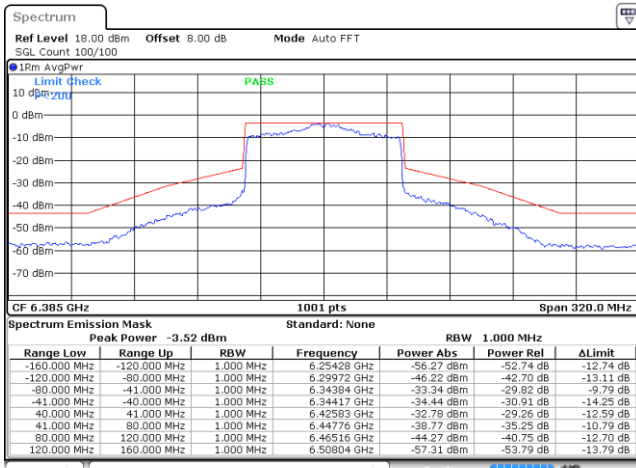

Date: 17 FEB 2022 01:56:41


Plot on Channel 6465MHz

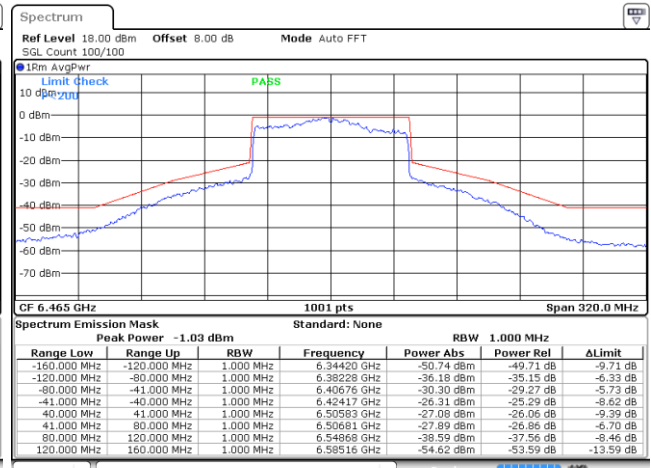

Date: 17 FEB 2022 01:58:33




Plot on Channel 6545MHz

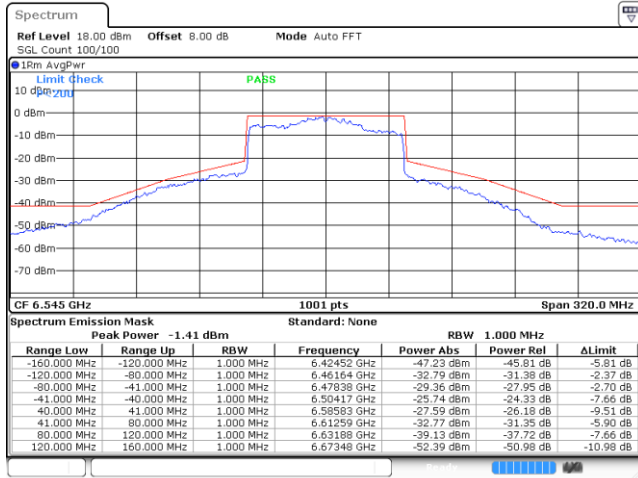


Date: 17.FEB.2022 02:00:41

Plot on Channel 6625MHz

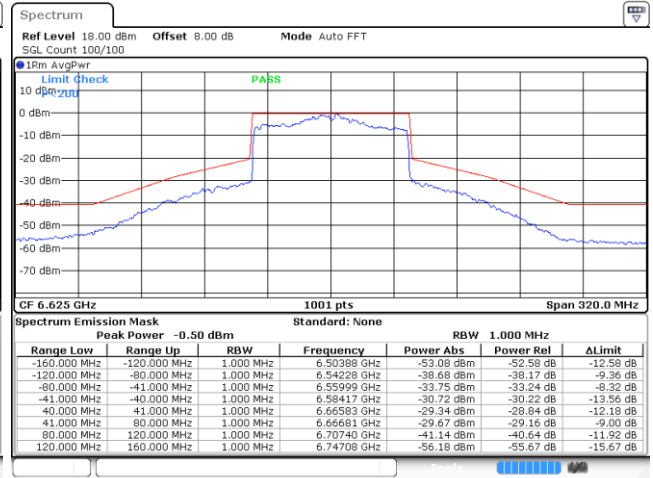


Date: 17.FEB.2022 02:23:32

Plot on Channel 6705MHz

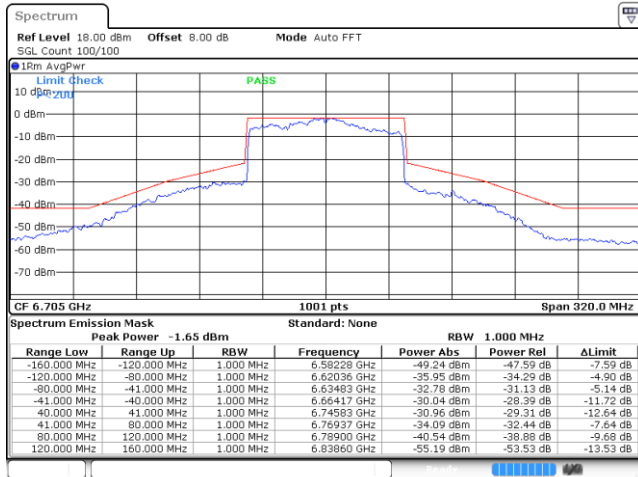

Date: 17.FEB.2022 02:28:01


Plot on Channel 6785MHz

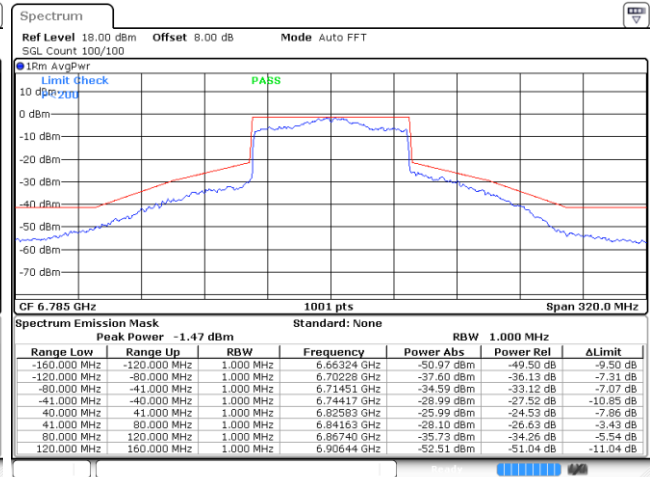

Date: 17.FEB.2022 02:06:35




Plot on Channel 6865MHz

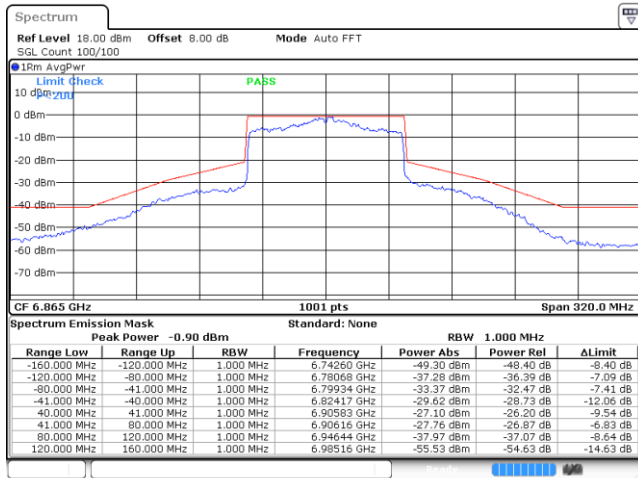


Date: 17 FEB 2022 02:21:43

Plot on Channel 6945MHz

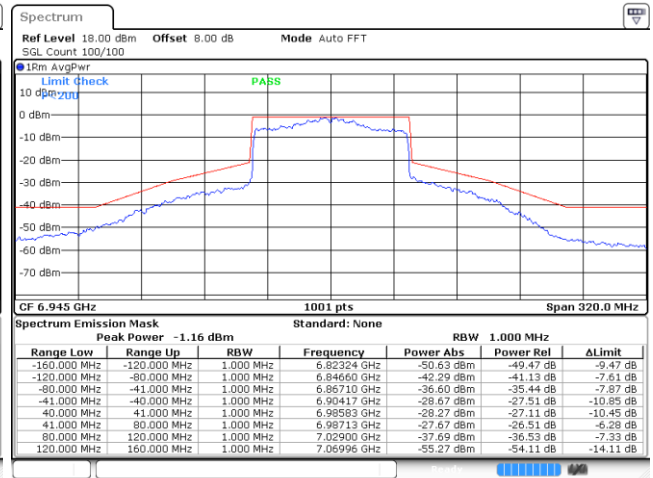

Date: 17 FEB 2022 02:18:47

Plot on Channel 7025MHz

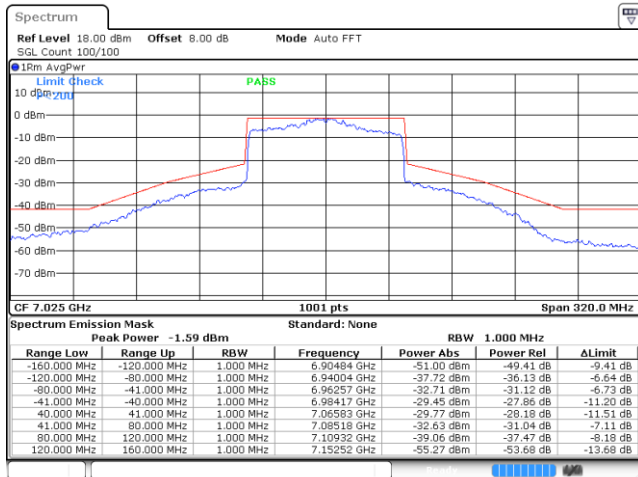


Date: 17 FEB 2022 02:29:19




EUT Mode : 802.11ax HE160

Plot on Channel 6025MHz

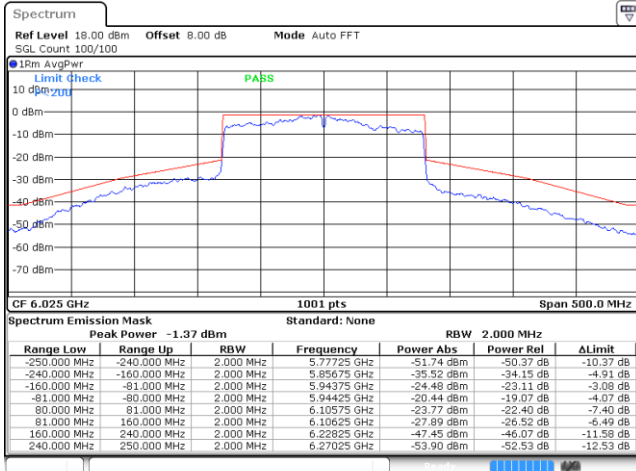


Date: 17 FEB 2022 02:36:47

Plot on Channel 6185MHz

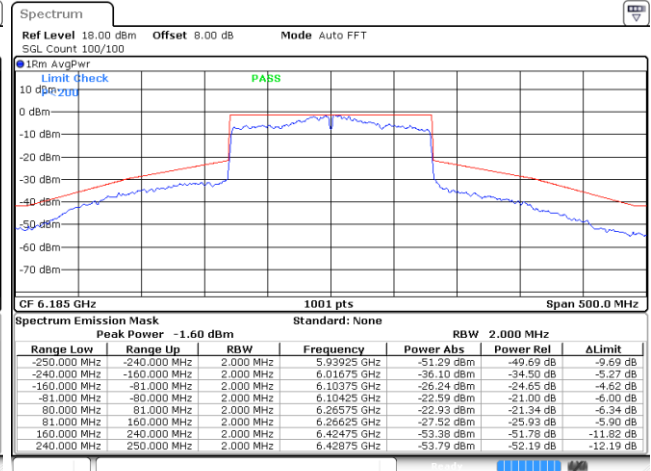


Date: 17 FEB 2022 02:38:39

Plot on Channel 6345MHz

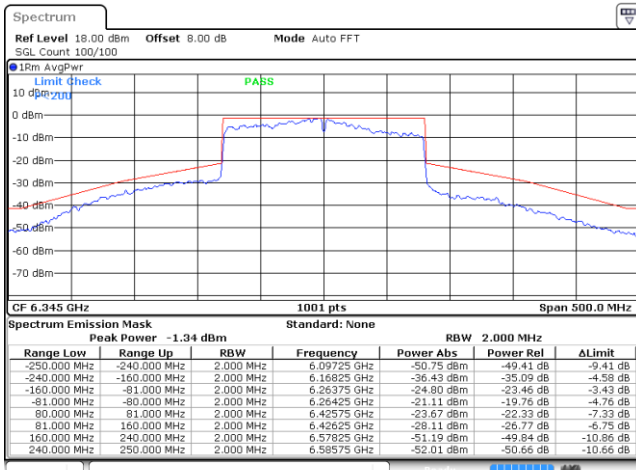

Date: 17 FEB 2022 02:40:45


Plot on Channel 6505MHz

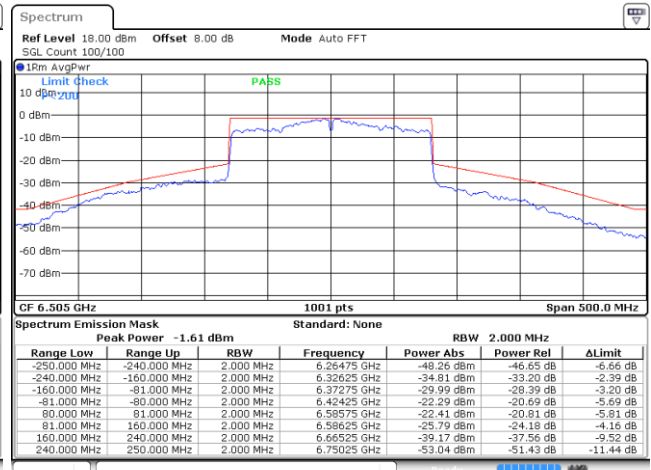

Date: 17 FEB 2022 02:42:46




Plot on Channel 6665MHz

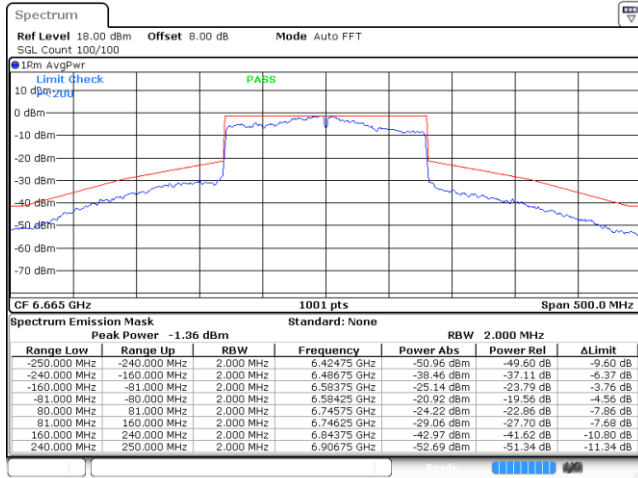


Date: 17 FEB 2022 02:44:36

Plot on Channel 6825MHz

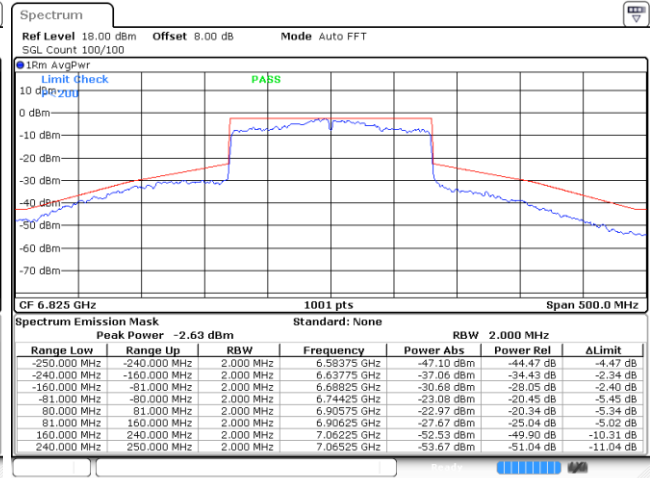

Date: 17 FEB 2022 02:46:44

Plot on Channel 6985MHz

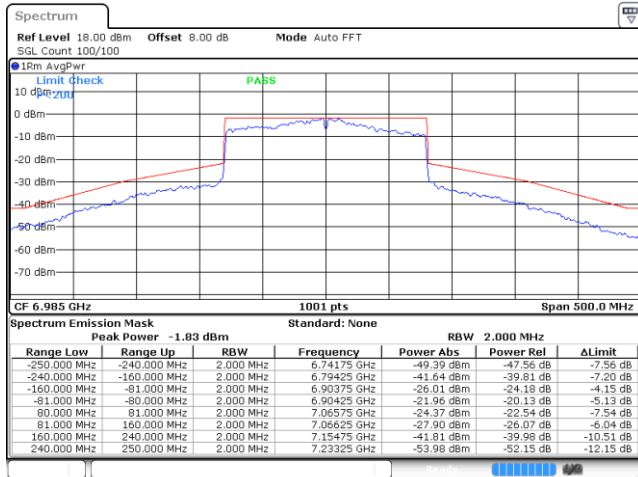

Date: 17 FEB 2022 02:48:51



3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

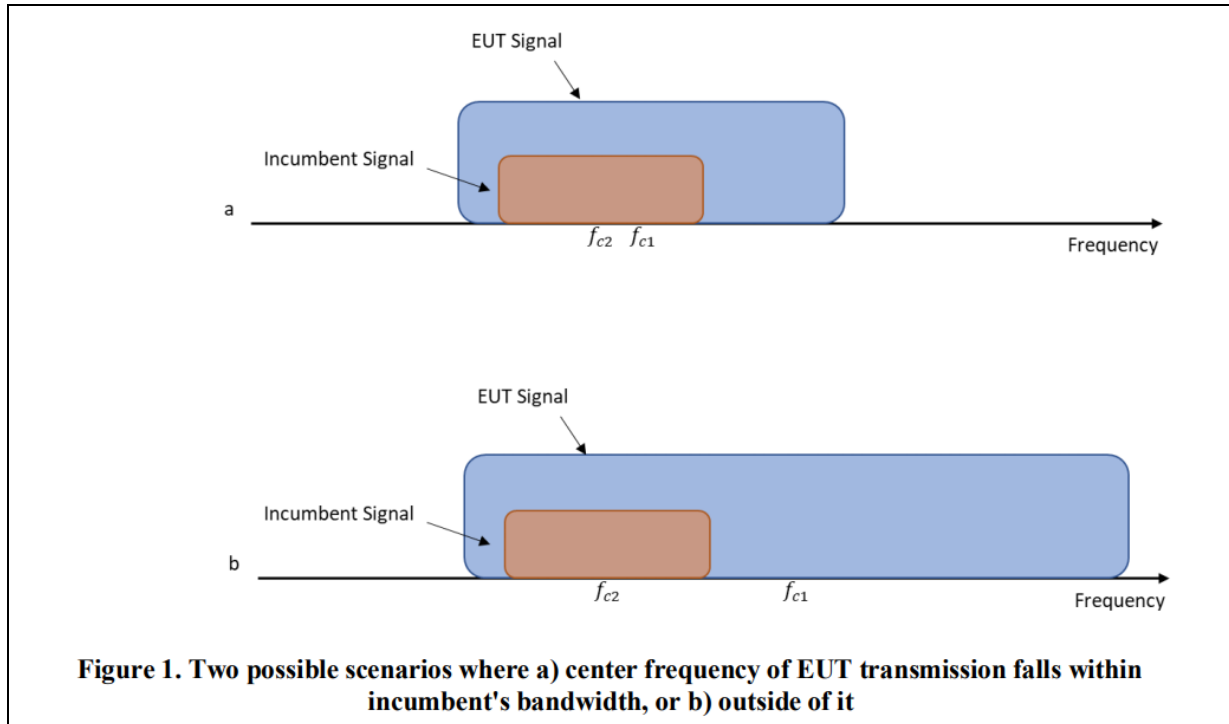

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures

Refer to KDB 987594 D02 v01v01.

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center frequency for the AWGN signal and repeat the process.

3.5.4 Test Setup

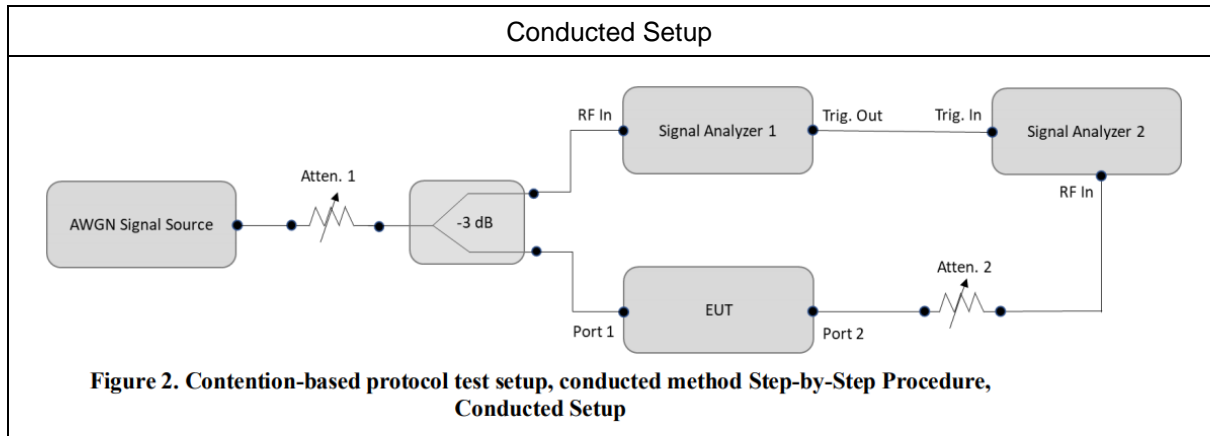

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
Notebook	Dell	P78G	LAN



3.5.6 Test Summary of Contention Based Protocol Test


Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Measured Detection level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-76.15	100	-67.7	8.45
	6185	160	6110	-69.01	100	-67.7	1.31
			6185	-71.6	100	-67.7	3.9
			6260	-73.86	100	-67.7	6.16
UNII Band 6	6455	20	6455	-74.84	100	-69.1	5.74
	6505	160	6430	-69.84	100	-69.1	0.74
			6505	-70.7	100	-69.1	1.60
			6580	-74.15	100	-69.1	5.05
UNII Band 7	6695	20	6695	-76.19	100	-68.9	7.29
	6665	160	6590	-70.52	100	-68.9	1.62
			6665	-72.65	100	-68.9	3.75
			6740	-75.19	100	-68.9	6.29
UNII Band 8	7015	20	7015	-73.69	100	-69.7	3.99
	6985	160	6910	-71.93	100	-69.7	2.23
			6985	-71.35	100	-69.7	1.65
			7060	-72.11	100	-69.7	2.41

Note: Threshold Level (TL) = -62dBm + minimum antenna gain




3.5.7 Worst Case Plots of Contention Based Protocol

802.11ax (HE160) / 6430MHz
Detection Level (AWGN) = -69.84dBm/MHz

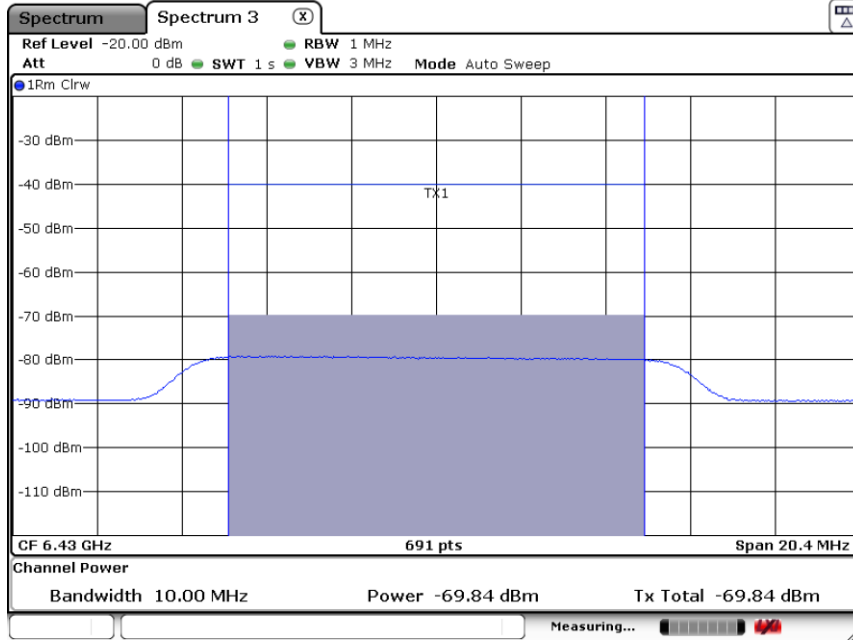

802.11ax (HE160) / 6430MHz
Test result is pass due to no transmission occur.

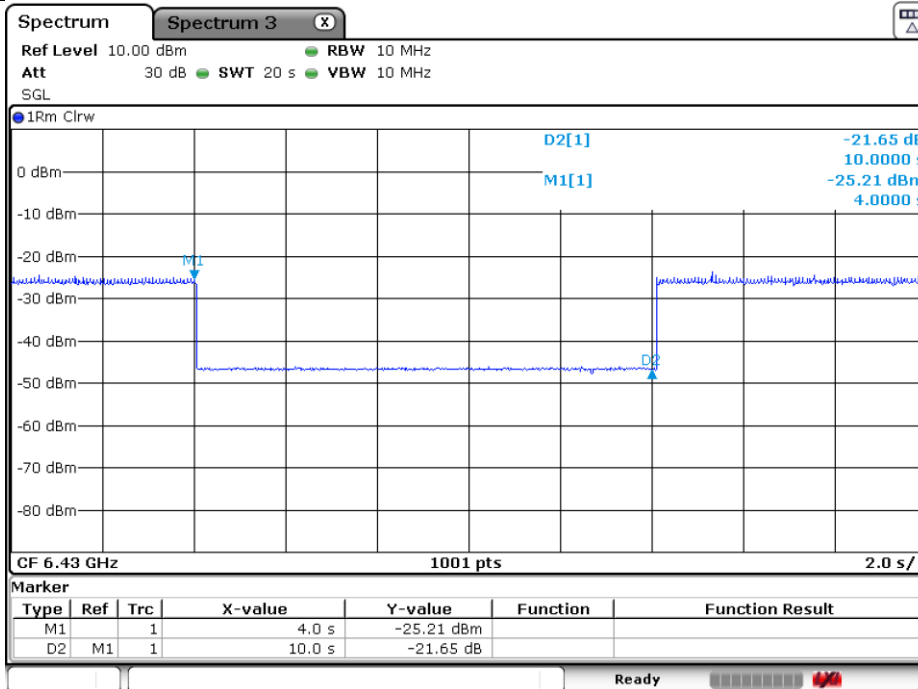

Remark: M1: Injection of AWGN signal, D2: Removal of AWGN signal

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.




3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

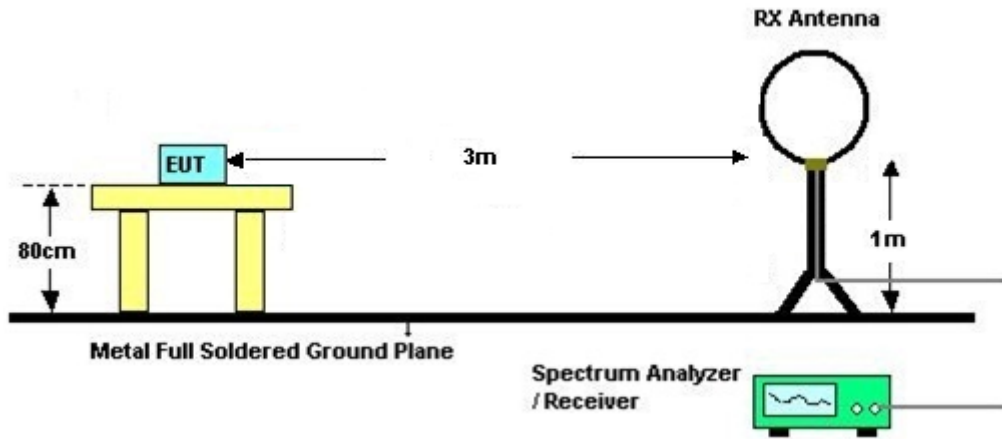

For radiated emissions from 30MHz to 1GHz

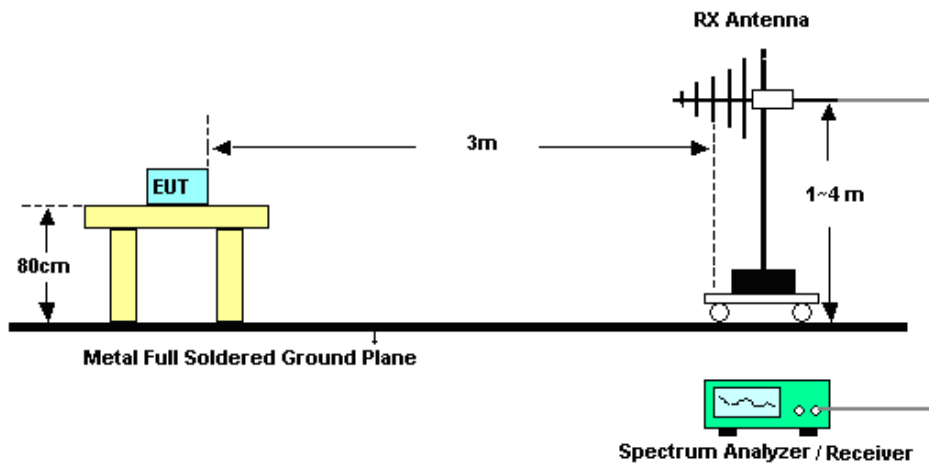

For radiated emissions above 1GHz

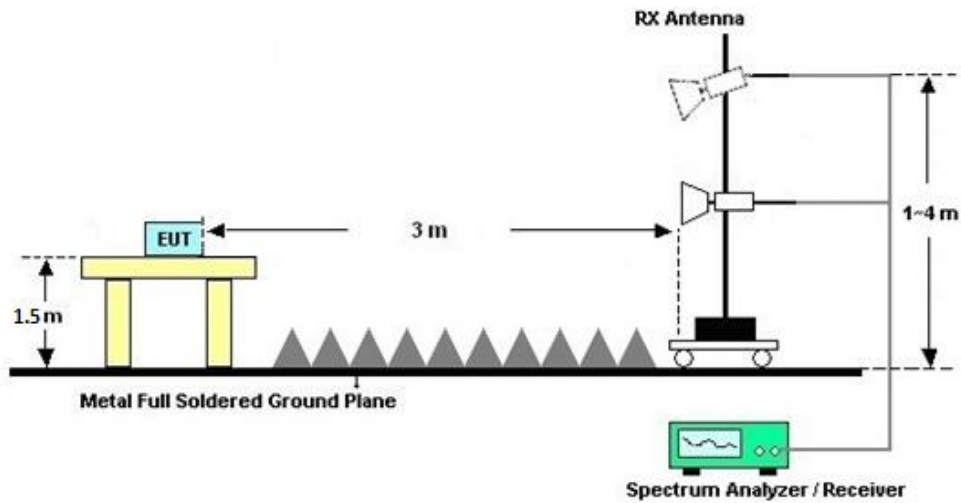

3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix E.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

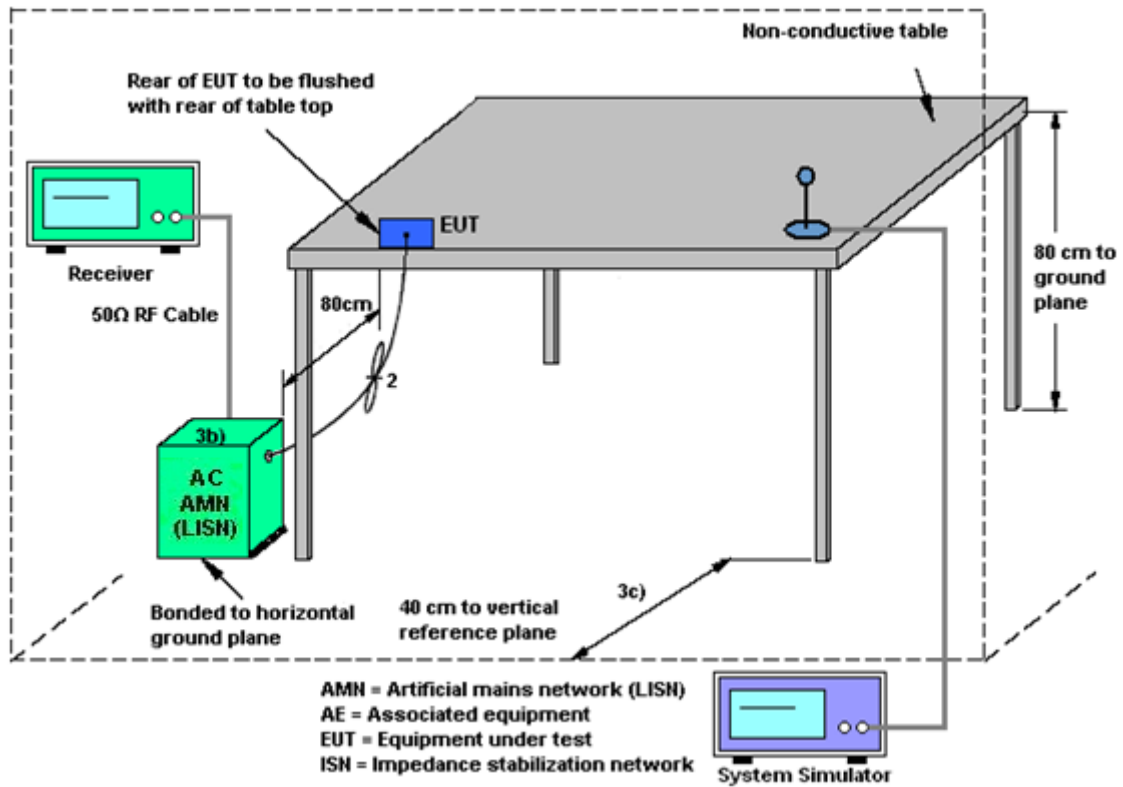

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/20} + 10^{G₂/20} + ... + 10^{G_n/20})² / N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when N_{SS} = 1)

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi

<CDD Modes>				
	Ant. 1	Ant. 2	DG for Power	DG for PSD
	(dBi)	(dBi)	(dBi)	(dBi)
U-NII-5	-5.70	-5.20	-5.20	-2.44
U-NII-6	-7.10	-6.30	-6.30	-3.68
U-NII-7	-6.90	-6.10	-6.10	-3.48
U-NII-8	-7.70	-6.90	-6.90	-4.28



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Feb. 16, 2022~ Feb. 17, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2022	Feb. 16, 2022~ Feb. 17, 2022	Jan. 06, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2022	Feb. 16, 2022~ Feb. 17, 2022	Jan. 06, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Feb. 24, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 13, 2021	Feb. 24, 2022	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Feb. 24, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2021	Feb. 24, 2022	May 29, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 25, 2021	Feb. 24, 2022	Apr. 24, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Feb. 24, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Feb. 24, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Feb. 24, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Feb. 24, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Feb. 24, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 24, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 24, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 24, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 21, 2021	Feb. 02, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Feb. 02, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Feb. 02, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000081 1	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Feb. 02, 2022	Oct. 13, 2022	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 06, 2022	Feb. 07, 2022	Jan. 05, 2023	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 13, 2021	Feb. 07, 2022	Apr. 12, 2022	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Feb. 07, 2022	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR1D2901G

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/2/16~2022/2/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO								
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
				Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	5955	16.33	16.28	18.93	18.83	
11a	6Mbps	2	6175	16.28	16.28	18.78	18.98	
11a	6Mbps	2	6415	16.33	16.33	18.83	18.88	

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	5955	0.24	0.25	6.55	7.14	9.86	-5.20		4.66	24.00	Pass
11a	6Mbps	2	6175	0.24	0.25	6.85	6.98	9.92	-5.20		4.72	24.00	Pass
11a	6Mbps	2	6415	0.24	0.25	7.29	7.01	10.16	-5.20		4.96	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
11a	6Mbps	2	001	5955	0.24	0.25			0.21		-2.44	-2.23	-1.00	Pass
11a	6Mbps	2	045	6175	0.24	0.25			0.38		-2.44	-2.06	-1.00	Pass
11a	6Mbps	2	093	6415	0.24	0.25			0.18		-2.44	-2.26	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO								
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
				Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	6435	16.33	16.33	18.83	18.83	
11a	6Mbps	2	6475	16.28	16.28	18.88	18.83	
11a	6Mbps	2	6515	16.33	16.33	18.93	18.83	

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
11a	6Mbps	2	6435	0.24	0.25	8.19	8.37	11.29	-6.30		4.99	24.00	Pass
11a	6Mbps	2	6475	0.24	0.25	8.73	9.02	11.88	-6.30		5.58	24.00	Pass
11a	6Mbps	2	6515	0.24	0.25	9.08	8.79	11.94	-6.30		5.64	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	097	6435	0.24	0.25			1.59	-3.68	-2.09	-1.00	Pass	
11a	6Mbps	2	105	6475	0.24	0.25			1.68	-3.68	-2.00	-1.00	Pass	
11a	6Mbps	2	113	6515	0.24	0.25			1.64	-3.68	-2.04	-1.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO								
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
				Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	6535	16.28	16.28	18.68	18.83	
11a	6Mbps	2	6695	16.28	16.28	18.88	18.98	
11a	6Mbps	2	6855	16.33	16.33	18.83	18.83	

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	6535	0.24	0.25	8.07	8.16	11.12	-6.10		5.02	24.00	Pass
11a	6Mbps	2	6695	0.24	0.25	7.29	8.63	11.02	-6.10		4.92	24.00	Pass
11a	6Mbps	2	6855	0.24	0.25	7.98	8.12	11.06	-6.10		4.96	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	117	6535	0.24	0.25			1.47	-3.48	-2.01	-1.00	Pass	
11a	6Mbps	2	149	6695	0.24	0.25			1.46	-3.48	-2.03	-1.00	Pass	
11a	6Mbps	2	149	6855	0.24	0.25			1.31	-3.48	-2.17	-1.00	Pass	

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO								
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
				Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	6875	16.33	16.28	18.58	18.73	
11a	6Mbps	2	6895	16.33	16.28	18.58	18.78	
11a	6Mbps	2	6995	16.28	16.28	18.63	18.48	
11a	6Mbps	2	7095	16.28	16.33	18.73	18.73	

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	6875	0.24	0.25	10.29	8.34	12.44	-6.90	-6.90	5.54	24.00	Pass
11a	6Mbps	2	6895	0.24	0.25	8.16	8.98	11.60	-6.90	-6.90	4.70	24.00	Pass
11a	6Mbps	2	6995	0.24	0.25	9.08	9.17	12.13	-6.90	-6.90	5.23	24.00	Pass
11a	6Mbps	2	7095	0.24	0.25	8.97	9.37	12.18	-6.90	-6.90	5.28	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
11a	6Mbps	2	185	6875	0.24	0.25			2.00	-4.28	-2.28	-1.00	Pass	
11a	6Mbps	2	189	6895	0.24	0.25			2.09	-4.28	-2.19	-1.00	Pass	
11a	6Mbps	2	209	6995	0.24	0.25			1.85	-4.28	-2.43	-1.00	Pass	
11a	6Mbps	2	229	7095	0.24	0.25			2.19	-4.28	-2.10	-1.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO									
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	5955	Full	18.78	18.78	20.68	20.63	
HE20	MCS0	2	6175	Full	16.68	16.63	20.13	20.48	
HE20	MCS0	2	6415	Full	16.68	16.68	20.58	20.73	
HE40	MCS0	2	5965	Full	37.66	37.66	40.01	40.10	
HE40	MCS0	2	6165	Full	37.76	37.66	40.19	40.19	
HE40	MCS0	2	6405	Full	37.66	37.76	40.19	40.10	
HE80	MCS0	2	5985	Full	76.72	76.72	81.68	81.68	
HE80	MCS0	2	6145	Full	76.72	76.72	81.52	81.36	
HE80	MCS0	2	6385	Full	76.84	76.84	81.36	81.52	
HE160	MCS0	2	6025	Full	155.60	155.60	164.96	165.59	
HE160	MCS0	2	6185	Full	155.84	156.08	166.23	164.64	
HE160	MCS0	2	6345	Full	155.84	155.60	165.27	164.96	

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO														
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
HE20	MCS0	2	5955	Full	0.24	0.26	7.38	7.80	10.60	-5.20		5.40	24.00	Pass
HE20	MCS0	2	5955	26/0	0.24	0.26	-0.85	-0.63	2.27	-5.20		-2.93	24.00	Pass
HE20	MCS0	2	5955	52/37	0.24	0.26	2.55	2.88	5.73	-5.20		0.53	24.00	Pass
HE20	MCS0	2	5955	106/53	0.24	0.26	5.03	5.01	8.03	-5.20		2.83	24.00	Pass
HE20	MCS0	2	6175	Full	0.24	0.26	8.13	7.89	11.02	-5.20		5.82	24.00	Pass
HE20	MCS0	2	6175	26/4	0.24	0.26	1.12	0.83	3.98	-5.20		-1.22	24.00	Pass
HE20	MCS0	2	6175	52/39	0.24	0.26	2.71	2.90	5.81	-5.20		0.61	24.00	Pass
HE20	MCS0	2	6175	106/53	0.24	0.26	5.37	4.96	8.18	-5.20		2.98	24.00	Pass
HE20	MCS0	2	6415	Full	0.24	0.26	7.55	7.72	10.64	-5.20		5.44	24.00	Pass
HE20	MCS0	2	6415	26/8	0.24	0.26	0.35	0.75	3.56	-5.20		-1.64	24.00	Pass
HE20	MCS0	2	6415	52/40	0.24	0.26	3.56	3.80	6.69	-5.20		1.49	24.00	Pass
HE20	MCS0	2	6415	106/54	0.24	0.26	5.58	5.89	8.74	-5.20		3.54	24.00	Pass
HE40	MCS0	2	5965	Full	0.28	0.28	10.41	11.09	13.77	-5.20		8.57	24.00	Pass
HE40	MCS0	2	5965	242/61	0.28	0.28	8.42	8.99	11.72	-5.20		6.52	24.00	Pass
HE40	MCS0	2	6165	Full	0.28	0.28	11.24	10.31	13.81	-5.20		8.61	24.00	Pass
HE40	MCS0	2	6165	242/61	0.28	0.28	9.77	8.83	12.34	-5.20		7.14	24.00	Pass
HE40	MCS0	2	6405	Full	0.28	0.28	11.36	10.81	14.10	-5.20		8.90	24.00	Pass
HE40	MCS0	2	6405	242/62	0.28	0.28	9.43	9.14	12.30	-5.20		7.10	24.00	Pass
HE80	MCS0	2	5985	Full	0.29	0.29	12.60	12.83	15.72	-5.20		10.52	24.00	Pass
HE80	MCS0	2	5985	484/65	0.29	0.29	12.23	12.19	15.22	-5.20		10.02	24.00	Pass
HE80	MCS0	2	6145	Full	0.29	0.29	12.58	12.88	15.74	-5.20		10.54	24.00	Pass
HE80	MCS0	2	6145	484/65	0.29	0.29	11.67	11.97	14.83	-5.20		9.63	24.00	Pass
HE80	MCS0	2	6385	Full	0.29	0.29	12.52	12.97	15.76	-5.20		10.56	24.00	Pass
HE80	MCS0	2	6385	484/66	0.29	0.29	11.96	11.25	14.63	-5.20		9.43	24.00	Pass
HE160	MCS0	2	6025	Full	0.31	0.28	12.03	11.69	14.87	-5.20		9.67	24.00	Pass
HE160	MCS0	2	6025	996/67	0.31	0.28	10.85	10.37	13.63	-5.20		8.43	24.00	Pass
HE160	MCS0	2	6185	Full	0.31	0.28	12.28	11.47	14.90	-5.20		9.70	24.00	Pass
HE160	MCS0	2	6185	996/67	0.31	0.28	11.32	10.79	14.07	-5.20		8.87	24.00	Pass
HE160	MCS0	2	6345	Full	0.31	0.28	14.99	14.16	17.61	-5.20		12.41	24.00	Pass
HE160	MCS0	2	6345	996/S67	0.31	0.28	12.88	13.13	16.02	-5.20		10.82	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO														
Mod.	Data Rate	N _{Tx}	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
HE20	MCS0	2	5955	Full	0.24	0.26			0.38	-2.44	-2.06	-1.00	Pass	
HE20	MCS0	2	5955	26/0	0.24	0.26			-1.10	-2.44	-3.54	-1.00	Pass	
HE20	MCS0	2	5955	52/37	0.24	0.26			-0.11	-2.44	-2.55	-1.00	Pass	
HE20	MCS0	2	5955	106/53	0.24	0.26			-0.01	-2.44	-2.45	-1.00	Pass	
HE20	MCS0	2	6175	Full	0.24	0.26			0.38	-2.44	-2.06	-1.00	Pass	
HE20	MCS0	2	6175	26/4	0.24	0.26			-0.04	-2.44	-2.47	-1.00	Pass	
HE20	MCS0	2	6175	52/39	0.24	0.26			-0.15	-2.44	-2.59	-1.00	Pass	
HE20	MCS0	2	6175	106/53	0.24	0.26			0.00	-2.44	-2.44	-1.00	Pass	
HE20	MCS0	2	6415	Full	0.24	0.26			0.04	-2.44	-2.40	-1.00	Pass	
HE20	MCS0	2	6415	26/8	0.24	0.26			-0.35	-2.44	-2.78	-1.00	Pass	
HE20	MCS0	2	6415	52/40	0.24	0.26			-0.13	-2.44	-2.56	-1.00	Pass	
HE20	MCS0	2	6415	106/54	0.24	0.26			-0.36	-2.44	-2.80	-1.00	Pass	
HE40	MCS0	2	5965	Full	0.28	0.28			0.24	-2.44	-2.19	-1.00	Pass	
HE40	MCS0	2	5965	242/61	0.28	0.28			-0.32	-2.44	-2.76	-1.00	Pass	
HE40	MCS0	2	6165	Full	0.28	0.28			0.24	-2.44	-2.20	-1.00	Pass	
HE40	MCS0	2	6165	242/61	0.28	0.28			0.23	-2.44	-2.21	-1.00	Pass	
HE40	MCS0	2	6405	Full	0.28	0.28			0.12	-2.44	-2.32	-1.00	Pass	
HE40	MCS0	2	6405	242/62	0.28	0.28			-0.20	-2.44	-2.64	-1.00	Pass	
HE80	MCS0	2	5985	Full	0.29	0.29			0.07	-2.44	-2.37	-1.00	Pass	
HE80	MCS0	2	5985	484/65	0.29	0.29			0.04	-2.44	-2.40	-1.00	Pass	
HE80	MCS0	2	6145	Full	0.29	0.29			-0.11	-2.44	-2.54	-1.00	Pass	
HE80	MCS0	2	6145	484/65	0.29	0.29			-0.45	-2.44	-2.89	-1.00	Pass	
HE80	MCS0	2	6385	Full	0.29	0.29			-0.19	-2.44	-2.63	-1.00	Pass	
HE80	MCS0	2	6385	484/66	0.29	0.29			-0.66	-2.44	-3.10	-1.00	Pass	
HE160	MCS0	2	6025	Full	0.31	0.28			-2.92	-2.44	-5.36	-1.00	Pass	
HE160	MCS0	2	6025	996/67	0.31	0.28			-3.06	-2.44	-5.50	-1.00	Pass	
HE160	MCS0	2	6185	Full	0.31	0.28			-2.71	-2.44	-5.15	-1.00	Pass	
HE160	MCS0	2	6185	996/67	0.31	0.28			-2.86	-2.44	-5.29	-1.00	Pass	
HE160	MCS0	2	6345	Full	0.31	0.28			-1.55	-2.44	-3.99	-1.00	Pass	
HE160	MCS0	2	6345	996/S67	0.31	0.28			-1.96	-2.44	-4.39	-1.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6 MIMO									
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	6435	Full	16.68	16.68	20.88	20.48	
HE20	MCS0	2	6475	Full	16.73	16.73	21.08	20.98	
HE20	MCS0	2	6515	Full	16.68	16.73	20.63	20.68	
HE40	MCS0	2	6445	Full	37.76	37.66	40.19	40.28	
HE40	MCS0	2	6485	Full	37.66	37.66	40.19	40.19	
HE40	MCS0	2	6525	Full	37.76	37.66	40.37	40.37	
HE80	MCS0	2	6465	Full	76.96	76.96	82.64	82.32	
HE80	MCS0	2	6545	Full	76.84	76.84	81.52	81.52	
HE160	MCS0	2	6505	Full	156.08	156.08	166.23	165.91	

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
HE20	MCS0	2	097	6435	Full	0.24	0.26	9.29	9.22	12.26	-6.30	5.96	24.00	Pass	
HE20	MCS0	2	097	6435	26/0	0.24	0.26	1.39	1.43	4.42	-6.30	-1.88	24.00	Pass	
HE20	MCS0	2	097	6435	52/37	0.24	0.26	4.63	5.09	7.87	-6.30	1.57	24.00	Pass	
HE20	MCS0	2	097	6435	106/53	0.24	0.26	7.40	6.41	9.94	-6.30	3.64	24.00	Pass	
HE20	MCS0	2	105	6475	Full	0.24	0.26	9.69	10.07	12.89	-6.30	6.59	24.00	Pass	
HE20	MCS0	2	105	6475	26/4	0.24	0.26	2.26	1.78	5.03	-6.30	-1.27	24.00	Pass	
HE20	MCS0	2	105	6475	52/39	0.24	0.26	4.74	4.44	7.60	-6.30	1.30	24.00	Pass	
HE20	MCS0	2	105	6475	106/54	0.24	0.26	6.78	7.17	9.99	-6.30	3.69	24.00	Pass	
HE20	MCS0	2	113	6515	Full	0.24	0.26	9.99	9.62	12.82	-6.30	6.52	24.00	Pass	
HE20	MCS0	2	113	6515	26/8	0.24	0.26	2.40	3.04	5.74	-6.30	-0.56	24.00	Pass	
HE20	MCS0	2	113	6515	52/40	0.24	0.26	4.96	5.35	8.17	-6.30	1.87	24.00	Pass	
HE20	MCS0	2	113	6515	106/54	0.24	0.26	7.93	6.84	10.43	-6.30	4.13	24.00	Pass	
HE40	MCS0	2	099	6445	Full	0.28	0.28	12.31	12.51	15.42	-6.30	9.12	24.00	Pass	
HE40	MCS0	2	099	6445	242/61	0.28	0.28	10.84	10.06	13.48	-6.30	7.18	24.00	Pass	
HE40	MCS0	2	107	6485	Full	0.28	0.28	12.60	12.40	15.51	-6.30	9.21	24.00	Pass	
HE40	MCS0	2	107	6485	242/62	0.28	0.28	10.05	9.96	13.02	-6.30	6.72	24.00	Pass	
HE40	MCS0	2	115	6525	Full	0.28	0.28	12.63	11.87	15.28	-6.30	8.98	24.00	Pass	
HE40	MCS0	2	115	6525	242/62	0.28	0.28	11.23	10.51	13.90	-6.30	7.60	24.00	Pass	
HE80	MCS0	2	103	6465	Full	0.29	0.29	14.12	14.60	17.38	-6.30	11.08	24.00	Pass	
HE80	MCS0	2	103	6465	484/65	0.29	0.29	14.15	14.47	17.32	-6.30	11.02	24.00	Pass	
HE80	MCS0	2	119	6545	Full	0.29	0.29	14.25	14.47	17.37	-6.30	11.07	24.00	Pass	
HE80	MCS0	2	119	6545	484/66	0.29	0.29	14.30	13.60	16.97	-6.30	10.67	24.00	Pass	
HE160	MCS0	2	111	6505	Full	0.00	0.00	14.74	14.36	17.57	-6.30	11.27	24.00	Pass	
HE160	MCS0	2	111	6505	996/67	0.00	0.00	13.03	13.40	16.23	-6.30	9.93	24.00	Pass	
HE160	MCS0	2	111	6505	996/S67	0.00	0.00	13.67	13.12	16.41	-6.30	10.11	24.00	Pass	

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6 MIMO														
Mod.	Data Rate	N _{TX}	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
HE20	MCS0	2	6435	Full	0.24	0.26			1.19	-3.68	-2.49	-1.00	Pass	
HE20	MCS0	2	6435	26/0	0.24	0.26			0.70	-3.68	-2.98	-1.00	Pass	
HE20	MCS0	2	6435	52/37	0.24	0.26			1.06	-3.68	-2.63	-1.00	Pass	
HE20	MCS0	2	6435	106/53	0.24	0.26			0.71	-3.68	-2.97	-1.00	Pass	
HE20	MCS0	2	6475	Full	0.24	0.26			1.50	-3.68	-2.18	-1.00	Pass	
HE20	MCS0	2	6475	26/4	0.24	0.26			1.18	-3.68	-2.50	-1.00	Pass	
HE20	MCS0	2	6475	52/39	0.24	0.26			1.05	-3.68	-2.63	-1.00	Pass	
HE20	MCS0	2	6475	106/54	0.24	0.26			0.96	-3.68	-2.72	-1.00	Pass	
HE20	MCS0	2	6515	Full	0.24	0.26			1.35	-3.68	-2.33	-1.00	Pass	
HE20	MCS0	2	6515	26/8	0.24	0.26			1.10	-3.68	-2.58	-1.00	Pass	
HE20	MCS0	2	6515	52/40	0.24	0.26			0.85	-3.68	-2.84	-1.00	Pass	
HE20	MCS0	2	6515	106/54	0.24	0.26			0.84	-3.68	-2.84	-1.00	Pass	
HE40	MCS0	2	6445	Full	0.28	0.28			1.26	-3.68	-2.42	-1.00	Pass	
HE40	MCS0	2	6445	242/61	0.28	0.28			0.21	-3.68	-3.47	-1.00	Pass	
HE40	MCS0	2	6485	Full	0.28	0.28			1.49	-3.68	-2.19	-1.00	Pass	
HE40	MCS0	2	6485	242/62	0.28	0.28			0.84	-3.68	-2.84	-1.00	Pass	
HE40	MCS0	2	6525	Full	0.28	0.28			1.16	-3.68	-2.52	-1.00	Pass	
HE40	MCS0	2	6525	242/62	0.28	0.28			0.55	-3.68	-3.13	-1.00	Pass	
HE80	MCS0	2	6465	Full	0.29	0.29			1.25	-3.68	-2.43	-1.00	Pass	
HE80	MCS0	2	6465	484/65	0.29	0.29			1.04	-3.68	-2.64	-1.00	Pass	
HE80	MCS0	2	6545	Full	0.29	0.29			1.07	-3.68	-2.61	-1.00	Pass	
HE80	MCS0	2	6545	484/66	0.29	0.29			0.71	-3.68	-2.97	-1.00	Pass	
HE160	MCS0	2	6505	Full	0.31	0.28			-1.10	-3.68	-4.78	-1.00	Pass	
HE160	MCS0	2	6505	996/67	0.31	0.28			-1.42	-3.68	-5.10	-1.00	Pass	
HE160	MCS0	2	6505	996/S67	0.31	0.28			-1.60	-3.68	-5.28	-1.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO									
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	6535	Full	16.68	16.73	20.73	20.48	
HE20	MCS0	2	6695	Full	16.68	16.73	20.33	20.68	
HE20	MCS0	2	6855	Full	16.73	16.73	20.38	20.48	
HE40	MCS0	2	6565	Full	37.76	37.66	40.10	40.19	
HE40	MCS0	2	6685	Full	37.66	37.76	40.55	40.46	
HE40	MCS0	2	6845	Full	37.66	37.76	40.10	40.01	
HE80	MCS0	2	6625	Full	76.96	76.96	81.68	82.00	
HE80	MCS0	2	6705	Full	76.72	76.84	82.64	81.84	
HE80	MCS0	2	6785	Full	77.08	77.08	82.00	82.32	
HE80	MCS0	2	6865	Full	76.84	76.84	81.20	81.84	
HE160	MCS0	2	6665	Full	155.36	155.36	164.32	164.32	
HE160	MCS0	2	6825	Full	156.08	156.32	167.51	163.68	

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO														
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
HE20	MCS0	2	6535	Full	0.24	0.26	10.12	9.42	12.79	-6.10		6.69	24.00	Pass
HE20	MCS0	2	6535	26/0	0.24	0.26	1.19	1.01	4.11	-6.10		-1.99	24.00	Pass
HE20	MCS0	2	6535	52/37	0.24	0.26	4.98	5.39	8.20	-6.10		2.10	24.00	Pass
HE20	MCS0	2	6535	106/53	0.24	0.26	7.69	7.19	10.45	-6.10		4.35	24.00	Pass
HE20	MCS0	2	6695	Full	0.24	0.26	9.72	10.37	13.06	-6.10		6.96	24.00	Pass
HE20	MCS0	2	6695	26/4	0.24	0.26	2.46	3.13	5.82	-6.10		-0.28	24.00	Pass
HE20	MCS0	2	6695	52/38	0.24	0.26	5.02	5.61	8.33	-6.10		2.23	24.00	Pass
HE20	MCS0	2	6695	106/53	0.24	0.26	7.96	6.64	10.36	-6.10		4.26	24.00	Pass
HE20	MCS0	2	6855	Full	0.24	0.26	10.00	9.87	12.94	-6.10		6.84	24.00	Pass
HE20	MCS0	2	6855	26/8	0.24	0.26	1.37	1.80	4.60	-6.10		-1.50	24.00	Pass
HE20	MCS0	2	6855	52/40	0.24	0.26	4.39	4.94	7.68	-6.10		1.58	24.00	Pass
HE20	MCS0	2	6855	106/54	0.24	0.26	6.32	7.09	9.73	-6.10		3.63	24.00	Pass
HE40	MCS0	2	6565	Full	0.00	0.00	12.41	11.84	15.14	-6.10		9.04	24.00	Pass
HE40	MCS0	2	6565	242/61	0.00	0.00	11.38	12.15	14.79	-6.10		8.69	24.00	Pass
HE40	MCS0	2	6685	Full	0.00	0.00	11.89	12.33	15.13	-6.10		9.03	24.00	Pass
HE40	MCS0	2	6685	242/61	0.00	0.00	11.55	10.04	13.87	-6.10		7.77	24.00	Pass
HE40	MCS0	2	6845	Full	0.00	0.00	12.53	11.30	14.97	-6.10		8.87	24.00	Pass
HE40	MCS0	2	6845	242/62	0.00	0.00	9.68	10.25	12.98	-6.10		6.88	24.00	Pass
HE80	MCS0	2	6625	Full	0.00	0.00	14.76	14.67	17.72	-6.10		11.62	24.00	Pass
HE80	MCS0	2	6625	484/65	0.00	0.00	14.12	14.67	17.41	-6.10		11.31	24.00	Pass
HE80	MCS0	2	6705	Full	0.00	0.00	14.35	15.40	17.92	-6.10		11.82	24.00	Pass
HE80	MCS0	2	6705	484/65	0.00	0.00	14.20	14.42	17.32	-6.10		11.22	24.00	Pass
HE80	MCS0	2	6785	Full	0.00	0.00	14.82	14.37	17.61	-6.10		11.51	24.00	Pass
HE80	MCS0	2	6785	484/66	0.00	0.00	14.05	13.27	16.69	-6.10		10.59	24.00	Pass
HE80	MCS0	2	6865	Full	0.00	0.00	14.60	14.56	17.59	-6.10		11.49	24.00	Pass
HE80	MCS0	2	6865	484/66	0.00	0.00	13.15	13.64	16.41	-6.10		10.31	24.00	Pass
HE160	MCS0	2	6665	Full	0.00	0.00	13.69	14.40	17.07	-6.10		10.97	24.00	Pass
HE160	MCS0	2	6665	996/67	0.00	0.00	12.49	13.24	15.89	-6.10		9.79	24.00	Pass
HE160	MCS0	2	6825	Full	0.00	0.00	14.47	13.67	17.10	-6.10		11.00	24.00	Pass
HE160	MCS0	2	6825	996/67	0.00	0.00	13.18	11.95	15.62	-6.10		9.52	24.00	Pass
HE160	MCS0	2	6826	996/S67	0.00	0.00	13.16	12.61	15.90	-6.10		9.80	24.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO														
Mod.	Data Rate	N _{Tx}	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
HE20	MCS0	2	6535	Full	0.24	0.26			1.10	-3.48	-2.38	-1.00	Pass	
HE20	MCS0	2	6535	26/0	0.24	0.26			0.81	-3.48	-2.67	-1.00	Pass	
HE20	MCS0	2	6535	52/37	0.24	0.26			1.00	-3.48	-2.48	-1.00	Pass	
HE20	MCS0	2	6535	106/53	0.24	0.26			0.71	-3.48	-2.77	-1.00	Pass	
HE20	MCS0	2	6695	Full	0.24	0.26			1.48	-3.48	-2.01	-1.00	Pass	
HE20	MCS0	2	6695	26/4	0.24	0.26			1.22	-3.48	-2.26	-1.00	Pass	
HE20	MCS0	2	6695	52/38	0.24	0.26			1.22	-3.48	-2.26	-1.00	Pass	
HE20	MCS0	2	6695	106/53	0.24	0.26			1.08	-3.48	-2.40	-1.00	Pass	
HE20	MCS0	2	6855	Full	0.24	0.26			1.08	-3.48	-2.40	-1.00	Pass	
HE20	MCS0	2	6855	26/8	0.24	0.26			0.90	-3.48	-2.58	-1.00	Pass	
HE20	MCS0	2	6855	52/40	0.24	0.26			0.98	-3.48	-2.50	-1.00	Pass	
HE20	MCS0	2	6855	106/54	0.24	0.26			0.65	-3.48	-2.83	-1.00	Pass	
HE40	MCS0	2	6565	Full	0.28	0.28			1.36	-3.48	-2.12	-1.00	Pass	
HE40	MCS0	2	6565	242/61	0.28	0.28			1.21	-3.48	-2.27	-1.00	Pass	
HE40	MCS0	2	6685	Full	0.28	0.28			1.32	-3.48	-2.16	-1.00	Pass	
HE40	MCS0	2	6685	242/61	0.28	0.28			0.82	-3.48	-2.66	-1.00	Pass	
HE40	MCS0	2	6845	Full	0.28	0.28			0.87	-3.48	-2.61	-1.00	Pass	
HE40	MCS0	2	6845	242/62	0.28	0.28			0.27	-3.48	-3.21	-1.00	Pass	
HE80	MCS0	2	6625	Full	0.29	0.29			1.12	-3.48	-2.36	-1.00	Pass	
HE80	MCS0	2	6625	484/65	0.29	0.29			1.11	-3.48	-2.37	-1.00	Pass	
HE80	MCS0	2	6705	Full	0.29	0.29			1.19	-3.48	-2.29	-1.00	Pass	
HE80	MCS0	2	6705	484/65	0.29	0.29			0.94	-3.48	-2.54	-1.00	Pass	
HE80	MCS0	2	6785	Full	0.29	0.29			0.83	-3.48	-2.65	-1.00	Pass	
HE80	MCS0	2	6785	484/66	0.29	0.29			0.79	-3.48	-2.69	-1.00	Pass	
HE80	MCS0	2	6865	Full	0.29	0.29			1.08	-3.48	-2.40	-1.00	Pass	
HE80	MCS0	2	6865	484/66	0.29	0.29			0.13	-3.48	-3.35	-1.00	Pass	
HE160	MCS0	2	6665	Full	0.31	0.28			-1.50	-3.48	-4.98	-1.00	Pass	
HE160	MCS0	2	6665	996/67	0.31	0.28			-1.82	-3.48	-5.30	-1.00	Pass	
HE160	MCS0	2	6825	Full	0.31	0.28			-1.80	-3.48	-5.28	-1.00	Pass	
HE160	MCS0	2	6825	996/67	0.31	0.28			-2.14	-3.48	-5.62	-1.00	Pass	
HE160	MCS0	2	6826	996/S67	0.31	0.28			-2.53	-3.48	-6.01	-1.00	Pass	

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8 MIMO									
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	6875	Full	16.68	16.68	20.53	20.18	
HE20	MCS0	2	6895	Full	16.68	16.60	20.48	20.28	
HE20	MCS0	2	6995	Full	16.73	16.63	19.98	19.83	
HE20	MCS0	2	7095	Full	16.68	16.68	20.43	20.08	
HE40	MCS0	2	6885	Full	37.76	37.76	40.10	40.01	
HE40	MCS0	2	6925	Full	37.76	37.76	40.01	40.19	
HE40	MCS0	2	6965	Full	37.56	37.66	40.10	40.10	
HE40	MCS0	2	7085	Full	37.66	37.66	40.10	40.10	
HE80	MCS0	2	6945	Full	76.84	76.84	80.88	81.68	
HE80	MCS0	2	7025	Full	76.84	76.82	81.04	81.04	
HE160	MCS0	2	6985	Full	155.36	154.89	163.36	164.32	

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO														
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2			
HE20	MCS0	2	6875	Full	0.24	0.26	10.35	10.64	13.50	-6.90		6.60	24.00	Pass
HE20	MCS0	2	6875	26/0	0.24	0.26	1.86	2.37	5.13	-6.90		-1.77	24.00	Pass
HE20	MCS0	2	6875	52/37	0.24	0.26	4.94	5.70	8.34	-6.90		1.44	24.00	Pass
HE20	MCS0	2	6875	106/53	0.24	0.26	8.52	7.57	11.08	-6.90		4.18	24.00	Pass
HE20	MCS0	2	6895	Full	0.24	0.26	10.22	11.03	13.65	-6.90		6.75	24.00	Pass
HE20	MCS0	2	6895	26/0	0.24	0.26	1.82	2.43	5.14	-6.90		-1.76	24.00	Pass
HE20	MCS0	2	6895	52/37	0.24	0.26	5.36	6.23	8.82	-6.90		1.92	24.00	Pass
HE20	MCS0	2	6895	106/53	0.24	0.26	9.02	7.75	11.44	-6.90		4.54	24.00	Pass
HE20	MCS0	2	6995	Full	0.24	0.26	10.80	10.90	13.86	-6.90		6.96	24.00	Pass
HE20	MCS0	2	6995	26/4	0.24	0.26	4.11	3.61	6.87	-6.90		-0.03	24.00	Pass
HE20	MCS0	2	6995	52/38	0.24	0.26	5.93	5.88	8.91	-6.90		2.01	24.00	Pass
HE20	MCS0	2	6995	106/53	0.24	0.26	8.02	8.49	11.27	-6.90		4.37	24.00	Pass
HE20	MCS0	2	7095	Full	0.24	0.26	10.48	10.98	13.74	-6.90		6.84	24.00	Pass
HE20	MCS0	2	7095	26/8	0.24	0.26	2.26	2.83	5.56	-6.90		-1.34	24.00	Pass
HE20	MCS0	2	7095	52/40	0.24	0.26	4.98	5.33	8.17	-6.90		1.27	24.00	Pass
HE20	MCS0	2	7095	106/54	0.24	0.26	8.53	7.88	11.22	-6.90		4.32	24.00	Pass
HE40	MCS0	2	6885	Full	0.00	0.00	12.46	12.93	15.71	-6.90		8.81	24.00	Pass
HE40	MCS0	2	6885	242/61	0.00	0.00	11.51	11.07	14.31	-6.90		7.41	24.00	Pass
HE40	MCS0	2	6925	Full	0.00	0.00	13.26	12.26	15.80	-6.90		8.90	24.00	Pass
HE40	MCS0	2	6925	242/61	0.00	0.00	11.10	12.06	14.62	-6.90		7.72	24.00	Pass
HE40	MCS0	2	6965	Full	0.00	0.00	13.23	12.90	16.08	-6.90		9.18	24.00	Pass
HE40	MCS0	2	6965	242/62	0.00	0.00	11.22	11.88	14.57	-6.90		7.67	24.00	Pass
HE40	MCS0	2	7085	Full	0.00	0.00	12.65	13.15	15.92	-6.90		9.02	24.00	Pass
HE40	MCS0	2	7085	242/62	0.00	0.00	11.06	10.51	13.80	-6.90		6.90	24.00	Pass
HE80	MCS0	2	6945	Full	0.00	0.00	14.92	14.72	17.83	-6.90		10.93	24.00	Pass
HE80	MCS0	2	6945	484/65	0.00	0.00	13.97	13.35	16.68	-6.90		9.78	24.00	Pass
HE80	MCS0	2	7025	Full	0.00	0.00	14.36	14.61	17.50	-6.90		10.60	24.00	Pass
HE80	MCS0	2	7025	484/66	0.00	0.00	13.32	13.67	16.51	-6.90		9.61	24.00	Pass
HE160	MCS0	2	6985	Full	0.00	0.00	14.09	13.74	16.93	-6.90		10.03	24.00	Pass
HE160	MCS0	2	6985	996/67	0.00	0.00	13.07	12.10	15.62	-6.90		8.72	24.00	Pass
HE160	MCS0	2	6985	996/S67	0.00	0.00	12.82	12.05	15.46	-6.90		8.56	24.00	Pass


TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8 MIMO														
Mod.	Data Rate	N _{Tx}	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	SUM		
HE20	MCS0	2	6875	Full	0.24	0.26			2.13	-4.28	-2.15	-1.00	Pass	
HE20	MCS0	2	6875	26/0	0.24	0.26			1.69	-4.28	-2.59	-1.00	Pass	
HE20	MCS0	2	6875	52/37	0.24	0.26			1.97	-4.28	-2.31	-1.00	Pass	
HE20	MCS0	2	6875	106/53	0.24	0.26			1.82	-4.28	-2.46	-1.00	Pass	
HE20	MCS0	2	6895	Full	0.24	0.26			2.09	-4.28	-2.19	-1.00	Pass	
HE20	MCS0	2	6895	26/0	0.24	0.26			1.81	-4.28	-2.47	-1.00	Pass	
HE20	MCS0	2	6895	52/37	0.24	0.26			1.95	-4.28	-2.33	-1.00	Pass	
HE20	MCS0	2	6895	106/53	0.24	0.26			1.95	-4.28	-2.33	-1.00	Pass	
HE20	MCS0	2	6995	Full	0.24	0.26			2.07	-4.28	-2.21	-1.00	Pass	
HE20	MCS0	2	6995	26/4	0.24	0.26			1.63	-4.28	-2.65	-1.00	Pass	
HE20	MCS0	2	6995	52/38	0.24	0.26			1.78	-4.28	-2.50	-1.00	Pass	
HE20	MCS0	2	6995	106/53	0.24	0.26			1.55	-4.28	-2.73	-1.00	Pass	
HE20	MCS0	2	7095	Full	0.24	0.26			2.24	-4.28	-2.04	-1.00	Pass	
HE20	MCS0	2	7095	26/8	0.24	0.26			2.13	-4.28	-2.15	-1.00	Pass	
HE20	MCS0	2	7095	52/40	0.24	0.26			1.84	-4.28	-2.44	-1.00	Pass	
HE20	MCS0	2	7095	106/54	0.24	0.26			2.08	-4.28	-2.20	-1.00	Pass	
HE40	MCS0	2	6885	Full	0.28	0.28			1.64	-4.28	-2.64	-1.00	Pass	
HE40	MCS0	2	6885	242/61	0.28	0.28			1.43	-4.28	-2.85	-1.00	Pass	
HE40	MCS0	2	6925	Full	0.28	0.28			1.77	-4.28	-2.52	-1.00	Pass	
HE40	MCS0	2	6925	242/61	0.28	0.28			1.69	-4.28	-2.59	-1.00	Pass	
HE40	MCS0	2	6965	Full	0.28	0.28			1.67	-4.28	-2.61	-1.00	Pass	
HE40	MCS0	2	6965	242/62	0.28	0.28			1.53	-4.28	-2.75	-1.00	Pass	
HE40	MCS0	2	7085	Full	0.28	0.28			1.65	-4.28	-2.63	-1.00	Pass	
HE40	MCS0	2	7085	242/62	0.28	0.28			1.23	-4.28	-3.05	-1.00	Pass	
HE80	MCS0	2	6945	Full	0.29	0.29			1.08	-4.28	-3.20	-1.00	Pass	
HE80	MCS0	2	6945	484/65	0.29	0.29			0.55	-4.28	-3.73	-1.00	Pass	
HE80	MCS0	2	7025	Full	0.29	0.29			1.16	-4.28	-3.12	-1.00	Pass	
HE80	MCS0	2	7025	484/66	0.29	0.29			0.83	-4.28	-3.45	-1.00	Pass	
HE160	MCS0	2	6985	Full	0.31	0.28			-1.98	-4.28	-6.26	-1.00	Pass	
HE160	MCS0	2	6985	996/67	0.31	0.28			-2.32	-4.28	-6.60	-1.00	Pass	
HE160	MCS0	2	6985	996/S67	0.31	0.28			-2.42	-4.28	-6.70	-1.00	Pass	



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

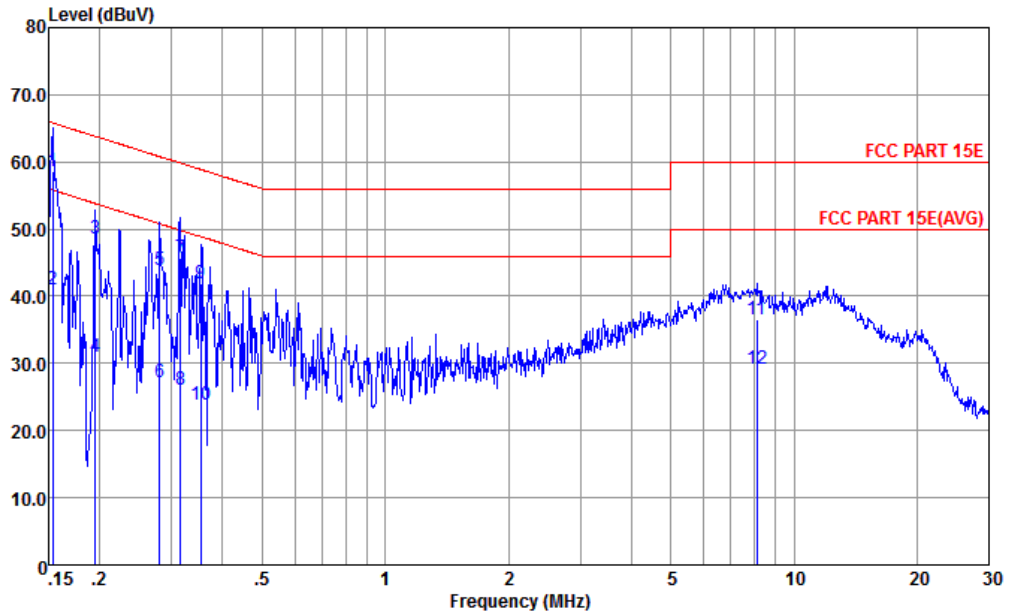


Site : CO01-KS
 Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.153	58.59	-7.23	65.82	48.10	0.02	10.47	QP
2	0.153	41.09	-14.73	55.82	30.60	0.02	10.47	Average
3	0.195	48.61	-15.19	63.80	38.20	0.04	10.37	QP
4	0.195	31.01	-22.79	53.80	20.60	0.04	10.37	Average
5	0.280	43.98	-16.83	60.81	33.59	0.07	10.32	QP
6	0.280	27.18	-23.63	50.81	16.79	0.07	10.32	Average
7	0.315	45.57	-14.27	59.84	35.20	0.07	10.30	QP
8	0.315	25.97	-23.87	49.84	15.60	0.07	10.30	Average
9	0.354	41.86	-17.01	58.87	31.50	0.08	10.28	QP
10	0.354	23.86	-25.01	48.87	13.50	0.08	10.28	Average
11	8.105	36.62	-23.38	60.00	26.10	0.20	10.32	QP
12	8.105	29.12	-20.88	50.00	18.60	0.20	10.32	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

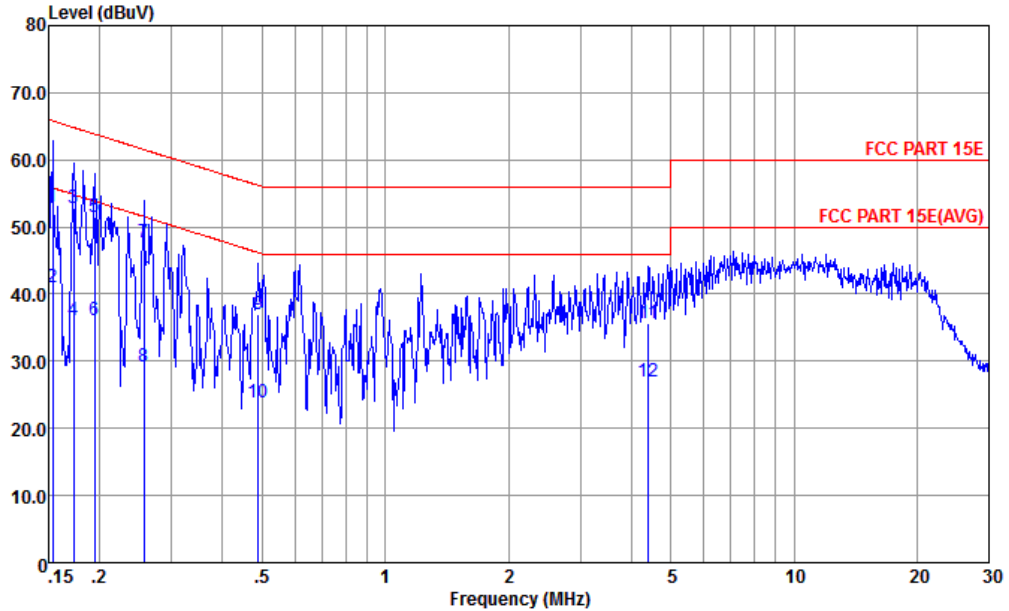

Site : CO01-KS
 Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	53.08	-12.74	65.82	42.50	0.11	10.47	QP
2	0.153	41.08	-14.74	55.82	30.50	0.11	10.47	Average
3 *	0.173	52.73	-12.08	64.81	42.20	0.11	10.42	QP
4	0.173	36.13	-18.68	54.81	25.60	0.11	10.42	Average
5	0.194	51.58	-12.26	63.84	41.11	0.10	10.37	QP
6	0.194	36.08	-17.76	53.84	25.61	0.10	10.37	Average
7	0.256	47.63	-13.93	61.56	37.20	0.10	10.33	QP
8	0.256	29.23	-22.33	51.56	18.80	0.10	10.33	Average
9	0.489	36.95	-19.24	56.19	26.60	0.11	10.24	QP
10	0.489	23.85	-22.34	46.19	13.50	0.11	10.24	Average
11	4.407	35.63	-20.37	56.00	25.20	0.17	10.26	QP
12	4.407	27.03	-18.97	46.00	16.60	0.17	10.26	Average



Appendix C. Radiated Spurious Emission

Test Engineer :	Henry LI	Temperature :	22~23°C
		Relative Humidity :	41~42%

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE80 Full CH 07 5985MHz		5918.44	65.52	-22.78	88.3	55.03	35.88	11.4	36.79	162	59	P	H
		5924.84	56.45	-11.85	68.3	45.99	35.87	11.4	36.81	162	59	A	H
	*	5977	99.16	-	-	88.73	35.84	11.45	36.86	162	59	P	H
		5977	91.31	-	-	80.88	35.84	11.45	36.86	162	59	A	H
		5919.72	60.57	-27.73	88.3	50.08	35.88	11.4	36.79	385	0	P	V
		5922.44	52.41	-15.89	68.3	41.95	35.87	11.4	36.81	385	0	A	V
	*	5986	97.7	-	-	87.27	35.84	11.45	36.86	385	0	P	V
	5986	90.87	-	-	80.44	35.84	11.45	36.86	385	0	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		11970	45.87	-28.13	74	56.29	38.98	16.66	66.06	300	0	P	H
CH 07 5985MHz		11970	45.37	-28.63	74	55.79	38.98	16.66	66.06	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/65 CH 07 5985MHz		5920.68	69.58	-18.72	88.3	59.77	35.2	11.4	36.79	173	62	P	H
		5923.08	47.35	-20.95	68.3	37.54	35.22	11.4	36.81	173	62	A	H
		5959	100.09	-	-	90.24	35.26	11.43	36.84	173	62	P	H
		5959	91.43	-	-	81.58	35.26	11.43	36.84	173	62	A	H
		5922.6	69.04	-19.26	88.3	59.23	35.22	11.4	36.81	244	352	P	V
		5924.04	47.69	-20.61	68.3	37.88	35.22	11.4	36.81	244	352	A	V
		5950	99.03	-	-	89.19	35.24	11.43	36.83	244	352	P	V
		5950	91.19	-	-	81.35	35.24	11.43	36.83	244	352	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5898.6	73.18	-15.12	88.3	62.69	35.88	11.38	36.77	255	62	P	H
		5917.48	62.56	-5.74	68.3	52.07	35.88	11.4	36.79	255	62	A	H
	*	5995	98.04	-	-	87.62	35.83	11.47	36.88	255	62	P	H
		5995	89.79	-	-	79.37	35.83	11.47	36.88	255	62	A	H
		5888.36	70.27	-18.03	88.3	59.8	35.88	11.36	36.77	399	0	P	V
		5910.12	62.23	-6.07	68.3	51.76	35.88	11.38	36.79	399	0	A	V
	*	6040	98.04	-	-	87.59	35.82	11.5	36.87	399	0	P	V
	6040	89.92	-	-	79.47	35.82	11.5	36.87	399	0	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		12050	45.87	-28.13	74	56.12	39.04	16.72	66.01	300	0	P	H
		12050	45.37	-28.63	74	55.62	39.04	16.72	66.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE160 Partial 996 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE160 Partial 996/67 CH 15 6025MHz and a Remark section.



U-NII 8 - 6875-7125MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 229 7095MHz		7218.92	53.02	-35.28	88.3	40.67	36.71	12.71	37.07	119	54	P	H
		7231.56	43.19	-25.11	68.3	30.85	36.7	12.71	37.07	119	54	A	H
	*	7093	98.76	-	-	86.52	36.77	12.59	37.12	119	54	P	H
		7093	89.53	-	-	77.29	36.77	12.59	37.12	119	54	A	H
		7208.84	53.52	-34.78	88.3	41.17	36.72	12.71	37.08	300	349	P	V
		7133	42.96	-25.34	68.3	30.68	36.74	12.64	37.1	300	349	A	V
	*	7093	99.95	-	-	87.71	36.77	12.59	37.12	300	349	P	V
		7093	91.15	-	-	78.91	36.77	12.59	37.12	300	349	A	V

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.

U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 229 7095MHz		14190	44.96	-43.34	88.3	51.89	39.83	18.16	64.92	300	0	P	H
		14190	46.18	-42.12	88.3	53.11	39.83	18.16	64.92	100	360	P	V

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 106/54 CH 229 7095MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes data for frequencies 7155.54, 7125.12, 7084, 7127.64, 7125.66, 7093 and a Remark section.

U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes data for frequency 14168 and a Remark section.



**U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		7126.02	62.6	-25.7	88.3	51.28	35.82	12.61	37.11	121	59	P	H
		7124.94	43.55	-24.75	68.3	32.23	35.82	12.61	37.11	121	59	A	H
		7093	97.41	-	-	86.12	35.82	12.59	37.12	121	59	P	H
		7093	89.4	-	-	78.11	35.82	12.59	37.12	121	59	A	H
		7126.56	64.7	-23.6	88.3	53.38	35.82	12.61	37.11	181	301	P	V
		7124.94	44.87	-23.43	68.3	33.55	35.82	12.61	37.11	181	301	A	V
		7102	100.5	-	-	89.2	35.82	12.59	37.11	181	301	P	V
		7102	90.5	-	-	79.2	35.82	12.59	37.11	181	301	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE160 Full LF		30.97	21.21	-18.79	40	28.4	24.7	0.51	32.4	-	-	P	H
		95.96	17.87	-25.63	43.5	33.66	15.2	1.41	32.4	-	-	P	H
		143.49	16.24	-27.26	43.5	29.66	17.25	1.73	32.4	-	-	P	H
		259.89	18.66	-27.34	46	28.71	20	2.35	32.4	-	-	P	H
		445.16	23.11	-22.89	46	29.54	22.9	3.07	32.4	-	-	P	H
		628.49	26.66	-19.34	46	29.23	26.17	3.66	32.4	-	-	P	H
		30.97	21	-19	40	28.19	24.7	0.51	32.4	-	-	P	V
		95.96	15.84	-27.66	43.5	31.63	15.2	1.41	32.4	-	-	P	V
		131.85	17.81	-25.69	43.5	31.05	17.5	1.66	32.4	-	-	P	V
		261.83	18.33	-27.67	46	28.37	20	2.36	32.4	-	-	P	V
		359.8	22.29	-23.71	46	31.42	20.5	2.77	32.4	-	-	P	V
		744.89	27.28	-18.72	46	27.71	27.9	3.98	32.31	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Co-location:

LTE B13 Link + WLAN 6GHz 802.11ax HE160 CH15 Tx + BLE (2Mbps) CH39 Tx
(Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		2486.92	50.61	-23.39	74	47.2	32.98	7.25	36.82	102	140	P	H
		2483.5	47.16	-6.84	54	43.75	32.98	7.25	36.82	102	140	A	H
		2480	100.7	-	-	97.29	32.98	7.25	36.82	102	140	P	H
		2480	99	-	-	95.59	32.98	7.25	36.82	102	140	A	H
		2483.62	50.9	-23.1	74	47.49	32.98	7.25	36.82	263	80	P	V
		2483.5	47.77	-6.23	54	44.36	32.98	7.25	36.82	263	80	A	V
		2480	101.25	-	-	97.84	32.98	7.25	36.82	263	80	P	V
		2480	99.68	-	-	96.27	32.98	7.25	36.82	263	80	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5917.16	75.24	-13.06	88.3	65.43	35.2	11.4	36.79	100	60	P	H
		5915.88	65.21	-3.09	68.3	55.4	35.2	11.4	36.79	100	60	A	H
	*	6040	102.81	-	-	92.86	35.32	11.5	36.87	100	60	P	H
		6040	94.27	-	-	84.32	35.32	11.5	36.87	100	60	A	H
		5918.76	69.77	-18.53	88.3	59.96	35.2	11.4	36.79	100	326	P	V
		5922.28	60.57	-7.73	68.3	50.76	35.22	11.4	36.81	100	326	A	V
	*	6013	98.67	-	-	88.76	35.31	11.48	36.88	100	326	P	V
		6013	90.01	-	-	80.1	35.31	11.48	36.88	100	326	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



LTE B13 Link + WLAN 6GHz 802.11ax HE160 CH15 Tx + BLE (2Mbps) CH39 Tx BT5.0_CH39
(Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4965	40.33	-33.67	74	60.61	34.78	10.41	65.47	300	183	P	H
		7440	41.68	-32.32	74	58.82	36.38	12.79	66.31	300	183	P	H
		4960	39.29	-34.71	74	59.59	34.78	10.39	65.47	300	291	P	V
		7440	40.72	-33.28	74	57.86	36.38	12.79	66.31	300	291	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		12048	44.7	-29.3	74	55.48	38.53	16.7	66.01	300	0	P	H
		12048	47.47	-26.53	74	58.25	38.53	16.7	66.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE80 Full CH07 5985MHz																																																																														
1+2	Horizontal	Fundamental																																																																													
Peak	<p>Site : 032905-KS Condition : WIFI @ PEAK 3m 3117 00218652 HORIZONTAL Project : RBM 1000.000kHz VBR 3000.000kHz SWT Auto Mode : 23 Plane : Z Full-directivity : Full-directivity IRE1 : #25 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5918.44</td> <td>65.52</td> <td>-22.78</td> <td>88.30</td> <td>55.03</td> <td>35.88</td> <td>11.40</td> <td>36.79</td> <td>162</td> <td>59 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	5918.44	65.52	-22.78	88.30	55.03	35.88	11.40	36.79	162	59 Peak	<p>Site : 032905-KS Condition : WIFI @ PEAK 3m 3117 00218652 HORIZONTAL Project : RBM 1000.000kHz VBR 3000.000kHz SWT Auto Mode : 23 Plane : Z Full-directivity : Full-directivity IRE1 : #25 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5977.00</td> <td>99.16</td> <td>10.86</td> <td>88.30</td> <td>88.73</td> <td>35.84</td> <td>11.45</td> <td>36.86</td> <td>162</td> <td>59 Peak</td> </tr> <tr> <td>2</td> <td>5977.00</td> <td>91.31</td> <td>23.01</td> <td>68.30</td> <td>80.88</td> <td>35.84</td> <td>11.45</td> <td>36.86</td> <td>162</td> <td>59 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	5977.00	99.16	10.86	88.30	88.73	35.84	11.45	36.86	162	59 Peak	2	5977.00	91.31	23.01	68.30	80.88	35.84	11.45	36.86	162	59 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1	5918.44	65.52	-22.78	88.30	55.03	35.88	11.40	36.79	162	59 Peak																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1	5977.00	99.16	10.86	88.30	88.73	35.84	11.45	36.86	162	59 Peak																																																																					
2	5977.00	91.31	23.01	68.30	80.88	35.84	11.45	36.86	162	59 Average																																																																					
Avg.	<p>Site : 032905-KS Condition : WIFI @ (AVG) 3m 3117 00218652 HORIZONTAL Project : RBM 1000.000kHz VBR 2.000kHz SWT Auto Mode : 23 Plane : Z Full-directivity : Full-directivity IRE1 : #25 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.84</td> <td>56.45</td> <td>-11.85</td> <td>68.30</td> <td>45.99</td> <td>35.87</td> <td>11.40</td> <td>36.81</td> <td>162</td> <td>59 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	5924.84	56.45	-11.85	68.30	45.99	35.87	11.40	36.81	162	59 Average	Left blank																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1	5924.84	56.45	-11.85	68.30	45.99	35.87	11.40	36.81	162	59 Average																																																																					



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE80 Full CH07 5985MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ PEAK 3m 3117.00218625 VERTICAL Project : RSM-1000.000MHz VBR-3000.000MHz SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity IMEI : 825 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5919.72</td> <td>60.57</td> <td>-27.73</td> <td>88.30</td> <td>50.08</td> <td>35.88</td> <td>11.40</td> <td>36.79</td> <td>385</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	5919.72	60.57	-27.73	88.30	50.08	35.88	11.40	36.79	385	0 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ PEAK 3m 3117.00218625 VERTICAL Project : RSM-1000.000MHz VBR-3000.000MHz SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity IMEI : 825 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5986.00</td> <td>97.70</td> <td>0.40</td> <td>88.30</td> <td>87.27</td> <td>35.84</td> <td>11.45</td> <td>36.86</td> <td>385</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5986.00</td> <td>90.87</td> <td>22.57</td> <td>68.30</td> <td>80.44</td> <td>35.84</td> <td>11.45</td> <td>36.86</td> <td>385</td> <td>0 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	5986.00	97.70	0.40	88.30	87.27	35.84	11.45	36.86	385	0 Peak	VERTICAL	2	5986.00	90.87	22.57	68.30	80.44	35.84	11.45	36.86	385	0 Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1	5919.72	60.57	-27.73	88.30	50.08	35.88	11.40	36.79	385	0 Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1	5986.00	97.70	0.40	88.30	87.27	35.84	11.45	36.86	385	0 Peak	VERTICAL																																																																											
2	5986.00	90.87	22.57	68.30	80.44	35.84	11.45	36.86	385	0 Average	VERTICAL																																																																											
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ (AVG) 3m 3117.00218625 VERTICAL Project : RSM-1000.000MHz VBR-3000.000MHz SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity IMEI : 825 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.44</td> <td>52.41</td> <td>-15.89</td> <td>68.30</td> <td>41.95</td> <td>35.87</td> <td>11.40</td> <td>36.81</td> <td>385</td> <td>0 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	5922.44	52.41	-15.89	68.30	41.95	35.87	11.40	36.81	385	0 Average	VERTICAL	<p>Left blank</p>																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1	5922.44	52.41	-15.89	68.30	41.95	35.87	11.40	36.81	385	0 Average	VERTICAL																																																																											



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	<p>Peak</p> <p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317 5N 7957 HORIZONTAL Project : RRF 1000 0000Hz VBR 3000 0000Hz SWT Auto Mode : 24 Plane : 2 Full-directivity : 2 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.68</td> <td>69.58</td> <td>-18.72</td> <td>88.30</td> <td>59.77</td> <td>35.20</td> <td>11.40</td> <td>36.79</td> <td>173</td> <td>62 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5920.68	69.58	-18.72	88.30	59.77	35.20	11.40	36.79	173	62 Peak	HORIZONTAL	<p>Peak</p> <p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317 5N 7957 HORIZONTAL Project : RRF 1000 0000Hz VBR 3000 0000Hz SWT Auto Mode : 24 Plane : 2 Full-directivity : 2 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5959.00</td> <td>100.00</td> <td>11.79</td> <td>88.30</td> <td>90.24</td> <td>35.24</td> <td>11.43</td> <td>36.84</td> <td>173</td> <td>62 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5959.00</td> <td>191.63</td> <td>23.13</td> <td>68.30</td> <td>81.58</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>173</td> <td>62 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5959.00	100.00	11.79	88.30	90.24	35.24	11.43	36.84	173	62 Peak	HORIZONTAL	2	5959.00	191.63	23.13	68.30	81.58	35.26	11.43	36.84	173	62 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5920.68	69.58	-18.72	88.30	59.77	35.20	11.40	36.79	173	62 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5959.00	100.00	11.79	88.30	90.24	35.24	11.43	36.84	173	62 Peak	HORIZONTAL																																																																							
2	5959.00	191.63	23.13	68.30	81.58	35.26	11.43	36.84	173	62 Average	HORIZONTAL																																																																							
Avg.	<p>Avg.</p> <p>Site : 032905-KS Condition : WIFI 6E (AVERAGE) 3m 3317 5N 7957 HORIZONTAL Project : RRF 1000 0000Hz VBR 0 0100Hz SWT Auto Mode : 24 Plane : 2 Full-directivity : 2 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.08</td> <td>47.35</td> <td>-20.95</td> <td>68.30</td> <td>37.54</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>173</td> <td>62 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5923.08	47.35	-20.95	68.30	37.54	35.22	11.40	36.81	173	62 Average	HORIZONTAL	Left blank																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5923.08	47.35	-20.95	68.30	37.54	35.22	11.40	36.81	173	62 Average	HORIZONTAL																																																																							



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																												
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																												
1+2	Vertical	Fundamental																																																																											
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ PEAK @ 3317.5M 75957 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SRT-Auto FR1D2901 Mode : 24 Plane : Y Full-directivity IMEI : 825 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.60</td> <td>69.04</td> <td>-19.26</td> <td>88.30</td> <td>69.23</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>244</td> <td>352</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5922.60	69.04	-19.26	88.30	69.23	35.22	11.40	36.81	244	352	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ PEAK @ 3317.5M 75957 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SRT-Auto FR1D2901 Mode : 24 Plane : Y Full-directivity IMEI : 825 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>99.03</td> <td>10.73</td> <td>88.30</td> <td>89.19</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>244</td> <td>352</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>91.19</td> <td>22.89</td> <td>68.30</td> <td>81.35</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>244</td> <td>352</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5950.00	99.03	10.73	88.30	89.19	35.24	11.43	36.83	244	352	Peak	VERTICAL	2	5950.00	91.19	22.89	68.30	81.35	35.24	11.43	36.83	244	352	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5922.60	69.04	-19.26	88.30	69.23	35.22	11.40	36.81	244	352	Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5950.00	99.03	10.73	88.30	89.19	35.24	11.43	36.83	244	352	Peak	VERTICAL																																																																	
2	5950.00	91.19	22.89	68.30	81.35	35.24	11.43	36.83	244	352	Average	VERTICAL																																																																	
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ (AVG) @ 3317.5M 75957 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SRT-Auto FR1D2901 Mode : 24 Plane : Y Full-directivity IMEI : 825 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.04</td> <td>47.69</td> <td>-20.61</td> <td>68.30</td> <td>37.88</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>244</td> <td>352</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5924.04	47.69	-20.61	68.30	37.88	35.22	11.40	36.81	244	352	Average	VERTICAL	Left blank																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5924.04	47.69	-20.61	68.30	37.88	35.22	11.40	36.81	244	352	Average	VERTICAL																																																																	



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE160 Full CH15 6025MHz																																																																																					
1+2	Horizontal	Fundamental																																																																																				
Peak	<p>Site: 032905-KS Condition: WIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project: RRF 1000 0000Hz VBR 3000 0000Hz SWT Auto Mode: 27 Plane: 2 Full-directivity MEI: #25 Powersetting: 14.5</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5898.60</td> <td>73.18</td> <td>-15.12</td> <td>88.30</td> <td>62.69</td> <td>35.88</td> <td>11.38</td> <td>36.77</td> <td>255</td> <td>62 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5898.60	73.18	-15.12	88.30	62.69	35.88	11.38	36.77	255	62 Peak	HORIZONTAL	<p>Site: 032905-KS Condition: WIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project: RRF 1000 0000Hz VBR 3000 0000Hz SWT Auto Mode: 27 Plane: 2 Full-directivity MEI: #25 Powersetting: 14.5</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5995.00</td> <td>98.04</td> <td>9.74</td> <td>88.30</td> <td>87.62</td> <td>35.83</td> <td>11.47</td> <td>36.88</td> <td>255</td> <td>62 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5995.00</td> <td>89.79</td> <td>21.49</td> <td>68.30</td> <td>79.31</td> <td>35.83</td> <td>11.47</td> <td>36.88</td> <td>255</td> <td>62 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5995.00	98.04	9.74	88.30	87.62	35.83	11.47	36.88	255	62 Peak	HORIZONTAL	2	5995.00	89.79	21.49	68.30	79.31	35.83	11.47	36.88	255	62 Average	HORIZONTAL
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																													
1	5898.60	73.18	-15.12	88.30	62.69	35.88	11.38	36.77	255	62 Peak	HORIZONTAL																																																																											
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																													
1	5995.00	98.04	9.74	88.30	87.62	35.83	11.47	36.88	255	62 Peak	HORIZONTAL																																																																											
2	5995.00	89.79	21.49	68.30	79.31	35.83	11.47	36.88	255	62 Average	HORIZONTAL																																																																											
Avg.	<p>Site: 032905-KS Condition: WIFI 6E (AVG) 3m 3117 00218652 HORIZONTAL Project: RRF 1000 0000Hz VBR 2.0000Hz SWT Auto Mode: 27 Plane: 2 Full-directivity MEI: #25 Powersetting: 14.5</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.48</td> <td>62.56</td> <td>-5.74</td> <td>68.30</td> <td>52.07</td> <td>35.88</td> <td>11.40</td> <td>36.79</td> <td>255</td> <td>62 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5917.48	62.56	-5.74	68.30	52.07	35.88	11.40	36.79	255	62 Average	HORIZONTAL	Left blank																																																
MEI	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																													
1	5917.48	62.56	-5.74	68.30	52.07	35.88	11.40	36.79	255	62 Average	HORIZONTAL																																																																											



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE160 Full CH15 6025MHz																																																																														
1+2	Vertical	Fundamental																																																																													
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3117.00218602 VERTICAL Project : R98-1000.000MHz VBR-3000.000MHz SRT-Auto FR1D2901G Mode : 27 Plane : Y Full-directivity IMEI : 825 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5888.36</td> <td>70.27</td> <td>-18.03</td> <td>88.30</td> <td>69.80</td> <td>35.88</td> <td>11.36</td> <td>36.77</td> <td>399</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1 5888.36	70.27	-18.03	88.30	69.80	35.88	11.36	36.77	399	0 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3117.00218602 VERTICAL Project : R98-1000.000MHz VBR-3000.000MHz SRT-Auto FR1D2901G Mode : 27 Plane : Y Full-directivity IMEI : 825 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 + 6040.00</td> <td>98.04</td> <td>9.74</td> <td>88.30</td> <td>87.59</td> <td>35.87</td> <td>11.50</td> <td>36.87</td> <td>399</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 + 6040.00</td> <td>89.92</td> <td>21.62</td> <td>68.30</td> <td>79.47</td> <td>35.87</td> <td>11.50</td> <td>36.87</td> <td>399</td> <td>0 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1 + 6040.00	98.04	9.74	88.30	87.59	35.87	11.50	36.87	399	0 Peak	VERTICAL	2 + 6040.00	89.92	21.62	68.30	79.47	35.87	11.50	36.87	399	0 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																																							
1 5888.36	70.27	-18.03	88.30	69.80	35.88	11.36	36.77	399	0 Peak	VERTICAL																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																																							
1 + 6040.00	98.04	9.74	88.30	87.59	35.87	11.50	36.87	399	0 Peak	VERTICAL																																																																					
2 + 6040.00	89.92	21.62	68.30	79.47	35.87	11.50	36.87	399	0 Average	VERTICAL																																																																					
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WIFI 6E (AVG) 3m 3117.00218602 VERTICAL Project : R98-1000.000MHz VBR-3000.000MHz SRT-Auto FR1D2901G Mode : 27 Plane : Y Full-directivity IMEI : 825 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5910.12</td> <td>62.23</td> <td>-6.07</td> <td>68.30</td> <td>51.76</td> <td>35.88</td> <td>11.38</td> <td>36.79</td> <td>399</td> <td>0 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1 5910.12	62.23	-6.07	68.30	51.76	35.88	11.38	36.79	399	0 Average	VERTICAL	Left blank																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																																							
1 5910.12	62.23	-6.07	68.30	51.76	35.88	11.38	36.79	399	0 Average	VERTICAL																																																																					



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Partial 996 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE160 Partial 996/67 CH15 6025MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317.5M 79567 HORIZONTAL Project : R9811000.000KHz V9813000.000KHz SWT:Auto Mode : 29 Plane : Y Full-directivity : Y MEI : #26 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5896.68</td> <td>65.04</td> <td>-23.26</td> <td>88.30</td> <td>55.25</td> <td>35.18</td> <td>11.38</td> <td>36.77</td> <td>188</td> <td>01 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5896.68	65.04	-23.26	88.30	55.25	35.18	11.38	36.77	188	01 Peak	HORIZONTAL	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317.5M 79567 HORIZONTAL Project : R9811000.000KHz V9813000.000KHz SWT:Auto Mode : 29 Plane : Y Full-directivity : Y MEI : #26 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5959.00</td> <td>97.00</td> <td>8.79</td> <td>88.30</td> <td>87.24</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>188</td> <td>01 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5959.00</td> <td>88.97</td> <td>20.67</td> <td>68.30</td> <td>79.12</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>188</td> <td>01 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5959.00	97.00	8.79	88.30	87.24	35.26	11.43	36.84	188	01 Peak	HORIZONTAL	2	5959.00	88.97	20.67	68.30	79.12	35.26	11.43	36.84	188	01 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5896.68	65.04	-23.26	88.30	55.25	35.18	11.38	36.77	188	01 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5959.00	97.00	8.79	88.30	87.24	35.26	11.43	36.84	188	01 Peak	HORIZONTAL																																																																							
2	5959.00	88.97	20.67	68.30	79.12	35.26	11.43	36.84	188	01 Average	HORIZONTAL																																																																							
Avg.	<p>Site : 032905-KS Condition : WIFI 6E(AVG) 3m 3317.5M 79567 HORIZONTAL Project : R9811000.000KHz V9813000.000KHz SWT:Auto Mode : 29 Plane : Y Full-directivity : Y MEI : #26 Powersetting : 12</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.84</td> <td>52.01</td> <td>-16.29</td> <td>68.30</td> <td>42.20</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>188</td> <td>01 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5924.84	52.01	-16.29	68.30	42.20	35.22	11.40	36.81	188	01 Average	HORIZONTAL	Left blank																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5924.84	52.01	-16.29	68.30	42.20	35.22	11.40	36.81	188	01 Average	HORIZONTAL																																																																							



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																										
ANT	802.11ax HE160 Partial 996/67 CH15 6025MHz																																																																										
1+2	Vertical	Fundamental																																																																									
<p>Peak</p>	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 VERTICAL Project : RSM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : (FR) 102901 Plane : Y IME1 : Full-directivity Powersetting : 425</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5864.12</td> <td>63.59</td> <td>-24.71</td> <td>88.30</td> <td>53.87</td> <td>35.13</td> <td>11.33</td> <td>36.74</td> <td>389</td> <td>3 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5864.12	63.59	-24.71	88.30	53.87	35.13	11.33	36.74	389	3 Peak VERTICAL	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 VERTICAL Project : RSM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : (FR) 102901 Plane : Y IME1 : Full-directivity Powersetting : 425</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5986.00</td> <td>76.02</td> <td>7.72</td> <td>88.30</td> <td>86.15</td> <td>35.28</td> <td>11.45</td> <td>36.86</td> <td>389</td> <td>3 Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>5986.00</td> <td>88.20</td> <td>19.90</td> <td>68.30</td> <td>78.33</td> <td>35.28</td> <td>11.45</td> <td>36.86</td> <td>389</td> <td>3 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5986.00	76.02	7.72	88.30	86.15	35.28	11.45	36.86	389	3 Peak VERTICAL	2	5986.00	88.20	19.90	68.30	78.33	35.28	11.45	36.86	389	3 Average VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																				
1	5864.12	63.59	-24.71	88.30	53.87	35.13	11.33	36.74	389	3 Peak VERTICAL																																																																	
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																				
1	5986.00	76.02	7.72	88.30	86.15	35.28	11.45	36.86	389	3 Peak VERTICAL																																																																	
2	5986.00	88.20	19.90	68.30	78.33	35.28	11.45	36.86	389	3 Average VERTICAL																																																																	
<p>Avg.</p>	<p>Site : 032905-KS Condition : WIFI 6E (AVG) 3m 3317.5M 75957 VERTICAL Project : RSM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : (FR) 102901 Plane : Y IME1 : Full-directivity Powersetting : 425</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.88</td> <td>50.46</td> <td>-17.84</td> <td>68.30</td> <td>40.65</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>389</td> <td>3 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5923.88	50.46	-17.84	68.30	40.65	35.22	11.40	36.81	389	3 Average VERTICAL	<p>Left blank</p>																																										
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																				
1	5923.88	50.46	-17.84	68.30	40.65	35.22	11.40	36.81	389	3 Average VERTICAL																																																																	



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																									
ANT	802.11ax HE80 Full CH07 5985MHz																																									
1+2	Horizontal	Vertical																																								
Peak Avg.	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project : RSM 1000 0000MHz VBR 3000 0000MHz SRT Auto Mode : FRS102901 Plane : Y IREI : Full-directivity Powersetting : 82.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 11970.00</td> <td>45.87</td> <td>-28.13</td> <td>74.00</td> <td>56.29</td> <td>38.98</td> <td>16.66</td> <td>66.00</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1 11970.00	45.87	-28.13	74.00	56.29	38.98	16.66	66.00	300	0 Peak HORIZONTAL	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 00218653 VERTICAL Project : RSM 1000 0000MHz VBR 3000 0000MHz SRT Auto Mode : FRS102901 Plane : Y IREI : Full-directivity Powersetting : 82.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 11970.00</td> <td>45.37</td> <td>-28.63</td> <td>74.00</td> <td>55.79</td> <td>38.98</td> <td>16.66</td> <td>66.00</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1 11970.00	45.37	-28.63	74.00	55.79	38.98	16.66	66.00	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
1 11970.00	45.87	-28.13	74.00	56.29	38.98	16.66	66.00	300	0 Peak HORIZONTAL																																	
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
1 11970.00	45.37	-28.63	74.00	55.79	38.98	16.66	66.00	100	0 Peak VERTICAL																																	



**U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)**




WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE160 Full CH15 6025MHz																																																																			
1+2	Horizontal	Vertical																																																																		
Peak	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project : 808-1000-0000MHz V98-3000-0000MHz CRT-Auto Mode : (FR) 102901 Node : 27 Plane : 7 Full-directivity MEI : 45 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12050.00</td> <td>45.87</td> <td>-28.13</td> <td>74.00</td> <td>58.12</td> <td>39.04</td> <td>16.72</td> <td>66.01</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	12050.00	45.87	-28.13	74.00	58.12	39.04	16.72	66.01	300	0 Peak HORIZONTAL	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3117 00218652 VERTICAL Project : 808-1000-0000MHz V98-3000-0000MHz CRT-Auto Mode : (FR) 102901 Node : 27 Plane : 7 Full-directivity MEI : 45 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12050.00</td> <td>45.37</td> <td>-28.63</td> <td>74.00</td> <td>55.62</td> <td>39.04</td> <td>16.72</td> <td>66.01</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	MEI	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	12050.00	45.37	-28.63	74.00	55.62	39.04	16.72	66.01	100	0 Peak VERTICAL
MEI	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																												
1	12050.00	45.87	-28.13	74.00	58.12	39.04	16.72	66.01	300	0 Peak HORIZONTAL																																																										
MEI	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																												
1	12050.00	45.37	-28.63	74.00	55.62	39.04	16.72	66.01	100	0 Peak VERTICAL																																																										
Avg.																																																																				



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																									
ANT	802.11ax HE20 Full CH229 7095MHz																																																																									
1+2	Horizontal	Fundamental																																																																								
Peak	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3117.00218652 HORIZONTAL Project : RSM 1000.000000 VSW 3.000.000000 SRT Auto Mode : OFDM 102901 Plane : Y IWEI : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7218.92</td> <td>53.02</td> <td>-35.28</td> <td>88.30</td> <td>40.67</td> <td>36.71</td> <td>12.71</td> <td>37.07</td> <td>119</td> <td>54 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg	1	7218.92	53.02	-35.28	88.30	40.67	36.71	12.71	37.07	119	54 Peak	HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3117.00218652 HORIZONTAL Project : RSM 1000.000000 VSW 3.000.000000 SRT Auto Mode : OFDM 102901 Plane : Y IWEI : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>98.76</td> <td>10.46</td> <td>88.30</td> <td>86.52</td> <td>36.72</td> <td>12.59</td> <td>37.12</td> <td>119</td> <td>54 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7093.00</td> <td>89.53</td> <td>21.23</td> <td>68.30</td> <td>77.29</td> <td>35.77</td> <td>12.59</td> <td>37.12</td> <td>119</td> <td>54 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg	1	7093.00	98.76	10.46	88.30	86.52	36.72	12.59	37.12	119	54 Peak	HORIZONTAL	2	7093.00	89.53	21.23	68.30	77.29	35.77	12.59	37.12	119	54 Average	HORIZONTAL
Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg																																																																		
1	7218.92	53.02	-35.28	88.30	40.67	36.71	12.71	37.07	119	54 Peak	HORIZONTAL																																																															
Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg																																																																		
1	7093.00	98.76	10.46	88.30	86.52	36.72	12.59	37.12	119	54 Peak	HORIZONTAL																																																															
2	7093.00	89.53	21.23	68.30	77.29	35.77	12.59	37.12	119	54 Average	HORIZONTAL																																																															
Avg.	<p>Site : 030905-KS Condition : WIFI 6E AVG 3m 3117.00218652 HORIZONTAL Project : RSM 1000.000000 VSW 3.000.000000 SRT Auto Mode : OFDM 102901 Plane : Y IWEI : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7231.56</td> <td>43.19</td> <td>-25.11</td> <td>68.30</td> <td>30.85</td> <td>36.70</td> <td>12.71</td> <td>37.07</td> <td>119</td> <td>54 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg	1	7231.56	43.19	-25.11	68.30	30.85	36.70	12.71	37.07	119	54 Average	HORIZONTAL	Left blank																																										
Over	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	deg																																																																		
1	7231.56	43.19	-25.11	68.30	30.85	36.70	12.71	37.07	119	54 Average	HORIZONTAL																																																															

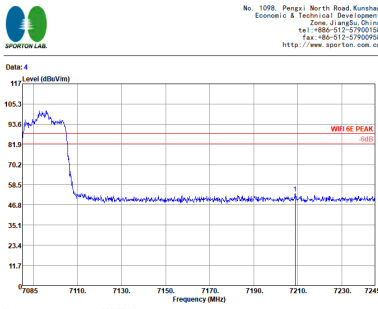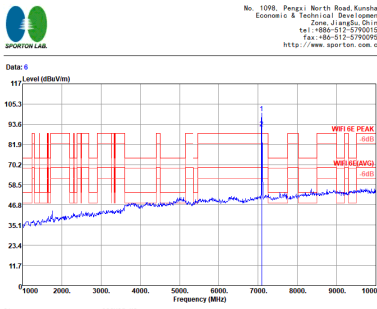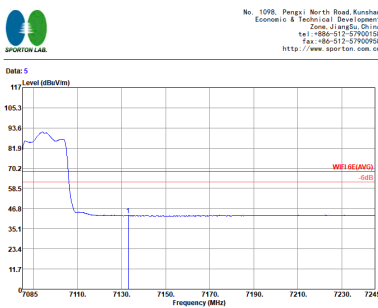




WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																										
ANT	802.11ax HE20 Full CH229 7095MHz																																																																										
1+2	Vertical	Fundamental																																																																									
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ PEAK @ 3117.00218652 VERTICAL Project : RRM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : FR1D2901G Plane : Y Full-directivity : Y Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7208.84</td> <td>53.52</td> <td>-34.78</td> <td>88.30</td> <td>41.17</td> <td>36.72</td> <td>12.71</td> <td>37.08</td> <td>300</td> <td>349</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	7208.84	53.52	-34.78	88.30	41.17	36.72	12.71	37.08	300	349	Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ PEAK @ 3117.00218652 VERTICAL Project : RRM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : FR1D2901G Plane : Y Full-directivity : Y Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>99.95</td> <td>11.65</td> <td>88.30</td> <td>87.71</td> <td>36.77</td> <td>12.59</td> <td>37.12</td> <td>300</td> <td>349</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7093.00</td> <td>91.15</td> <td>22.85</td> <td>68.30</td> <td>78.91</td> <td>36.77</td> <td>12.59</td> <td>37.12</td> <td>300</td> <td>349</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	7093.00	99.95	11.65	88.30	87.71	36.77	12.59	37.12	300	349	Peak	VERTICAL	2	7093.00	91.15	22.85	68.30	78.91	36.77	12.59	37.12	300	349	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																			
1	7208.84	53.52	-34.78	88.30	41.17	36.72	12.71	37.08	300	349	Peak	VERTICAL																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																			
1	7093.00	99.95	11.65	88.30	87.71	36.77	12.59	37.12	300	349	Peak	VERTICAL																																																															
2	7093.00	91.15	22.85	68.30	78.91	36.77	12.59	37.12	300	349	Average	VERTICAL																																																															
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : WiFi @ (AVG) @ 3117.00218652 VERTICAL Project : RRM-1000.000kHz VBR-3000.000kHz SRT-Auto Mode : FR1D2901G Plane : Y Full-directivity : Y Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7133.00</td> <td>42.96</td> <td>-25.34</td> <td>68.30</td> <td>30.68</td> <td>36.74</td> <td>12.64</td> <td>37.10</td> <td>300</td> <td>349</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	7133.00	42.96	-25.34	68.30	30.68	36.74	12.64	37.10	300	349	Average	VERTICAL	Left blank																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																			
1	7133.00	42.96	-25.34	68.30	30.68	36.74	12.64	37.10	300	349	Average	VERTICAL																																																															



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)




WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE20 Partial 106/54 CH229 7095MHz																																																																														
1+2	Horizontal	Fundamental																																																																													
Peak	<p>Site : 032905-KS Condition : WIFI 8E PEAK 3m 3317.5M 7957 HORIZONTAL Project : RRE 1000.000KHz VBR 3000.000KHz SWT:Auto Mode : FR1 102901 Plane : 50 Full-directivity : 0 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7177.32</td> <td>52.55-35.75</td> <td>88.30</td> <td>41.12</td> <td>35.83</td> <td>12.69</td> <td>37.09</td> <td>120</td> <td>58</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7177.32	52.55-35.75	88.30	41.12	35.83	12.69	37.09	120	58	Peak HORIZONTAL	<p>Site : 032905-KS Condition : WIFI 8E PEAK 3m 3317.5M 7957 HORIZONTAL Project : RRE 1000.000KHz VBR 3000.000KHz SWT:Auto Mode : FR1 102901 Plane : 50 Full-directivity : 0 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>96.18</td> <td>7.88</td> <td>88.30</td> <td>84.88</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>120</td> <td>58 Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>88.97</td> <td>20.39</td> <td>68.30</td> <td>77.39</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>120</td> <td>58 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7102.00	96.18	7.88	88.30	84.88	35.82	12.59	37.11	120	58 Peak HORIZONTAL	2	7102.00	88.97	20.39	68.30	77.39	35.82	12.59	37.11	120	58 Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	7177.32	52.55-35.75	88.30	41.12	35.83	12.69	37.09	120	58	Peak HORIZONTAL																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	7102.00	96.18	7.88	88.30	84.88	35.82	12.59	37.11	120	58 Peak HORIZONTAL																																																																					
2	7102.00	88.97	20.39	68.30	77.39	35.82	12.59	37.11	120	58 Average HORIZONTAL																																																																					
Avg.	<p>Site : 032905-KS Condition : WIFI 8E(AVG) 3m 3317.5M 7957 HORIZONTAL Project : RRE 1000.000KHz VBR 0.010KHz SWT:Auto Mode : FR1 102901 Plane : 50 Full-directivity : 0 Powersetting : #20</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7227.88</td> <td>41.64-26.66</td> <td>68.30</td> <td>30.16</td> <td>35.84</td> <td>12.71</td> <td>37.07</td> <td>120</td> <td>58</td> <td>Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7227.88	41.64-26.66	68.30	30.16	35.84	12.71	37.07	120	58	Average HORIZONTAL	Left blank																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	7227.88	41.64-26.66	68.30	30.16	35.84	12.71	37.07	120	58	Average HORIZONTAL																																																																					

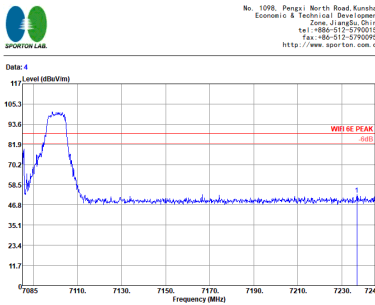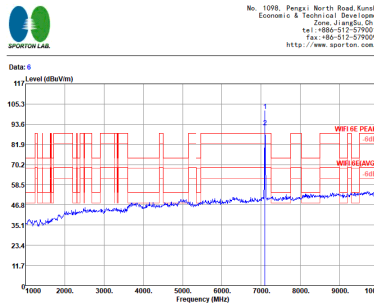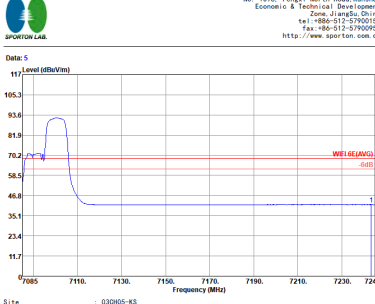

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE20 Partial 106/54 CH229 7095MHz																																																																							
1+2	Vertical	Fundamental																																																																						
<p>Peak</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI DE PEAK @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto FR1D2901 Mode : 56 Plane : Y Full-directivity IME1 : 9 Powersetting : 25</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7236.84</td> <td>52.80</td> <td>-35.50</td> <td>88.30</td> <td>41.31</td> <td>35.85</td> <td>12.71</td> <td>37.07</td> <td>181</td> <td>301 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1 7236.84	52.80	-35.50	88.30	41.31	35.85	12.71	37.07	181	301 Peak VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI DE PEAK @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto FR1D2901 Mode : 56 Plane : Y Full-directivity IME1 : 9 Powersetting : 25</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 7102.00</td> <td>101.43</td> <td>13.13</td> <td>88.30</td> <td>90.13</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>181</td> <td>301 Peak VERTICAL</td> </tr> <tr> <td>2 * 7102.00</td> <td>91.93</td> <td>23.63</td> <td>68.30</td> <td>80.63</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>181</td> <td>301 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1 * 7102.00	101.43	13.13	88.30	90.13	35.82	12.59	37.11	181	301 Peak VERTICAL	2 * 7102.00	91.93	23.63	68.30	80.63	35.82	12.59	37.11	181	301 Average VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																															
1 7236.84	52.80	-35.50	88.30	41.31	35.85	12.71	37.07	181	301 Peak VERTICAL																																																															
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																															
1 * 7102.00	101.43	13.13	88.30	90.13	35.82	12.59	37.11	181	301 Peak VERTICAL																																																															
2 * 7102.00	91.93	23.63	68.30	80.63	35.82	12.59	37.11	181	301 Average VERTICAL																																																															
<p>Avg.</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI DE (AVG) @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto FR1D2901 Mode : 56 Plane : Y Full-directivity IME1 : 9 Powersetting : 25</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7243.24</td> <td>41.62</td> <td>-26.68</td> <td>68.30</td> <td>30.12</td> <td>35.85</td> <td>12.72</td> <td>37.07</td> <td>181</td> <td>301 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1 7243.24	41.62	-26.68	68.30	30.12	35.85	12.72	37.07	181	301 Average VERTICAL	<p>Left blank</p>																																								
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																															
1 7243.24	41.62	-26.68	68.30	30.12	35.85	12.72	37.07	181	301 Average VERTICAL																																																															



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

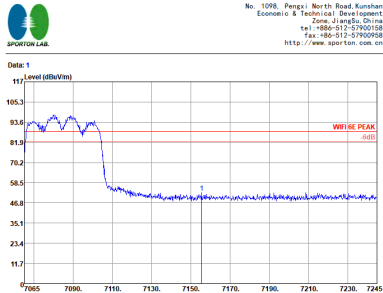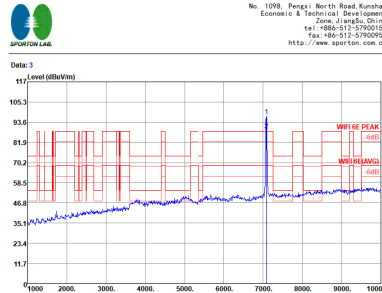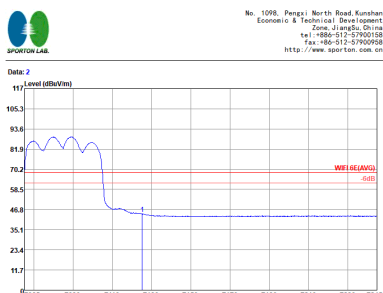WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE40 Full CH227 7085MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	 <p>Site: 032905-KS Condition: RIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project: RRF 1000.000kHz VBR 3000.000kHz SWT Auto Mode: OFDM Plane: Y IBEI: Full-directivity Powersetting: #25 Over Limit: 12.5</p> <table border="1"> <thead> <tr> <th>WIFI</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7155.54</td> <td>52.88</td> <td>-35.42</td> <td>88.30</td> <td>40.58</td> <td>36.74</td> <td>12.66</td> <td>37.10</td> <td>100</td> <td>41 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7155.54	52.88	-35.42	88.30	40.58	36.74	12.66	37.10	100	41 Peak	HORIZONTAL	 <p>Site: 032905-KS Condition: RIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project: RRF 1000.000kHz VBR 3000.000kHz SWT Auto Mode: OFDM Plane: Y IBEI: Full-directivity Powersetting: #25 Over Limit: 12.5</p> <table border="1"> <thead> <tr> <th>WIFI</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7084.00</td> <td>97.23</td> <td>8.93</td> <td>88.30</td> <td>85.02</td> <td>36.77</td> <td>12.56</td> <td>37.12</td> <td>100</td> <td>41 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7084.00</td> <td>88.86</td> <td>-20.56</td> <td>88.30</td> <td>16.60</td> <td>-36.77</td> <td>12.56</td> <td>37.12</td> <td>100</td> <td>41 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7084.00	97.23	8.93	88.30	85.02	36.77	12.56	37.12	100	41 Peak	HORIZONTAL	2	7084.00	88.86	-20.56	88.30	16.60	-36.77	12.56	37.12	100	41 Average	HORIZONTAL
WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7155.54	52.88	-35.42	88.30	40.58	36.74	12.66	37.10	100	41 Peak	HORIZONTAL																																																																							
WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7084.00	97.23	8.93	88.30	85.02	36.77	12.56	37.12	100	41 Peak	HORIZONTAL																																																																							
2	7084.00	88.86	-20.56	88.30	16.60	-36.77	12.56	37.12	100	41 Average	HORIZONTAL																																																																							
Avg.	 <p>Site: 032905-KS Condition: RIFI 6E (AVERAGE) 3m 3117 00218652 HORIZONTAL Project: RRF 1000.000kHz VBR 1.000kHz SWT Auto Mode: OFDM Plane: Y IBEI: Full-directivity Powersetting: #25 Over Limit: 12.5</p> <table border="1"> <thead> <tr> <th>WIFI</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.12</td> <td>44.34</td> <td>-22.96</td> <td>68.30</td> <td>32.09</td> <td>36.75</td> <td>12.61</td> <td>37.11</td> <td>100</td> <td>41 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7125.12	44.34	-22.96	68.30	32.09	36.75	12.61	37.11	100	41 Average	HORIZONTAL	Left blank																																														
WIFI	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7125.12	44.34	-22.96	68.30	32.09	36.75	12.61	37.11	100	41 Average	HORIZONTAL																																																																							



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE40 Full H227 7085MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
Peak	<p>Site : 032905-KS Condition : RFT GE PEAK 3m 3117.00218663 VERTICAL Project : RSM-1000.000MHz VBR-3000.000MHz SRT-Auto Mode : FRS 102901 Plane : SR Full-directivity : Y Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7127.64</td> <td>54.29</td> <td>-34.01</td> <td>88.30</td> <td>42.01</td> <td>36.75</td> <td>12.64</td> <td>37.11</td> <td>171</td> <td>310</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1 7127.64	54.29	-34.01	88.30	42.01	36.75	12.64	37.11	171	310	Peak	VERTICAL	<p>Site : 032905-KS Condition : RFT GE PEAK 3m 3117.00218663 VERTICAL Project : RSM-1000.000MHz VBR-3000.000MHz SRT-Auto Mode : FRS 102901 Plane : SR Full-directivity : Y Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7093.00</td> <td>100.80</td> <td>12.50</td> <td>88.30</td> <td>88.56</td> <td>36.77</td> <td>12.59</td> <td>37.12</td> <td>171</td> <td>310</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 7093.00</td> <td>92.35</td> <td>24.05</td> <td>68.30</td> <td>80.11</td> <td>36.77</td> <td>12.59</td> <td>37.12</td> <td>171</td> <td>310</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1 7093.00	100.80	12.50	88.30	88.56	36.77	12.59	37.12	171	310	Peak	VERTICAL	2 7093.00	92.35	24.05	68.30	80.11	36.77	12.59	37.12	171	310	Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1 7127.64	54.29	-34.01	88.30	42.01	36.75	12.64	37.11	171	310	Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1 7093.00	100.80	12.50	88.30	88.56	36.77	12.59	37.12	171	310	Peak	VERTICAL																																																																											
2 7093.00	92.35	24.05	68.30	80.11	36.77	12.59	37.12	171	310	Average	VERTICAL																																																																											
Avg.	<p>Site : 032905-KS Condition : RFT GE (AVG) 3m 3117.00218663 VERTICAL Project : RSM-1000.000MHz VBR-1.000MHz SRT-Auto Mode : FRS 102901 Plane : SR Full-directivity : Y Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7125.66</td> <td>45.79</td> <td>-22.51</td> <td>68.30</td> <td>33.54</td> <td>36.75</td> <td>12.61</td> <td>37.11</td> <td>171</td> <td>310</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1 7125.66	45.79	-22.51	68.30	33.54	36.75	12.61	37.11	171	310	Average	VERTICAL	Left blank																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1 7125.66	45.79	-22.51	68.30	33.54	36.75	12.61	37.11	171	310	Average	VERTICAL																																																																											



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE40 Partial 242/62 H227 7085MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	<p>Site: 032905-KS Condition: RIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project: RRF 1000.000KHz VBR 3000.000KHz SWT:Auto Mode: OF Plane: Y IBEI: Full-directivity Powersetting: #25 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.02</td> <td>62.60</td> <td>-25.70</td> <td>88.30</td> <td>51.28</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>121</td> <td>59 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7126.02	62.60	-25.70	88.30	51.28	35.82	12.61	37.11	121	59 Peak	HORIZONTAL	<p>Site: 032905-KS Condition: RIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project: RRF 1000.000KHz VBR 3000.000KHz SWT:Auto Mode: OF Plane: Y IBEI: Full-directivity Powersetting: #25 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7083.00</td> <td>97.41</td> <td>9.11</td> <td>88.30</td> <td>86.12</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>121</td> <td>59 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7093.00</td> <td>89.40</td> <td>21.10</td> <td>88.30</td> <td>78.11</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>121</td> <td>59 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7083.00	97.41	9.11	88.30	86.12	35.82	12.59	37.12	121	59 Peak	HORIZONTAL	2	7093.00	89.40	21.10	88.30	78.11	35.82	12.59	37.12	121	59 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7126.02	62.60	-25.70	88.30	51.28	35.82	12.61	37.11	121	59 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7083.00	97.41	9.11	88.30	86.12	35.82	12.59	37.12	121	59 Peak	HORIZONTAL																																																																							
2	7093.00	89.40	21.10	88.30	78.11	35.82	12.59	37.12	121	59 Average	HORIZONTAL																																																																							
Avg.	<p>Site: 032905-KS Condition: RIFI 6E (AVG) 3m 3317 5N 75957 HORIZONTAL Project: RRF 1000.000KHz VBR 0.010KHz SWT:Auto Mode: OF Plane: Y IBEI: Full-directivity Powersetting: #25 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7124.94</td> <td>43.55</td> <td>-24.75</td> <td>68.30</td> <td>32.23</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>121</td> <td>59 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7124.94	43.55	-24.75	68.30	32.23	35.82	12.61	37.11	121	59 Average	HORIZONTAL	Left blank																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	7124.94	43.55	-24.75	68.30	32.23	35.82	12.61	37.11	121	59 Average	HORIZONTAL																																																																							



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE40 Partial 242/62 CH227 7085MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ PEAK @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity : Y IME1 : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7124.94</td> <td>64.70</td> <td>-23.40</td> <td>88.30</td> <td>53.38</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>181</td> <td>301</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1 7124.94	64.70	-23.40	88.30	53.38	35.82	12.61	37.11	181	301	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ PEAK @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity : Y IME1 : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 + 7102.00</td> <td>100.50</td> <td>12.20</td> <td>88.30</td> <td>89.20</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>181</td> <td>301</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 + 7102.00</td> <td>90.50</td> <td>22.20</td> <td>68.30</td> <td>79.20</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>181</td> <td>301</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1 + 7102.00	100.50	12.20	88.30	89.20	35.82	12.59	37.11	181	301	Peak	VERTICAL	2 + 7102.00	90.50	22.20	68.30	79.20	35.82	12.59	37.11	181	301	Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1 7124.94	64.70	-23.40	88.30	53.38	35.82	12.61	37.11	181	301	Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1 + 7102.00	100.50	12.20	88.30	89.20	35.82	12.59	37.11	181	301	Peak	VERTICAL																																																																											
2 + 7102.00	90.50	22.20	68.30	79.20	35.82	12.59	37.11	181	301	Average	VERTICAL																																																																											
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-KS Condition : RFI @ (AVG) @ 3317.5M 70957 VERTICAL Project : RSM-1000, 000KHz, VBR-3000, 000KHz, SRT-Auto Mode : (FR) 102901 Plane : Y Full-directivity : Y IME1 : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7124.94</td> <td>44.87</td> <td>-23.43</td> <td>68.30</td> <td>33.55</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>181</td> <td>301</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1 7124.94	44.87	-23.43	68.30	33.55	35.82	12.61	37.11	181	301	Average	VERTICAL	<p>Left blank</p>																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																													
1 7124.94	44.87	-23.43	68.30	33.55	35.82	12.61	37.11	181	301	Average	VERTICAL																																																																											



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																													
ANT	802.11ax HE20 Full CH229 7095 MHz																																													
1+2	Horizontal	Vertical																																												
Peak Avg.	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 00218652 HORIZONTAL Project : RSM 1000 0000MHz VBR 3000 0000MHz SRT Auto Mode : FR1D2901G Plane : Y IMEI : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>14190.00</td> <td>44.96</td> <td>-43.34</td> <td>88.30</td> <td>51.89</td> <td>39.83</td> <td>18.16</td> <td>64.92</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	14190.00	44.96	-43.34	88.30	51.89	39.83	18.16	64.92	300	0 Peak	HORIZONTAL	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 00218653 VERTICAL Project : RSM 1000 0000MHz VBR 3000 0000MHz SRT Auto Mode : FR1D2901G Plane : Y IMEI : Full-directivity Powersetting : 11.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>14190.00</td> <td>44.18</td> <td>-42.12</td> <td>88.30</td> <td>53.11</td> <td>39.83</td> <td>18.16</td> <td>64.92</td> <td>100</td> <td>300 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	14190.00	44.18	-42.12	88.30	53.11	39.83	18.16	64.92	100	300 Peak	VERTICAL
	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																			
14190.00	44.96	-43.34	88.30	51.89	39.83	18.16	64.92	300	0 Peak	HORIZONTAL																																				
Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																				
14190.00	44.18	-42.12	88.30	53.11	39.83	18.16	64.92	100	300 Peak	VERTICAL																																				



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																													
ANT	802.11ax HE40 Full CH227 7085MHz																																																													
1+2	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 032005-KS Condition : WIFI 802.11ax HE40 Full CH227 7085MHz HORIZONTAL Project : 802.11ax HE40 Full CH227 7085MHz CH227 Auto Mode : OFDM Plane : Y Antenna : Full-directivity NEI : 425 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 14168.00</td> <td>46.05</td> <td>-42.25</td> <td>88.30</td> <td>53.01</td> <td>39.82</td> <td>18.15</td> <td>64.93</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 14168.00	46.05	-42.25	88.30	53.01	39.82	18.15	64.93	300	0 Peak HORIZONTAL	<p>Site : 032005-KS Condition : WIFI 802.11ax HE40 Full CH227 7085MHz VERTICAL Project : 802.11ax HE40 Full CH227 7085MHz CH227 Auto Mode : OFDM Plane : Y Antenna : Full-directivity NEI : 425 Powersetting : 12.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 14168.00</td> <td>45.98</td> <td>-42.32</td> <td>88.30</td> <td>52.94</td> <td>39.82</td> <td>18.15</td> <td>64.93</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 14168.00	45.98	-42.32	88.30	52.94	39.82	18.15	64.93	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 14168.00	46.05	-42.25	88.30	53.01	39.82	18.15	64.93	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 14168.00	45.98	-42.32	88.30	52.94	39.82	18.15	64.93	100	0 Peak VERTICAL																																																					



Emission below 1GHz
WIFI 802.11ax HE160 Full (LF)

WIFI	WIFI																																																																																																																																																													
ANT	802.11ax HE160 Full LF																																																																																																																																																													
1+2	Horizontal	Vertical																																																																																																																																																												
QP / Peak	<table border="1"> <thead> <tr> <th>1</th> <th>30.97</th> <th>21.21</th> <th>-18.79</th> <th>40.00</th> <th>28.40</th> <th>24.20</th> <th>0.51</th> <th>32.40</th> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>95.96</td> <td>17.87</td> <td>-20.43</td> <td>43.50</td> <td>33.66</td> <td>15.20</td> <td>1.41</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <td>3</td> <td>143.49</td> <td>16.34</td> <td>-22.24</td> <td>43.50</td> <td>29.66</td> <td>17.25</td> <td>1.73</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <td>4</td> <td>259.89</td> <td>18.66</td> <td>-22.38</td> <td>46.00</td> <td>28.71</td> <td>20.00</td> <td>2.35</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <td>5</td> <td>442.16</td> <td>23.11</td> <td>-22.89</td> <td>46.00</td> <td>29.54</td> <td>22.90</td> <td>3.07</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <td>6</td> <td>628.49</td> <td>26.66</td> <td>-19.34</td> <td>46.00</td> <td>29.23</td> <td>26.17</td> <td>3.66</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </tbody> </table>	1	30.97	21.21	-18.79	40.00	28.40	24.20	0.51	32.40	---	---	Peak	HORIZONTAL	2	95.96	17.87	-20.43	43.50	33.66	15.20	1.41	32.40	---	---	Peak	HORIZONTAL	3	143.49	16.34	-22.24	43.50	29.66	17.25	1.73	32.40	---	---	Peak	HORIZONTAL	4	259.89	18.66	-22.38	46.00	28.71	20.00	2.35	32.40	---	---	Peak	HORIZONTAL	5	442.16	23.11	-22.89	46.00	29.54	22.90	3.07	32.40	---	---	Peak	HORIZONTAL	6	628.49	26.66	-19.34	46.00	29.23	26.17	3.66	32.40	---	---	Peak	HORIZONTAL	<table border="1"> <thead> <tr> <th>1</th> <th>30.97</th> <th>21.00</th> <th>-19.00</th> <th>40.00</th> <th>28.19</th> <th>24.20</th> <th>0.51</th> <th>32.40</th> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>95.96</td> <td>15.84</td> <td>-22.66</td> <td>43.50</td> <td>31.63</td> <td>15.20</td> <td>1.41</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> <tr> <td>3</td> <td>131.85</td> <td>17.81</td> <td>-25.69</td> <td>43.50</td> <td>31.65</td> <td>17.50</td> <td>1.66</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> <tr> <td>4</td> <td>261.83</td> <td>18.23</td> <td>-27.67</td> <td>46.00</td> <td>28.37</td> <td>20.00</td> <td>2.35</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> <tr> <td>5</td> <td>399.80</td> <td>22.29</td> <td>-23.71</td> <td>46.00</td> <td>31.42</td> <td>20.50</td> <td>2.77</td> <td>32.40</td> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> <tr> <td>6</td> <td>744.89</td> <td>27.28</td> <td>-18.72</td> <td>46.00</td> <td>27.71</td> <td>27.90</td> <td>3.98</td> <td>32.31</td> <th>---</th> <th>---</th> <th>Peak</th> <th>VERTICAL</th> </tr> </tbody> </table>	1	30.97	21.00	-19.00	40.00	28.19	24.20	0.51	32.40	---	---	Peak	VERTICAL	2	95.96	15.84	-22.66	43.50	31.63	15.20	1.41	32.40	---	---	Peak	VERTICAL	3	131.85	17.81	-25.69	43.50	31.65	17.50	1.66	32.40	---	---	Peak	VERTICAL	4	261.83	18.23	-27.67	46.00	28.37	20.00	2.35	32.40	---	---	Peak	VERTICAL	5	399.80	22.29	-23.71	46.00	31.42	20.50	2.77	32.40	---	---	Peak	VERTICAL	6	744.89	27.28	-18.72	46.00	27.71	27.90	3.98	32.31	---	---	Peak	VERTICAL
1	30.97	21.21	-18.79	40.00	28.40	24.20	0.51	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
2	95.96	17.87	-20.43	43.50	33.66	15.20	1.41	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
3	143.49	16.34	-22.24	43.50	29.66	17.25	1.73	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
4	259.89	18.66	-22.38	46.00	28.71	20.00	2.35	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
5	442.16	23.11	-22.89	46.00	29.54	22.90	3.07	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
6	628.49	26.66	-19.34	46.00	29.23	26.17	3.66	32.40	---	---	Peak	HORIZONTAL																																																																																																																																																		
1	30.97	21.00	-19.00	40.00	28.19	24.20	0.51	32.40	---	---	Peak	VERTICAL																																																																																																																																																		
2	95.96	15.84	-22.66	43.50	31.63	15.20	1.41	32.40	---	---	Peak	VERTICAL																																																																																																																																																		
3	131.85	17.81	-25.69	43.50	31.65	17.50	1.66	32.40	---	---	Peak	VERTICAL																																																																																																																																																		
4	261.83	18.23	-27.67	46.00	28.37	20.00	2.35	32.40	---	---	Peak	VERTICAL																																																																																																																																																		
5	399.80	22.29	-23.71	46.00	31.42	20.50	2.77	32.40	---	---	Peak	VERTICAL																																																																																																																																																		
6	744.89	27.28	-18.72	46.00	27.71	27.90	3.98	32.31	---	---	Peak	VERTICAL																																																																																																																																																		

Note: Pre-scanned for 18GHz to 40GHz, there are no signals, thus only test data below 18GHz are shown in the report.







For Co-location:

LTE B13 Link + WLAN 6GHz 802.11ax HE160 CH15 Tx + BLE (2Mbps) CH39 Tx
(Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
	BLE CH39 2480MHz																																																																					
	Horizontal	Fundamental																																																																				
Peak	<p>Site Condition : 030905-K3 FCC PART 15C 3m 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW:5.000kHz SRT:Auto Project : FR1D2901 Mode : 06 Plane : 2 Full-directivity : Full-directivity IME1 : #27 IME2 : #25.0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.92</td> <td>50.61</td> <td>-23.39</td> <td>74.00</td> <td>47.20</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>102</td> <td>140 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2480.92	50.61	-23.39	74.00	47.20	32.98	7.25	36.82	102	140 Peak	HORIZONTAL	<p>Site Condition : 030905-K3 FCC PART 15C 3m 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW:5.000kHz SRT:Auto Project : FR1D2901 Mode : 06 Plane : 2 Full-directivity : Full-directivity IME1 : #27 IME2 : #25.0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.70</td> <td>26.70</td> <td>74.00</td> <td>97.29</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>102</td> <td>140 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2480.00	100.70	26.70	74.00	97.29	32.98	7.25	36.82	102	140 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2480.92	50.61	-23.39	74.00	47.20	32.98	7.25	36.82	102	140 Peak	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2480.00	100.70	26.70	74.00	97.29	32.98	7.25	36.82	102	140 Peak	HORIZONTAL																																																											
Avg.	<p>Site Condition : 030905-K3 FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW:5.100kHz SRT:Auto Project : FR1D2901 Mode : 06 Plane : 2 Full-directivity : Full-directivity IME1 : #27 IME2 : #25.0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>47.16</td> <td>-6.84</td> <td>54.00</td> <td>43.75</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>102</td> <td>140 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.50	47.16	-6.84	54.00	43.75	32.98	7.25	36.82	102	140 Average	HORIZONTAL	<p>Site Condition : 030905-K3 FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL RSM 1000.000kHz VSW:5.100kHz SRT:Auto Project : FR1D2901 Mode : 06 Plane : 2 Full-directivity : Full-directivity IME1 : #27 IME2 : #25.0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.00</td> <td>45.00</td> <td>54.00</td> <td>95.59</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>102</td> <td>140 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2480.00	99.00	45.00	54.00	95.59	32.98	7.25	36.82	102	140 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2483.50	47.16	-6.84	54.00	43.75	32.98	7.25	36.82	102	140 Average	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2480.00	99.00	45.00	54.00	95.59	32.98	7.25	36.82	102	140 Average	HORIZONTAL																																																											

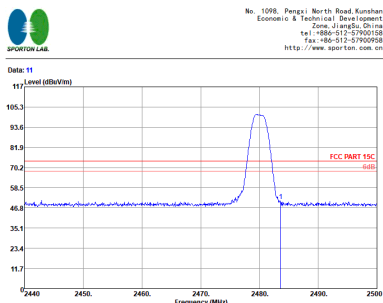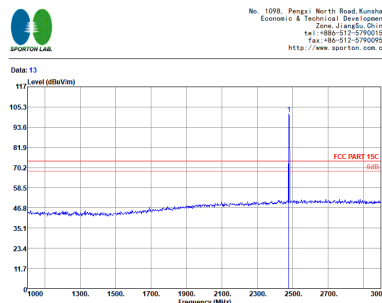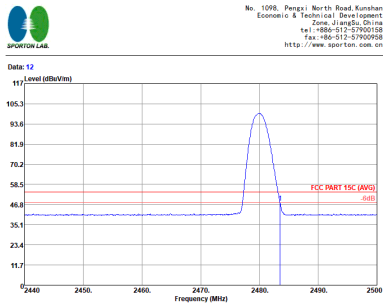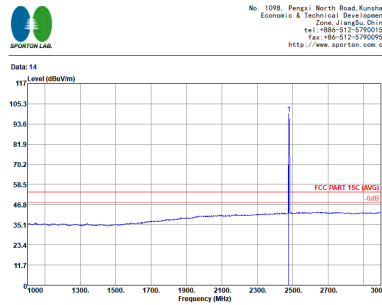

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
BLE CH39 2480MHz																																																														
Vertical		Fundamental																																																												
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-K3 Condition : FCC PART 15C 3m 3317 SN 79957 VERTICAL Project : RSM 1000.000kHz VBW 3000.000kHz SMT Auto Mode : 60 Plane : T Full-directivity : Y IME1 : BTS 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.62</td> <td>50.90</td> <td>-23.10</td> <td>74.00</td> <td>47.49</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>263</td> <td>80 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2483.62	50.90	-23.10	74.00	47.49	32.98	7.25	36.82	263	80 Peak VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-K3 Condition : FCC PART 15C 3m 3317 SN 79957 VERTICAL Project : RSM 1000.000kHz VBW 3000.000kHz SMT Auto Mode : 60 Plane : T Full-directivity : Y IME1 : BTS 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.00</td> <td>101.25</td> <td>27.25</td> <td>74.00</td> <td>97.84</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>263</td> <td>80 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 * 2480.00	101.25	27.25	74.00	97.84	32.98	7.25	36.82	263	80 Peak VERTICAL
	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2483.62	50.90	-23.10	74.00	47.49	32.98	7.25	36.82	263	80 Peak VERTICAL																																																					
Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 * 2480.00	101.25	27.25	74.00	97.84	32.98	7.25	36.82	263	80 Peak VERTICAL																																																					
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-K3 Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 VERTICAL Project : RSM 1000.000kHz VBW 3.100kHz SMT Auto Mode : 60 Plane : T Full-directivity : Y IME1 : BTS 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>47.77</td> <td>-6.23</td> <td>54.00</td> <td>44.36</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>263</td> <td>80 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2483.50	47.77	-6.23	54.00	44.36	32.98	7.25	36.82	263	80 Average VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032905-K3 Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 VERTICAL Project : RSM 1000.000kHz VBW 3.100kHz SMT Auto Mode : 60 Plane : T Full-directivity : Y IME1 : BTS 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.00</td> <td>99.68</td> <td>45.68</td> <td>54.00</td> <td>96.27</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>263</td> <td>80 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 * 2480.00	99.68	45.68	54.00	96.27	32.98	7.25	36.82	263	80 Average VERTICAL
	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2483.50	47.77	-6.23	54.00	44.36	32.98	7.25	36.82	263	80 Average VERTICAL																																																					
Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 * 2480.00	99.68	45.68	54.00	96.27	32.98	7.25	36.82	263	80 Average VERTICAL																																																					



BLE_CH39 (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																	
	BLE CH39 2480MHz																																																																																																	
	Horizontal	Vertical																																																																																																
Peak	<p>Site : 032905-K5 Condition : FCC PART 15C 3m 3117 SN 75957 HORIZONTAL Project : HSE-1000-0009HC-YBR-3000-0009HC-08T-Auto Mode : (FR)1D2901 Plane : 40 Full-directivity : Y IMEI : 827 81</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cn</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.33</td> <td>-33.67</td> <td>74.00</td> <td>60.61</td> <td>34.78</td> <td>10.41</td> <td>65.47</td> <td>300</td> <td>183</td> <td>Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7460.00</td> <td>41.68</td> <td>-32.32</td> <td>74.00</td> <td>58.82</td> <td>36.38</td> <td>12.79</td> <td>66.31</td> <td>300</td> <td>183</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg		1	4960.00	40.33	-33.67	74.00	60.61	34.78	10.41	65.47	300	183	Peak HORIZONTAL	2	7460.00	41.68	-32.32	74.00	58.82	36.38	12.79	66.31	300	183	Peak HORIZONTAL	<p>Site : 032905-K5 Condition : FCC PART 15C 3m 3117 SN 75957 VERTICAL Project : HSE-1000-0009HC-YBR-3000-0009HC-08T-Auto Mode : (FR)1D2901 Plane : 40 Full-directivity : Y IMEI : 827 81</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cn</td> <td>deg</td> <td></td> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>39.29</td> <td>-34.71</td> <td>74.00</td> <td>59.59</td> <td>34.78</td> <td>10.39</td> <td>65.47</td> <td>300</td> <td>291</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>7460.00</td> <td>40.72</td> <td>-32.28</td> <td>74.00</td> <td>57.66</td> <td>36.38</td> <td>12.79</td> <td>66.31</td> <td>300</td> <td>291</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg		1	4960.00	39.29	-34.71	74.00	59.59	34.78	10.39	65.47	300	291	Peak VERTICAL	2	7460.00	40.72	-32.28	74.00	57.66	36.38	12.79	66.31	300	291	Peak VERTICAL
IMEI	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																																																								
1	4960.00	40.33	-33.67	74.00	60.61	34.78	10.41	65.47	300	183	Peak HORIZONTAL																																																																																							
2	7460.00	41.68	-32.32	74.00	58.82	36.38	12.79	66.31	300	183	Peak HORIZONTAL																																																																																							
IMEI	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																																																								
1	4960.00	39.29	-34.71	74.00	59.59	34.78	10.39	65.47	300	291	Peak VERTICAL																																																																																							
2	7460.00	40.72	-32.28	74.00	57.66	36.38	12.79	66.31	300	291	Peak VERTICAL																																																																																							



WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE160 Full CH15 6025MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317 5M 75957 HORIZONTAL Project : RRM 1000.000kHz VSW:3.000 SWT:Auto Mode : (FR) 102901 Plane : 0 Polarization : Full-directivity IMEI : 823 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.16</td> <td>75.24</td> <td>-13.06</td> <td>88.30</td> <td>65.43</td> <td>35.20</td> <td>11.40</td> <td>35.79</td> <td>100</td> <td>60 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	5917.16	75.24	-13.06	88.30	65.43	35.20	11.40	35.79	100	60 Peak	HORIZONTAL	<p>Site : 032905-KS Condition : WIFI 6E PEAK 3m 3317 5M 75957 HORIZONTAL Project : RRM 1000.000kHz VSW:3.000 SWT:Auto Mode : (FR) 102901 Plane : 0 Polarization : Full-directivity IMEI : 823 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6040.00</td> <td>102.81</td> <td>14.51</td> <td>88.30</td> <td>92.86</td> <td>35.32</td> <td>11.50</td> <td>36.87</td> <td>100</td> <td>60 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>6040.00</td> <td>94.27</td> <td>25.97</td> <td>68.30</td> <td>84.32</td> <td>35.32</td> <td>11.50</td> <td>36.87</td> <td>100</td> <td>60 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	6040.00	102.81	14.51	88.30	92.86	35.32	11.50	36.87	100	60 Peak	HORIZONTAL	2	6040.00	94.27	25.97	68.30	84.32	35.32	11.50	36.87	100	60 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																										
1	5917.16	75.24	-13.06	88.30	65.43	35.20	11.40	35.79	100	60 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																										
1	6040.00	102.81	14.51	88.30	92.86	35.32	11.50	36.87	100	60 Peak	HORIZONTAL																																																																							
2	6040.00	94.27	25.97	68.30	84.32	35.32	11.50	36.87	100	60 Average	HORIZONTAL																																																																							
Avg.	<p>Site : 032905-KS Condition : WIFI 6E(AVG) 3m 3317 5M 75957 HORIZONTAL Project : RRM 1000.000kHz VSW:2.000kHz SWT:Auto Mode : (FR) 102901 Plane : 0 Polarization : Full-directivity IMEI : 823 Powersetting : 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5919.88</td> <td>65.21</td> <td>-3.09</td> <td>68.30</td> <td>55.40</td> <td>35.20</td> <td>11.40</td> <td>35.79</td> <td>100</td> <td>60 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	5919.88	65.21	-3.09	68.30	55.40	35.20	11.40	35.79	100	60 Peak	HORIZONTAL	Left blank																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																										
1	5919.88	65.21	-3.09	68.30	55.40	35.20	11.40	35.79	100	60 Peak	HORIZONTAL																																																																							