



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2203-1
FCC ID : IHDT56AE6
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Feb. 01, 2022 ~ Mar. 08, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Specification of Accessory 8

 1.7. Test Location 9

 1.8. Test Software 9

 1.9. Applicable Standards 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 13

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.24 dB at 0.230 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.56 dB at 50.370 MHz for Quasi-Peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2203-1
FCC ID	IHDT56AE6
EUT supports Radios application	GSM/WCDMA/LTE/NFC/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE, GNSS,
IMEI Code	Radiation/Conduction: 354596750032137/354596750032145 for Sample 1 351227590005843 for Sample 2 351227590012419 for Sample 3
HW Version	DVT2
SW Version	S1RD32.41
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT, the sample 1 is 1st source +Battery1, the sample 2 is 2nd source + Battery 2 and the sample 3 is 3rd source + Battery 2. The difference could refer to the XT2203-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we evaluate the sample 1 to perform full test and the sample 2/3 were verified for the worse cases.



	5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n78: 3450 MHz ~ 3550 MHz 802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz WLAN 802.11a/ax: 5925 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC: Loop Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK

GNSS: Galileo/GLONASS/GPS

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-331
AC Adapter 1(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-332
AC Adapter 1(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-333
AC Adapter 1(IN)	Brand Name	Motorola (Salcomp)	Model Name	MC-334
AC Adapter 1(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-335
AC Adapter 1(AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-336
AC Adapter 1(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-337
AC Adapter 1(CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-339
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-331
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-332
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name	MC-333
AC Adapter 3(US)	Brand Name	Motorola (AOHAI)	Model Name	MC-331
AC Adapter 3(EU)	Brand Name	Motorola (AOHAI)	Model Name	MC-332
AC Adapter 3(UK)	Brand Name	Motorola (AOHAI)	Model Name	MC-333
Earphone	Brand Name	Motorola (Lyand)	Model Name	MI181C
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D22299
Battery 1	Brand Name	Motorola(ATL)	Model Name	ND40
Battery 2	Brand Name	Motorola(SCUD)	Model Name	ND40

1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN1257	314309

1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle)+USB Cable 1(Charging from Adapter1)+Bluetooth Idle+WLAN Idle(2.4G)+Camera(Rear) for Sample 1
	Mode 2: WCDMA 1900 Rx+USB Cable 2(Charging from Adapter2)+Bluetooth Idle+WLAN Idle(5G)+Camera(Front) for Sample 1
	Mode 3: LTE Band 12 Rx(Middle)+ USB Cable 3(Charging from Adapter3)+ Bluetooth Idle+ WLAN Idle(6E)+ MP4 for Sample 1
	Mode 4: LTE Band 13 Rx(High)+ USB Cable 1(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(2.4G)+ NFC On for Sample 1
	Mode 5: LTE Band 26 Rx(Low)+ USB Cable 2(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(5G)+ GNSS Rx for Sample 1
	Mode 6: n78A Rx+ USB Cable 3(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(6E)+ GNSS Rx for Sample 1
	Mode 7: GSM 850 Rx(Middle)+USB Cable 1(Charging from Adapter1)+Bluetooth Idle+WLAN Idle(2.4G)+Camera(Rear) for Sample 2
	Mode 8: LTE Band 26 Rx(Low)+ USB Cable 2(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(5G)+ GNSS Rx for Sample 3




Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle)+USB Cable 1(Charging from Adapter1)+Bluetooth Idle+WLAN Idle(2.4G)+Camera(Rear) for Sample 1</p> <p>Mode 2: WCDMA 1900 Rx+USB Cable 2(Charging from Adapter2)+Bluetooth Idle+WLAN Idle(5G)+Camera(Front) for Sample 1</p> <p>Mode 3: LTE Band 12 Rx(Middle)+ USB Cable 3(Charging from Adapter3)+ Bluetooth Idle+ WLAN Idle(6E)+ MP4 for Sample 1</p> <p>Mode 4: LTE Band 13 Rx(High)+ USB Cable 1(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(2.4G)+ NFC On for Sample 1</p> <p>Mode 5: LTE Band 26 Rx(Low)+ USB Cable 2(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(5G)+ GNSS Rx for Sample 1</p> <p>Mode 6: n78A Rx+ USB Cable 3(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(6E)+ GNSS Rx for Sample 1</p> <p>Mode 7: DC_7A_n5A (Low) Rx+ Earphone+ Bluetooth Idle+WLAN Idle(2.4G)+ Camera(Rear) for Sample 1</p> <p>Mode 8: GSM 850 Rx(Middle)+USB Cable 1(Charging from Adapter1)+Bluetooth Idle+WLAN Idle(2.4G)+Camera(Rear) for Sample 2</p> <p>Mode 9: n78A Rx+ USB Cable 3(Data Link with Notebook)+ Bluetooth Idle+WLAN Idle(6E)+ GNSS Rx for Sample 3</p>
--------------------	---

Remark:

1. The worst case of AC is mode 1; only the test data of this mode is reported.
2. The worst case of RE is mode 1; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

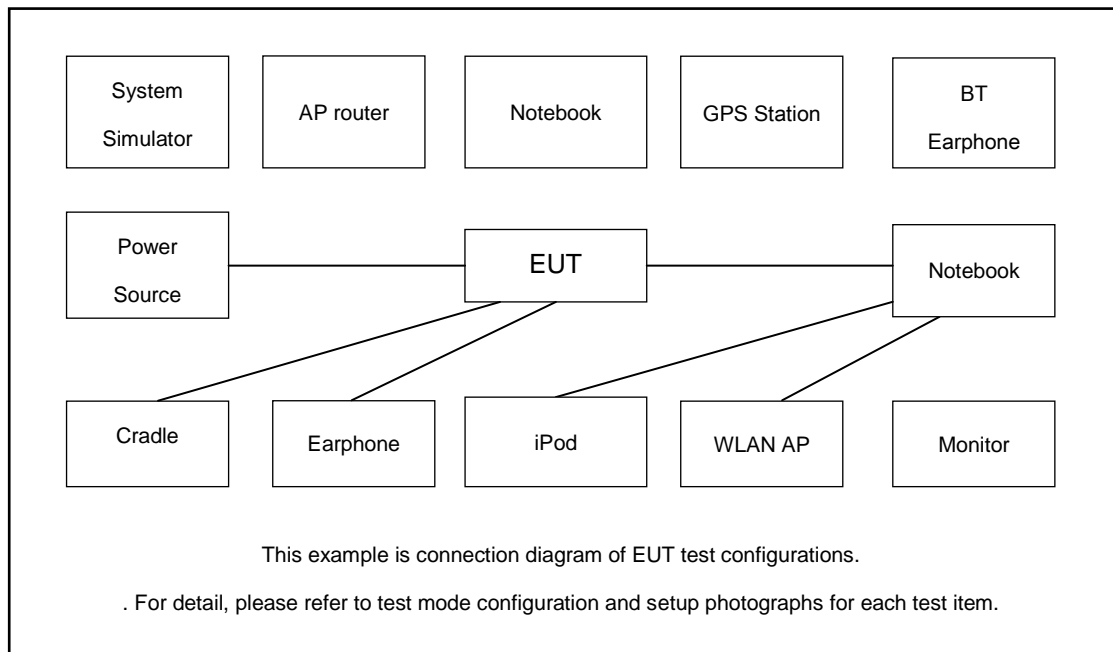

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	R&S	SMBV100A	258305	N/A	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
7.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
8.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Notebook	Lenovo	S730-13IWL	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
10.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
11.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	Shielded, 1.2m	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

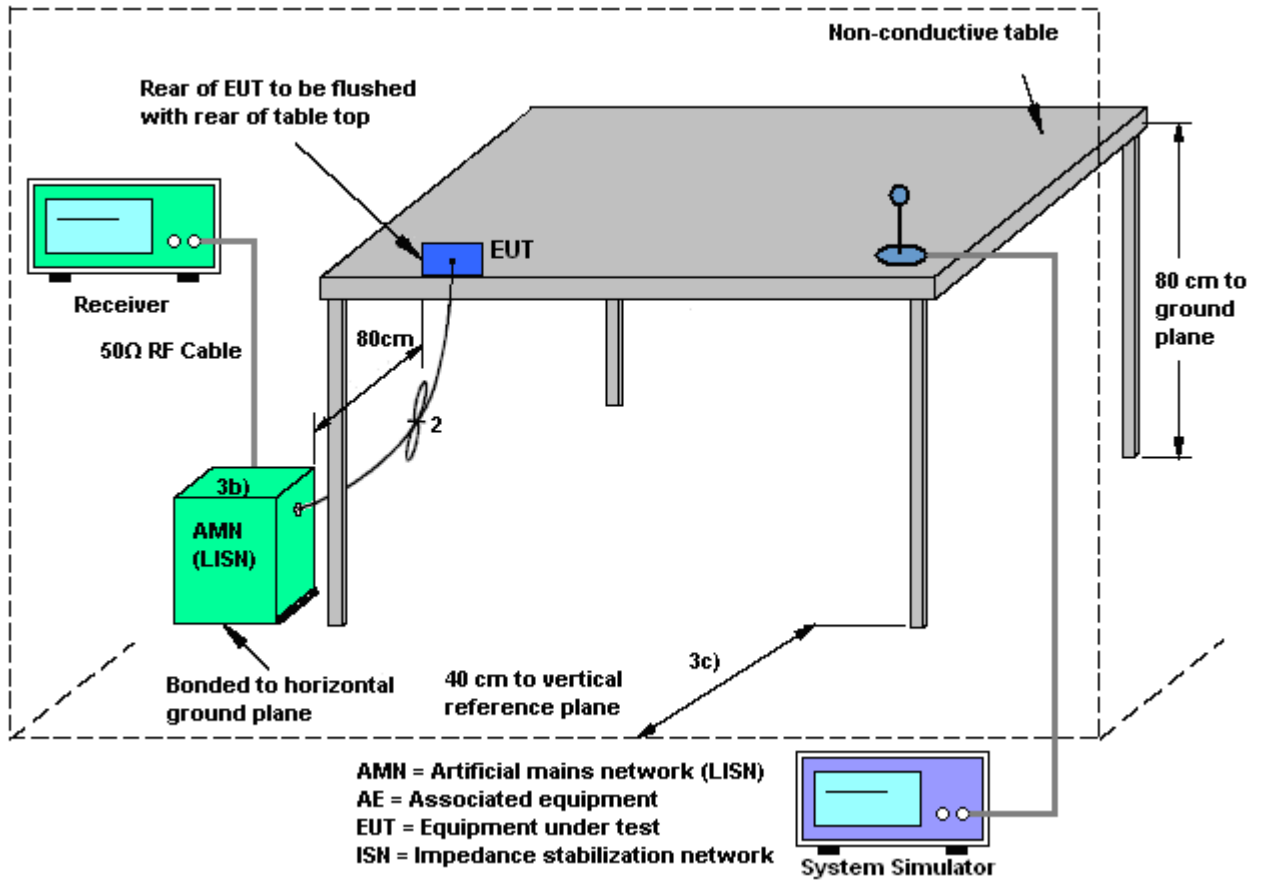



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

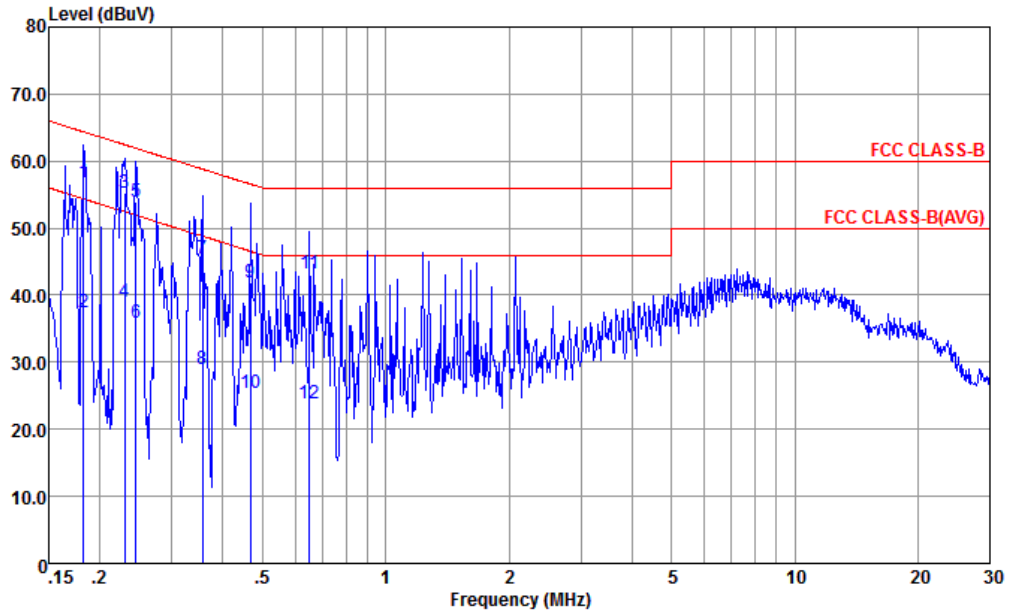


Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.182	56.93	-7.44	64.37	46.50	0.03	10.40	QP
2	0.182	37.33	-17.04	54.37	26.90	0.03	10.40	Average
3 *	0.230	55.20	-7.24	62.44	44.81	0.05	10.34	QP
4	0.230	38.90	-13.54	52.44	28.51	0.05	10.34	Average
5	0.246	53.89	-8.02	61.91	43.49	0.06	10.34	QP
6	0.246	35.89	-16.02	51.91	25.49	0.06	10.34	Average
7	0.356	45.46	-13.37	58.83	35.10	0.08	10.28	QP
8	0.356	28.86	-19.97	48.83	18.50	0.08	10.28	Average
9	0.466	41.84	-14.74	56.58	31.50	0.10	10.24	QP
10	0.466	25.44	-21.14	46.58	15.10	0.10	10.24	Average
11	0.651	43.15	-12.85	56.00	32.80	0.11	10.24	QP
12	0.651	23.85	-22.15	46.00	13.50	0.11	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

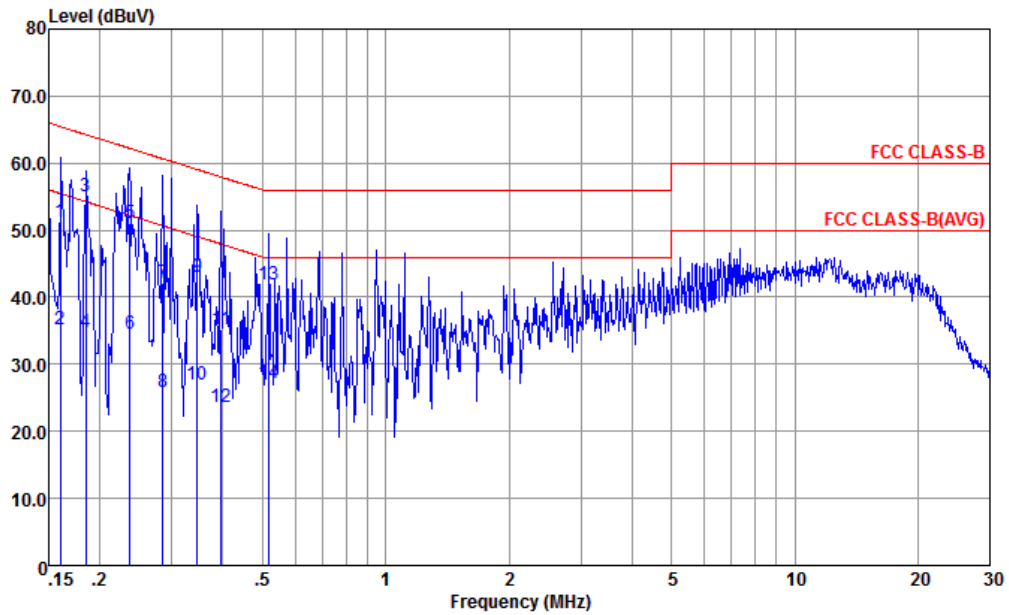

Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.160	51.16	-14.31	65.47	40.60	0.11	10.45	QP
2	0.160	35.16	-20.31	55.47	24.60	0.11	10.45	Average
3 *	0.184	55.00	-9.28	64.28	44.50	0.10	10.40	QP
4	0.184	34.70	-19.58	54.28	24.20	0.10	10.40	Average
5	0.237	51.04	-11.18	62.22	40.60	0.10	10.34	QP
6	0.237	34.54	-17.68	52.22	24.10	0.10	10.34	Average
7	0.285	42.01	-18.67	60.68	31.60	0.10	10.31	QP
8	0.285	25.91	-24.77	50.68	15.50	0.10	10.31	Average
9	0.346	42.99	-16.06	59.05	32.60	0.10	10.29	QP
10	0.346	26.99	-22.06	49.05	16.60	0.10	10.29	Average
11	0.396	35.17	-22.78	57.95	24.79	0.11	10.27	QP
12	0.396	23.57	-24.38	47.95	13.19	0.11	10.27	Average
13	0.518	41.85	-14.15	56.00	31.50	0.11	10.24	QP
14	0.518	27.15	-18.85	46.00	16.80	0.11	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

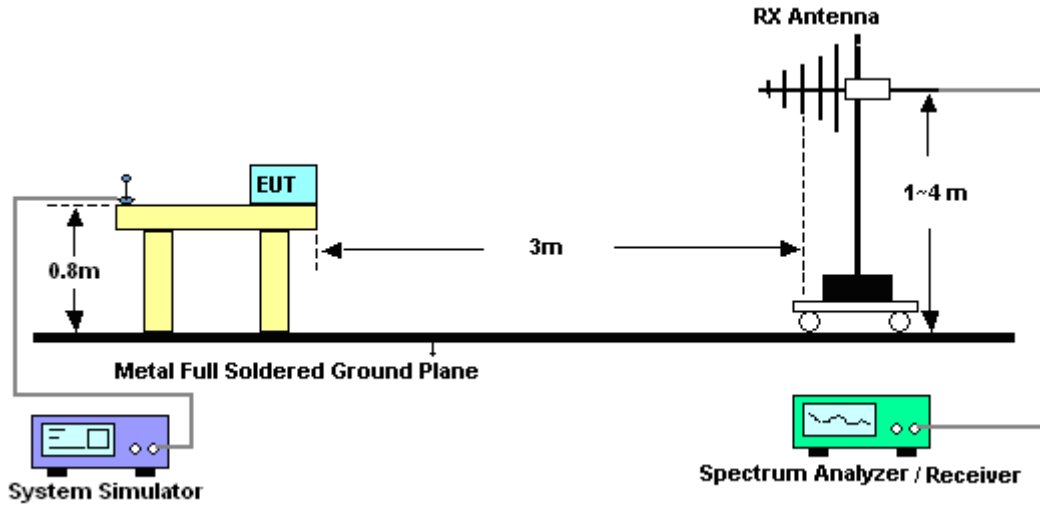


For radiated emissions above 1GHz

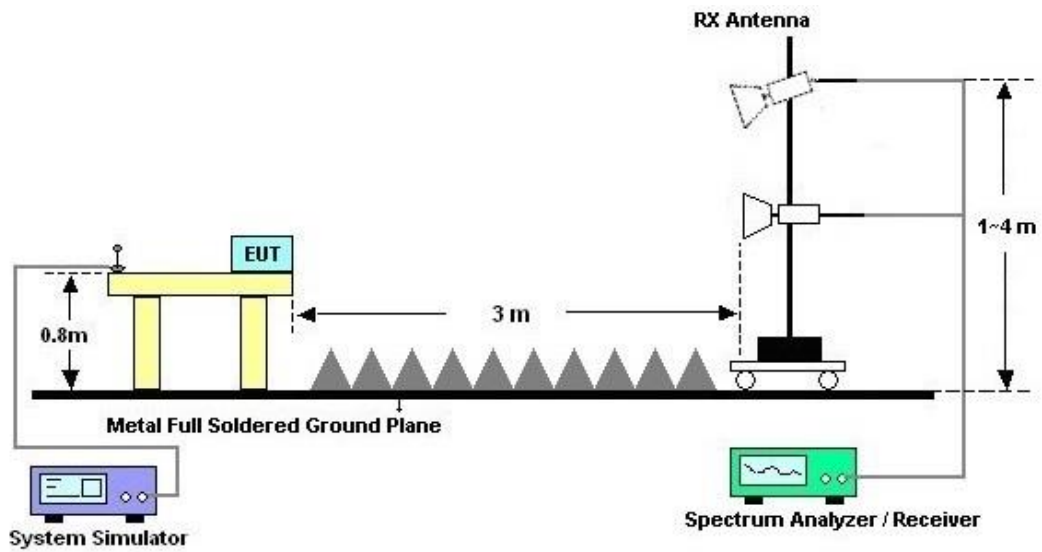



3.2.5. Test Result of Radiated Emission

Test Engineer :	Fang Peng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

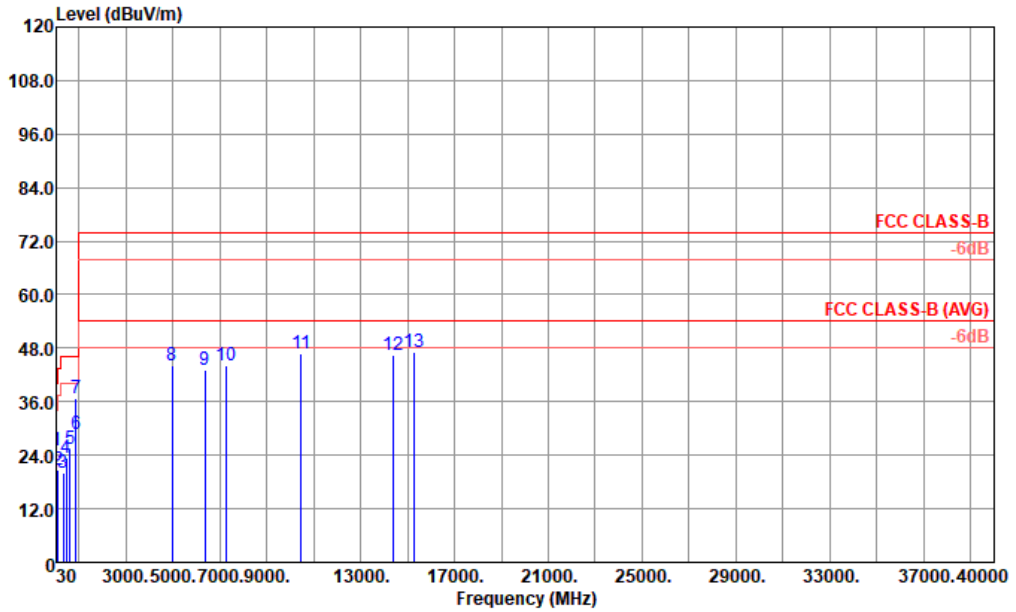


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 HORIZONTAL

: Y											
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	49.400	24.98	-15.02	40.00	42.02	14.60	0.76	32.40	---	---	Peak
2	96.930	20.63	-22.87	43.50	36.21	15.40	1.42	32.40	---	---	Peak
3	330.700	20.06	-25.94	46.00	30.16	19.64	2.66	32.40	---	---	Peak
4	450.980	23.40	-22.60	46.00	29.89	22.82	3.09	32.40	---	---	Peak
5	624.610	25.36	-20.64	46.00	28.02	26.10	3.64	32.40	---	---	Peak
6	859.350	28.65	-17.35	46.00	27.23	28.98	4.26	31.82	---	---	Peak
7	881.660	36.62			34.93	29.02	4.32	31.65	---	---	Peak
8	4968.000	44.22	-29.78	74.00	61.98	35.54	10.51	63.81	---	---	Peak
9	6384.000	43.24	-30.76	74.00	60.04	34.86	11.85	63.51	---	---	Peak
10	7264.000	44.17	-29.83	74.00	58.53	35.86	12.80	63.02	---	---	Peak
11	10458.000	46.85	-27.15	74.00	54.61	38.53	15.61	61.90	---	---	Peak
12	14400.000	46.49	-27.51	74.00	50.79	40.75	18.19	63.24	---	---	Peak
13	15309.000	46.98	-27.02	74.00	50.97	41.05	18.66	63.70	---	---	Peak



Test Engineer :	Fang Peng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

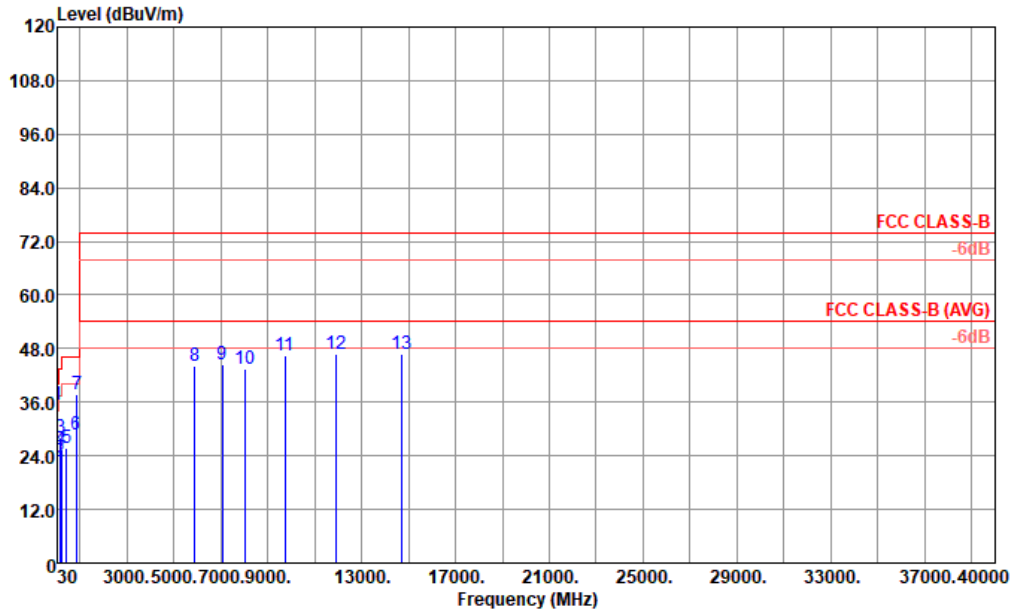

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m CBL 6111D 59913 VERTICAL

	Y										
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	50.370	35.44	-4.56	40.00	52.87	14.20	0.77	32.40	100	257	QP
2	138.640	22.72	-20.78	43.50	36.02	17.40	1.70	32.40	---	---	Peak
3	179.380	28.04	-15.46	43.50	43.69	14.80	1.95	32.40	---	---	Peak
4	218.180	25.42	-20.58	46.00	40.63	15.04	2.15	32.40	---	---	Peak
5	437.400	25.77	-20.23	46.00	32.46	22.66	3.05	32.40	---	---	Peak
6	828.310	28.83	-17.17	46.00	28.62	28.02	4.18	31.99	---	---	Peak
7	881.660	37.89			36.20	29.02	4.32	31.65	---	---	Peak
8	5896.000	44.00	-30.00	74.00	61.35	34.80	11.45	63.60	---	---	Peak
9	7080.000	44.42	-29.58	74.00	58.71	35.75	12.67	62.71	---	---	Peak
10	8032.000	43.33	-30.67	74.00	57.15	35.47	13.53	62.82	---	---	Peak
11	9729.000	46.38	-27.62	74.00	56.36	37.54	14.88	62.40	---	---	Peak
12	11943.000	46.88	-27.12	74.00	52.16	39.75	16.37	61.40	---	---	Peak
13	14697.000	46.75	-27.25	74.00	50.84	41.03	18.35	63.47	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 21, 2021	Feb. 01, 2022~ Mar. 08, 2022	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2021	Feb. 01, 2022~ Mar. 08, 2022	Oct. 16, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 17, 2021	Feb. 01, 2022~ Mar. 08, 2022	Oct. 16, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2021	Feb. 01, 2022~ Mar. 08, 2022	Oct. 16, 2022	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 16, 2021	Feb. 12, 2022~ Mar. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Feb. 12, 2022~ Mar. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 26, 2022	Feb. 12, 2022~ Mar. 08, 2022	Jan. 25, 2023	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Feb. 12, 2022~ Mar. 08, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 06, 2021	Feb. 12, 2022~ Mar. 08, 2022	Nov. 05, 2022	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2022	Feb. 12, 2022~ Mar. 08, 2022	Jan. 05, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2022	Feb. 12, 2022~ Mar. 08, 2022	Jan. 05, 2023	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5G Hz	Oct. 16, 2021	Feb. 12, 2022~ Mar. 08, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Feb. 12, 2022~ Mar. 08, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 12, 2022~ Mar. 08, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 12, 2022~ Mar. 08, 2022	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------