





11AX80MIMO_Ant1_6465_484Tone_RU65


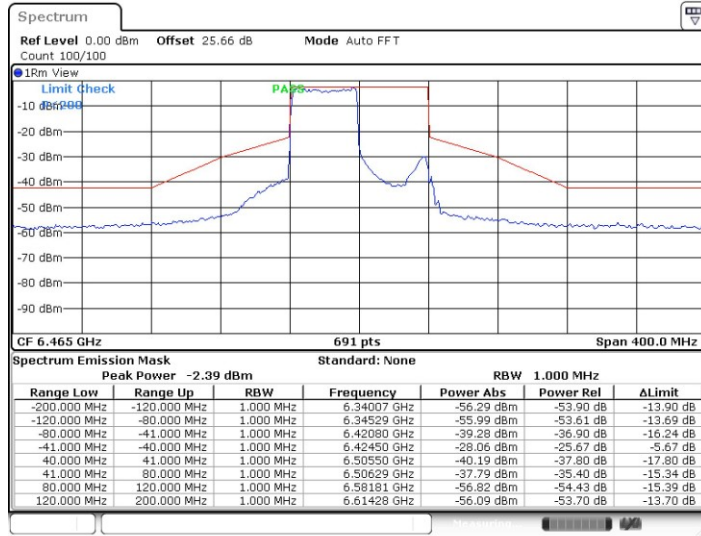


Date: 6.MAY.2022 01:00:52

11AX80MIMO_Ant2_6465_484Tone_RU65

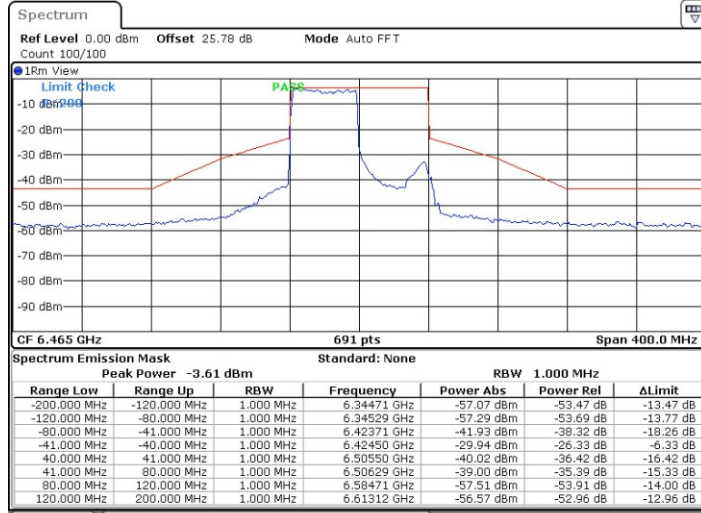


Date: 6.MAY.2022 01:02:45

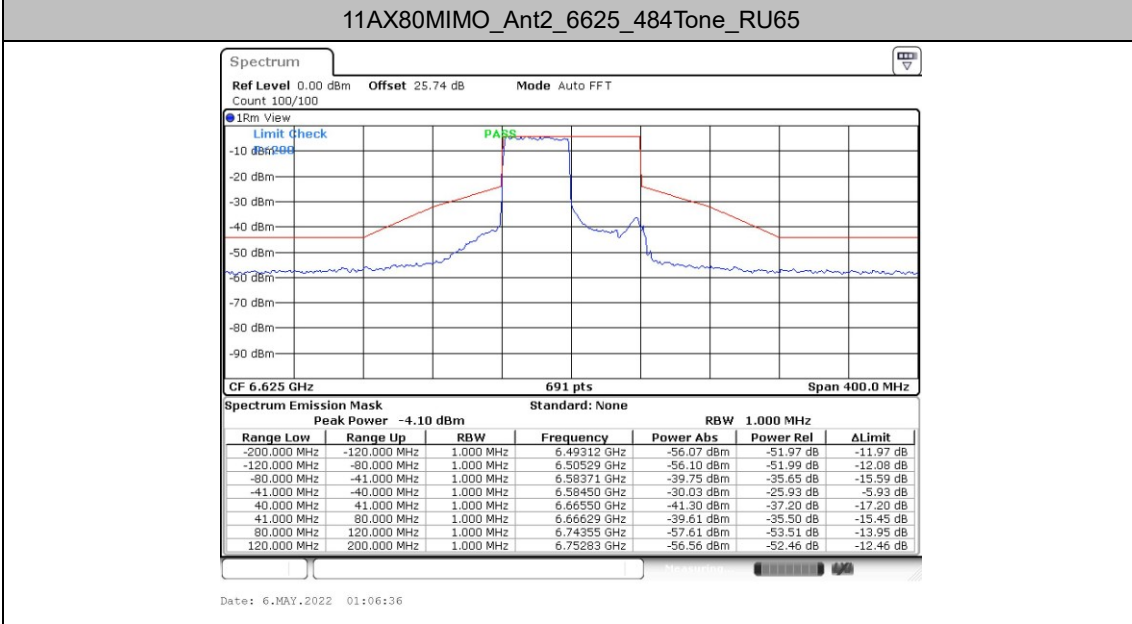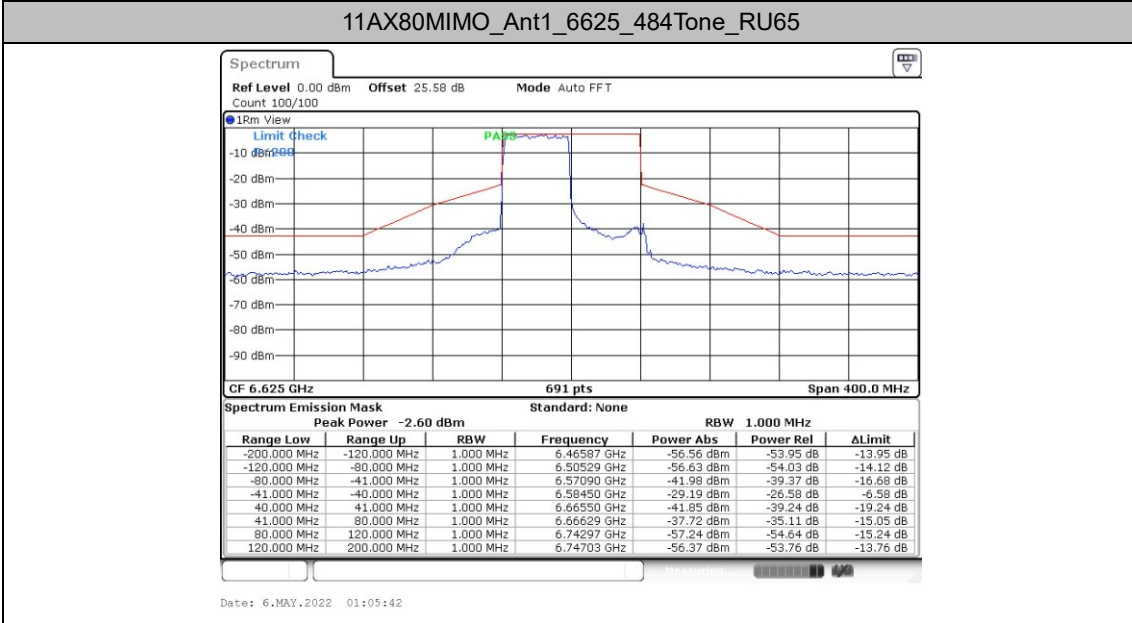




11AX80MIMO_Ant1_6705_484Tone_RU65

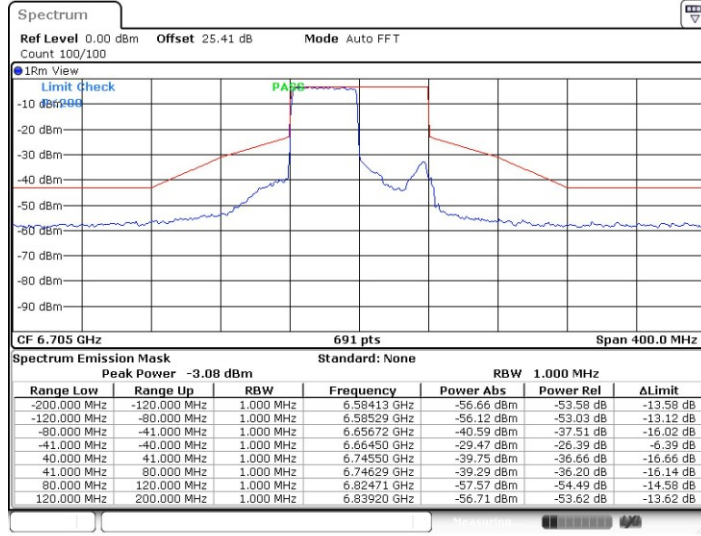

Date: 6.MAY.2022 01:07:51


11AX80MIMO_Ant2_6705_484Tone_RU65

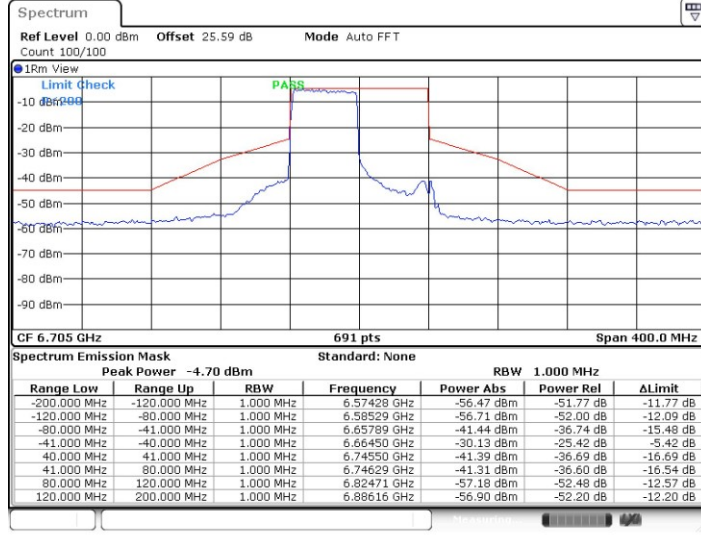

Date: 6.MAY.2022 01:09:02




11AX80MIMO_Ant1_6785_484Tone_RU66

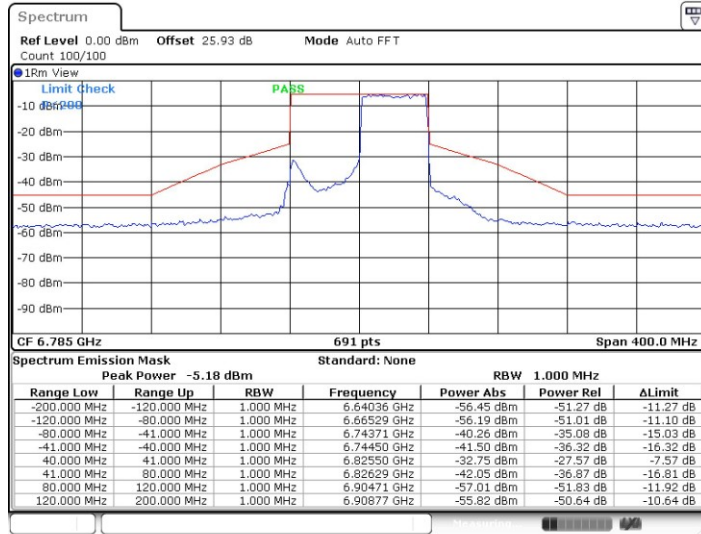

Date: 6.MAY.2022 01:20:27


11AX80MIMO_Ant2_6785_484Tone_RU66

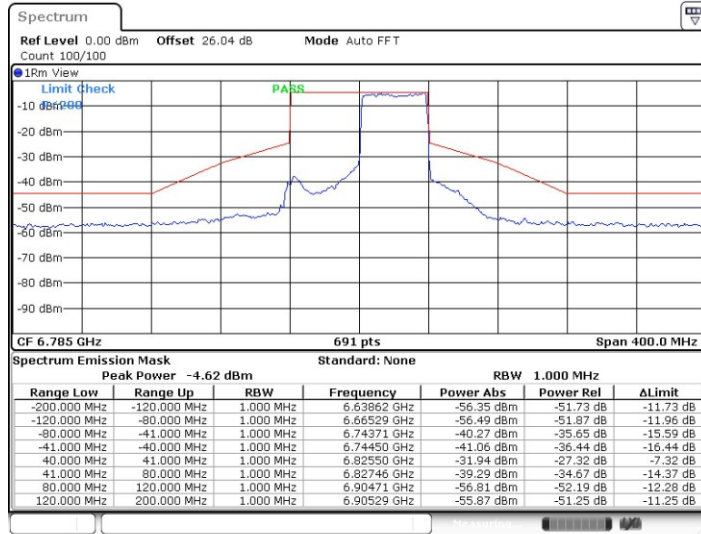

Date: 6.MAY.2022 01:21:54




11AX80MIMO_Ant1_6945_484Tone_RU65

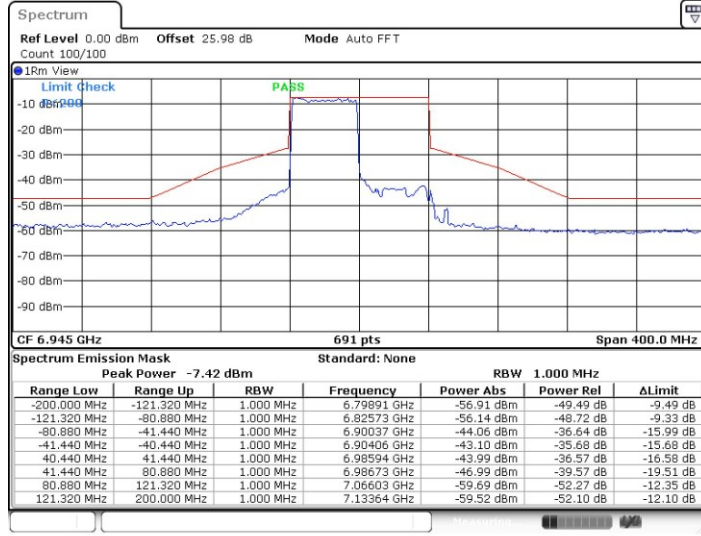

Date: 12.MAY.2022 11:58:27


11AX80MIMO_Ant2_6945_484Tone_RU65

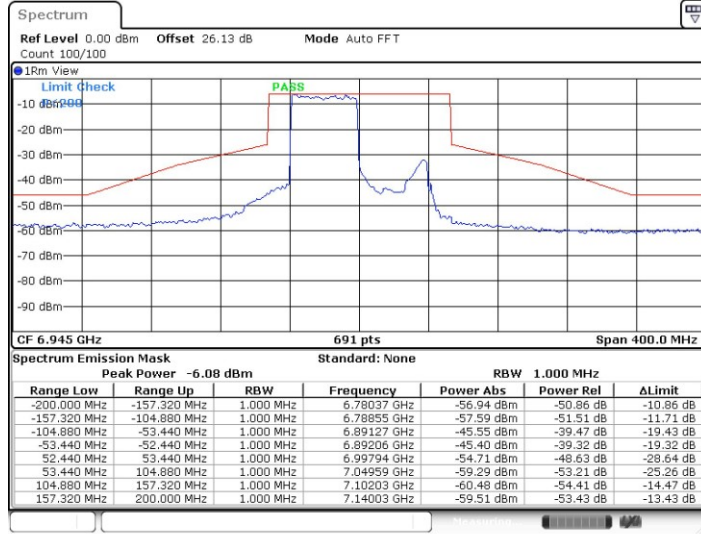

Date: 12.MAY.2022 11:58:48




11AX80MIMO_Ant1_7025_484Tone_RU66

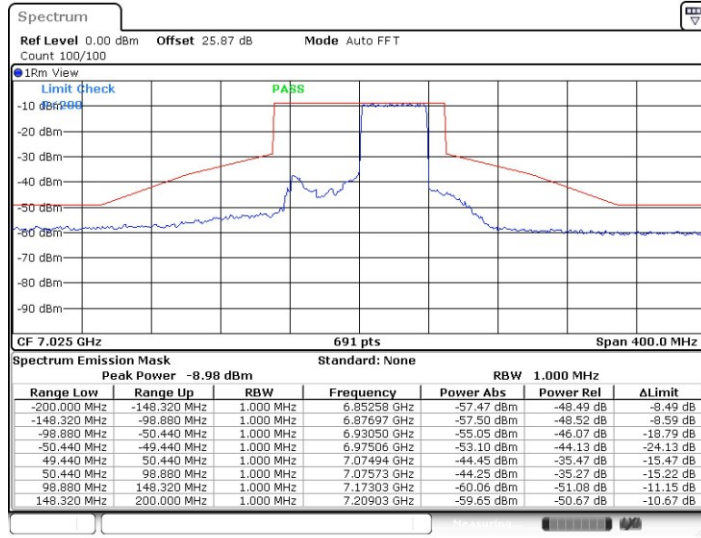

Date: 12.MAY.2022 11:59:27

11AX80MIMO_Ant2_7025_484Tone_RU66

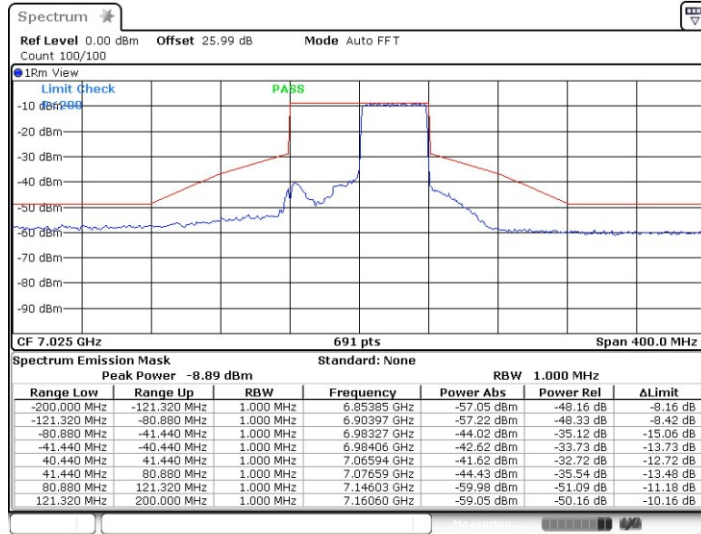


Date: 12.MAY.2022 12:00:15



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

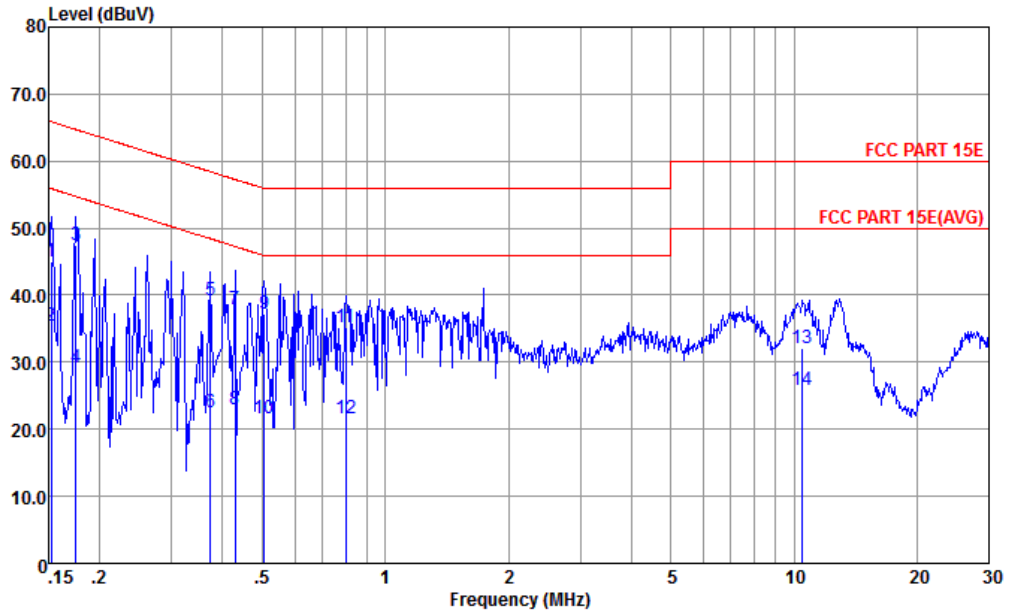


Site : CO01-KS
Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	44.99	-20.88	65.87	34.50	0.02	10.47	QP
2	0.152	35.39	-20.48	55.87	24.90	0.02	10.47	Average
3 *	0.175	47.55	-17.17	64.72	37.10	0.03	10.42	QP
4	0.175	29.25	-25.47	54.72	18.80	0.03	10.42	Average
5	0.373	39.16	-19.27	58.43	28.80	0.08	10.28	QP
6	0.373	22.56	-25.87	48.43	12.20	0.08	10.28	Average
7	0.428	37.85	-19.44	57.29	27.50	0.09	10.26	QP
8	0.428	22.95	-24.34	47.29	12.60	0.09	10.26	Average
9	0.505	37.14	-18.86	56.00	26.80	0.10	10.24	QP
10	0.505	21.64	-24.36	46.00	11.30	0.10	10.24	Average
11	0.800	35.16	-20.84	56.00	24.80	0.12	10.24	QP
12	0.800	21.56	-24.44	46.00	11.20	0.12	10.24	Average
13	10.508	32.18	-27.82	60.00	21.60	0.23	10.35	QP
14	10.508	25.78	-24.22	50.00	15.20	0.23	10.35	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

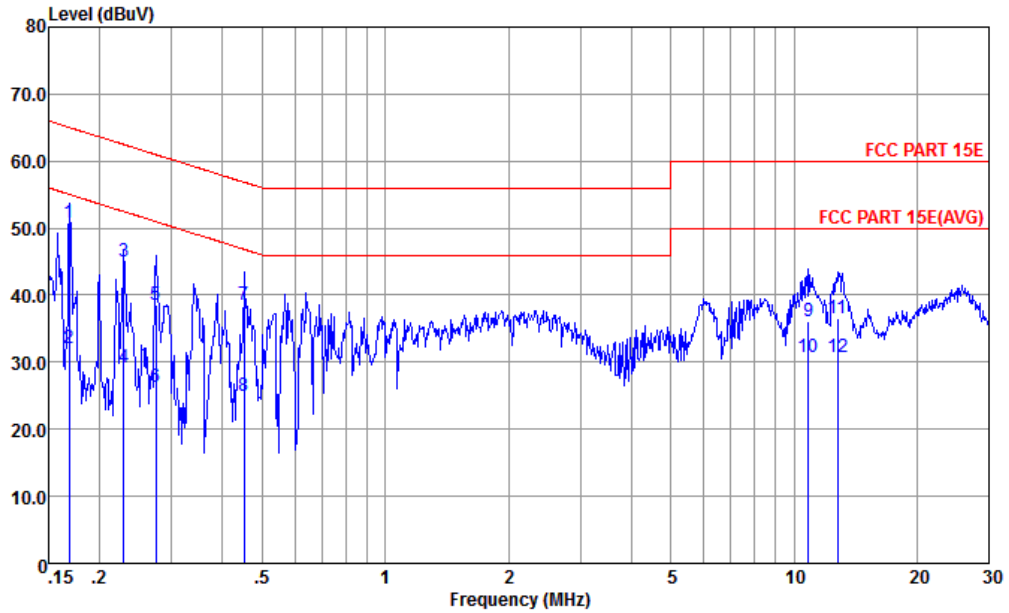

Site : CO01-KS
 Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.169	50.74	-14.29	65.03	40.20	0.11	10.43	QP
2	0.169	32.14	-22.89	55.03	21.60	0.11	10.43	Average
3	0.229	44.95	-17.53	62.48	34.50	0.10	10.35	QP
4	0.229	29.25	-23.23	52.48	18.80	0.10	10.35	Average
5	0.274	38.62	-22.36	60.98	28.20	0.10	10.32	QP
6	0.274	26.32	-24.66	50.98	15.90	0.10	10.32	Average
7	0.452	38.56	-18.29	56.85	28.20	0.11	10.25	QP
8	0.452	24.96	-21.89	46.85	14.60	0.11	10.25	Average
9	10.847	36.10	-23.90	60.00	25.50	0.25	10.35	QP
10	10.847	30.80	-19.20	50.00	20.20	0.25	10.35	Average
11	12.784	36.55	-23.45	60.00	25.90	0.28	10.37	QP
12	12.784	30.75	-19.25	50.00	20.10	0.28	10.37	Average



Appendix C. Radiated Spurious Emission

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 01 5955MHz		5921.32	60.06	-28.24	88.3	46.21	35.33	10.51	31.99	100	229	P	H
		5923.98	50.92	-17.38	68.3	37.02	35.37	10.52	31.99	100	229	A	H
	*	5950	109.35	--	--	95.43	35.4	10.53	32.01	100	229	P	H
		5950	101.8	--	--	87.88	35.4	10.53	32.01	100	229	A	H
		5918.24	57.5	-30.8	88.3	43.65	35.33	10.51	31.99	292	90	P	V
		5923.56	47.38	-20.92	68.3	33.48	35.37	10.52	31.99	292	90	A	V
	*	5950	103.17	--	--	89.25	35.4	10.53	32.01	292	90	P	V
		5950	95.44	--	--	81.52	35.4	10.53	32.01	292	90	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full		11912	43.47	-30.53	74	50.33	38.78	16.49	62.13	300	0	P	H
CH 01 5955MHz		11912	44.19	-29.81	74	51.05	38.78	16.49	62.13	100	0	P	V
802.11ax HE20 Full		12352	43.75	-30.25	74	50.39	39.12	16.76	62.52	300	0	P	H
CH 45 6175MHz		12352	43.84	-30.16	74	50.48	39.12	16.76	62.52	100	0	P	V
802.11ax HE20 Full		12832	43.4	-44.9	88.3	49.81	39.27	17.05	62.73	300	0	P	H
CH 93 6415MHz		12832	43.75	-44.55	88.3	50.16	39.27	17.05	62.73	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for frequencies 5924.82, 5924.96, 5950, and 5914.04.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11ax HE20 Partial 52/37 CH 01 5955MHz and a Remark section.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE20 Partial 106/53 CH 01 5955MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE40 Full CH 03 5965MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		11928	43.83	-30.17	74	50.65	38.8	16.5	62.12	300	0	P	H
CH 03 5965MHz		11928	44.53	-29.47	74	51.35	38.8	16.5	62.12	100	0	P	V
802.11ax HE40 Full		12328	43.42	-30.58	74	50.06	39.1	16.74	62.48	300	0	P	H
CH 43 6165MHz		12328	44.79	-29.21	74	51.43	39.1	16.74	62.48	100	0	P	V
802.11ax HE40 Full		12808	43.21	-45.09	88.3	49.64	39.26	17.04	62.73	300	0	P	H
CH 91 6405MHz		12808	43.5	-44.8	88.3	49.93	39.26	17.04	62.73	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE40 Partial 242/61 CH 03 5965MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE80 Full CH 07 5985MHz at various frequencies (5918.44, 5924.2, 5950, 5922.12, 5924.52, 5977).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		11968	43.29	-30.71	74	50.02	38.85	16.53	62.11	300	0	P	H
CH 07 5985MHz		11968	43.84	-30.16	74	50.57	38.85	16.53	62.11	100	0	P	V
802.11ax HE80 Full		12288	43.33	-30.67	74	49.97	39.08	16.72	62.44	300	0	P	H
CH 39 6145MHz		12288	44.05	-29.95	74	50.69	39.08	16.72	62.44	100	0	P	V
802.11ax HE80 Full		12768	42.56	-45.74	88.3	49.02	39.25	17.01	62.72	300	0	P	H
CH 87 6385MHz		12768	45.17	-43.13	88.3	51.63	39.25	17.01	62.72	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE80 Partial 484/65 CH 07 5985MHz and a Remark section.



U-NII 6 - 6425-6525MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full		12872	43.51	-44.79	88.3	49.9	39.27	17.07	62.73	300	0	P	H
CH 97 6435MHz		12872	44.28	-44.02	88.3	50.67	39.27	17.07	62.73	100	0	P	V
802.11ax HE20 Full		12952	42.81	-45.49	88.3	49.14	39.29	17.12	62.74	300	0	P	H
CH 105 6475MHz		12952	43.06	-45.24	88.3	49.39	39.29	17.12	62.74	100	0	P	V
802.11ax HE20 Full		13032	43.77	-44.53	88.3	50.1	39.27	17.18	62.78	300	0	P	H
CH 113 6515MHz		13032	43.4	-44.9	88.3	49.73	39.27	17.18	62.78	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 6 5925~6425MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		12888	43.91	-44.39	88.3	50.29	39.28	17.08	62.74	300	0	P	H
CH 99 6445MHz		12888	42.87	-45.43	88.3	49.25	39.28	17.08	62.74	100	0	P	V
802.11ax HE40 Full		12968	42.65	-45.65	88.3	48.98	39.29	17.13	62.75	300	0	P	H
CH 107 6485MHz		12968	42.54	-45.76	88.3	48.87	39.29	17.13	62.75	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 6 6425~6525MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		12928	43.01	-45.29	88.3	49.35	39.29	17.11	62.74	300	0	P	H
CH 103 6465MHz		12928	42.09	-46.21	88.3	48.43	39.29	17.11	62.74	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 - 6525-6875MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full		13072	43.45	-44.85	88.3	49.82	39.24	17.21	62.82	300	0	P	H
CH 117 6535MHz		13072	43.76	-44.54	88.3	50.13	39.24	17.21	62.82	100	0	P	V
802.11ax HE20 Full		13392	42.66	-31.34	74	49.34	38.98	17.49	63.15	300	0	P	H
CH 149 6695MHz		13392	44.85	-29.15	74	51.53	38.98	17.49	63.15	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 6525~6875MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		13128	43.76	-44.54	88.3	50.18	39.2	17.25	62.87	300	0	P	H
CH 123 6565MHz		13128	41.94	-46.36	88.3	48.36	39.2	17.25	62.87	100	0	P	V
802.11ax HE40 Full		13368	43.53	-30.47	74	50.19	39	17.47	63.13	300	0	P	H
CH 147 6685MHz		13368	44.42	-29.58	74	51.08	39	17.47	63.13	100	0	P	V
802.11ax HE40 Full		13688	44.75	-43.55	88.3	51.66	38.86	17.73	63.5	300	0	P	H
CH 179 6845MHz		13688	44.67	-43.63	88.3	51.58	38.86	17.73	63.5	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 6525~6875MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 135 6625MHz		13248	44.85	-43.45	88.3	51.38	39.11	17.35	62.99	300	0	P	H
802.11ax HE80 Full CH 151 6705MHz		13408	42.36	-45.94	88.3	49.05	38.97	17.5	63.16	300	0	P	H
		13248	42.99	-45.31	88.3	49.52	39.11	17.35	62.99	100	0	P	V
		13408	42.71	-45.59	88.3	49.4	38.97	17.5	63.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 - 6875-7125MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 229 7095MHz		7125.16	56.64	-31.66	88.3	45.64	35.04	12.57	36.61	334	80	P	H
		7125.32	45.39	-22.91	68.3	34.39	35.04	12.57	36.61	334	80	A	H
	*	7102	97.01	--	--	86.05	35.02	12.55	36.61	334	80	P	H
		7102	89.99	--	--	79.03	35.02	12.55	36.61	334	80	A	H
		7128.68	58.45	-29.85	88.3	47.39	35.07	12.59	36.6	100	111	P	V
		7125.48	47.51	-20.79	68.3	36.51	35.04	12.57	36.61	100	111	A	V
	*	7093	99.81	--	--	88.9	35	12.53	36.62	100	111	P	V
	7093	91.94	--	--	81.03	35	12.53	36.62	100	111	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full		13792	44.64	-43.66	88.3	51.61	38.84	17.82	63.63	300	0	P	H
CH 189 6895MHz		13792	46.89	-41.41	88.3	53.86	38.84	17.82	63.63	100	0	P	V
802.11ax HE20 Full		13992	46.55	-41.75	88.3	53.65	38.8	18	63.9	300	0	P	H
CH 209 6995MHz		13992	47.38	-40.92	88.3	54.48	38.8	18	63.9	100	0	P	V
802.11ax HE20 Full		14192	44.52	-43.78	88.3	51.53	39.1	18.09	64.2	300	0	P	H
CH 229 7095MHz		14192	45.41	-42.89	88.3	52.42	39.1	18.09	64.2	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 26/8 CH 229 7095MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 52/40 CH 229 7095MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 106/54 CH 229 7095MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE40 Full CH 227 7085MHz and a Remark section.



U-NII 8 6875~7125MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		13928	44.82	-43.48	88.3	51.87	38.82	17.94	63.81	300	0	P	H
CH 203 6965MHz		13928	44.88	-43.42	88.3	51.93	38.82	17.94	63.81	100	0	P	V
802.11ax HE40 Full		14168	44.12	-44.18	88.3	51.13	39.08	18.09	64.18	300	0	P	H
CH 227 7085MHz		14168	47.57	-40.73	88.3	54.58	39.08	18.09	64.18	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE40 Partial 242/62 CH 227 7085MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE80 Full CH 215 7025MHz and a Remark section.



U-NII 8 6875~7125MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		13888	45.41	-42.89	88.3	52.44	38.82	17.91	63.76	300	0	P	H
CH 199 6945MHz		13888	44.19	-44.11	88.3	51.22	38.82	17.91	63.76	100	0	P	V
802.11ax HE80 Full		14048	45.49	-42.81	88.3	52.58	38.88	18.03	64	300	0	P	H
CH 215 7025MHz		14048	45.26	-43.04	88.3	52.35	38.88	18.03	64	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE80 Partial 484/66 CH 215 7025MHz and a Remark section.



RSE Co-location

WIFI 802.11ax HE40 Partial 242 + LTE_B30_BW_10M (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		7149.06	74.59	-13.71	88.3	60.18	35.6	11.61	32.8	109	283	P	H
		7134.12	63.73	-4.57	68.3	49.33	35.6	11.6	32.8	109	283	A	H
		7102	103.57	---	---	89.17	35.6	11.57	32.77	109	283	P	H
		7102	95.46	---	---	81.06	35.6	11.57	32.77	109	283	A	H
		7144.74	70.77	-17.53	88.3	56.37	35.6	11.6	32.8	290	261	P	V
		7131.78	61.19	-7.11	68.3	46.78	35.6	11.6	32.79	290	261	A	V
		7093	101.9	---	---	87.51	35.6	11.56	32.77	290	261	P	V
		7102	92.19	---	---	77.79	35.6	11.57	32.77	290	261	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI 802.11ax HE40 Partial 242 + LTE_B30_BW_10M (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		14168	46.18	-42.12	88.3	52.14	39	16.64	61.6	300	0	P	H
		14168	46.23	-42.07	88.3	52.19	39	16.64	61.6	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ax HE40 Partial 242 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Partial 242 LF		30	21.16	-18.84	40	28.28	24.8	0.88	32.8	--	--	P	H
		150.28	14.96	-28.54	43.5	28.91	17	1.95	32.9	--	--	P	H
		263.77	16.89	-29.11	46	28.6	18.69	2.61	33.01	--	--	P	H
		508.21	23.65	-22.35	46	29.42	24	3.6	33.37	--	--	P	H
		750.71	27.73	-18.27	46	28.5	28	4.38	33.15	--	--	P	H
		787.57	28.19	-17.81	46	28.55	28.15	4.48	32.99	--	--	P	H
		30	21.16	-18.84	40	28.28	24.8	0.88	32.8	--	--	P	V
		150.28	14.96	-28.54	43.5	28.91	17	1.95	32.9	--	--	P	V
		260.86	17.31	-28.69	46	29.07	18.65	2.6	33.01	--	--	P	V
		508.21	23.65	-22.35	46	29.42	24	3.6	33.37	--	--	P	V
		564.47	24.34	-21.66	46	28.6	25.27	3.79	33.32	--	--	P	V
		756.53	28.59	-17.41	46	29.3	28.03	4.39	33.13	--	--	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission

Note symbol



-L	Low channel location
-R	High channel location



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																								
ANT	802.11ax HE20 Full CH01 5955MHz																																																																																								
1+2	Horizontal	Fundamental																																																																																							
Peak	<p>Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 5902240138 HORIZONTAL Project : RRM 1000 0000Hz VBR 3000 0000Hz SRT Auto Mode : (FR) 240834 IME1 : 1 Plane : #23 powersetting : 1 Single-directivity : 1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5921.32</td> <td>40.06</td> <td>-28.24</td> <td>88.30</td> <td>44.21</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>229</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB	1	5921.32	40.06	-28.24	88.30	44.21	35.33	10.51	31.99	100	229	Peak	HORIZONTAL	<p>Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 5902240138 HORIZONTAL Project : RRM 1000 0000Hz VBR 3000 0000Hz SRT Auto Mode : (FR) 240834 IME1 : 1 Plane : #23 powersetting : 1 Single-directivity : 1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>109.35</td> <td>21.05</td> <td>88.30</td> <td>95.43</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>229</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>101.80</td> <td>33.50</td> <td>68.30</td> <td>87.88</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>229</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB	1	5950.00	109.35	21.05	88.30	95.43	35.40	10.53	32.01	100	229	Peak	HORIZONTAL	2	5950.00	101.80	33.50	68.30	87.88	35.40	10.53	32.01	100	229	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB																																																																																		
1	5921.32	40.06	-28.24	88.30	44.21	35.33	10.51	31.99	100	229	Peak	HORIZONTAL																																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB																																																																																		
1	5950.00	109.35	21.05	88.30	95.43	35.40	10.53	32.01	100	229	Peak	HORIZONTAL																																																																													
2	5950.00	101.80	33.50	68.30	87.88	35.40	10.53	32.01	100	229	Average	HORIZONTAL																																																																													
Avg.	<p>Site : 032004-KS Condition : WIFI 6E (AVG) 3m 3117 5902240138 HORIZONTAL Project : RRM 1000 0000Hz VBR 0.015000 SRT Auto Mode : (FR) 240834 IME1 : 1 Plane : #23 powersetting : 1 Single-directivity : 1</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.98</td> <td>50.92</td> <td>-17.38</td> <td>68.30</td> <td>37.02</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>229</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB	1	5923.98	50.92	-17.38	68.30	37.02	35.37	10.52	31.99	100	229	Average	HORIZONTAL	Left blank																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	dB																																																																																		
1	5923.98	50.92	-17.38	68.30	37.02	35.37	10.52	31.99	100	229	Average	HORIZONTAL																																																																													

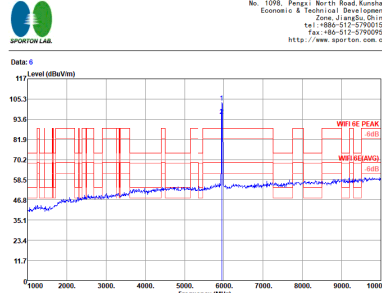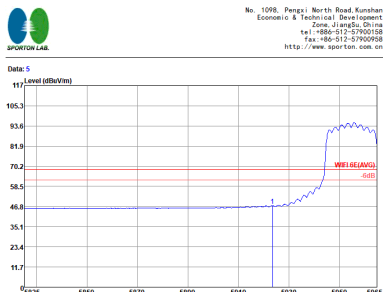

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE20 Full CH01 5955MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : RFI @ PEAK @ 3117.5M00240138 VERTICAL Project : R98-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5918.24</td> <td>57.50</td> <td>-30.80</td> <td>88.30</td> <td>43.65</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>292</td> <td>90 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1	5918.24	57.50	-30.80	88.30	43.65	35.33	10.51	31.99	292	90 Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : RFI @ PEAK @ 3117.5M00240138 VERTICAL Project : R98-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>103.17</td> <td>14.87</td> <td>88.30</td> <td>89.25</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>292</td> <td>90 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>95.44</td> <td>27.14</td> <td>68.30</td> <td>81.52</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>292</td> <td>90 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1	5950.00	103.17	14.87	88.30	89.25	35.40	10.53	32.01	292	90 Peak	VERTICAL	2	5950.00	95.44	27.14	68.30	81.52	35.40	10.53	32.01	292	90 Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1	5918.24	57.50	-30.80	88.30	43.65	35.33	10.51	31.99	292	90 Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1	5950.00	103.17	14.87	88.30	89.25	35.40	10.53	32.01	292	90 Peak	VERTICAL																																																																											
2	5950.00	95.44	27.14	68.30	81.52	35.40	10.53	32.01	292	90 Average	VERTICAL																																																																											
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : RFI @ (AVG) @ 3117.5M00240138 VERTICAL Project : R98-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.56</td> <td>47.38</td> <td>-20.92</td> <td>68.30</td> <td>33.48</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>292</td> <td>90 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg			1	5923.56	47.38	-20.92	68.30	33.48	35.37	10.52	31.99	292	90 Average	VERTICAL	Left blank																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																													
1	5923.56	47.38	-20.92	68.30	33.48	35.37	10.52	31.99	292	90 Average	VERTICAL																																																																											



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																								
ANT	802.11ax HE20 Partial 26/0 CH01 5955MHz																																								
1+2	Horizontal	Fundamental																																							
Peak	<p>Site: 032006-KS Condition: WIFI 6E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 3000.000KHz SWT Auto Mode: 2 Freq: #23 Plane: 2 Power: Single-directivity Power: 14 Over Limit: Read:Antenna Cable Presamp A/Pos T/Pos Loss Factor: Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5924.82</th> <th>56.11</th> <th>-32.19</th> <th>88.30</th> <th>42.21</th> <th>35.37</th> <th>10.52</th> <th>31.99</th> <th>100</th> <th>289</th> <th>Peak</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5924.82	56.11	-32.19	88.30	42.21	35.37	10.52	31.99	100	289	Peak	HORIZONT	<p>Site: 032006-KS Condition: WIFI 6E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 3000.000KHz SWT Auto Mode: 2 Freq: #23 Plane: 2 Power: Single-directivity Power: 14 Over Limit: Read:Antenna Cable Presamp A/Pos T/Pos Loss Factor: Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5950.00</th> <th>113.96</th> <th>25.66</th> <th>88.30</th> <th>100.04</th> <th>35.40</th> <th>10.53</th> <th>32.01</th> <th>100</th> <th>289</th> <th>Peak</th> <th>HORIZONT</th> </tr> <tr> <th>2</th> <th>5950.00</th> <th>107.23</th> <th>38.93</th> <th>68.30</th> <th>93.31</th> <th>35.40</th> <th>10.53</th> <th>32.01</th> <th>100</th> <th>289</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5950.00	113.96	25.66	88.30	100.04	35.40	10.53	32.01	100	289	Peak	HORIZONT	2	5950.00	107.23	38.93	68.30	93.31	35.40	10.53	32.01	100	289	Average	HORIZONT
1	5924.82	56.11	-32.19	88.30	42.21	35.37	10.52	31.99	100	289	Peak	HORIZONT																													
1	5950.00	113.96	25.66	88.30	100.04	35.40	10.53	32.01	100	289	Peak	HORIZONT																													
2	5950.00	107.23	38.93	68.30	93.31	35.40	10.53	32.01	100	289	Average	HORIZONT																													
Avg.	<p>Site: 032006-KS Condition: WIFI 6E (AVG) 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 0.010KHz SWT Auto Mode: 2 Freq: #23 Plane: 2 Power: Single-directivity Power: 14 Over Limit: Read:Antenna Cable Presamp A/Pos T/Pos Loss Factor: Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5924.96</th> <th>46.24</th> <th>-22.06</th> <th>68.30</th> <th>32.34</th> <th>35.37</th> <th>10.52</th> <th>31.99</th> <th>100</th> <th>289</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5924.96	46.24	-22.06	68.30	32.34	35.37	10.52	31.99	100	289	Average	HORIZONT	Left blank																										
1	5924.96	46.24	-22.06	68.30	32.34	35.37	10.52	31.99	100	289	Average	HORIZONT																													



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE20 Partial 26/0 CH01 5955MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032906-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5914.04</td> <td>58.41</td> <td>-29.89</td> <td>88.30</td> <td>44.56</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>301</td> <td>255 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg	1	5914.04	58.41	-29.89	88.30	44.56	35.33	10.51	31.99	301	255 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032906-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>110.04</td> <td>21.74</td> <td>88.30</td> <td>96.12</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>104.26</td> <td>35.96</td> <td>68.30</td> <td>90.34</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg	1	5950.00	110.04	21.74	88.30	96.12	35.40	10.53	32.01	301	255 Peak	VERTICAL	2	5950.00	104.26	35.96	68.30	90.34	35.40	10.53	32.01	301	255 Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg																																																																											
1	5914.04	58.41	-29.89	88.30	44.56	35.33	10.51	31.99	301	255 Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg																																																																											
1	5950.00	110.04	21.74	88.30	96.12	35.40	10.53	32.01	301	255 Peak	VERTICAL																																																																											
2	5950.00	104.26	35.96	68.30	90.34	35.40	10.53	32.01	301	255 Average	VERTICAL																																																																											
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032906-KS Condition : WIFI @E (AVG) @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>46.01</td> <td>-22.29</td> <td>68.30</td> <td>32.11</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>301</td> <td>255 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg	1	5924.96	46.01	-22.29	68.30	32.11	35.37	10.52	31.99	301	255 Average	VERTICAL	Left blank																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg		deg																																																																											
1	5924.96	46.01	-22.29	68.30	32.11	35.37	10.52	31.99	301	255 Average	VERTICAL																																																																											



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																								
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																								
1+2	Horizontal	Fundamental																																							
Peak	<p>Site: 032006-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZ20NTAL Project: RRF 1000.0000KHz VBR 3000.0000KHz SWT:Auto Mode: 3 ME1: #23 Plane: 3 Powersetting: 14 Over Limit ReadAttenua Cable Presamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dB dB on deg</p> <table border="1"> <tr> <td>1</td> <td>5924.96</td> <td>58.52</td> <td>-29.78</td> <td>88.30</td> <td>44.62</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>289</td> <td>Peak</td> <td>HORIZ20NT</td> </tr> </table>	1	5924.96	58.52	-29.78	88.30	44.62	35.37	10.52	31.99	100	289	Peak	HORIZ20NT	<p>Site: 032006-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZ20NTAL Project: RRF 1000.0000KHz VBR 3000.0000KHz SWT:Auto Mode: 3 ME1: #23 Plane: 3 Powersetting: 14 Over Limit ReadAttenua Cable Presamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dB dB on deg</p> <table border="1"> <tr> <td>1</td> <td>5950.00</td> <td>112.70</td> <td>24.40</td> <td>88.30</td> <td>98.78</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>289</td> <td>Peak</td> <td>HORIZ20NT</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>105.07</td> <td>36.77</td> <td>68.30</td> <td>91.15</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>289</td> <td>Average</td> <td>HORIZ20NT</td> </tr> </table>	1	5950.00	112.70	24.40	88.30	98.78	35.40	10.53	32.01	100	289	Peak	HORIZ20NT	2	5950.00	105.07	36.77	68.30	91.15	35.40	10.53	32.01	100	289	Average	HORIZ20NT
1	5924.96	58.52	-29.78	88.30	44.62	35.37	10.52	31.99	100	289	Peak	HORIZ20NT																													
1	5950.00	112.70	24.40	88.30	98.78	35.40	10.53	32.01	100	289	Peak	HORIZ20NT																													
2	5950.00	105.07	36.77	68.30	91.15	35.40	10.53	32.01	100	289	Average	HORIZ20NT																													
Avg.	<p>Site: 032006-KS Condition: RIFI 6E (AVG) 3m 3117 590240138 HORIZ20NTAL Project: RRF 1000.0000KHz VBR 0.0100KHz SWT:Auto Mode: 3 ME1: #23 Plane: 3 Powersetting: 14 Over Limit ReadAttenua Cable Presamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBm dB dB on deg</p> <table border="1"> <tr> <td>1</td> <td>5924.96</td> <td>47.18</td> <td>-21.12</td> <td>68.30</td> <td>33.28</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>289</td> <td>Average</td> <td>HORIZ20NT</td> </tr> </table>	1	5924.96	47.18	-21.12	68.30	33.28	35.37	10.52	31.99	100	289	Average	HORIZ20NT	Left blank																										
1	5924.96	47.18	-21.12	68.30	33.28	35.37	10.52	31.99	100	289	Average	HORIZ20NT																													






WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																																																								
1+2	Vertical	Fundamental																																																																							
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X PowerSetting : Single-directivity 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5914.46</td> <td>58.00</td> <td>-30.30</td> <td>88.30</td> <td>44.15</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>301</td> <td>255</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	1	5914.46	58.00	-30.30	88.30	44.15	35.33	10.51	31.99	301	255	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X PowerSetting : Single-directivity 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>109.82</td> <td>21.52</td> <td>88.30</td> <td>95.90</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>101.65</td> <td>33.35</td> <td>68.30</td> <td>67.73</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	1	5950.00	109.82	21.52	88.30	95.90	35.40	10.53	32.01	301	255	Peak	VERTICAL	2	5950.00	101.65	33.35	68.30	67.73	35.40	10.53	32.01	301	255	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																		
1	5914.46	58.00	-30.30	88.30	44.15	35.33	10.51	31.99	301	255	Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																		
1	5950.00	109.82	21.52	88.30	95.90	35.40	10.53	32.01	301	255	Peak	VERTICAL																																																													
2	5950.00	101.65	33.35	68.30	67.73	35.40	10.53	32.01	301	255	Average	VERTICAL																																																													
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E (AVG) @m 3117 5800240138 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto (FR) 240834 Mode : 2 MEI : #23 Plane : X PowerSetting : Single-directivity 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>46.32</td> <td>-21.98</td> <td>68.30</td> <td>32.42</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>301</td> <td>255</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg	1	5924.96	46.32	-21.98	68.30	32.42	35.37	10.52	31.99	301	255	Average	VERTICAL	<p>Left blank</p>																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																		
1	5924.96	46.32	-21.98	68.30	32.42	35.37	10.52	31.99	301	255	Average	VERTICAL																																																													



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																								
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz																																								
1+2	Horizontal	Fundamental																																							
Peak	<p>Site: 032006-KS Condition: WIFI 8E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: 4 Freq: #23 Plane: 4 Power: Single-directivity Power: 14 Over: Limit ReadStenna Cable Presamp A/Pos T/Pos Loss Factor Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5924.96</th> <th>59.07</th> <th>-29.23</th> <th>88.30</th> <th>45.17</th> <th>35.37</th> <th>10.52</th> <th>31.99</th> <th>100</th> <th>289</th> <th>Peak</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5924.96	59.07	-29.23	88.30	45.17	35.37	10.52	31.99	100	289	Peak	HORIZONT	<p>Site: 032006-KS Condition: WIFI 8E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: 4 Freq: #23 Plane: 4 Power: Single-directivity Power: 14 Over: Limit ReadStenna Cable Presamp A/Pos T/Pos Loss Factor Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5950.00</th> <th>109.52</th> <th>21.22</th> <th>88.30</th> <th>95.60</th> <th>35.40</th> <th>10.53</th> <th>32.01</th> <th>100</th> <th>289</th> <th>Peak</th> <th>HORIZONT</th> </tr> <tr> <th>2</th> <th>5950.00</th> <th>101.96</th> <th>33.66</th> <th>88.30</th> <th>88.64</th> <th>35.40</th> <th>10.53</th> <th>32.01</th> <th>100</th> <th>289</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5950.00	109.52	21.22	88.30	95.60	35.40	10.53	32.01	100	289	Peak	HORIZONT	2	5950.00	101.96	33.66	88.30	88.64	35.40	10.53	32.01	100	289	Average	HORIZONT
1	5924.96	59.07	-29.23	88.30	45.17	35.37	10.52	31.99	100	289	Peak	HORIZONT																													
1	5950.00	109.52	21.22	88.30	95.60	35.40	10.53	32.01	100	289	Peak	HORIZONT																													
2	5950.00	101.96	33.66	88.30	88.64	35.40	10.53	32.01	100	289	Average	HORIZONT																													
Avg.	<p>Site: 032006-KS Condition: WIFI 8E (AVG) 3m 3117 5900240138 HORIZONTA Project: RFR 1000.0000KHz VBR 0.0100KHz SWT Auto Mode: 4 Freq: #23 Plane: 4 Power: Single-directivity Power: 14 Over: Limit ReadStenna Cable Presamp A/Pos T/Pos Loss Factor Loss Factor Remark: Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>5924.92</th> <th>49.37</th> <th>-18.93</th> <th>68.30</th> <th>35.47</th> <th>35.37</th> <th>10.52</th> <th>31.99</th> <th>100</th> <th>289</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	5924.92	49.37	-18.93	68.30	35.47	35.37	10.52	31.99	100	289	Average	HORIZONT	Left blank																										
1	5924.92	49.37	-18.93	68.30	35.47	35.37	10.52	31.99	100	289	Average	HORIZONT																													

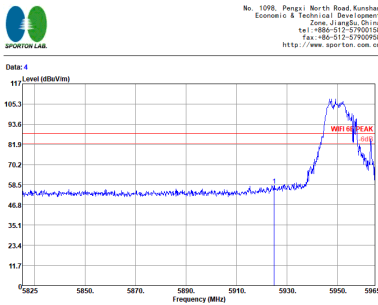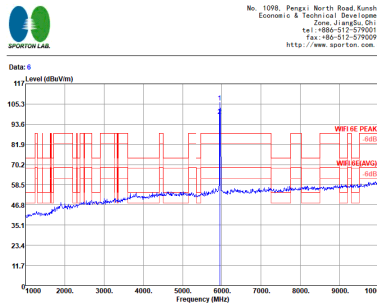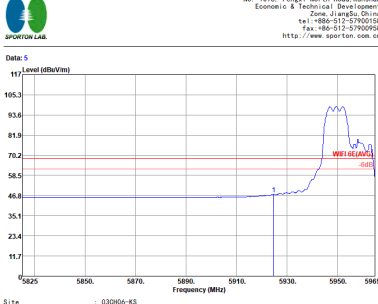

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz																																																																																					
1+2	Vertical	Fundamental																																																																																				
<p>Peak</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : WIFI @E PEAK @ 3117.5800240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>58.10</td> <td>-30.20</td> <td>88.30</td> <td>44.20</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>301</td> <td>255 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg			1	5924.96	58.10	-30.20	88.30	44.20	35.37	10.52	31.99	301	255 Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : WIFI @E PEAK @ 3117.5800240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>106.40</td> <td>18.10</td> <td>88.30</td> <td>92.48</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>98.39</td> <td>30.09</td> <td>68.30</td> <td>84.47</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>301</td> <td>255 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg			1	5950.00	106.40	18.10	88.30	92.48	35.40	10.53	32.01	301	255 Peak	VERTICAL	2	5950.00	98.39	30.09	68.30	84.47	35.40	10.53	32.01	301	255 Average	VERTICAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg																																																																													
1	5924.96	58.10	-30.20	88.30	44.20	35.37	10.52	31.99	301	255 Peak	VERTICAL																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg																																																																													
1	5950.00	106.40	18.10	88.30	92.48	35.40	10.53	32.01	301	255 Peak	VERTICAL																																																																											
2	5950.00	98.39	30.09	68.30	84.47	35.40	10.53	32.01	301	255 Average	VERTICAL																																																																											
<p>Avg.</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : WIFI @E (AVG) @ 3117.5800240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto Mode : #23 Plane : X PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.82</td> <td>47.63</td> <td>-20.67</td> <td>68.30</td> <td>33.73</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>301</td> <td>255 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg			1	5924.82	47.63	-20.67	68.30	33.73	35.37	10.52	31.99	301	255 Average	VERTICAL	<p>Left blank</p>																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	dB	cm	deg																																																																													
1	5924.82	47.63	-20.67	68.30	33.73	35.37	10.52	31.99	301	255 Average	VERTICAL																																																																											



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE40 Full CH03 5965MHz																																																																														
1+2	Horizontal	Fundamental																																																																													
Peak	<p>Site: 032006-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZONTAL Project: R98 1000 0000Hz V98 3000 0000Hz SWT:Auto Mode: 7 Freq: 240834 ME1: #23 Plane: 2 Power: Single-directivity Power: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Stenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.82</td> <td>64.80</td> <td>-23.50</td> <td>88.30</td> <td>50.90</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>107</td> <td>228 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5924.82	64.80	-23.50	88.30	50.90	35.37	10.52	31.99	107	228 Peak	<p>Site: 032006-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZONTAL Project: R98 1000 0000Hz V98 3000 0000Hz SWT:Auto Mode: 7 Freq: 240834 ME1: #23 Plane: 2 Power: Single-directivity Power: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Stenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5929.00</td> <td>105.98</td> <td>17.68</td> <td>88.30</td> <td>92.04</td> <td>35.40</td> <td>10.55</td> <td>32.01</td> <td>107</td> <td>228 Peak</td> </tr> <tr> <td>2</td> <td>5929.00</td> <td>108.51</td> <td>30.21</td> <td>68.30</td> <td>84.57</td> <td>35.40</td> <td>10.55</td> <td>32.01</td> <td>107</td> <td>228 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5929.00	105.98	17.68	88.30	92.04	35.40	10.55	32.01	107	228 Peak	2	5929.00	108.51	30.21	68.30	84.57	35.40	10.55	32.01	107	228 Average
Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5924.82	64.80	-23.50	88.30	50.90	35.37	10.52	31.99	107	228 Peak																																																																					
Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5929.00	105.98	17.68	88.30	92.04	35.40	10.55	32.01	107	228 Peak																																																																					
2	5929.00	108.51	30.21	68.30	84.57	35.40	10.55	32.01	107	228 Average																																																																					
Avg.	<p>Site: 032006-KS Condition: RIFI 6E (AVG) 3m 3117 590240138 HORIZONTAL Project: R98 1000 0000Hz V98 2 0000Hz SWT:Auto Mode: 7 Freq: 240834 ME1: #23 Plane: 2 Power: Single-directivity Power: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Stenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>55.20</td> <td>-13.10</td> <td>68.30</td> <td>41.30</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>107</td> <td>228 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5924.96	55.20	-13.10	68.30	41.30	35.37	10.52	31.99	107	228 Average	Left blank																																												
Freq	Level	Limit	Read	Stenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5924.96	55.20	-13.10	68.30	41.30	35.37	10.52	31.99	107	228 Average																																																																					



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE40 Full CH03 5965MHz																																																																							
1+2	Vertical	Fundamental																																																																						
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @ PEAK @ 3117.5M00240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto IMEI : (FR)240834 Mode : #23 Plane : X PowerSetting : 14 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5924.64</td> <td>60.85</td> <td>-27.45</td> <td>88.30</td> <td>46.95</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>303</td> <td>89 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 5924.64	60.85	-27.45	88.30	46.95	35.37	10.52	31.99	303	89 Peak VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @ PEAK @ 3117.5M00240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto IMEI : (FR)240834 Mode : #23 Plane : X PowerSetting : 14 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 + 5968.00</td> <td>99.05</td> <td>10.75</td> <td>88.30</td> <td>85.13</td> <td>35.40</td> <td>10.55</td> <td>32.03</td> <td>303</td> <td>89 Peak VERTICAL</td> </tr> <tr> <td>2 + 5968.00</td> <td>91.85</td> <td>23.55</td> <td>68.30</td> <td>77.93</td> <td>35.40</td> <td>10.55</td> <td>32.03</td> <td>303</td> <td>89 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 + 5968.00	99.05	10.75	88.30	85.13	35.40	10.55	32.03	303	89 Peak VERTICAL	2 + 5968.00	91.85	23.55	68.30	77.93	35.40	10.55	32.03	303	89 Average VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 5924.64	60.85	-27.45	88.30	46.95	35.37	10.52	31.99	303	89 Peak VERTICAL																																																															
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 + 5968.00	99.05	10.75	88.30	85.13	35.40	10.55	32.03	303	89 Peak VERTICAL																																																															
2 + 5968.00	91.85	23.55	68.30	77.93	35.40	10.55	32.03	303	89 Average VERTICAL																																																															
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @ (AVG) @ 3117.5M00240138 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto IMEI : (FR)240834 Mode : #23 Plane : X PowerSetting : 14 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5924.68</td> <td>50.03</td> <td>-18.27</td> <td>68.30</td> <td>35.13</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>303</td> <td>89 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 5924.68	50.03	-18.27	68.30	35.13	35.37	10.52	31.99	303	89 Average VERTICAL	<p>Left blank</p>																																								
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 5924.68	50.03	-18.27	68.30	35.13	35.37	10.52	31.99	303	89 Average VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT	802.11ax HE40 Partial 242/61 CH03 5965MHz																																																																								
1+2	Horizontal	Fundamental																																																																							
Peak	<p>Site: 032004-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZONTA Project: R98 1000.000KHz V98 3000.000KHz SWT Auto Mode: 8 (FR) 240834 Mod: 8 ME1: #23 Plane: 2 Single-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.84</td> <td>58.46</td> <td>-29.84</td> <td>88.30</td> <td>44.56</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>287</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5923.84	58.46	-29.84	88.30	44.56	35.37	10.52	31.99	100	287	Peak	HORIZONT	<p>Site: 032004-KS Condition: RIFI 6E PEAK 3m 3117 590240138 HORIZONTA Project: R98 1000.000KHz V98 3000.000KHz SWT Auto Mode: 8 (FR) 240834 Mod: 8 ME1: #23 Plane: 2 Single-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5929.00</td> <td>100.81</td> <td>18.51</td> <td>88.30</td> <td>92.87</td> <td>35.40</td> <td>10.55</td> <td>32.01</td> <td>100</td> <td>287</td> <td>Peak</td> <td>HORIZONT</td> </tr> <tr> <td>2</td> <td>5929.00</td> <td>17.38</td> <td>29.08</td> <td>68.30</td> <td>83.44</td> <td>35.40</td> <td>10.55</td> <td>32.01</td> <td>100</td> <td>287</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5929.00	100.81	18.51	88.30	92.87	35.40	10.55	32.01	100	287	Peak	HORIZONT	2	5929.00	17.38	29.08	68.30	83.44	35.40	10.55	32.01	100	287	Average	HORIZONT
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5923.84	58.46	-29.84	88.30	44.56	35.37	10.52	31.99	100	287	Peak	HORIZONT																																																													
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5929.00	100.81	18.51	88.30	92.87	35.40	10.55	32.01	100	287	Peak	HORIZONT																																																													
2	5929.00	17.38	29.08	68.30	83.44	35.40	10.55	32.01	100	287	Average	HORIZONT																																																													
Avg.	<p>Site: 032004-KS Condition: RIFI 6E (AVG) 3m 3117 590240138 HORIZONTA Project: R98 1000.000KHz V98 1.000KHz SWT Auto Mode: 8 (FR) 240834 Mod: 8 ME1: #23 Plane: 2 Single-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.84</td> <td>49.27</td> <td>-19.03</td> <td>68.30</td> <td>35.37</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>287</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5923.84	49.27	-19.03	68.30	35.37	35.37	10.52	31.99	100	287	Average	HORIZONT	Left blank																																										
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5923.84	49.27	-19.03	68.30	35.37	35.37	10.52	31.99	100	287	Average	HORIZONT																																																													



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE40 Partial 242/61 CH03 5965MHz																																																																							
1+2	Vertical	Fundamental																																																																						
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : R98 1000 000KHz VBR 3000 000KHz SRT:Auto Mode : B Plane : #23 PowerSetting : 14 Single-directivity : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5860.98</td> <td>57.11</td> <td>-31.19</td> <td>88.30</td> <td>43.37</td> <td>35.33</td> <td>10.46</td> <td>31.95</td> <td>305 256 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1 5860.98	57.11	-31.19	88.30	43.37	35.33	10.46	31.95	305 256 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : R98 1000 000KHz VBR 3000 000KHz SRT:Auto Mode : B Plane : #23 PowerSetting : 14 Single-directivity : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5950.00</td> <td>103.13</td> <td>14.83</td> <td>88.30</td> <td>89.21</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>305 256 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5950.00</td> <td>94.19</td> <td>25.89</td> <td>68.30</td> <td>80.27</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>305 256 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1 5950.00	103.13	14.83	88.30	89.21	35.40	10.53	32.01	305 256 Peak	VERTICAL	2 5950.00	94.19	25.89	68.30	80.27	35.40	10.53	32.01	305 256 Average	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																	
1 5860.98	57.11	-31.19	88.30	43.37	35.33	10.46	31.95	305 256 Peak	VERTICAL																																																															
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																	
1 5950.00	103.13	14.83	88.30	89.21	35.40	10.53	32.01	305 256 Peak	VERTICAL																																																															
2 5950.00	94.19	25.89	68.30	80.27	35.40	10.53	32.01	305 256 Average	VERTICAL																																																															
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H5-KS Condition : WIFI @E (AVG) @m 3117 5800240138 VERTICAL Project : R98 1000 000KHz VBR 11 000KHz SRT:Auto Mode : B Plane : #23 PowerSetting : 14 Single-directivity : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5923.28</td> <td>47.81</td> <td>-20.49</td> <td>68.30</td> <td>33.91</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>305 256 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg			1 5923.28	47.81	-20.49	68.30	33.91	35.37	10.52	31.99	305 256 Average	VERTICAL	<p>Left blank</p>																																								
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																																	
1 5923.28	47.81	-20.49	68.30	33.91	35.37	10.52	31.99	305 256 Average	VERTICAL																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT	802.11ax HE80 Full CH07 5985MHz																																																																								
1+2	Horizontal	Fundamental																																																																							
Peak	<p>Site : 032004-KS Condition : RIFI 5E PEAK 3m 3117 5902240138 HORIZONTA Project : R98 1000.0000KHz V98 3000.0000KHz SRT Auto Mode : 11 PWR : 240834 ME1 : #23 Plane : 2 PowerSetting : Single-directivity 15 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5918.44</td> <td>70.03</td> <td>-18.27</td> <td>88.30</td> <td>56.18</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>100</td> <td>223</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5918.44	70.03	-18.27	88.30	56.18	35.33	10.51	31.99	100	223	Peak	HORIZONT	<p>Site : 032004-KS Condition : RIFI 5E PEAK 3m 3117 5902240138 HORIZONTA Project : R98 1000.0000KHz V98 3000.0000KHz SRT Auto Mode : 11 PWR : 240834 ME1 : #23 Plane : 2 PowerSetting : Single-directivity 15 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>102.87</td> <td>14.57</td> <td>88.30</td> <td>88.95</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>223</td> <td>Peak</td> <td>HORIZONT</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>104.27</td> <td>25.97</td> <td>88.30</td> <td>80.35</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>223</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5950.00	102.87	14.57	88.30	88.95	35.40	10.53	32.01	100	223	Peak	HORIZONT	2	5950.00	104.27	25.97	88.30	80.35	35.40	10.53	32.01	100	223	Average	HORIZONT
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5918.44	70.03	-18.27	88.30	56.18	35.33	10.51	31.99	100	223	Peak	HORIZONT																																																													
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5950.00	102.87	14.57	88.30	88.95	35.40	10.53	32.01	100	223	Peak	HORIZONT																																																													
2	5950.00	104.27	25.97	88.30	80.35	35.40	10.53	32.01	100	223	Average	HORIZONT																																																													
Avg.	<p>Site : 032004-KS Condition : RIFI 5E (AVG) 3m 3117 5902240138 HORIZONTA Project : R98 1000.0000KHz V98 3.0000KHz SRT Auto Mode : 11 PWR : 240834 ME1 : #23 Plane : 2 PowerSetting : Single-directivity 15 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.20</td> <td>60.95</td> <td>-7.35</td> <td>68.30</td> <td>47.05</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>223</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg	1	5924.20	60.95	-7.35	68.30	47.05	35.37	10.52	31.99	100	223	Average	HORIZONT	Left blank																																										
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on deg																																																																		
1	5924.20	60.95	-7.35	68.30	47.05	35.37	10.52	31.99	100	223	Average	HORIZONT																																																													



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																										
ANT	802.11ax HE80 Full CH07 5985MHz																																																																																										
1+2	Vertical	Fundamental																																																																																									
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D80-KS Condition : WIFI @ PEAK @ 3117.5M00240138 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SRT-Auto (FR) 240834 Mode : 11 MEI : #23 Plane : X Single-directivity : X poewersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.12</td> <td>63.91</td> <td>-24.39</td> <td>88.30</td> <td>50.01</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>302</td> <td>88</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5922.12	63.91	-24.39	88.30	50.01	35.37	10.52	31.99	302	88	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D80-KS Condition : WIFI @ PEAK @ 3117.5M00240138 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SRT-Auto (FR) 240834 Mode : 11 MEI : #23 Plane : X Single-directivity : X poewersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5977.00</td> <td>97.25</td> <td>8.95</td> <td>88.30</td> <td>83.32</td> <td>35.40</td> <td>10.56</td> <td>32.03</td> <td>302</td> <td>88</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5977.00</td> <td>89.00</td> <td>20.70</td> <td>68.30</td> <td>75.07</td> <td>35.40</td> <td>10.56</td> <td>32.03</td> <td>302</td> <td>88</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5977.00	97.25	8.95	88.30	83.32	35.40	10.56	32.03	302	88	Peak	VERTICAL	2	5977.00	89.00	20.70	68.30	75.07	35.40	10.56	32.03	302	88	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																			
1	5922.12	63.91	-24.39	88.30	50.01	35.37	10.52	31.99	302	88	Peak	VERTICAL																																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																			
1	5977.00	97.25	8.95	88.30	83.32	35.40	10.56	32.03	302	88	Peak	VERTICAL																																																																															
2	5977.00	89.00	20.70	68.30	75.07	35.40	10.56	32.03	302	88	Average	VERTICAL																																																																															
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D80-KS Condition : WIFI @ (AVG) @ 3117.5M00240138 VERTICAL Project : RSM-1000.000KHz VBR-3.000KHz SRT-Auto (FR) 240834 Mode : 11 MEI : #23 Plane : X Single-directivity : X poewersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.52</td> <td>55.58</td> <td>-12.72</td> <td>68.30</td> <td>41.68</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>302</td> <td>88</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5924.52	55.58	-12.72	68.30	41.68	35.37	10.52	31.99	302	88	Average	VERTICAL	<p>Left blank</p>																																																			
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																			
1	5924.52	55.58	-12.72	68.30	41.68	35.37	10.52	31.99	302	88	Average	VERTICAL																																																																															



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																																					
1+2	Horizontal	Fundamental																																																																																				
Peak	<p>Site: 032004-KS Condition: WIFI 8E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 3000.000KHz SWT Auto Mode: 12 ME1: #23 Plane: 2 Power: Single-directivity Power: 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Stema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.36</td> <td>71.71</td> <td>-16.59</td> <td>88.30</td> <td>57.81</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>223 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg			1	5924.36	71.71	-16.59	88.30	57.81	35.37	10.52	31.99	100	223 Peak	HORIZONT	<p>Site: 032004-KS Condition: WIFI 8E PEAK 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 3000.000KHz SWT Auto Mode: 12 ME1: #23 Plane: 2 Power: Single-directivity Power: 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Stema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>100.26</td> <td>17.96</td> <td>88.30</td> <td>92.34</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>223 Peak</td> <td>HORIZONT</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>97.78</td> <td>20.48</td> <td>68.30</td> <td>83.80</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>100</td> <td>223 Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg			1	5950.00	100.26	17.96	88.30	92.34	35.40	10.53	32.01	100	223 Peak	HORIZONT	2	5950.00	97.78	20.48	68.30	83.80	35.40	10.53	32.01	100	223 Average	HORIZONT
Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																																													
1	5924.36	71.71	-16.59	88.30	57.81	35.37	10.52	31.99	100	223 Peak	HORIZONT																																																																											
Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																																													
1	5950.00	100.26	17.96	88.30	92.34	35.40	10.53	32.01	100	223 Peak	HORIZONT																																																																											
2	5950.00	97.78	20.48	68.30	83.80	35.40	10.53	32.01	100	223 Average	HORIZONT																																																																											
Avg.	<p>Site: 032004-KS Condition: WIFI 8E(AVG) 3m 3117 5900240138 HORIZONTA Project: RFR 1000.000KHz VBR 1.000KHz SWT Auto Mode: 12 ME1: #23 Plane: 2 Power: Single-directivity Power: 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Stema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.04</td> <td>59.97</td> <td>-8.33</td> <td>68.30</td> <td>46.07</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>100</td> <td>223 Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg			1	5924.04	59.97	-8.33	68.30	46.07	35.37	10.52	31.99	100	223 Average	HORIZONT	Left blank																																																
Freq	Level	Over	Limit	Read	Stema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																																													
1	5924.04	59.97	-8.33	68.30	46.07	35.37	10.52	31.99	100	223 Average	HORIZONT																																																																											



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																								
1+2	Vertical	Fundamental																																																																							
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : WIFI DE PEAK @ 3117.5800240138 VERTICAL Project : RBW: 1000.000kHz VBW: 3000.000kHz SRT: Auto (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : Single-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.00</td> <td>67.90</td> <td>-20.40</td> <td>88.30</td> <td>54.05</td> <td>35.33</td> <td>10.51</td> <td>31.99</td> <td>292</td> <td>89</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5925.00	67.90	-20.40	88.30	54.05	35.33	10.51	31.99	292	89	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : WIFI DE PEAK @ 3117.5800240138 VERTICAL Project : RBW: 1000.000kHz VBW: 3000.000kHz SRT: Auto (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : Single-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>98.86</td> <td>10.66</td> <td>88.30</td> <td>85.04</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>292</td> <td>89</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5950.00</td> <td>91.78</td> <td>23.48</td> <td>68.30</td> <td>77.86</td> <td>35.40</td> <td>10.53</td> <td>32.01</td> <td>292</td> <td>89</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5950.00	98.86	10.66	88.30	85.04	35.40	10.53	32.01	292	89	Peak	VERTICAL	2	5950.00	91.78	23.48	68.30	77.86	35.40	10.53	32.01	292	89	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																		
1	5925.00	67.90	-20.40	88.30	54.05	35.33	10.51	31.99	292	89	Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																		
1	5950.00	98.86	10.66	88.30	85.04	35.40	10.53	32.01	292	89	Peak	VERTICAL																																																													
2	5950.00	91.78	23.48	68.30	77.86	35.40	10.53	32.01	292	89	Average	VERTICAL																																																													
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : WIFI DE (AVG) @ 3117.5800240138 VERTICAL Project : RBW: 1000.000kHz VBW: 1.000kHz SRT: Auto (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : Single-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.56</td> <td>54.70</td> <td>-12.60</td> <td>68.30</td> <td>40.80</td> <td>35.37</td> <td>10.52</td> <td>31.99</td> <td>292</td> <td>89</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5925.56	54.70	-12.60	68.30	40.80	35.37	10.52	31.99	292	89	Average	VERTICAL	<p>Left blank</p>																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																		
1	5925.56	54.70	-12.60	68.30	40.80	35.37	10.52	31.99	292	89	Average	VERTICAL																																																													



U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE20 Full CH01 5955MHz																																																																			
1+2	Horizontal	Vertical																																																																		
Peak	<p>Site : 030904-KS Condition : WIFI HE PEAK @ 3117 0237860 HORIZONTAL Project : FR240834H Mode : I MEI : #23 Plane : X : single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11912.00</td> <td>43.47</td> <td>-30.53</td> <td>74.00</td> <td>50.33</td> <td>38.78</td> <td>16.49</td> <td>62.13</td> <td>300</td> <td>0</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg		1 11912.00	43.47	-30.53	74.00	50.33	38.78	16.49	62.13	300	0	Peak HORIZONTAL	<p>Site : 030904-KS Condition : WIFI HE PEAK @ 3117 0237860 VERTICAL Project : FR240834H Mode : I MEI : #23 Plane : X : single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11912.00</td> <td>44.19</td> <td>-29.81</td> <td>74.00</td> <td>51.05</td> <td>38.78</td> <td>16.49</td> <td>62.13</td> <td>100</td> <td>0</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg		1 11912.00	44.19	-29.81	74.00	51.05	38.78	16.49	62.13	100	0	Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																											
1 11912.00	43.47	-30.53	74.00	50.33	38.78	16.49	62.13	300	0	Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																											
1 11912.00	44.19	-29.81	74.00	51.05	38.78	16.49	62.13	100	0	Peak VERTICAL																																																										



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH45 6175MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : FR240834 Mode : S BEI : #23 Plane : X Single-directivity : X Over Limit : 0 ReadAttenu : 74.00 Cable Loss : 0.39 Cable Pramp : 16.76 Loss Factor : 62.52 A/Pos : 300 T/Pos : 0 Remark : Peak Pol/Phas : HORIZONTAL</p>	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : FR240834 Mode : S BEI : #23 Plane : X Single-directivity : X Over Limit : 0 ReadAttenu : 74.00 Cable Loss : 0.48 Cable Pramp : 16.76 Loss Factor : 62.52 A/Pos : 100 T/Pos : 0 Remark : Peak Pol/Phas : VERTICAL</p>



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																											
ANT	802.11ax HE20 Full CH93 6415MHz																											
1+2	Horizontal	Vertical																										
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RBW:1000, 000kHz; VBW:3000, 000kHz; SMT:Auto Model : F70150004 Mode : S PCE : #23 Plane : X Single-directivity : X Over Limit : Level Limit : ReadAttenu : Cable Preamp : Loss Factor : A/Pos : T/Pos : Remark : Pol/Phas :</p> <table border="1"> <thead> <tr> <th>1</th> <th>12832.00</th> <th>43.40</th> <th>-44.90</th> <th>88.30</th> <th>49.81</th> <th>39.27</th> <th>17.05</th> <th>62.73</th> <th>300</th> <th>0</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	12832.00	43.40	-44.90	88.30	49.81	39.27	17.05	62.73	300	0	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RBW:1000, 000kHz; VBW:3000, 000kHz; SMT:Auto Model : F70150004 Mode : S PCE : #23 Plane : X Single-directivity : X Over Limit : Level Limit : ReadAttenu : Cable Preamp : Loss Factor : A/Pos : T/Pos : Remark : Pol/Phas :</p> <table border="1"> <thead> <tr> <th>1</th> <th>12832.00</th> <th>43.75</th> <th>-44.55</th> <th>88.30</th> <th>50.16</th> <th>39.27</th> <th>17.05</th> <th>62.73</th> <th>100</th> <th>0</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	12832.00	43.75	-44.55	88.30	50.16	39.27	17.05	62.73	100	0	Peak	VERTICAL
1	12832.00	43.40	-44.90	88.30	49.81	39.27	17.05	62.73	300	0	Peak	HORIZONTAL																
1	12832.00	43.75	-44.55	88.30	50.16	39.27	17.05	62.73	100	0	Peak	VERTICAL																



**U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)**

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																											
ANT	802.11ax HE40 Full CH03 5965MHz																																											
1+2	Horizontal	Vertical																																										
Peak	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HSE-1000-0000Hz-V08-3000-0000Hz-08T-Auto Model : (FBI)240834 Mode : 7 ME1 : #23 Plane : 4</p> <table border="1"> <thead> <tr> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>11928.00</td> <td>43.83</td> <td>-30.17</td> <td>74.00</td> <td>50.65</td> <td>38.80</td> <td>16.50 62.12 300 0 Peak HORIZONTAL</td> </tr> </tbody> </table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			11928.00	43.83	-30.17	74.00	50.65	38.80	16.50 62.12 300 0 Peak HORIZONTAL	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSE-1000-0000Hz-V08-3000-0000Hz-08T-Auto Model : (FBI)240834 Mode : 7 ME1 : #23 Plane : 4</p> <table border="1"> <thead> <tr> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>11928.00</td> <td>44.53</td> <td>-29.47</td> <td>74.00</td> <td>51.35</td> <td>38.80</td> <td>16.50 62.12 100 0 Peak VERTICAL</td> </tr> </tbody> </table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			11928.00	44.53	-29.47	74.00	51.35	38.80	16.50 62.12 100 0 Peak VERTICAL
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																						
Freq	Level	Line	Level Factor	Loss Factor																																								
11928.00	43.83	-30.17	74.00	50.65	38.80	16.50 62.12 300 0 Peak HORIZONTAL																																						
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																						
Freq	Level	Line	Level Factor	Loss Factor																																								
11928.00	44.53	-29.47	74.00	51.35	38.80	16.50 62.12 100 0 Peak VERTICAL																																						



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																											
ANT	802.11ax HE40 Full CH43 6165MHz																											
1+2	Horizontal	Vertical																										
Peak	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Mode : FREQ:5000Hz BEI : #23 Plane : X Antenna : Single-directivity Over Limit : ReadAttenu : Cable Loss : A/Pos : T/Pos : Remark : Pol/Phas :</p> <table border="1"> <thead> <tr> <th>1</th> <th>12228.00</th> <th>43.42</th> <th>-30.58</th> <th>74.00</th> <th>50.06</th> <th>39.10</th> <th>16.74</th> <th>62.48</th> <th>300</th> <th>0</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	12228.00	43.42	-30.58	74.00	50.06	39.10	16.74	62.48	300	0	Peak	HORIZONTAL	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Mode : FREQ:5000Hz BEI : #23 Plane : X Antenna : Single-directivity Over Limit : ReadAttenu : Cable Loss : A/Pos : T/Pos : Remark : Pol/Phas :</p> <table border="1"> <thead> <tr> <th>1</th> <th>12228.00</th> <th>44.79</th> <th>-29.21</th> <th>74.00</th> <th>51.43</th> <th>39.10</th> <th>16.74</th> <th>62.48</th> <th>100</th> <th>0</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	12228.00	44.79	-29.21	74.00	51.43	39.10	16.74	62.48	100	0	Peak	VERTICAL
1	12228.00	43.42	-30.58	74.00	50.06	39.10	16.74	62.48	300	0	Peak	HORIZONTAL																
1	12228.00	44.79	-29.21	74.00	51.43	39.10	16.74	62.48	100	0	Peak	VERTICAL																



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																											
ANT	802.11ax HE40 Full CH91 6405MHz																											
1+2	Horizontal	Vertical																										
Peak	<p>Site : 032804-MS Condition : WIFI PE PEAK @ 3117 0277860 HORIZONTAL Project : RBW:1000,000kHz; VBW:3000,000kHz; SMT:Auto Mode : IS MEI : #2 Plane : X Single-directivity Over Limit ReadAttenu Loss Factor Cable Loss Factor A/Pos T/Pos Remark Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>12808.00</th> <th>43.21</th> <th>-45.09</th> <th>88.30</th> <th>49.64</th> <th>39.26</th> <th>17.04</th> <th>62.73</th> <th>300</th> <th>0</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	12808.00	43.21	-45.09	88.30	49.64	39.26	17.04	62.73	300	0	Peak	HORIZONTAL	<p>Site : 032804-MS Condition : WIFI PE PEAK @ 3117 0277860 VERTICAL Project : RBW:1000,000kHz; VBW:3000,000kHz; SMT:Auto Mode : IS MEI : #2 Plane : X Single-directivity Over Limit ReadAttenu Loss Factor Cable Loss Factor A/Pos T/Pos Remark Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>12808.00</th> <th>43.50</th> <th>-44.80</th> <th>88.30</th> <th>49.93</th> <th>39.26</th> <th>17.04</th> <th>62.73</th> <th>100</th> <th>0</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	12808.00	43.50	-44.80	88.30	49.93	39.26	17.04	62.73	100	0	Peak	VERTICAL
1	12808.00	43.21	-45.09	88.30	49.64	39.26	17.04	62.73	300	0	Peak	HORIZONTAL																
1	12808.00	43.50	-44.80	88.30	49.93	39.26	17.04	62.73	100	0	Peak	VERTICAL																



**U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)**

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																									
ANT	802.11ax HE80 Full CH07 5985MHz																																									
1+2	Horizontal	Vertical																																								
Peak	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0277860 HORIZONTA Project : HSE-1000-0000Hz VBR-3000-0000Hz DBT-Auto Mode : (F) 240834 Rate : 11 MCS : #23 Plane : 4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>11968.00</td> <td>43.29</td> <td>-30.71</td> <td>74.00</td> <td>50.02</td> <td>38.85</td> <td>16.53</td> <td>62.11</td> <td>0 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Freq	Level	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	11968.00	43.29	-30.71	74.00	50.02	38.85	16.53	62.11	0 Peak	HORIZONT	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0277860 VERTICAL Project : HSE-1000-0000Hz VBR-3000-0000Hz DBT-Auto Mode : (F) 240834 Rate : 11 MCS : #23 Plane : 4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>11968.00</td> <td>43.84</td> <td>-30.16</td> <td>74.00</td> <td>50.07</td> <td>38.85</td> <td>16.53</td> <td>62.11</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	11968.00	43.84	-30.16	74.00	50.07	38.85	16.53	62.11	0 Peak	VERTICAL
Freq	Level	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
11968.00	43.29	-30.71	74.00	50.02	38.85	16.53	62.11	0 Peak	HORIZONT																																	
Freq	Level	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
11968.00	43.84	-30.16	74.00	50.07	38.85	16.53	62.11	0 Peak	VERTICAL																																	



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH39 6145MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 032824-MS Condition : WIFI PE PEAK @ 3117 0277860 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Mode : FREQ:560004 MEI : 13 Plane : X Single-directivity Over Limit ReadAttenu Cable Loss A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB cm deg 1 12288.00 43.33 -30.67 74.00 49.97 39.08 16.72 62.44 300 0 Peak HORIZONTAL</p>	<p>Site : 032824-MS Condition : WIFI PE PEAK @ 3117 0277860 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Mode : FREQ:560004 MEI : 13 Plane : X Single-directivity Over Limit ReadAttenu Cable Loss A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB cm deg 1 12288.00 44.05 -29.95 74.00 50.69 39.08 16.72 62.44 100 0 Peak VERTICAL</p>



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH87 6385MHz	
1+2	Horizontal	Vertical
Peak		



U-NII 6 - 6425-6525MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																											
ANT	802.11ax HE20 Full CH97 6435MHz																											
1+2	Horizontal	Vertical																										
Peak	<p>Site : 030904-KS Condition : WIFI HE PEAK @ 3117 0237860 HORIZONTAL Project : F021540934 Mode : IS MEI : #23 Plane : #23 Single/directivity : single/directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm deg</p> <table border="1"> <thead> <tr> <th>1</th> <th>12872.00</th> <th>43.51</th> <th>-44.79</th> <th>88.30</th> <th>49.90</th> <th>39.27</th> <th>17.07</th> <th>62.73</th> <th>300</th> <th>0</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	12872.00	43.51	-44.79	88.30	49.90	39.27	17.07	62.73	300	0	Peak	HORIZONTAL	<p>Site : 030904-KS Condition : WIFI HE PEAK @ 3117 0237860 VERTICAL Project : F021540934 Mode : IS MEI : #23 Plane : #23 Single/directivity : single/directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos MHz dBuV/m dB dBuV/m dBuV dBm dBm dBm deg</p> <table border="1"> <thead> <tr> <th>1</th> <th>12872.00</th> <th>44.28</th> <th>-44.02</th> <th>88.30</th> <th>50.67</th> <th>39.27</th> <th>17.07</th> <th>62.73</th> <th>100</th> <th>0</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	12872.00	44.28	-44.02	88.30	50.67	39.27	17.07	62.73	100	0	Peak	VERTICAL
	1	12872.00	43.51	-44.79	88.30	49.90	39.27	17.07	62.73	300	0	Peak	HORIZONTAL															
1	12872.00	44.28	-44.02	88.30	50.67	39.27	17.07	62.73	100	0	Peak	VERTICAL																



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																																																													
ANT	802.11ax HE20 Full CH105 6475MHz																																																													
1+2	Horizontal	Vertical																																																												
Peak	<p style="font-size: small;">No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 1 Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT: Auto Model : F30150004 Mode : IS PCE : #2 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp Loss Factor A/Pos T/Pos Remark Pol/Phas</p> <table border="1" style="font-size: x-small; width: 100%;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12952.00</td> <td>42.81</td> <td>-45.49</td> <td>88.30</td> <td>49.14</td> <td>39.29</td> <td>17.12</td> <td>62.74</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1 12952.00	42.81	-45.49	88.30	49.14	39.29	17.12	62.74	300	0 Peak HORIZONTAL	<p style="font-size: small;">No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 2 Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT: Auto Model : F30150004 Mode : IS PCE : #2 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp Loss Factor A/Pos T/Pos Remark Pol/Phas</p> <table border="1" style="font-size: x-small; width: 100%;"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12952.00</td> <td>43.06</td> <td>-45.24</td> <td>88.30</td> <td>49.39</td> <td>39.29</td> <td>17.12</td> <td>62.74</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg		1 12952.00	43.06	-45.24	88.30	49.39	39.29	17.12	62.74	100	0 Peak VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																						
1 12952.00	42.81	-45.49	88.30	49.14	39.29	17.12	62.74	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																						
1 12952.00	43.06	-45.24	88.30	49.39	39.29	17.12	62.74	100	0 Peak VERTICAL																																																					



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																																																																																																																																																																																																																											
ANT	802.11ax HE20 Full CH113 6515MHz																																																																																																																																																																																																																											
1+2	Horizontal	Vertical																																																																																																																																																																																																																										
Peak	<table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th>Site</th> <th colspan="11">No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China</th> </tr> <tr> <th>Condition</th> <th colspan="11">Economic & Technical Development Zone, Jiangsu China</th> </tr> <tr> <th>Project</th> <th colspan="11">ECC150804</th> </tr> <tr> <th>Mode</th> <th colspan="11">#23</th> </tr> <tr> <th>MEI</th> <th colspan="11">#</th> </tr> <tr> <th>Plane</th> <th colspan="11">#</th> </tr> <tr> <th colspan="2"></th> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Wiz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13032.00</td> <td>43.77</td> <td>-44.53</td> <td>88.30</td> <td>50.10</td> <td>39.27</td> <td>17.18</td> <td>62.78</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Site	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China											Condition	Economic & Technical Development Zone, Jiangsu China											Project	ECC150804											Mode	#23											MEI	#											Plane	#													Single-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1	13032.00	43.77	-44.53	88.30	50.10	39.27	17.18	62.78	300	0	Peak	HORIZONTAL	<table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th>Site</th> <th colspan="11">No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China</th> </tr> <tr> <th>Condition</th> <th colspan="11">Economic & Technical Development Zone, Jiangsu China</th> </tr> <tr> <th>Project</th> <th colspan="11">ECC150804</th> </tr> <tr> <th>Mode</th> <th colspan="11">#23</th> </tr> <tr> <th>MEI</th> <th colspan="11">#</th> </tr> <tr> <th>Plane</th> <th colspan="11">#</th> </tr> <tr> <th colspan="2"></th> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Wiz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13032.00</td> <td>43.40</td> <td>-44.90</td> <td>88.30</td> <td>49.73</td> <td>39.27</td> <td>17.18</td> <td>62.78</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Site	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China											Condition	Economic & Technical Development Zone, Jiangsu China											Project	ECC150804											Mode	#23											MEI	#											Plane	#													Single-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1	13032.00	43.40	-44.90	88.30	49.73	39.27	17.18	62.78	100	0	Peak	VERTICAL
Site	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China																																																																																																																																																																																																																											
Condition	Economic & Technical Development Zone, Jiangsu China																																																																																																																																																																																																																											
Project	ECC150804																																																																																																																																																																																																																											
Mode	#23																																																																																																																																																																																																																											
MEI	#																																																																																																																																																																																																																											
Plane	#																																																																																																																																																																																																																											
		Single-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																																																																																																																																																	
Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																			
1	13032.00	43.77	-44.53	88.30	50.10	39.27	17.18	62.78	300	0	Peak	HORIZONTAL																																																																																																																																																																																																																
Site	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China																																																																																																																																																																																																																											
Condition	Economic & Technical Development Zone, Jiangsu China																																																																																																																																																																																																																											
Project	ECC150804																																																																																																																																																																																																																											
Mode	#23																																																																																																																																																																																																																											
MEI	#																																																																																																																																																																																																																											
Plane	#																																																																																																																																																																																																																											
		Single-directivity	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																																																																																																																																																	
Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																			
1	13032.00	43.40	-44.90	88.30	49.73	39.27	17.18	62.78	100	0	Peak	VERTICAL																																																																																																																																																																																																																



**U-NII 6 - 6425-6525MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)**

WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																																																	
ANT	802.11ax HE40 Full CH99 6445 MHz																																																	
1+2	Horizontal	Vertical																																																
Peak	<p>Site : 032104-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HSB-1000-0000Hz VBR-3000-0000Hz DBT-Auto Model : (F0)240834 Mode : 18 ME1 : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12888.00</td> <td>43.91</td> <td>-44.29</td> <td>88.30</td> <td>50.29</td> <td>39.28</td> <td>17.08 62.74</td> <td>300</td> <td>0 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			1 12888.00	43.91	-44.29	88.30	50.29	39.28	17.08 62.74	300	0 Peak	HORIZONT	<p>Site : 032104-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSB-1000-0000Hz VBR-3000-0000Hz DBT-Auto Model : (F0)240834 Mode : 18 ME1 : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12888.00</td> <td>42.87</td> <td>-45.43</td> <td>88.30</td> <td>49.25</td> <td>39.28</td> <td>17.08 62.74</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor			1 12888.00	42.87	-45.43	88.30	49.25	39.28	17.08 62.74	100	0 Peak	VERTICAL
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																												
Freq	Level	Line	Level Factor	Loss Factor																																														
1 12888.00	43.91	-44.29	88.30	50.29	39.28	17.08 62.74	300	0 Peak	HORIZONT																																									
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																												
Freq	Level	Line	Level Factor	Loss Factor																																														
1 12888.00	42.87	-45.43	88.30	49.25	39.28	17.08 62.74	100	0 Peak	VERTICAL																																									



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH107 6485 MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RBM 1000 000KHz VBR 3000 000KHz SRT Auto Mode : 15 BEI : #23 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB dB cm deg 1 12968.00 42.65 -45.65 88.30 48.98 39.29 17.13 62.75 300 0 Peak HORIZONTAL</p>	<p>Site : 032804-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RBM 1000 000KHz VBR 3000 000KHz SRT Auto Mode : 15 BEI : #23 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB dB cm deg 1 12968.00 42.54 -45.76 88.30 48.87 39.29 17.13 62.75 100 0 Peak VERTICAL</p>



**U-NII 6 - 6425-6525MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)**

WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																																																																									
ANT	802.11ax HE80 Full CH103 6465MHz																																																																									
1+2	Horizontal	Vertical																																																																								
Peak	<p>Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTA Project : H88-1000-0000K; V88-3000-0000K; SBT-Auto Mode : (F) 240834 ME1 : #23 Plane : #</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12928.00</td> <td>43.01</td> <td>-45.29</td> <td>88.30</td> <td>49.35</td> <td>39.29</td> <td>17.11</td> <td>62.74</td> <td>300</td> <td>0 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas			MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	12928.00	43.01	-45.29	88.30	49.35	39.29	17.11	62.74	300	0 Peak	HORIZONT	<p>Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : H88-1000-0000K; V88-3000-0000K; SBT-Auto Mode : (F) 240834 ME1 : #23 Plane : #</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12928.00</td> <td>42.09</td> <td>-46.21</td> <td>88.30</td> <td>48.43</td> <td>39.29</td> <td>17.11</td> <td>62.74</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas			MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg			1	12928.00	42.09	-46.21	88.30	48.43	39.29	17.11	62.74	100	0 Peak	VERTICAL
Site	Condition	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																	
1	12928.00	43.01	-45.29	88.30	49.35	39.29	17.11	62.74	300	0 Peak	HORIZONT																																																															
Site	Condition	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
		MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																	
1	12928.00	42.09	-46.21	88.30	48.43	39.29	17.11	62.74	100	0 Peak	VERTICAL																																																															



U-NII 7 - 6525~6875MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH117 6535MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 030904-KS Condition : WIFI HE PEAK 3m 3117 0237860 HORIZONTAL Project : F02150834 Mode : 23 MEI : #23 Plane : X : single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB/m dB dB cn deg 1 13072.00 43.45 -44.85 88.30 49.82 39.24 17.21 62.82 300 0 Peak HORIZONTAL</p>	<p>Site : 030904-KS Condition : WIFI HE PEAK 3m 3117 0237860 VERTICAL Project : F02150834 Mode : 23 MEI : #23 Plane : X : single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB/m dB dB cn deg 1 13072.00 43.76 -44.54 88.30 50.13 39.24 17.21 62.82 100 0 Peak VERTICAL</p>



WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 6695MHz	
1+2	Horizontal	Vertical
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RSM 1000 000KHz VSW:3000 000KHz SMT:Auto Model : FSD160004 Mode : 2A PCE : #2 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas MHz dBV/m dB dBV/m dBV dB dB dB cm deg 1 13392.00 42.66 -31.34 74.00 49.34 38.98 17.49 63.15 300 0 Peak HORIZONTAL</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RSM 1000 000KHz VSW:3000 000KHz SMT:Auto Model : FSD160004 Mode : 2A PCE : #2 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas MHz dBV/m dB dBV/m dBV dB dB dB cm deg 1 13392.00 44.85 -29.15 74.00 51.53 38.98 17.49 63.15 100 0 Peak VERTICAL</p>



U-NII 7 6525~6875MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m																																																	
ANT	802.11ax HE40 Full CH123 6565MHz																																																	
1+2	Horizontal	Vertical																																																
Peak	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTA Project : HSE-1000-000000-VER-3000-000000-08T-Auto Name : (F0)240834 Mode : 25 ME1 : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13128.00</td> <td>43.76</td> <td>-44.54</td> <td>88.30</td> <td>50.18</td> <td>39.20</td> <td>17.25</td> <td>62.87</td> <td>300</td> <td>0 Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	1	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	13128.00	43.76	-44.54	88.30	50.18	39.20	17.25	62.87	300	0 Peak	HORIZONT	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSE-1000-000000-VER-3000-000000-08T-Auto Name : (F0)240834 Mode : 25 ME1 : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13128.00</td> <td>41.94</td> <td>-46.36</td> <td>88.30</td> <td>48.36</td> <td>39.20</td> <td>17.25</td> <td>62.87</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	1	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	13128.00	41.94	-46.36	88.30	48.36	39.20	17.25	62.87	100	0 Peak	VERTICAL
	1	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																						
1	13128.00	43.76	-44.54	88.30	50.18	39.20	17.25	62.87	300	0 Peak	HORIZONT																																							
1	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																							
1	13128.00	41.94	-46.36	88.30	48.36	39.20	17.25	62.87	100	0 Peak	VERTICAL																																							



WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH147 6685MHz	
1+2	Horizontal	Vertical
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto RFD 560004 Mode : 20 MEI : #03 Plane : X Single-directivity Over Limit ReadAttenu Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor cm deg Remark Pol/Phas 1 13368.00 43.53 -30.47 74.00 50.19 39.00 17.47 63.13 300 0 Peak HORIZONTAL</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto RFD 560004 Mode : 20 MEI : #03 Plane : X Single-directivity Over Limit ReadAttenu Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor cm deg Remark Pol/Phas 1 13368.00 44.42 -29.58 74.00 51.08 39.00 17.47 63.13 100 0 Peak VERTICAL</p>





WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m																																																																																											
ANT	802.11ax HE40 Full CH179 6845MHz																																																																																											
1+2	Horizontal	Vertical																																																																																										
Peak	<p style="font-size: small;">No. 1098, Pengzi North Road, Kunshan Economic & Technological Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 1 Level (dBuV/m) 117 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 0 10000 11000 12000 13000 14000 15000 16000 17000 18000 Frequency (MHz)</p> <table border="1" style="font-size: x-small; width: 100%;"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAttenu</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Wiz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13688.00</td> <td>44.75</td> <td>-43.55</td> <td>88.30</td> <td>51.66</td> <td>38.86</td> <td>17.73</td> <td>63.50</td> <td>300</td> <td></td> <td></td> <td></td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg			1	13688.00	44.75	-43.55	88.30	51.66	38.86	17.73	63.50	300				0 Peak	HORIZONTAL	<p style="font-size: small;">No. 1098, Pengzi North Road, Kunshan Economic & Technological Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p style="font-size: x-small;">Data: 2 Level (dBuV/m) 117 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 0 10000 11000 12000 13000 14000 15000 16000 17000 18000 Frequency (MHz)</p> <table border="1" style="font-size: x-small; width: 100%;"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAttenu</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Wiz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13688.00</td> <td>44.67</td> <td>-43.63</td> <td>88.30</td> <td>51.58</td> <td>38.86</td> <td>17.73</td> <td>63.50</td> <td>100</td> <td></td> <td></td> <td></td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg			1	13688.00	44.67	-43.63	88.30	51.58	38.86	17.73	63.50	100				0 Peak	VERTICAL
Site	Condition	Project	Mode	Plane	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																														
Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg																																																																																
1	13688.00	44.75	-43.55	88.30	51.66	38.86	17.73	63.50	300				0 Peak	HORIZONTAL																																																																														
Site	Condition	Project	Mode	Plane	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																														
Wiz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	dB	cm	deg																																																																																
1	13688.00	44.67	-43.63	88.30	51.58	38.86	17.73	63.50	100				0 Peak	VERTICAL																																																																														



**U-NII 7 6525~6875MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)**

WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m																																																	
ANT	802.11ax HE80 Full CH135 6625MHz																																																	
1+2	Horizontal	Vertical																																																
Peak	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTA Project : HSE-1000-0000Hz-V08-3000-0000Hz-08T-Auto Model : ZS Mode : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>Plane</th> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 13248.00</td> <td>44.85</td> <td>-43.45</td> <td>88.30</td> <td>39.11</td> <td>17.35</td> <td>62.99</td> <td>0 Peak HORIZONT</td> </tr> </tbody> </table>	Plane	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1 13248.00	44.85	-43.45	88.30	39.11	17.35	62.99	0 Peak HORIZONT	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSE-1000-0000Hz-V08-3000-0000Hz-08T-Auto Model : ZS Mode : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>Plane</th> <th>single-directivity</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 13248.00</td> <td>42.99</td> <td>-45.31</td> <td>88.30</td> <td>49.52</td> <td>39.11</td> <td>17.35</td> <td>62.99 100 0 Peak VERTICAL</td> </tr> </tbody> </table>	Plane	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				1 13248.00	42.99	-45.31	88.30	49.52	39.11	17.35	62.99 100 0 Peak VERTICAL
Plane	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																														
1 13248.00	44.85	-43.45	88.30	39.11	17.35	62.99	0 Peak HORIZONT																																											
Plane	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
Freq	Level	Line	Level Factor	Loss Factor																																														
1 13248.00	42.99	-45.31	88.30	49.52	39.11	17.35	62.99 100 0 Peak VERTICAL																																											

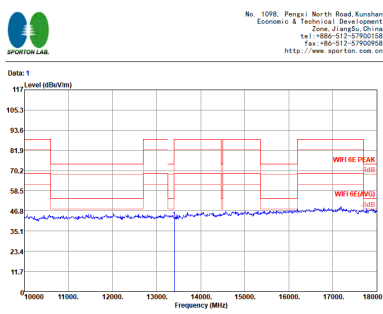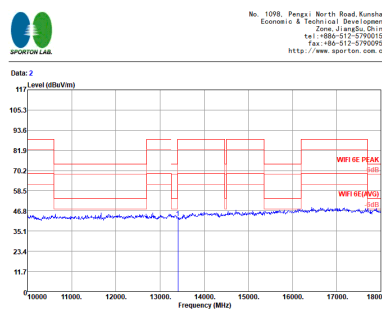

WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m																																																																																	
ANT	802.11ax HE80 Full CH151 6705MHz																																																																																	
1+2	Horizontal	Vertical																																																																																
Peak	 <table border="1" data-bbox="430 772 813 884"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>032804-MS</td> <td>WiFi Harmonic @ 3117 0277860 HORIZONTAL</td> <td>03240804</td> <td>25</td> <td>X</td> </tr> </tbody> </table> <table border="1" data-bbox="430 884 813 1099"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 13408.00</td> <td>42.36</td> <td>-45.94</td> <td>88.30</td> <td>49.05</td> <td>38.97</td> <td>17.50</td> <td>63.16</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	032804-MS	WiFi Harmonic @ 3117 0277860 HORIZONTAL	03240804	25	X	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	deg			1 13408.00	42.36	-45.94	88.30	49.05	38.97	17.50	63.16	300	0 Peak HORIZONTAL	 <table border="1" data-bbox="901 772 1284 884"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>032804-MS</td> <td>WiFi Harmonic @ 3117 0277860 VERTICAL</td> <td>03240804</td> <td>25</td> <td>X</td> </tr> </tbody> </table> <table border="1" data-bbox="901 884 1284 1099"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 13408.00</td> <td>42.71</td> <td>-45.59</td> <td>88.30</td> <td>49.40</td> <td>38.97</td> <td>17.50</td> <td>63.16</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	032804-MS	WiFi Harmonic @ 3117 0277860 VERTICAL	03240804	25	X	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	deg			1 13408.00	42.71	-45.59	88.30	49.40	38.97	17.50	63.16	100	0 Peak VERTICAL
Site	Condition	Project	Mode	Plane																																																																														
032804-MS	WiFi Harmonic @ 3117 0277860 HORIZONTAL	03240804	25	X																																																																														
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	deg																																																																											
1 13408.00	42.36	-45.94	88.30	49.05	38.97	17.50	63.16	300	0 Peak HORIZONTAL																																																																									
Site	Condition	Project	Mode	Plane																																																																														
032804-MS	WiFi Harmonic @ 3117 0277860 VERTICAL	03240804	25	X																																																																														
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	deg																																																																											
1 13408.00	42.71	-45.59	88.30	49.40	38.97	17.50	63.16	100	0 Peak VERTICAL																																																																									



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																	
ANT	802.11ax HE20 Full CH229 7095MHz																																																																																	
1+2	Horizontal	Fundamental																																																																																
Peak	<p>Site : 030904-KS Condition : WIFI AE PEAK 3m 91200 16dB HORIZONTAL Project : F70240834 Mode : 24 IMI : #23 Plane : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.16</td> <td>56.64</td> <td>-31.66</td> <td>88.30</td> <td>45.64</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>334</td> <td>80 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1	7125.16	56.64	-31.66	88.30	45.64	35.04	12.57	36.61	334	80 Peak	HORIZONTAL	<p>Site : 030904-KS Condition : WIFI AE PEAK 3m 91200 16dB HORIZONTAL Project : F70240834 Mode : 24 IMI : #23 Plane : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>97.01</td> <td>8.71</td> <td>88.30</td> <td>86.05</td> <td>35.02</td> <td>12.55</td> <td>36.61</td> <td>334</td> <td>80 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>89.99</td> <td>21.69</td> <td>68.30</td> <td>79.03</td> <td>35.02</td> <td>12.00</td> <td>36.61</td> <td>334</td> <td>90 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1	7102.00	97.01	8.71	88.30	86.05	35.02	12.55	36.61	334	80 Peak	HORIZONTAL	2	7102.00	89.99	21.69	68.30	79.03	35.02	12.00	36.61	334	90 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																																									
1	7125.16	56.64	-31.66	88.30	45.64	35.04	12.57	36.61	334	80 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																																									
1	7102.00	97.01	8.71	88.30	86.05	35.02	12.55	36.61	334	80 Peak	HORIZONTAL																																																																							
2	7102.00	89.99	21.69	68.30	79.03	35.02	12.00	36.61	334	90 Average	HORIZONTAL																																																																							
Avg.	<p>Site : 030904-KS Condition : WIFI AE (AVG) 3m 91200 16dB HORIZONTAL Project : F70240834 Mode : 24 IMI : #23 Plane : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.32</td> <td>45.39</td> <td>-22.91</td> <td>68.30</td> <td>34.39</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>334</td> <td>80 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1	7125.32	45.39	-22.91	68.30	34.39	35.04	12.57	36.61	334	80 Average	HORIZONTAL	Left blank																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																																									
1	7125.32	45.39	-22.91	68.30	34.39	35.04	12.57	36.61	334	80 Average	HORIZONTAL																																																																							



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																												
ANT	802.11ax HE20 Full CH229 7095MHz																																																																												
1+2	Vertical	Fundamental																																																																											
<p>Peak</p>	<p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL RSM: 1000.000MHz VSW: 3000.000MHz SRT: Auto Project : FFD240834 Mode : 34 MEI : #23 Plane : X Antenna : single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.68</td> <td>58.45</td> <td>-29.85</td> <td>88.30</td> <td>47.39</td> <td>35.07</td> <td>12.59</td> <td>36.60</td> <td>100</td> <td>111</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	7125.68	58.45	-29.85	88.30	47.39	35.07	12.59	36.60	100	111	Peak	VERTICAL	<p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL RSM: 1000.000MHz VSW: 3000.000MHz SRT: Auto Project : FFD240834 Mode : 34 MEI : #23 Plane : X Antenna : single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>99.81</td> <td>11.51</td> <td>88.30</td> <td>88.90</td> <td>35.00</td> <td>12.53</td> <td>36.62</td> <td>100</td> <td>111</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7093.00</td> <td>91.94</td> <td>23.64</td> <td>68.30</td> <td>81.03</td> <td>35.00</td> <td>12.53</td> <td>36.62</td> <td>100</td> <td>111</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	7093.00	99.81	11.51	88.30	88.90	35.00	12.53	36.62	100	111	Peak	VERTICAL	2	7093.00	91.94	23.64	68.30	81.03	35.00	12.53	36.62	100	111	Average	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	7125.68	58.45	-29.85	88.30	47.39	35.07	12.59	36.60	100	111	Peak	VERTICAL																																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	7093.00	99.81	11.51	88.30	88.90	35.00	12.53	36.62	100	111	Peak	VERTICAL																																																																	
2	7093.00	91.94	23.64	68.30	81.03	35.00	12.53	36.62	100	111	Average	VERTICAL																																																																	
<p>Avg.</p>	<p>Site : 032004-K3 Condition : WIFI AE (AVG) 3m 91200 1648 VERTICAL RSM: 1000.000MHz VSW: 1.000MHz SRT: Auto Project : FFD240834 Mode : 34 MEI : #23 Plane : X Antenna : single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.48</td> <td>47.51</td> <td>-20.79</td> <td>68.30</td> <td>36.51</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>100</td> <td>111</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	7125.48	47.51	-20.79	68.30	36.51	35.04	12.57	36.61	100	111	Average	VERTICAL	<p>Left blank</p>																																												
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	7125.48	47.51	-20.79	68.30	36.51	35.04	12.57	36.61	100	111	Average	VERTICAL																																																																	



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																
ANT	802.11ax HE20 Partial 26/8 CH229 7095MHz																																																
1+2	Horizontal	Fundamental																																															
Peak	<p>Site : 032104-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTA Project : HSB 1000 0000Hz VSW 3000 0000Hz SRT Auto Mode : ZF0 240834 Role : 25 MEI : #23 Plane : 3</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Plane</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7140.04</td> <td>80.25</td> <td>-8.05</td> <td>88.30</td> <td>68.29</td> <td>35.97</td> <td>12.59</td> <td>36.60</td> <td>100</td> <td>0</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Plane	Plane	1	7140.04	80.25	-8.05	88.30	68.29	35.97	12.59	36.60	100	0	Peak	HORIZONT	<p>Site : 032104-KS Condition : WIFI AE PEAK 3m 3117 580277860 HORIZONTA Project : HSB 1000 0000Hz VSW 3000 0000Hz SRT Auto Mode : ZF0 240834 Role : 25 MEI : #23 Plane : 3</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Plane</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>107.77</td> <td>19.47</td> <td>88.30</td> <td>96.44</td> <td>35.39</td> <td>12.55</td> <td>36.61</td> <td>100</td> <td>0</td> <td>Peak</td> <td>HORIZONT</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>100.69</td> <td>32.29</td> <td>68.30</td> <td>89.36</td> <td>35.39</td> <td>12.55</td> <td>36.61</td> <td>100</td> <td>0</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Plane	Plane	1	7102.00	107.77	19.47	88.30	96.44	35.39	12.55	36.61	100	0	Peak	HORIZONT	2	7102.00	100.69	32.29	68.30	89.36	35.39	12.55	36.61	100	0	Average	HORIZONT
Site	Condition	Plane	Plane																																														
1	7140.04	80.25	-8.05	88.30	68.29	35.97	12.59	36.60	100	0	Peak	HORIZONT																																					
Site	Condition	Plane	Plane																																														
1	7102.00	107.77	19.47	88.30	96.44	35.39	12.55	36.61	100	0	Peak	HORIZONT																																					
2	7102.00	100.69	32.29	68.30	89.36	35.39	12.55	36.61	100	0	Average	HORIZONT																																					
Avg.	<p>Site : 032104-KS Condition : WIFI (ECCV) 3m 3117 0227860 HORIZONTA Project : HSB 1000 0000Hz VSW 0.0100Hz SRT Auto Mode : ZF0 240834 Role : 25 MEI : #23 Plane : 3</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Plane</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7135.56</td> <td>62.62</td> <td>-5.68</td> <td>68.30</td> <td>50.66</td> <td>35.97</td> <td>12.59</td> <td>36.60</td> <td>100</td> <td>0</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Plane	Plane	1	7135.56	62.62	-5.68	68.30	50.66	35.97	12.59	36.60	100	0	Average	HORIZONT	Left blank																														
Site	Condition	Plane	Plane																																														
1	7135.56	62.62	-5.68	68.30	50.66	35.97	12.59	36.60	100	0	Average	HORIZONT																																					



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																
ANT	802.11ax HE20 Partial 26/8 CH229 7095MHZ																																																																																
1+2	Vertical	Fundamental																																																																															
<p>Peak</p>	<p>Site : 023004-K3 Condition : WIFI 6E PEAK 3m 3117 0277860 VERTICAL Project : RSM:1000.000MHz; VSR:3000.000MHz; SRT:Auto Mode : FFD240834 MEI : 35 Plane : #23 Antenna : X Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7136.84</td> <td>74.62</td> <td>-13.68</td> <td>88.30</td> <td>62.66</td> <td>35.97</td> <td>12.59</td> <td>36.60</td> <td>301</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	7136.84	74.62	-13.68	88.30	62.66	35.97	12.59	36.60	301	270	Peak	VERTICAL	<p>Site : 023004-K3 Condition : WIFI 6E PEAK 3m 3117 58077860 VERTICAL Project : RSM:1000.000MHz; VSR:3000.000MHz; SRT:Auto Mode : FFD240834 MEI : 35 Plane : #23 Antenna : X Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>104.46</td> <td>16.16</td> <td>88.30</td> <td>93.13</td> <td>35.39</td> <td>12.55</td> <td>36.61</td> <td>301</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>76.04</td> <td>28.24</td> <td>68.30</td> <td>65.21</td> <td>35.39</td> <td>12.55</td> <td>36.61</td> <td>301</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	7102.00	104.46	16.16	88.30	93.13	35.39	12.55	36.61	301	270	Peak	VERTICAL	2	7102.00	76.04	28.24	68.30	65.21	35.39	12.55	36.61	301	270	Average	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																									
1	7136.84	74.62	-13.68	88.30	62.66	35.97	12.59	36.60	301	270	Peak	VERTICAL																																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																									
1	7102.00	104.46	16.16	88.30	93.13	35.39	12.55	36.61	301	270	Peak	VERTICAL																																																																					
2	7102.00	76.04	28.24	68.30	65.21	35.39	12.55	36.61	301	270	Average	VERTICAL																																																																					
<p>Avg.</p>	<p>Site : 023004-K3 Condition : WIFI 6E (AVG) 3m 3117 0277860 VERTICAL Project : RSM:1000.000MHz; VSR:3000.000MHz; SRT:Auto Mode : FFD240834 MEI : 35 Plane : #23 Antenna : X Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7136.68</td> <td>58.53</td> <td>-9.77</td> <td>68.30</td> <td>46.57</td> <td>35.97</td> <td>12.59</td> <td>36.60</td> <td>301</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	7136.68	58.53	-9.77	68.30	46.57	35.97	12.59	36.60	301	270	Average	VERTICAL	<p>Left blank</p>																																														
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																									
1	7136.68	58.53	-9.77	68.30	46.57	35.97	12.59	36.60	301	270	Average	VERTICAL																																																																					