

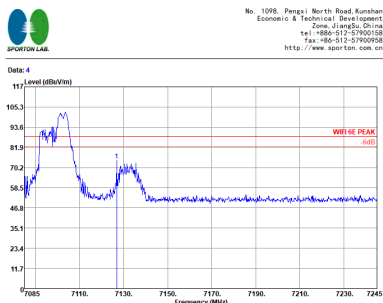


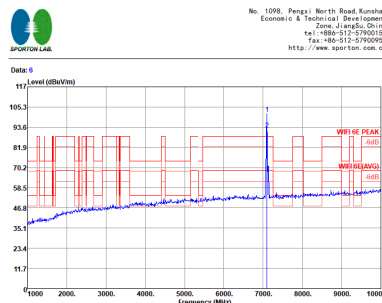

**U-NII 8 - 6875-7125MHz**  
**WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)**

<b>WIFI</b>	<b>U-NII 8 - 6875-7125MHz Band Edge @ 3m</b>																																								
<b>ANT</b>	<b>802.11ax HE20 Partial 52/40 CH229 7095MHz</b>																																								
<b>1+2</b>	<b>Horizontal</b>	<b>Fundamental</b>																																							
<b>Peak</b>	<p>Site: 032004-KS          Condition: WIFI AE PEAK 3m 3117 02277860 HORIZONTA          Project: FR240834          Mode: 26          MEI: #23          Plane: 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7134.44</th> <th>77.28</th> <th>-11.02</th> <th>88.30</th> <th>65.32</th> <th>35.97</th> <th>12.59</th> <th>36.40</th> <th>100</th> <th>19</th> <th>Peak</th> <th>HORIZONT</th> </tr> </thead> </table>	1	7134.44	77.28	-11.02	88.30	65.32	35.97	12.59	36.40	100	19	Peak	HORIZONT	<p>Site: 032004-KS          Condition: WIFI AE PEAK 3m 3117 580277860 HORIZONTA          Project: FR240834          Mode: 26          MEI: #23          Plane: 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7102.00</th> <th>104.90</th> <th>16.40</th> <th>88.30</th> <th>93.57</th> <th>35.39</th> <th>12.55</th> <th>36.61</th> <th>100</th> <th>19</th> <th>Peak</th> <th>HORIZONT</th> </tr> <tr> <th>2</th> <th>7102.00</th> <th>97.00</th> <th>28.70</th> <th>68.30</th> <th>85.67</th> <th>35.39</th> <th>12.55</th> <th>36.61</th> <th>100</th> <th>19</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	7102.00	104.90	16.40	88.30	93.57	35.39	12.55	36.61	100	19	Peak	HORIZONT	2	7102.00	97.00	28.70	68.30	85.67	35.39	12.55	36.61	100	19	Average	HORIZONT
1	7134.44	77.28	-11.02	88.30	65.32	35.97	12.59	36.40	100	19	Peak	HORIZONT																													
1	7102.00	104.90	16.40	88.30	93.57	35.39	12.55	36.61	100	19	Peak	HORIZONT																													
2	7102.00	97.00	28.70	68.30	85.67	35.39	12.55	36.61	100	19	Average	HORIZONT																													
<b>Avg.</b>	<p>Site: 032004-KS          Condition: WIFI (E-CV65) 3m 3117 580277860 HORIZONTA          Project: FR240834          Mode: 26          MEI: #23          Plane: 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7129.16</th> <th>59.74</th> <th>-8.56</th> <th>68.30</th> <th>48.36</th> <th>35.39</th> <th>12.59</th> <th>36.60</th> <th>100</th> <th>19</th> <th>Average</th> <th>HORIZONT</th> </tr> </thead> </table>	1	7129.16	59.74	-8.56	68.30	48.36	35.39	12.59	36.60	100	19	Average	HORIZONT	<b>Left blank</b>																										
1	7129.16	59.74	-8.56	68.30	48.36	35.39	12.59	36.60	100	19	Average	HORIZONT																													

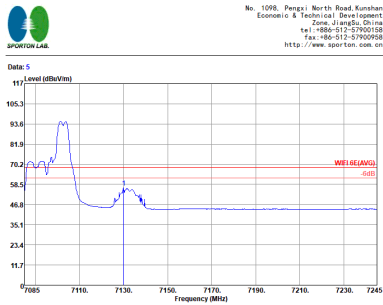

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 52/40 CH229 7095MHZ	
1+2	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030904-K3 Condition : WIFI AE PEAK 3m 3117 0277860 VERTICAL Project : RSM:1000.000MHz; VBR:3000.000MHz; SRT:Auto RFD240834 Mode : 30 MEI : #23 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor cm deg 1 7126.92 74.46 -13.84 88.30 62.52 35.98 12.57 36.61 290 262 Peak VERTICAL</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030904-K3 Condition : WIFI AE PEAK 3m 3117 08077860 VERTICAL Project : RSM:1000.000MHz; VBR:3000.000MHz; SRT:Auto RFD240834 Mode : 30 MEI : #23 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor cm deg 1 * 7102.00 101.23 12.93 88.30 89.90 35.39 12.55 36.61 290 262 Peak VERTICAL 2 * 7102.00 92.36 24.06 68.30 81.63 35.39 12.55 36.61 290 262 Average VERTICAL</p>
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030904-K3 Condition : WIFI AE (AVG) 3m 3117 0277860 VERTICAL Project : RSM:1000.000MHz; VBR:3000.000MHz; SRT:Auto RFD240834 Mode : 30 MEI : #23 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor cm deg 1 7130.12 56.69 -11.61 68.30 44.73 35.97 12.59 36.60 290 262 Average VERTICAL</p>	<p><b>Left blank</b></p>



**U-NII 8 - 6875-7125MHzMHz**  
**WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																								
ANT	802.11ax HE20 Partial 106/54 CH229 7095MHz																																								
1+2	Horizontal	Fundamental																																							
<b>Peak</b>	<p>Site : 032004-KS            Condition : WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 27            ME1 : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7128.04</th> <th>54.04</th> <th>-34.26</th> <th>88.30</th> <th>43.04</th> <th>35.04</th> <th>12.57</th> <th>36.61</th> <th>289</th> <th>87</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	7128.04	54.04	-34.26	88.30	43.04	35.04	12.57	36.61	289	87	Peak	HORIZONTAL	<p>Site : 032004-KS            Condition : WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 27            ME1 : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7102.00</th> <th>99.07</th> <th>10.77</th> <th>88.30</th> <th>88.11</th> <th>35.02</th> <th>12.55</th> <th>36.61</th> <th>289</th> <th>87</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> <tr> <th>2</th> <th>7102.00</th> <th>91.97</th> <th>23.67</th> <th>68.30</th> <th>81.01</th> <th>35.02</th> <th>12.55</th> <th>36.61</th> <th>289</th> <th>87</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	7102.00	99.07	10.77	88.30	88.11	35.02	12.55	36.61	289	87	Peak	HORIZONTAL	2	7102.00	91.97	23.67	68.30	81.01	35.02	12.55	36.61	289	87	Average	HORIZONTAL
1	7128.04	54.04	-34.26	88.30	43.04	35.04	12.57	36.61	289	87	Peak	HORIZONTAL																													
1	7102.00	99.07	10.77	88.30	88.11	35.02	12.55	36.61	289	87	Peak	HORIZONTAL																													
2	7102.00	91.97	23.67	68.30	81.01	35.02	12.55	36.61	289	87	Average	HORIZONTAL																													
<b>Avg.</b>	<p>Site : 032004-KS            Condition : WIFI (ECCV) 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 27            ME1 : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>1</th> <th>7128.44</th> <th>44.31</th> <th>-23.99</th> <th>68.30</th> <th>33.31</th> <th>35.04</th> <th>12.57</th> <th>36.61</th> <th>289</th> <th>87</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	7128.44	44.31	-23.99	68.30	33.31	35.04	12.57	36.61	289	87	Average	HORIZONTAL	<b>Left blank</b>																										
1	7128.44	44.31	-23.99	68.30	33.31	35.04	12.57	36.61	289	87	Average	HORIZONTAL																													




WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																											
ANT	802.11ax HE20 Partial 106/54 CH229 7095MHz																											
1+2	Vertical	Fundamental																										
Peak	<p>Site : 032004-K3            Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL            Project : FR240834            Mode : 27            MEI : #23            Plane : X            Single-directivity : Over Limit            ReadAntenna : Cable Preamp : Loss Factor : A/Pos : T/Pos : Remark : Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>7128.04</th> <th>56.45</th> <th>-31.85</th> <th>88.30</th> <th>45.45</th> <th>35.04</th> <th>12.57</th> <th>36.61</th> <th>108</th> <th>112</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	7128.04	56.45	-31.85	88.30	45.45	35.04	12.57	36.61	108	112	Peak	VERTICAL	<p>Site : 032004-K3            Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL            Project : FR240834            Mode : 27            MEI : #23            Plane : X            Single-directivity : Over Limit            ReadAntenna : Cable Preamp : Loss Factor : A/Pos : T/Pos : Remark : Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>7102.00</th> <th>99.29</th> <th>11.09</th> <th>88.30</th> <th>88.43</th> <th>35.02</th> <th>12.55</th> <th>36.61</th> <th>108</th> <th>112</th> <th>Peak</th> <th>VERTICAL</th> </tr> </thead> </table>	1	7102.00	99.29	11.09	88.30	88.43	35.02	12.55	36.61	108	112	Peak	VERTICAL
1	7128.04	56.45	-31.85	88.30	45.45	35.04	12.57	36.61	108	112	Peak	VERTICAL																
1	7102.00	99.29	11.09	88.30	88.43	35.02	12.55	36.61	108	112	Peak	VERTICAL																
Avg.	<p>Site : 032004-K3            Condition : WIFI AE (AVG) 3m 91200 1648 VERTICAL            Project : FR240834            Mode : 27            MEI : #23            Plane : X            Single-directivity : Over Limit            ReadAntenna : Cable Preamp : Loss Factor : A/Pos : T/Pos : Remark : Pol/Phas</p> <table border="1"> <thead> <tr> <th>1</th> <th>7126.76</th> <th>45.16</th> <th>-23.14</th> <th>68.30</th> <th>34.16</th> <th>35.04</th> <th>12.57</th> <th>36.61</th> <th>108</th> <th>112</th> <th>Average</th> <th>VERTICAL</th> </tr> </thead> </table>	1	7126.76	45.16	-23.14	68.30	34.16	35.04	12.57	36.61	108	112	Average	VERTICAL	Left blank													
1	7126.76	45.16	-23.14	68.30	34.16	35.04	12.57	36.61	108	112	Average	VERTICAL																



**U-NII 8 - 6875-7125MHz**  
**WIFI 802.11ax HE40 Full (Band Edge @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																						
ANT	802.11ax HE40 Full CH227 7085MHz																																																																						
1+2	Horizontal	Fundamental																																																																					
<b>Peak</b>	<p>Site: 032006-KS            Condition: RIF1 SE PEAK 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.0000Hz VBR 3000.0000Hz SWT Auto            Mode: 3P            Freq: 240834            ME1: #24            Plane: X            Power: Single-directivity            Power: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>7125.84</td> <td>69.94</td> <td>-18.36</td> <td>88.30</td> <td>51.35</td> <td>35.90</td> <td>15.48</td> <td>32.79</td> <td>100</td> <td>200 Peak</td> <td>HORI2ONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Level	Line	Level	Factor	Loss	dB	dB	cn	deg	7125.84	69.94	-18.36	88.30	51.35	35.90	15.48	32.79	100	200 Peak	HORI2ONT	<p>Site: 032006-KS            Condition: RIF1 SE PEAK 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.0000Hz VBR 3000.0000Hz SWT Auto            Mode: 3P            Freq: 240834            ME1: #24            Plane: X            Power: Single-directivity            Power: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>7084.00</td> <td>101.21</td> <td>12.91</td> <td>88.30</td> <td>86.82</td> <td>35.60</td> <td>11.56</td> <td>32.77</td> <td>100</td> <td>200 Peak</td> <td>HORI2ONT</td> </tr> <tr> <td>7084.00</td> <td>104.76</td> <td>26.66</td> <td>88.30</td> <td>16.34</td> <td>35.90</td> <td>15.49</td> <td>32.77</td> <td>100</td> <td>200 Average</td> <td>HORI2ONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Level	Line	Level	Factor	Loss	dB	dB	cn	deg	7084.00	101.21	12.91	88.30	86.82	35.60	11.56	32.77	100	200 Peak	HORI2ONT	7084.00	104.76	26.66	88.30	16.34	35.90	15.49	32.77	100	200 Average	HORI2ONT
Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
Level	Line	Level	Factor	Loss	dB	dB	cn	deg																																																															
7125.84	69.94	-18.36	88.30	51.35	35.90	15.48	32.79	100	200 Peak	HORI2ONT																																																													
Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
Level	Line	Level	Factor	Loss	dB	dB	cn	deg																																																															
7084.00	101.21	12.91	88.30	86.82	35.60	11.56	32.77	100	200 Peak	HORI2ONT																																																													
7084.00	104.76	26.66	88.30	16.34	35.90	15.49	32.77	100	200 Average	HORI2ONT																																																													
<b>Avg.</b>	<p>Site: 032006-KS            Condition: RIF1 (S.AVG) 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.0000Hz VBR 2.0000Hz SWT Auto            Mode: 3P            Freq: 240834            ME1: #24            Plane: X            Power: Single-directivity            Power: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>7126.20</td> <td>61.88</td> <td>-6.42</td> <td>68.30</td> <td>47.49</td> <td>35.60</td> <td>11.58</td> <td>32.79</td> <td>100</td> <td>200 Peak</td> <td>HORI2ONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Level	Line	Level	Factor	Loss	dB	dB	cn	deg	7126.20	61.88	-6.42	68.30	47.49	35.60	11.58	32.79	100	200 Peak	HORI2ONT	<b>Left blank</b>																																								
Over	Limit	ReadStenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																															
Level	Line	Level	Factor	Loss	dB	dB	cn	deg																																																															
7126.20	61.88	-6.42	68.30	47.49	35.60	11.58	32.79	100	200 Peak	HORI2ONT																																																													

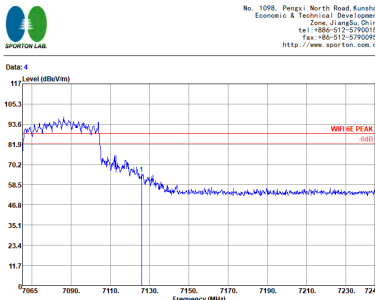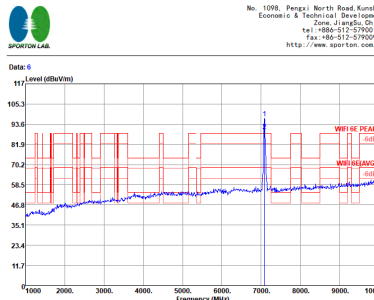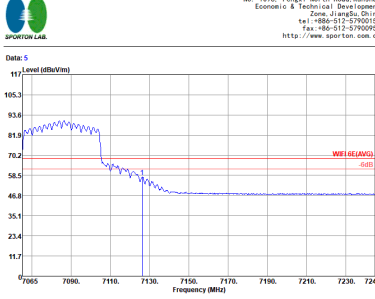

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																								
ANT	802.11ax HE40 Full H227 7085MHz																																																																																								
1+2	Vertical	Fundamental																																																																																							
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto FR21240834 Mode : 3P MEI : #24 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.84</td> <td>65.00</td> <td>-23.30</td> <td>88.30</td> <td>50.61</td> <td>35.60</td> <td>11.58</td> <td>32.79</td> <td>300</td> <td>89</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	1	7125.84	65.00	-23.30	88.30	50.61	35.60	11.58	32.79	300	89	Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto FR21240834 Mode : 3P MEI : #24 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7084.00</td> <td>97.14</td> <td>8.84</td> <td>88.30</td> <td>82.75</td> <td>35.60</td> <td>11.56</td> <td>32.77</td> <td>300</td> <td>89</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7084.00</td> <td>89.73</td> <td>21.43</td> <td>68.30</td> <td>75.34</td> <td>35.60</td> <td>11.56</td> <td>32.77</td> <td>300</td> <td>89</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	1	7084.00	97.14	8.84	88.30	82.75	35.60	11.56	32.77	300	89	Peak	VERTICAL	2	7084.00	89.73	21.43	68.30	75.34	35.60	11.56	32.77	300	89	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB																																																																																		
1	7125.84	65.00	-23.30	88.30	50.61	35.60	11.58	32.79	300	89	Peak	VERTICAL																																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB																																																																																		
1	7084.00	97.14	8.84	88.30	82.75	35.60	11.56	32.77	300	89	Peak	VERTICAL																																																																													
2	7084.00	89.73	21.43	68.30	75.34	35.60	11.56	32.77	300	89	Average	VERTICAL																																																																													
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E (AVG) @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto FR21240834 Mode : 3P MEI : #24 Plane : X Single-directivity : X powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.20</td> <td>57.66</td> <td>-10.64</td> <td>68.30</td> <td>43.27</td> <td>35.60</td> <td>11.58</td> <td>32.79</td> <td>300</td> <td>89</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	1	7126.20	57.66	-10.64	68.30	43.27	35.60	11.58	32.79	300	89	Average	VERTICAL	<p><b>Left blank</b></p>																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB																																																																																		
1	7126.20	57.66	-10.64	68.30	43.27	35.60	11.58	32.79	300	89	Average	VERTICAL																																																																													



**U-NII 8 - 6875-7125MHz**  
**WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																										
ANT	802.11ax HE40 Partial 242/62 H227 7085MHz																																																																										
1+2	Horizontal	Fundamental																																																																									
<b>Peak</b>	<p>Site: 032004-KS            Condition: RIFI 6E PEAK 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.000KHz VBR 3000.000KHz SWT Auto            Mode: 40            Freq: 240834            ME1: #23            Plane: 2            Power: 16            Power: Single-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7137.00</td> <td>74.66</td> <td>-13.64</td> <td>88.30</td> <td>40.26</td> <td>35.60</td> <td>11.60</td> <td>32.80</td> <td>109</td> <td>283</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	7137.00	74.66	-13.64	88.30	40.26	35.60	11.60	32.80	109	283	Peak	HORIZONTAL	<p>Site: 032004-KS            Condition: RIFI 6E PEAK 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.000KHz VBR 3000.000KHz SWT Auto            Mode: 40            Freq: 240834            ME1: #23            Plane: 2            Power: 16            Power: Single-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>163.57</td> <td>15.27</td> <td>88.30</td> <td>89.17</td> <td>35.60</td> <td>11.57</td> <td>32.77</td> <td>109</td> <td>283</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>156.46</td> <td>27.16</td> <td>88.30</td> <td>81.06</td> <td>35.60</td> <td>11.57</td> <td>32.77</td> <td>109</td> <td>283</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	7102.00	163.57	15.27	88.30	89.17	35.60	11.57	32.77	109	283	Peak	HORIZONTAL	2	7102.00	156.46	27.16	88.30	81.06	35.60	11.57	32.77	109	283	Average	HORIZONTAL
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																			
1	7137.00	74.66	-13.64	88.30	40.26	35.60	11.60	32.80	109	283	Peak	HORIZONTAL																																																															
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																			
1	7102.00	163.57	15.27	88.30	89.17	35.60	11.57	32.77	109	283	Peak	HORIZONTAL																																																															
2	7102.00	156.46	27.16	88.30	81.06	35.60	11.57	32.77	109	283	Average	HORIZONTAL																																																															
<b>Avg.</b>	<p>Site: 032004-KS            Condition: RIFI 6E (AVG) 3m 3117 5M00240138 HORIZONTAL            Project: RRF 1000.000KHz VBR 1.000KHz SWT Auto            Mode: 40            Freq: 240834            ME1: #23            Plane: 2            Power: 16            Power: Single-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7131.00</td> <td>63.78</td> <td>-4.52</td> <td>68.30</td> <td>49.37</td> <td>35.60</td> <td>11.60</td> <td>32.79</td> <td>109</td> <td>283</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	7131.00	63.78	-4.52	68.30	49.37	35.60	11.60	32.79	109	283	Average	HORIZONTAL	<b>Left blank</b>																																											
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																			
1	7131.00	63.78	-4.52	68.30	49.37	35.60	11.60	32.79	109	283	Average	HORIZONTAL																																																															



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE40 Partial 242/62 H227 7085MHz																																																																							
1+2	Vertical	Fundamental																																																																						
Peak	<p>Site : 032806-KS Condition : WIFI @ PEAK @ 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto Mode : (FR) 240834 Plane : X PowerSetting : 10 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7141.68</td> <td>72.40</td> <td>-15.90</td> <td>88.30</td> <td>58.00</td> <td>35.60</td> <td>11.60</td> <td>32.80</td> <td>290 261 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 7141.68	72.40	-15.90	88.30	58.00	35.60	11.60	32.80	290 261 Peak	VERTICAL	<p>Site : 032806-KS Condition : WIFI @ PEAK @ 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto Mode : (FR) 240834 Plane : X PowerSetting : 10 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7102.00</td> <td>100.78</td> <td>12.48</td> <td>88.30</td> <td>86.38</td> <td>35.60</td> <td>11.57</td> <td>32.77</td> <td>290 261 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 7102.00</td> <td>92.19</td> <td>23.89</td> <td>68.30</td> <td>77.79</td> <td>35.60</td> <td>11.57</td> <td>32.77</td> <td>290 261 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 7102.00	100.78	12.48	88.30	86.38	35.60	11.57	32.77	290 261 Peak	VERTICAL	2 7102.00	92.19	23.89	68.30	77.79	35.60	11.57	32.77	290 261 Average	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 7141.68	72.40	-15.90	88.30	58.00	35.60	11.60	32.80	290 261 Peak	VERTICAL																																																															
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 7102.00	100.78	12.48	88.30	86.38	35.60	11.57	32.77	290 261 Peak	VERTICAL																																																															
2 7102.00	92.19	23.89	68.30	77.79	35.60	11.57	32.77	290 261 Average	VERTICAL																																																															
Avg.	<p>Site : 032806-KS Condition : WIFI @ (AVG) @ 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 11 000KHz SRT:Auto Mode : (FR) 240834 Plane : X PowerSetting : 10 Single-directivity : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7134.30</td> <td>60.00</td> <td>-7.70</td> <td>68.30</td> <td>46.20</td> <td>35.60</td> <td>11.60</td> <td>32.80</td> <td>290 261 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1 7134.30	60.00	-7.70	68.30	46.20	35.60	11.60	32.80	290 261 Average	VERTICAL	Left blank																																								
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																																																																	
1 7134.30	60.00	-7.70	68.30	46.20	35.60	11.60	32.80	290 261 Average	VERTICAL																																																															





**U-NII 8 - 6875-7125MHzMHz**  
**WIFI 802.11ax HE80 Full (Band Edge @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																					
ANT	802.11ax HE80 Full CH215 7025MHz																																																																																					
1+2	Horizontal	Fundamental																																																																																				
<b>Peak</b>	<p>Site : 032004-KS            Condition : WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 42            MEI : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>Single-directivity</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7125.16</td> <td>53.55</td> <td>-34.75</td> <td>88.30</td> <td>42.55</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>300</td> <td>273</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 7125.16	53.55	-34.75	88.30	42.55	35.04	12.57	36.61	300	273	Peak	HORIZONTAL	<p>Site : 032004-KS            Condition : WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 42            MEI : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>Single-directivity</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7012.00</td> <td>89.95</td> <td>1.66</td> <td>88.30</td> <td>79.22</td> <td>34.92</td> <td>12.46</td> <td>36.64</td> <td>300</td> <td>273</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 7012.00</td> <td>81.77</td> <td>13.47</td> <td>68.30</td> <td>71.03</td> <td>34.92</td> <td>12.46</td> <td>36.64</td> <td>300</td> <td>273</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 7012.00	89.95	1.66	88.30	79.22	34.92	12.46	36.64	300	273	Peak	HORIZONTAL	2 7012.00	81.77	13.47	68.30	71.03	34.92	12.46	36.64	300	273	Average	HORIZONTAL
Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																															
1 7125.16	53.55	-34.75	88.30	42.55	35.04	12.57	36.61	300	273	Peak	HORIZONTAL																																																																											
Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																															
1 7012.00	89.95	1.66	88.30	79.22	34.92	12.46	36.64	300	273	Peak	HORIZONTAL																																																																											
2 7012.00	81.77	13.47	68.30	71.03	34.92	12.46	36.64	300	273	Average	HORIZONTAL																																																																											
<b>Avg.</b>	<p>Site : 032004-KS            Condition : WIFI (CAVE) 3m 91200 1648 HORIZONTAL            Project : FR240834            Mode : 42            MEI : #23            Plane : 3</p> <table border="1"> <thead> <tr> <th>Single-directivity</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7125.00</td> <td>46.04</td> <td>-22.26</td> <td>68.30</td> <td>35.04</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>300</td> <td>273</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 7125.00	46.04	-22.26	68.30	35.04	35.04	12.57	36.61	300	273	Average	HORIZONTAL	<b>Left blank</b>																																																
Single-directivity	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																															
1 7125.00	46.04	-22.26	68.30	35.04	35.04	12.57	36.61	300	273	Average	HORIZONTAL																																																																											



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH215 7025MHz	
1+2	Vertical	Fundamental
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL Project : FR240834 RFR : 1000.000MHz VBR : 3000.000MHz SRT : Auto RFE : 032004 RFE : 43 RFE : 923 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB cm deg 1 7125.16 56.31 -31.99 88.30 45.31 35.04 12.57 36.61 102 288 Peak VERTICAL</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL Project : FR240834 RFR : 1000.000MHz VBR : 3000.000MHz SRT : Auto RFE : 032004 RFE : 43 RFE : 923 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB cm deg 1 * 7066.00 81.81 2.51 88.30 80.94 34.98 12.51 36.62 102 288 Peak VERTICAL 2 * 7066.00 83.90 15.60 68.30 73.03 34.98 12.51 36.62 102 288 Average VERTICAL</p>
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE (AVG) 3m 91200 1648 VERTICAL Project : FR240834 RFR : 1000.000MHz VBR : 3.000MHz SRT : Auto RFE : 032004 RFE : 43 RFE : 923 Plane : X Single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB cm deg 1 7125.32 48.63 -19.67 68.30 37.63 35.04 12.57 36.61 102 288 Average VERTICAL</p>	<p><b>Left blank</b></p>



**U-NII 8 - 6875-7125MHz**  
**WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																															
ANT	802.11ax HE80 Partial 484/66 CH215 7025MHz																																																																																															
1+2	Horizontal	Fundamental																																																																																														
<b>Peak</b>	<p>Site: 032104-KS            Condition: WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project: RSR 1000 000KHz VBR 3000 000KHz SRT Auto            Mode: (F) 240834            ME1: #23            Plane: #1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7136.20</td> <td>53.24</td> <td>-35.06</td> <td>88.30</td> <td>42.18</td> <td>35.07</td> <td>12.59</td> <td>36.40</td> <td>302</td> <td></td> <td>100</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg						1	7136.20	53.24	-35.06	88.30	42.18	35.07	12.59	36.40	302		100	Peak	HORIZONTAL	<p>Site: 032104-KS            Condition: WIFI AE PEAK 3m 91200 1648 HORIZONTAL            Project: RSR 1000 000KHz VBR 3000 000KHz SRT Auto            Mode: (F) 240834            ME1: #23            Plane: #1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7057.00</td> <td>89.34</td> <td>1.04</td> <td>88.30</td> <td>78.51</td> <td>34.96</td> <td>12.50</td> <td>36.63</td> <td>302</td> <td></td> <td>100</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7057.00</td> <td>81.86</td> <td>13.56</td> <td>68.30</td> <td>71.03</td> <td>34.96</td> <td>12.50</td> <td>36.63</td> <td>302</td> <td></td> <td>100</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg						1	7057.00	89.34	1.04	88.30	78.51	34.96	12.50	36.63	302		100	Peak	HORIZONTAL	2	7057.00	81.86	13.56	68.30	71.03	34.96	12.50	36.63	302		100	Average	HORIZONTAL
Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg																																																																																									
1	7136.20	53.24	-35.06	88.30	42.18	35.07	12.59	36.40	302		100	Peak	HORIZONTAL																																																																																			
Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg																																																																																									
1	7057.00	89.34	1.04	88.30	78.51	34.96	12.50	36.63	302		100	Peak	HORIZONTAL																																																																																			
2	7057.00	81.86	13.56	68.30	71.03	34.96	12.50	36.63	302		100	Average	HORIZONTAL																																																																																			
<b>Avg.</b>	<p>Site: 032104-KS            Condition: WIFI (ECCV) 3m 91200 1648 HORIZONTAL            Project: RSR 1000 000KHz VBR 1.800KHz SRT Auto            Mode: (F) 240834            ME1: #23            Plane: #1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.96</td> <td>44.33</td> <td>-23.97</td> <td>68.30</td> <td>33.33</td> <td>35.04</td> <td>12.57</td> <td>36.61</td> <td>302</td> <td></td> <td>100</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg						1	7125.96	44.33	-23.97	68.30	33.33	35.04	12.57	36.61	302		100	Average	HORIZONTAL	<b>Left blank</b>																																																						
Site	Condition	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBm	dB	cm	deg																																																																																									
1	7125.96	44.33	-23.97	68.30	33.33	35.04	12.57	36.61	302		100	Average	HORIZONTAL																																																																																			



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																
ANT	802.11ax HE80 Partial 484/66 CH215 7025MHz																																																																
1+2	Vertical	Fundamental																																																															
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL Project : FR240834 Mode : 43 MEI : 923 Plane : X Single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>7125.72</td> <td>85.42</td> <td>-2.88</td> <td>88.30</td> <td>42.59</td> <td>35.07</td> <td>12.59</td> <td>36.40</td> <td>305 100 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		7125.72	85.42	-2.88	88.30	42.59	35.07	12.59	36.40	305 100 Peak VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE PEAK 3m 91200 1648 VERTICAL Project : FR240834 Mode : 43 MEI : 923 Plane : X Single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>7048.00</td> <td>85.42</td> <td>-2.88</td> <td>88.30</td> <td>74.59</td> <td>34.96</td> <td>12.50</td> <td>36.63</td> <td>305 100 Peak VERTICAL</td> </tr> <tr> <td>7048.00</td> <td>79.19</td> <td>10.89</td> <td>68.30</td> <td>68.36</td> <td>34.96</td> <td>12.50</td> <td>36.63</td> <td>305 100 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		7048.00	85.42	-2.88	88.30	74.59	34.96	12.50	36.63	305 100 Peak VERTICAL	7048.00	79.19	10.89	68.30	68.36	34.96	12.50	36.63	305 100 Average VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
7125.72	85.42	-2.88	88.30	42.59	35.07	12.59	36.40	305 100 Peak VERTICAL																																																									
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
7048.00	85.42	-2.88	88.30	74.59	34.96	12.50	36.63	305 100 Peak VERTICAL																																																									
7048.00	79.19	10.89	68.30	68.36	34.96	12.50	36.63	305 100 Average VERTICAL																																																									
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-K3 Condition : WIFI AE (AVG) 3m 91200 1648 VERTICAL Project : FR240834 Mode : 43 MEI : 923 Plane : X Single-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>7122.84</td> <td>44.34</td> <td>-23.96</td> <td>68.30</td> <td>33.28</td> <td>35.07</td> <td>12.59</td> <td>36.40</td> <td>305 100 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		7122.84	44.34	-23.96	68.30	33.28	35.07	12.59	36.40	305 100 Average VERTICAL	<p><b>Left blank</b></p>																																				
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
7122.84	44.34	-23.96	68.30	33.28	35.07	12.59	36.40	305 100 Average VERTICAL																																																									



U-NII 8 - 6875-7125MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH189 6895MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 030904-KS            Condition : WIFI HE PEAK 3m 3117 0237860 HORIZONTAL            Project : F021540934            Mode : 22            MEI : #23            Plane : X            : single-directivity            Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas            MHz dBuV/m dB dBuV/m dBV dB/m dB dB cn deg            1 13792.00 44.64 -43.66 88.30 51.61 38.84 17.82 63.63 300 0 Peak HORIZONTAL</p>	<p>Site : 030904-KS            Condition : WIFI HE PEAK 3m 3117 0237860 VERTICAL            Project : F021540934            Mode : 22            MEI : #23            Plane : X            : single-directivity            Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas            MHz dBuV/m dB dBuV/m dBV dB/m dB dB cn deg            1 13792.00 46.89 -41.41 88.30 53.86 38.84 17.82 63.63 100 0 Peak VERTICAL</p>



WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH209 6995 MHz	
1+2	Horizontal	Vertical
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032084-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto RFL : 03240834 Mode : 33 MSEI : #2 Plane : X Single-directivity Over Level ReadAttenu Cable Pramp A/Pos T/Pos Loss Factor Loss Factor Freq Level Limit Line Level Factor Loss Factor MHz dBuV/m dB dBuV/m dBuV dB dB dB cm deg Remark Pol/Phas 1 13992.00 46.55 -41.75 88.30 53.65 38.80 18.00 63.90 300 0 Peak HORIZONTAL</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032084-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto RFL : 03240834 Mode : 33 MSEI : #2 Plane : X Single-directivity Over Level ReadAttenu Cable Pramp A/Pos T/Pos Loss Factor Loss Factor Freq Level Limit Line Level Factor Loss Factor MHz dBuV/m dB dBuV/m dBuV dB dB dB cm deg Remark Pol/Phas 1 13992.00 47.38 -40.92 88.30 54.48 38.80 18.00 63.90 100 0 Peak VERTICAL</p>



WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																																																			
ANT	802.11ax HE20 Full CH229 7095 MHz																																																																																			
1+2	Horizontal	Vertical																																																																																		
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : RSM 1000 000KHz VSW:3000 000KHz SMT:Auto Model : 34 Mode : #2 Plane : X</p> <table border="1"> <thead> <tr> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAttenu</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14192.00</td> <td>44.52</td> <td>-43.78</td> <td>88.30</td> <td>51.53</td> <td>39.10</td> <td>18.09</td> <td>64.20</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1 14192.00	44.52	-43.78	88.30	51.53	39.10	18.09	64.20	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : RSM 1000 000KHz VSW:3000 000KHz SMT:Auto Model : 34 Mode : #2 Plane : X</p> <table border="1"> <thead> <tr> <th>Single-directivity</th> <th>Over</th> <th>Limit</th> <th>ReadAttenu</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14192.00</td> <td>45.41</td> <td>-42.89</td> <td>88.30</td> <td>52.42</td> <td>39.10</td> <td>18.09</td> <td>64.20</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1 14192.00	45.41	-42.89	88.30	52.42	39.10	18.09	64.20	100	0 Peak	VERTICAL
Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																											
1 14192.00	44.52	-43.78	88.30	51.53	39.10	18.09	64.20	300	0 Peak	HORIZONTAL																																																																										
Single-directivity	Over	Limit	ReadAttenu	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																											
1 14192.00	45.41	-42.89	88.30	52.42	39.10	18.09	64.20	100	0 Peak	VERTICAL																																																																										



**U-NII 8 - 6875-7125MHz  
WIFI 802.11ax HE40 Full (Harmonic @ 3m)**

<b>WIFI</b>	<b>U-NII 8 - 6875-7125MHz Harmonic @ 3m</b>																																																							
<b>ANT</b>	<b>802.11ax HE40 Full CH203 6965MHz</b>																																																							
<b>1+2</b>	<b>Horizontal</b>	<b>Vertical</b>																																																						
<b>Peak</b>	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTA Project : HSE-1000-0000K; VBR-3000-0000K; DBT-Auto Model : ZS IMEI : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13928.00</td> <td>44.82</td> <td>-43.48</td> <td>88.30</td> <td>51.87</td> <td>38.82</td> <td>17.94</td> <td>63.81</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Unit	Line	Level	Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	13928.00	44.82	-43.48	88.30	51.87	38.82	17.94	63.81	300	0	Peak	HORIZONT	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSE-1000-0000K; VBR-3000-0000K; DBT-Auto Model : ZS IMEI : #23 Plane : 1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13928.00</td> <td>44.88</td> <td>-43.42</td> <td>88.30</td> <td>51.93</td> <td>38.82</td> <td>17.94</td> <td>63.81</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Unit	Line	Level	Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	13928.00	44.88	-43.42	88.30	51.93	38.82	17.94	63.81	100	0	Peak	VERTICAL
Site	Condition	Freq	Level	Unit	Line	Level	Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
1	13928.00	44.82	-43.48	88.30	51.87	38.82	17.94	63.81	300	0	Peak	HORIZONT																																												
Site	Condition	Freq	Level	Unit	Line	Level	Factor	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																											
1	13928.00	44.88	-43.42	88.30	51.93	38.82	17.94	63.81	100	0	Peak	VERTICAL																																												







WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH227 7085MHz	
1+2	Horizontal	Vertical
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL Project : FR240834 Mode : 2P BNC : #23 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB dBm dBm dBm dBm cm deg 1 14168.00 44.12 -44.18 88.30 51.13 39.08 18.09 64.18 300 0 Peak HORIZONTAL</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032004-MS Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL Project : FR240834 Mode : 2P BNC : #23 Plane : X Single-directivity Over Limit ReadAttenua Cable Preamp A/Pos T/Pos Remark Pol/Phas Freq Level Limit Line Level Factor Loss Factor dB dBm dBm dBm dBm cm deg 1 14168.00 47.57 -40.73 88.30 54.58 39.08 18.09 64.18 100 0 Peak VERTICAL</p>



**U-NII 8 - 6875-7125MHz  
WIFI 802.11ax HE80 Full (Harmonic @ 3m)**

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																																															
ANT	802.11ax HE80 Full CH199 6945MHz																																																																															
1+2	Horizontal	Vertical																																																																														
<b>Peak</b>	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HSE-1000-0000K; VBR-3000-0000K; DBT-Auto Mode : (F0)240834 ME1 : 41 Plane : #23</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13888.00</td> <td>45.41</td> <td>-42.89</td> <td>88.30</td> <td>52.44</td> <td>38.82</td> <td>17.91</td> <td>63.76</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	1	13888.00	45.41	-42.89	88.30	52.44	38.82	17.91	63.76	300	0	Peak	HORIZONT	<p>Site : 032104-K5 Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSE-1000-0000K; VBR-3000-0000K; DBT-Auto Mode : (F0)240834 ME1 : 41 Plane : #23</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13888.00</td> <td>44.19</td> <td>-44.11</td> <td>88.30</td> <td>51.22</td> <td>38.82</td> <td>17.91</td> <td>63.76</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	1	13888.00	44.19	-44.11	88.30	51.22	38.82	17.91	63.76	100	0	Peak	VERTICAL
Site	Condition	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB																																																																				
1	13888.00	45.41	-42.89	88.30	52.44	38.82	17.91	63.76	300	0	Peak	HORIZONT																																																																				
Site	Condition	Freq	Level	Unit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB																																																																				
1	13888.00	44.19	-44.11	88.30	51.22	38.82	17.91	63.76	100	0	Peak	VERTICAL																																																																				

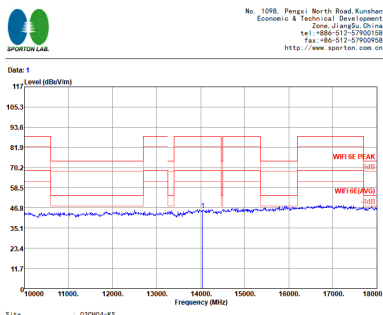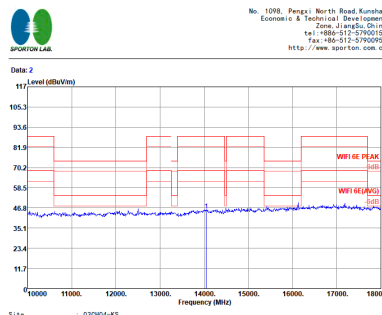

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																													
ANT	802.11ax HE80 Full CH215 7025MHz																																																													
1+2	Horizontal	Vertical																																																												
Peak	 <p>Site : 032004-MS          Condition : WIFI 6E PEAK @ 3117 0277860 HORIZONTAL          Project : RSM 1000 000MHz VSW:3000 000MHz SMT:Auto          Mode : 43          IMN : #23          Plane : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadName</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 14048.00</td> <td>45.49</td> <td>-42.81</td> <td>88.30</td> <td>52.58</td> <td>38.88</td> <td>18.03</td> <td>64.00</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadName	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 14048.00	45.49	-42.81	88.30	52.58	38.88	18.03	64.00	300	0 Peak HORIZONTAL	 <p>Site : 032004-MS          Condition : WIFI 6E PEAK @ 3117 0277860 VERTICAL          Project : RSM 1000 000MHz VSW:3000 000MHz SMT:Auto          Mode : 43          IMN : #23          Plane : X</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadName</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 14048.00</td> <td>45.26</td> <td>-43.04</td> <td>88.30</td> <td>52.35</td> <td>38.88</td> <td>18.03</td> <td>64.00</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadName	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 14048.00	45.26	-43.04	88.30	52.35	38.88	18.03	64.00	100	0 Peak VERTICAL
Freq	Level	Limit	ReadName	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 14048.00	45.49	-42.81	88.30	52.58	38.88	18.03	64.00	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadName	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 14048.00	45.26	-43.04	88.30	52.35	38.88	18.03	64.00	100	0 Peak VERTICAL																																																					






RSE Co-location

WIFI 802.11ax HE40 Partial 242 + LTE\_B30\_BW\_10M (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m	
ANT	802.11ax HE40 Partial 242/62 CH227 7085MHz	
1+2	Horizontal	Fundamental
<b>Peak</b>		
<b>Avg.</b>		Left blank

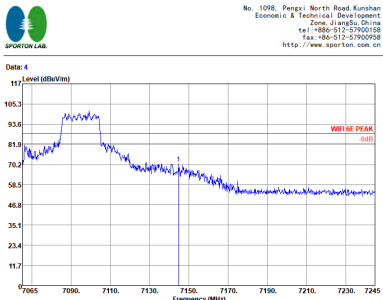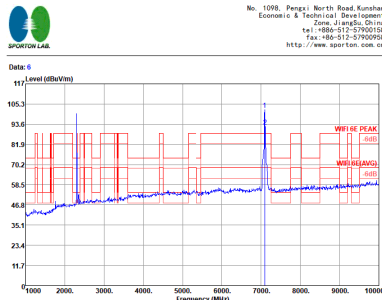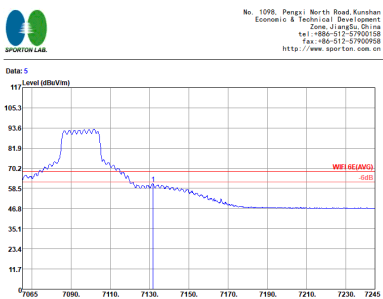

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																								
ANT	802.11ax HE40 Partial 242/62 CH227 7085MHz																																																																																								
1+2	Vertical	Fundamental																																																																																							
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto (FR) 240834 Mode : 49 MEI : #23 Plane : X Single-directivity : X powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7144.74</td> <td>70.77</td> <td>-17.53</td> <td>88.30</td> <td>56.37</td> <td>35.60</td> <td>11.60</td> <td>32.80</td> <td>290</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg	1	7144.74	70.77	-17.53	88.30	56.37	35.60	11.60	32.80	290	261	Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E PEAK @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 3000 000KHz SRT:Auto (FR) 240834 Mode : 49 MEI : #23 Plane : X Single-directivity : X powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>101.90</td> <td>13.60</td> <td>88.30</td> <td>87.51</td> <td>35.60</td> <td>11.56</td> <td>32.77</td> <td>290</td> <td>261</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7102.00</td> <td>92.19</td> <td>3.89</td> <td>88.30</td> <td>77.79</td> <td>35.60</td> <td>11.57</td> <td>32.77</td> <td>290</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg	1	7093.00	101.90	13.60	88.30	87.51	35.60	11.56	32.77	290	261	Peak	VERTICAL	2	7102.00	92.19	3.89	88.30	77.79	35.60	11.57	32.77	290	261	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg																																																																																		
1	7144.74	70.77	-17.53	88.30	56.37	35.60	11.60	32.80	290	261	Peak	VERTICAL																																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg																																																																																		
1	7093.00	101.90	13.60	88.30	87.51	35.60	11.56	32.77	290	261	Peak	VERTICAL																																																																													
2	7102.00	92.19	3.89	88.30	77.79	35.60	11.57	32.77	290	261	Average	VERTICAL																																																																													
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : WIFI @E (AVG) @m 3117 5800240138 VERTICAL Project : RSM 1000 000KHz VBR 11 000KHz SRT:Auto (FR) 240834 Mode : 49 MEI : #23 Plane : X Single-directivity : X powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7131.78</td> <td>61.19</td> <td>-7.11</td> <td>68.30</td> <td>46.78</td> <td>35.60</td> <td>11.60</td> <td>32.79</td> <td>290</td> <td>261</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg	1	7131.78	61.19	-7.11	68.30	46.78	35.60	11.60	32.79	290	261	Average	VERTICAL	Left blank																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	deg																																																																																		
1	7131.78	61.19	-7.11	68.30	46.78	35.60	11.60	32.79	290	261	Average	VERTICAL																																																																													



U-NII 8 - 6875-7125MHz

WIFI 802.11ax HE40 Partial 242 + LTE\_B30\_BW\_10M (Harmonic @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																													
ANT	802.11ax HE40 Partial 242/62 CH227 7085MHz																																																													
1+2	Horizontal	Vertical																																																												
Peak	<p>Site : 03DH6-KS          Condition : WIFI 6E PEAK 3m 3117 2800300138 HORIZONTAL          Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto          Mode : FR2 240834          Band : 40          SFE : 873          Plane : S          PowerSetting : SingleDirectivity          PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14168.00</td> <td>46.18</td> <td>-42.12</td> <td>88.30</td> <td>52.14</td> <td>39.00</td> <td>16.64</td> <td>61.60</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB	1	14168.00	46.18	-42.12	88.30	52.14	39.00	16.64	61.60	300	0 Peak	HORIZONTAL	<p>Site : 03DH6-KS          Condition : WIFI 6E PEAK 3m 3117 2800300138 VERTICAL          Project : RRM 1000 000KHz VBR 3000 000KHz SRT Auto          Mode : FR2 240834          Band : 40          SFE : 873          Plane : S          PowerSetting : SingleDirectivity          PowerSetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14168.00</td> <td>46.23</td> <td>-42.07</td> <td>88.30</td> <td>52.19</td> <td>39.00</td> <td>16.64</td> <td>61.60</td> <td>100</td> <td>300 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB	1	14168.00	46.23	-42.07	88.30	52.19	39.00	16.64	61.60	100	300 Peak	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB																																																						
1	14168.00	46.18	-42.12	88.30	52.14	39.00	16.64	61.60	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB																																																						
1	14168.00	46.23	-42.07	88.30	52.19	39.00	16.64	61.60	100	300 Peak	VERTICAL																																																			



Emission below 1GHz

WIFI 802.11ax HE40 Partial 242 (LF @ 3m)


WIFI	802.11ax HE40 Partial 242 LF																																																																																																																																																											
ANT	-																																																																																																																																																											
1+2	Horizontal	Vertical																																																																																																																																																										
Peak	<p>Site : 030906-KS            Condition : WIFI 802.11ax HE40 Partial 242 LF HORIZONTAL            Project : 240824            mode : 40            MEI : #23</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBm/m)</th> <th>Over Limit</th> <th>Limit</th> <th>ReedAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>21.16</td><td>-18.84</td><td>40.00</td><td>28.28</td><td>24.80</td><td>0.88</td><td>32.80</td><td>---</td><td>Peak HORIZONTAL</td></tr> <tr><td>2</td><td>100.28</td><td>14.96</td><td>-28.04</td><td>40.00</td><td>28.91</td><td>17.00</td><td>1.90</td><td>32.90</td><td>---</td><td>Peak HORIZONTAL</td></tr> <tr><td>3</td><td>263.77</td><td>16.89</td><td>-29.11</td><td>46.00</td><td>28.60</td><td>18.09</td><td>2.61</td><td>33.01</td><td>---</td><td>Peak HORIZONTAL</td></tr> <tr><td>4</td><td>508.21</td><td>23.65</td><td>-22.35</td><td>46.00</td><td>29.42</td><td>24.00</td><td>3.60</td><td>33.37</td><td>---</td><td>Peak HORIZONTAL</td></tr> <tr><td>5</td><td>750.71</td><td>27.73</td><td>-18.27</td><td>46.00</td><td>28.50</td><td>28.00</td><td>4.38</td><td>33.15</td><td>---</td><td>Peak HORIZONTAL</td></tr> <tr><td>6</td><td>987.07</td><td>28.19</td><td>-17.81</td><td>46.00</td><td>28.50</td><td>28.15</td><td>4.48</td><td>32.99</td><td>---</td><td>Peak HORIZONTAL</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBm/m)	Over Limit	Limit	ReedAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	30.00	21.16	-18.84	40.00	28.28	24.80	0.88	32.80	---	Peak HORIZONTAL	2	100.28	14.96	-28.04	40.00	28.91	17.00	1.90	32.90	---	Peak HORIZONTAL	3	263.77	16.89	-29.11	46.00	28.60	18.09	2.61	33.01	---	Peak HORIZONTAL	4	508.21	23.65	-22.35	46.00	29.42	24.00	3.60	33.37	---	Peak HORIZONTAL	5	750.71	27.73	-18.27	46.00	28.50	28.00	4.38	33.15	---	Peak HORIZONTAL	6	987.07	28.19	-17.81	46.00	28.50	28.15	4.48	32.99	---	Peak HORIZONTAL	<p>Site : 030906-KS            Condition : WIFI 802.11ax HE40 Partial 242 LF VERTICAL            Project : 240824            mode : 40            MEI : #23</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBm/m)</th> <th>Over Limit</th> <th>Limit</th> <th>ReedAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>21.16</td><td>-18.84</td><td>40.00</td><td>28.28</td><td>24.80</td><td>0.88</td><td>32.80</td><td>---</td><td>Peak VERTICAL</td></tr> <tr><td>2</td><td>100.28</td><td>14.96</td><td>-28.04</td><td>40.00</td><td>28.91</td><td>17.00</td><td>1.90</td><td>32.90</td><td>---</td><td>Peak VERTICAL</td></tr> <tr><td>3</td><td>260.86</td><td>17.23</td><td>-28.09</td><td>46.00</td><td>29.07</td><td>18.00</td><td>2.60</td><td>33.01</td><td>---</td><td>Peak VERTICAL</td></tr> <tr><td>4</td><td>508.21</td><td>23.65</td><td>-22.35</td><td>46.00</td><td>29.42</td><td>24.00</td><td>3.60</td><td>33.37</td><td>---</td><td>Peak VERTICAL</td></tr> <tr><td>5</td><td>564.47</td><td>24.34</td><td>-21.66</td><td>46.00</td><td>28.60</td><td>25.27</td><td>3.79</td><td>33.32</td><td>---</td><td>Peak VERTICAL</td></tr> <tr><td>6</td><td>756.53</td><td>28.97</td><td>-17.03</td><td>46.00</td><td>29.40</td><td>28.00</td><td>4.39</td><td>33.12</td><td>---</td><td>Peak VERTICAL</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBm/m)	Over Limit	Limit	ReedAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1	30.00	21.16	-18.84	40.00	28.28	24.80	0.88	32.80	---	Peak VERTICAL	2	100.28	14.96	-28.04	40.00	28.91	17.00	1.90	32.90	---	Peak VERTICAL	3	260.86	17.23	-28.09	46.00	29.07	18.00	2.60	33.01	---	Peak VERTICAL	4	508.21	23.65	-22.35	46.00	29.42	24.00	3.60	33.37	---	Peak VERTICAL	5	564.47	24.34	-21.66	46.00	28.60	25.27	3.79	33.32	---	Peak VERTICAL	6	756.53	28.97	-17.03	46.00	29.40	28.00	4.39	33.12	---	Peak VERTICAL
Peak	Freq (MHz)	Level (dBm/m)	Over Limit	Limit	ReedAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																		
1	30.00	21.16	-18.84	40.00	28.28	24.80	0.88	32.80	---	Peak HORIZONTAL																																																																																																																																																		
2	100.28	14.96	-28.04	40.00	28.91	17.00	1.90	32.90	---	Peak HORIZONTAL																																																																																																																																																		
3	263.77	16.89	-29.11	46.00	28.60	18.09	2.61	33.01	---	Peak HORIZONTAL																																																																																																																																																		
4	508.21	23.65	-22.35	46.00	29.42	24.00	3.60	33.37	---	Peak HORIZONTAL																																																																																																																																																		
5	750.71	27.73	-18.27	46.00	28.50	28.00	4.38	33.15	---	Peak HORIZONTAL																																																																																																																																																		
6	987.07	28.19	-17.81	46.00	28.50	28.15	4.48	32.99	---	Peak HORIZONTAL																																																																																																																																																		
Peak	Freq (MHz)	Level (dBm/m)	Over Limit	Limit	ReedAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																		
1	30.00	21.16	-18.84	40.00	28.28	24.80	0.88	32.80	---	Peak VERTICAL																																																																																																																																																		
2	100.28	14.96	-28.04	40.00	28.91	17.00	1.90	32.90	---	Peak VERTICAL																																																																																																																																																		
3	260.86	17.23	-28.09	46.00	29.07	18.00	2.60	33.01	---	Peak VERTICAL																																																																																																																																																		
4	508.21	23.65	-22.35	46.00	29.42	24.00	3.60	33.37	---	Peak VERTICAL																																																																																																																																																		
5	564.47	24.34	-21.66	46.00	28.60	25.27	3.79	33.32	---	Peak VERTICAL																																																																																																																																																		
6	756.53	28.97	-17.03	46.00	29.40	28.00	4.39	33.12	---	Peak VERTICAL																																																																																																																																																		



### Appendix E. Duty Cycle Plots

Mode	Antenna	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11ax HE20 MIMO	1	95.24	1.000	1.000	1kHz
	2	95.24	1.000	1.000	1kHz
802.11ax HE40 MIMO	1	92.98	0.530	1.887	2kHz
	2	91.38	0.530	1.887	2kHz
802.11ax HE80 MIMO	1	87.88	0.290	3.448	3.6kHz
	2	87.50	0.280	3.571	3.6kHz


802.11ax HE20 – Antenna 1

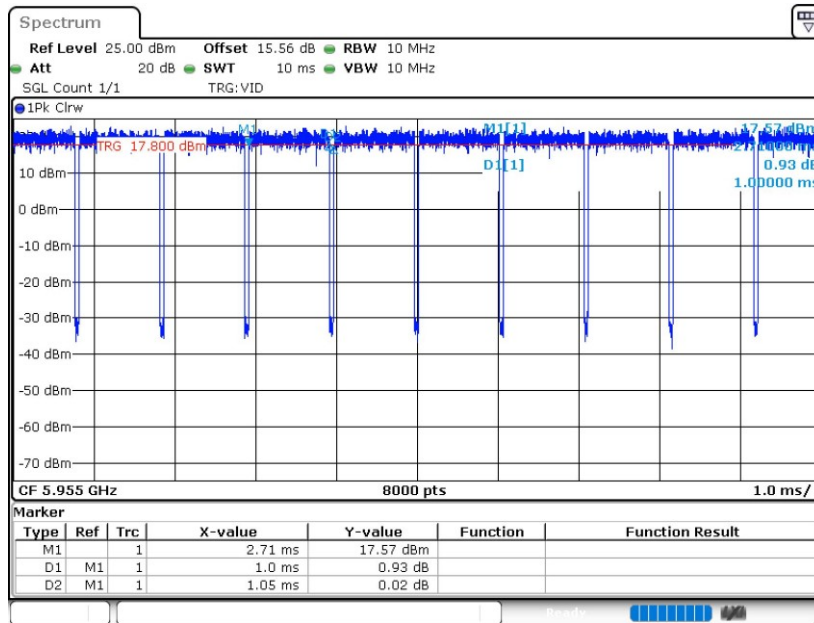






802.11ax HE20 – Antenna 2

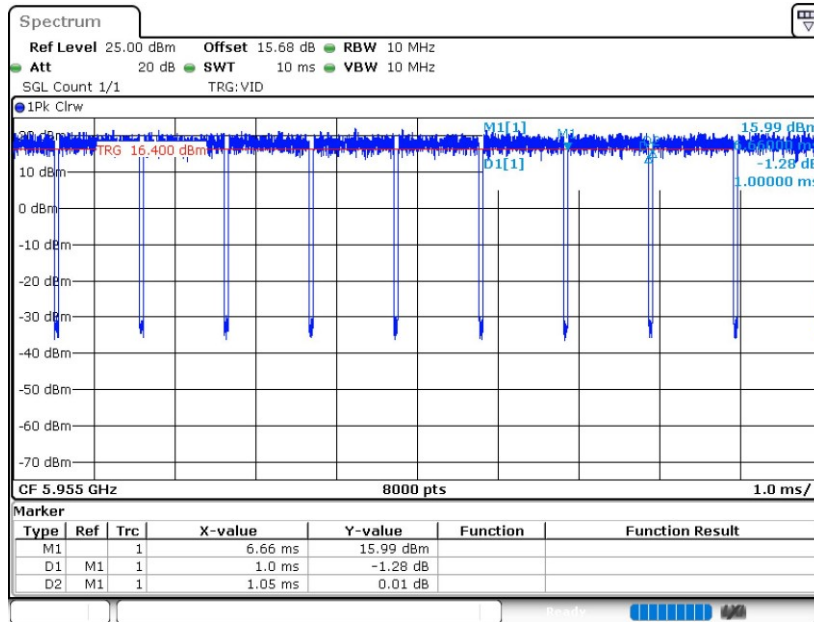


802.11ax HE40 – Antenna 1

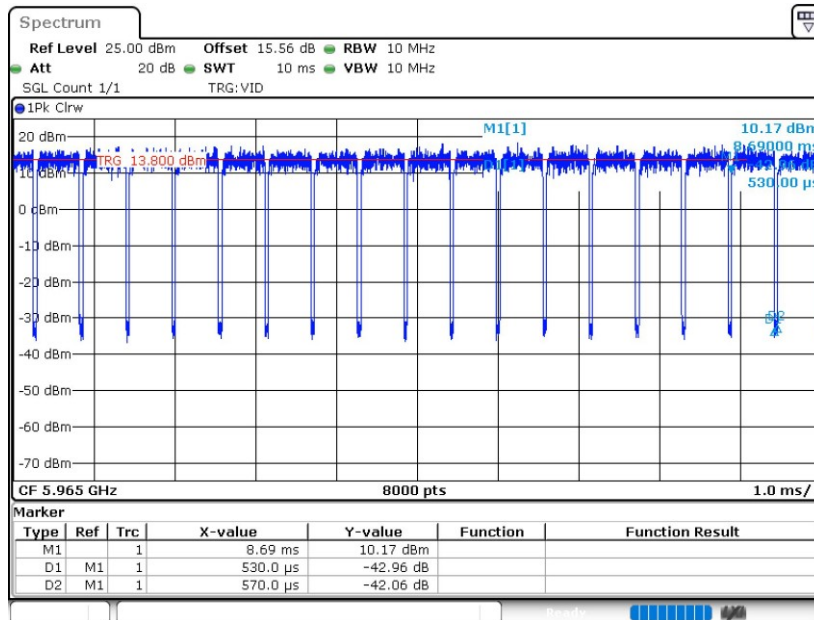




802.11ax HE40 – Antenna 2

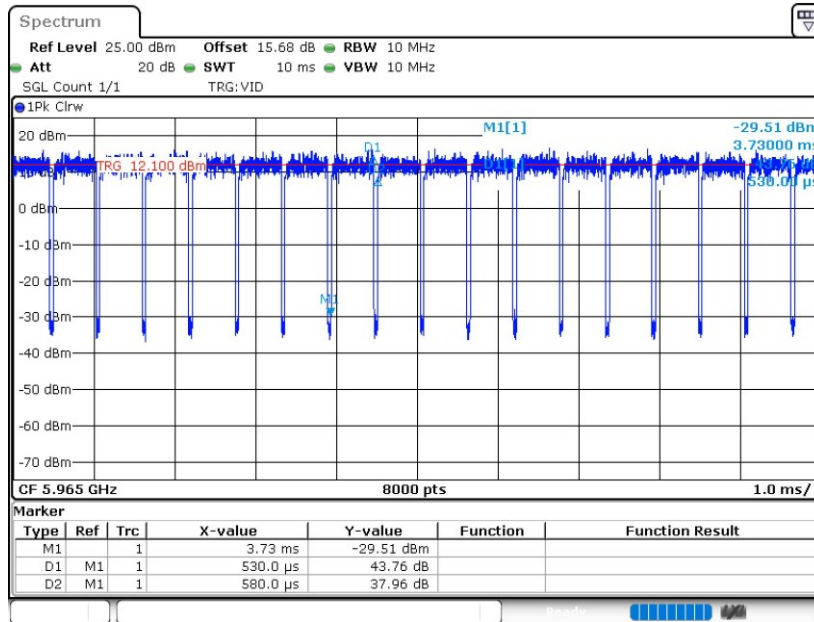

802.11ax HE80 – Antenna 1

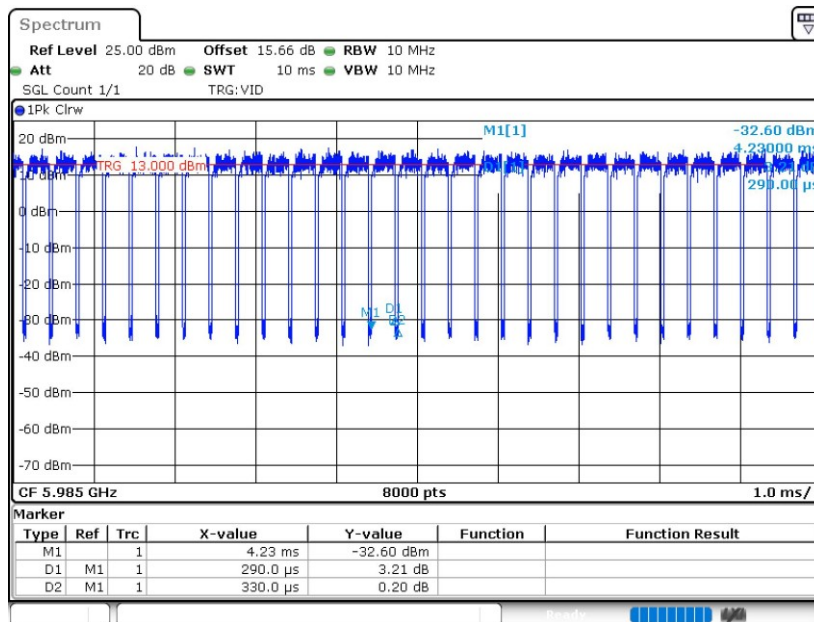



802.11ax HE80 – Antenna 2

