

|       |     |  |               |      |         |
|-------|-----|--|---------------|------|---------|
| 10729 | AAC | IEEE 802.11ax (80MHz, MCS10, 90pc dc)          | WLAN          | 8.64 | ± 9.6 % |
| 10730 | AAC | IEEE 802.11ax (80MHz, MCS11, 90pc dc)          | WLAN          | 8.67 | ± 9.6 % |
| 10731 | AAC | IEEE 802.11ax (80MHz, MCS0, 99pc dc)           | WLAN          | 8.42 | ± 9.6 % |
| 10732 | AAC | IEEE 802.11ax (80MHz, MCS1, 99pc dc)           | WLAN          | 8.46 | ± 9.6 % |
| 10733 | AAC | IEEE 802.11ax (80MHz, MCS2, 99pc dc)           | WLAN          | 8.40 | ± 9.6 % |
| 10734 | AAC | IEEE 802.11ax (80MHz, MCS3, 99pc dc)           | WLAN          | 8.25 | ± 9.6 % |
| 10735 | AAC | IEEE 802.11ax (80MHz, MCS4, 99pc dc)           | WLAN          | 8.33 | ± 9.6 % |
| 10736 | AAC | IEEE 802.11ax (80MHz, MCS5, 99pc dc)           | WLAN          | 8.27 | ± 9.6 % |
| 10737 | AAC | IEEE 802.11ax (80MHz, MCS6, 99pc dc)           | WLAN          | 8.36 | ± 9.6 % |
| 10738 | AAC | IEEE 802.11ax (80MHz, MCS7, 99pc dc)           | WLAN          | 8.42 | ± 9.6 % |
| 10739 | AAC | IEEE 802.11ax (80MHz, MCS8, 99pc dc)           | WLAN          | 8.29 | ± 9.6 % |
| 10740 | AAC | IEEE 802.11ax (80MHz, MCS9, 99pc dc)           | WLAN          | 8.48 | ± 9.6 % |
| 10741 | AAC | IEEE 802.11ax (80MHz, MCS10, 99pc dc)          | WLAN          | 8.40 | ± 9.6 % |
| 10742 | AAC | IEEE 802.11ax (80MHz, MCS11, 99pc dc)          | WLAN          | 8.43 | ± 9.6 % |
| 10743 | AAC | IEEE 802.11ax (160MHz, MCS0, 90pc dc)          | WLAN          | 8.94 | ± 9.6 % |
| 10744 | AAC | IEEE 802.11ax (160MHz, MCS1, 90pc dc)          | WLAN          | 9.16 | ± 9.6 % |
| 10745 | AAC | IEEE 802.11ax (160MHz, MCS2, 90pc dc)          | WLAN          | 8.93 | ± 9.6 % |
| 10746 | AAC | IEEE 802.11ax (160MHz, MCS3, 90pc dc)          | WLAN          | 9.11 | ± 9.6 % |
| 10747 | AAC | IEEE 802.11ax (160MHz, MCS4, 90pc dc)          | WLAN          | 9.04 | ± 9.6 % |
| 10748 | AAC | IEEE 802.11ax (160MHz, MCS5, 90pc dc)          | WLAN          | 8.93 | ± 9.6 % |
| 10749 | AAC | IEEE 802.11ax (160MHz, MCS6, 90pc dc)          | WLAN          | 8.90 | ± 9.6 % |
| 10750 | AAC | IEEE 802.11ax (160MHz, MCS7, 90pc dc)          | WLAN          | 8.79 | ± 9.6 % |
| 10751 | AAC | IEEE 802.11ax (160MHz, MCS8, 90pc dc)          | WLAN          | 8.82 | ± 9.6 % |
| 10752 | AAC | IEEE 802.11ax (160MHz, MCS9, 90pc dc)          | WLAN          | 8.81 | ± 9.6 % |
| 10753 | AAC | IEEE 802.11ax (160MHz, MCS10, 90pc dc)         | WLAN          | 9.00 | ± 9.6 % |
| 10754 | AAC | IEEE 802.11ax (160MHz, MCS11, 90pc dc)         | WLAN          | 8.94 | ± 9.6 % |
| 10755 | AAC | IEEE 802.11ax (160MHz, MCS0, 99pc dc)          | WLAN          | 8.64 | ± 9.6 % |
| 10756 | AAC | IEEE 802.11ax (160MHz, MCS1, 99pc dc)          | WLAN          | 8.77 | ± 9.6 % |
| 10757 | AAC | IEEE 802.11ax (160MHz, MCS2, 99pc dc)          | WLAN          | 8.77 | ± 9.6 % |
| 10758 | AAC | IEEE 802.11ax (160MHz, MCS3, 99pc dc)          | WLAN          | 8.69 | ± 9.6 % |
| 10759 | AAC | IEEE 802.11ax (160MHz, MCS4, 99pc dc)          | WLAN          | 8.58 | ± 9.6 % |
| 10760 | AAC | IEEE 802.11ax (160MHz, MCS5, 99pc dc)          | WLAN          | 8.49 | ± 9.6 % |
| 10761 | AAC | IEEE 802.11ax (160MHz, MCS6, 99pc dc)          | WLAN          | 8.58 | ± 9.6 % |
| 10762 | AAC | IEEE 802.11ax (160MHz, MCS7, 99pc dc)          | WLAN          | 8.49 | ± 9.6 % |
| 10763 | AAC | IEEE 802.11ax (160MHz, MCS8, 99pc dc)          | WLAN          | 8.53 | ± 9.6 % |
| 10764 | AAC | IEEE 802.11ax (160MHz, MCS9, 99pc dc)          | WLAN          | 8.54 | ± 9.6 % |
| 10765 | AAC | IEEE 802.11ax (160MHz, MCS10, 99pc dc)         | WLAN          | 8.54 | ± 9.6 % |
| 10766 | AAC | IEEE 802.11ax (160MHz, MCS11, 99pc dc)         | WLAN          | 8.51 | ± 9.6 % |
| 10767 | AAE | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)     | 5G NR FR1 TDD | 7.99 | ± 9.6 % |
| 10768 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10769 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10770 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10771 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10772 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.23 | ± 9.6 % |
| 10773 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.03 | ± 9.6 % |
| 10774 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)    | 5G NR FR1 TDD | 8.02 | ± 9.6 % |
| 10775 | AAD | 5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)   | 5G NR FR1 TDD | 8.31 | ± 9.6 % |
| 10776 | AAD | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10777 | AAC | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10778 | AAD | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10779 | AAC | 5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.42 | ± 9.6 % |
| 10780 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.38 | ± 9.6 % |
| 10781 | AAD | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.38 | ± 9.6 % |
| 10782 | AAD | 5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.43 | ± 9.6 % |
| 10783 | AAE | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.31 | ± 9.6 % |
| 10784 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz) | 5G NR FR1 TDD | 8.29 | ± 9.6 % |

|       |     |   |               |      |         |
|-------|-----|---|---------------|------|---------|
| 10785 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10786 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10787 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.44 | ± 9.6 % |
| 10788 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10789 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10790 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)  | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10791 | AAE | 5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)      | 5G NR FR1 TDD | 7.83 | ± 9.6 % |
| 10792 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.92 | ± 9.6 % |
| 10793 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.95 | ± 9.6 % |
| 10794 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10795 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.84 | ± 9.6 % |
| 10796 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.82 | ± 9.6 % |
| 10797 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 8.01 | ± 9.6 % |
| 10798 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.89 | ± 9.6 % |
| 10799 | AAD | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.93 | ± 9.6 % |
| 10801 | AAD | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.89 | ± 9.6 % |
| 10802 | AAD | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 7.87 | ± 9.6 % |
| 10803 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 7.93 | ± 9.6 % |
| 10805 | AAD | 5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10806 | AAD | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10809 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10810 | AAD | 5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10812 | AAD | 5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10817 | AAE | 5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10818 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10819 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.33 | ± 9.6 % |
| 10820 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.30 | ± 9.6 % |
| 10821 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10822 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10823 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10824 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.39 | ± 9.6 % |
| 10825 | AAD | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10827 | AAD | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.42 | ± 9.6 % |
| 10828 | AAD | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)  | 5G NR FR1 TDD | 8.43 | ± 9.6 % |
| 10829 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz) | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10830 | AAD | 5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.63 | ± 9.6 % |
| 10831 | AAD | 5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.73 | ± 9.6 % |
| 10832 | AAD | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.74 | ± 9.6 % |
| 10833 | AAD | 5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10834 | AAD | 5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.75 | ± 9.6 % |
| 10835 | AAD | 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10836 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.66 | ± 9.6 % |
| 10837 | AAD | 5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.68 | ± 9.6 % |
| 10839 | AAD | 5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.70 | ± 9.6 % |
| 10840 | AAD | 5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)     | 5G NR FR1 TDD | 7.67 | ± 9.6 % |
| 10841 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)    | 5G NR FR1 TDD | 7.71 | ± 9.6 % |
| 10843 | AAD | 5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)   | 5G NR FR1 TDD | 8.49 | ± 9.6 % |
| 10844 | AAD | 5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)   | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10846 | AAD | 5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)   | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10854 | AAD | 5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10855 | AAD | 5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10856 | AAD | 5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10857 | AAD | 5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.35 | ± 9.6 % |
| 10858 | AAD | 5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.36 | ± 9.6 % |
| 10859 | AAD | 5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.34 | ± 9.6 % |
| 10860 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)  | 5G NR FR1 TDD | 8.41 | ± 9.6 % |

|       |     |  |               |      |         |
|-------|-----|--|---------------|------|---------|
| 10861 | AAD | 5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)       | 5G NR FR1 TDD | 8.40 | ± 9.6 % |
| 10863 | AAD | 5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)       | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10864 | AAD | 5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)       | 5G NR FR1 TDD | 8.37 | ± 9.6 % |
| 10865 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)      | 5G NR FR1 TDD | 8.41 | ± 9.6 % |
| 10866 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)      | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10868 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.89 | ± 9.6 % |
| 10869 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)     | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10870 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)  | 5G NR FR2 TDD | 5.86 | ± 9.6 % |
| 10871 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)    | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10872 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz) | 5G NR FR2 TDD | 6.52 | ± 9.6 % |
| 10873 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)    | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10874 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz) | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10875 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)        | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10876 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)     | 5G NR FR2 TDD | 8.39 | ± 9.6 % |
| 10877 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)       | 5G NR FR2 TDD | 7.95 | ± 9.6 % |
| 10878 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)    | 5G NR FR2 TDD | 8.41 | ± 9.6 % |
| 10879 | AAD | 5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)       | 5G NR FR2 TDD | 8.12 | ± 9.6 % |
| 10880 | AAD | 5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)    | 5G NR FR2 TDD | 8.38 | ± 9.6 % |
| 10881 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)      | 5G NR FR2 TDD | 5.75 | ± 9.6 % |
| 10882 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)   | 5G NR FR2 TDD | 5.96 | ± 9.6 % |
| 10883 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)     | 5G NR FR2 TDD | 6.57 | ± 9.6 % |
| 10884 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)  | 5G NR FR2 TDD | 6.53 | ± 9.6 % |
| 10885 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)     | 5G NR FR2 TDD | 6.61 | ± 9.6 % |
| 10886 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)  | 5G NR FR2 TDD | 6.65 | ± 9.6 % |
| 10887 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)         | 5G NR FR2 TDD | 7.78 | ± 9.6 % |
| 10888 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)      | 5G NR FR2 TDD | 8.35 | ± 9.6 % |
| 10889 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)        | 5G NR FR2 TDD | 8.02 | ± 9.6 % |
| 10890 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)     | 5G NR FR2 TDD | 8.40 | ± 9.6 % |
| 10891 | AAD | 5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)        | 5G NR FR2 TDD | 8.13 | ± 9.6 % |
| 10892 | AAD | 5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)     | 5G NR FR2 TDD | 8.41 | ± 9.6 % |
| 10897 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)        | 5G NR FR1 TDD | 5.66 | ± 9.6 % |
| 10898 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.67 | ± 9.6 % |
| 10899 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.67 | ± 9.6 % |
| 10900 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10901 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10902 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10903 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10904 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10905 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10906 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)       | 5G NR FR1 TDD | 5.68 | ± 9.6 % |
| 10907 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)      | 5G NR FR1 TDD | 5.78 | ± 9.6 % |
| 10908 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.93 | ± 9.6 % |
| 10909 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.96 | ± 9.6 % |
| 10910 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.83 | ± 9.6 % |
| 10911 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.93 | ± 9.6 % |
| 10912 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10913 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10914 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.85 | ± 9.6 % |
| 10915 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.83 | ± 9.6 % |
| 10916 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.87 | ± 9.6 % |
| 10917 | AAB | 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 5.94 | ± 9.6 % |
| 10918 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 5.86 | ± 9.6 % |
| 10919 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 5.86 | ± 9.6 % |
| 10920 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 5.87 | ± 9.6 % |
| 10921 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 5.84 | ± 9.6 % |
| 10922 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)    | 5G NR FR1 TDD | 5.82 | ± 9.6 % |

|       |     |   |               |       |         |
|-------|-----|---|---------------|-------|---------|
| 10923 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.84  | ± 9.6 % |
| 10924 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.84  | ± 9.6 % |
| 10925 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.95  | ± 9.6 % |
| 10926 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.84  | ± 9.6 % |
| 10927 | AAB | 5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)   | 5G NR FR1 TDD | 5.94  | ± 9.6 % |
| 10928 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)       | 5G NR FR1 FDD | 5.52  | ± 9.6 % |
| 10929 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.52  | ± 9.6 % |
| 10930 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.52  | ± 9.6 % |
| 10931 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.51  | ± 9.6 % |
| 10932 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.51  | ± 9.6 % |
| 10933 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.51  | ± 9.6 % |
| 10934 | AAC | 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.51  | ± 9.6 % |
| 10935 | AAD | 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)      | 5G NR FR1 FDD | 5.51  | ± 9.6 % |
| 10936 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)     | 5G NR FR1 FDD | 5.90  | ± 9.6 % |
| 10937 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.77  | ± 9.6 % |
| 10938 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.90  | ± 9.6 % |
| 10939 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.82  | ± 9.6 % |
| 10940 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.89  | ± 9.6 % |
| 10941 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.83  | ± 9.6 % |
| 10942 | AAC | 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.85  | ± 9.6 % |
| 10943 | AAD | 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.95  | ± 9.6 % |
| 10944 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)    | 5G NR FR1 FDD | 5.81  | ± 9.6 % |
| 10945 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.85  | ± 9.6 % |
| 10946 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.83  | ± 9.6 % |
| 10947 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.87  | ± 9.6 % |
| 10948 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.94  | ± 9.6 % |
| 10949 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.87  | ± 9.6 % |
| 10950 | AAC | 5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.94  | ± 9.6 % |
| 10951 | AAD | 5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)   | 5G NR FR1 FDD | 5.92  | ± 9.6 % |
| 10952 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)   | 5G NR FR1 FDD | 8.25  | ± 9.6 % |
| 10953 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 FDD | 8.15  | ± 9.6 % |
| 10954 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 FDD | 8.23  | ± 9.6 % |
| 10955 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 FDD | 8.42  | ± 9.6 % |
| 10956 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)   | 5G NR FR1 FDD | 8.14  | ± 9.6 % |
| 10957 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 FDD | 8.31  | ± 9.6 % |
| 10958 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 FDD | 8.61  | ± 9.6 % |
| 10959 | AAA | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 FDD | 8.33  | ± 9.6 % |
| 10960 | AAC | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)   | 5G NR FR1 TDD | 9.32  | ± 9.6 % |
| 10961 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 TDD | 9.36  | ± 9.6 % |
| 10962 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 TDD | 9.40  | ± 9.6 % |
| 10963 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)  | 5G NR FR1 TDD | 9.55  | ± 9.6 % |
| 10964 | AAC | 5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)   | 5G NR FR1 TDD | 9.29  | ± 9.6 % |
| 10965 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 TDD | 9.37  | ± 9.6 % |
| 10966 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 TDD | 9.55  | ± 9.6 % |
| 10967 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)  | 5G NR FR1 TDD | 9.42  | ± 9.6 % |
| 10968 | AAB | 5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz) | 5G NR FR1 TDD | 9.49  | ± 9.6 % |
| 10972 | AAB | 5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)         | 5G NR FR1 TDD | 11.59 | ± 9.6 % |
| 10973 | AAB | 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)     | 5G NR FR1 TDD | 9.06  | ± 9.6 % |
| 10974 | AAB | 5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)  | 5G NR FR1 TDD | 10.28 | ± 9.6 % |
| 10978 | AAA | ULLA BDR  | ULLA          | 2.23  | ± 9.6 % |
| 10979 | AAA | ULLA HDR4   | ULLA          | 7.02  | ± 9.6 % |
| 10980 | AAA | ULLA HDR8   | ULLA          | 8.82  | ± 9.6 % |
| 10981 | AAA | ULLA HDRp4  | ULLA          | 1.50  | ± 9.6 % |
| 10982 | AAA | ULLA HDRp8  | ULLA          | 1.44  | ± 9.6 % |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EF/4050  
Sporton

Norm

| Probe Calibration Factors          |            |          |      |      |      |      |      |                |          | axial (ACAP)                       |                          |      |      |                     |         |        |            |      |      | previous                     |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
|------------------------------------|------------|----------|------|------|------|------|------|----------------|----------|------------------------------------|--------------------------|------|------|---------------------|---------|--------|------------|------|------|------------------------------|--------|--------|----------|---------------------------------|------|-------|-------|-------|-------|-------|-----|-------|-----|----|
| Probe Type: EF3D3                  |            |          |      |      |      |      |      |                |          | Sensor Offset X,Y,Z: 1.5, -50.0, - |                          |      |      |                     |         |        |            |      |      | Axial Iso XY: 0.21 ± 0.19 dB |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Serial No: SN:4050                 |            |          |      |      |      |      |      |                |          | Probe Angle: -                     |                          |      |      |                     |         |        |            |      |      | Axial Iso Z: 0.61 ± 0.07 dB  |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Calibration System: DAS/EASY       |            |          |      |      |      |      |      |                |          | check: 90 -90.0                    |                          |      |      |                     |         |        |            |      |      | Sph Iso: ± 0.4 dB            |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Fabrication Date: 09-Jan-18        |            |          |      |      |      |      |      |                |          | MinX (in WG): 337.5                |                          |      |      |                     |         |        |            |      |      | 0.40                         |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Calibration Date: 25-Jan-21        |            |          |      |      |      |      |      |                |          | Electronics: 292.5                 |                          |      |      |                     |         |        |            |      |      |                              |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Recalibration Date: 31-Jan-22      |            |          |      |      |      |      |      |                |          | Op angle: #2                       |                          |      |      |                     |         |        |            |      |      |                              |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Repair Date:                       |            |          |      |      |      |      |      |                |          | UID Ref: SMC                       |                          |      |      |                     |         |        |            |      |      | Nr. UIDs: 722                |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Sensitivity in air: 30 MHz - 6 GHz |            |          |      |      |      |      |      |                |          | 25-Jan-21                          |                          |      |      |                     |         |        |            |      |      | 31-Jan-22                    |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Norm X: 0.61                       |            |          |      |      |      |      |      |                |          | Norm Y: 0.70                       |                          |      |      |                     |         |        |            |      |      | Norm Z: 1.0                  |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Free Cor: -0.84                    |            |          |      |      |      |      |      |                |          | Norm X: 0.70                       |                          |      |      |                     |         |        |            |      |      | Norm Y: 1.0                  |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Norm: 1.00                         |            |          |      |      |      |      |      |                |          | DCP X: 101.7                       |                          |      |      |                     |         |        |            |      |      | DCP Y: 99.9                  |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| DCP (TEM): 99.9                    |            |          |      |      |      |      |      |                |          | DCP X: 100.1                       |                          |      |      |                     |         |        |            |      |      | DCP Y: 99.9                  |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| ACAP: 0.61                         |            |          |      |      |      |      |      |                |          | DCP Z: 94.4                        |                          |      |      |                     |         |        |            |      |      | DCP X: 0                     |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Average: 0.58                      |            |          |      |      |      |      |      |                |          | Angle X: -98.°                     |                          |      |      |                     |         |        |            |      |      | Angle Y: 352.°               |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| diff (%): 9%                       |            |          |      |      |      |      |      |                |          | Sph Iso: ± 0.4 dB                  |                          |      |      |                     |         |        |            |      |      | ± 0.4 dB                     |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Uplimit[mV]: 144.9                 |            |          |      |      |      |      |      |                |          | 157.7                              |                          |      |      |                     |         |        |            |      |      | 119.0                        |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
|                                    |            |          |      |      |      |      |      |                |          | ± 2.7%                             |                          |      |      |                     |         |        |            |      |      |                              |        |        |          |                                 |      |       |       |       |       |       |     |       |     |    |
| Frequency                          | Probe data | Response |      |      | WMT  |      |      | Isotropy (±dB) |          |                                    | E-field (max) per sensor |      |      | Max/Min Signal [dB] |         |        | Min Signal |      |      | Norm                         |        |        | E-Theory |                                 |      | En ME |       |       | En ME |       |     | En ME |     |    |
|                                    | X          | Y        | Z    | XY   | Z    | cell | XY   | Z              | Ex (V/m) | Sy (V/m)                           | Ez (V/m)                 | X    | Y    | Z                   | XY [µV] | Z [µV] | X          | Y    | Z    | X-calc                       | Y-calc | Z-calc | EF (a2)  | Linearize 3-6 GHz (WU,25,02,18) | X    | Y     | Z     | (V/m) | (V/m) | (V/m) | dev | dev   | dev |    |
| 10                                 | 1.50       | 1.50     | 1.50 | 0.05 | 0.05 | 1.04 | 0.00 | 0.00           | 1.3      | 1.2                                | 0.8                      | 0.0  | 0.0  | 0.0                 | 0.0     | 1.0    | 1.0        | 0.0  | 0.0  | 0.0                          | 0.0    | 0.0    | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 20                                 | 1.50       | 1.50     | 1.50 | 0.05 | 0.05 | 1.04 | 0.00 | 0.00           | 1.3      | 1.2                                | 0.7                      | 0.0  | 0.0  | 0.0                 | 0.0     | 1.0    | 1.0        | 0.0  | 0.0  | 0.0                          | 0.0    | 0.0    | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 30                                 | 0.60       | 0.69     | 2.07 | 1.00 | 1.00 | 1.04 | 0.33 | 0.01           | 77.2     | 76.6                               | 77.0                     | 84.4 | 47.0 | 0.0                 | -2.1    | 44.5   | 0.60       | 0.69 | 2.09 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 100                                | 0.62       | 0.71     | 1.69 | 1.01 | 1.01 | 1.04 | 0.26 | 0.01           | 77.6     | 77.7                               | 77.7                     | 75.7 | 44.3 | 0.0                 | -0.6    | 2.0    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 450                                | 0.62       | 0.72     | 1.41 | 1.01 | 1.01 | 1.04 | 0.22 | 0.01           | 77.9     | 77.9                               | 78.0                     | 61.4 | 47.6 | 0.0                 | 3.1     | -2.4   | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 600                                | 0.62       | 0.71     | 1.37 | 1.01 | 1.01 | 1.04 | 0.22 | 0.01           | 77.4     | 77.4                               | 77.5                     | 63.3 | 45.6 | 0.0                 | -2.4    | -3.9   | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 750                                | 0.61       | 0.71     | 1.34 | 1.00 | 1.00 | 1.04 | 0.21 | 0.01           | 77.4     | 77.4                               | 77.5                     | 63.3 | 45.6 | 0.0                 | -2.4    | -3.9   | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 1800                               | 0.58       | 0.67     | 1.21 | 0.97 | 0.97 | 1.04 | 0.20 | 0.00           | 140.3    | 140.0                              | 140.5                    | 63.0 | 50.0 | 0.0                 | -2.6    | -0.0   | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.61     | 0.70                            | 1.34 | 143.3 | 139.5 | 139.8 | -3%   | -2%   | 0%  | 0%    | 0%  | 0% |
| 2000                               | 0.58       | 0.67     | 1.20 | 0.97 | 0.97 | 1.04 | 0.20 | 0.01           | 132.6    | 132.2                              | 132.5                    | 66.1 | 50.7 | 0.0                 | -4.8    | 5.2    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.62     | 0.71                            | 1.27 | 135.2 | 131.6 | 131.7 | -3%   | -3%   | 0%  | 0%    | 0%  | 0% |
| 2200                               | 0.58       | 0.67     | 1.21 | 0.97 | 0.98 | 1.00 | 0.20 | 0.01           | 124.3    | 124.1                              | 125.5                    | 78.7 | 51.1 | 0.0                 | -1.0    | 4.2    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.62     | 0.71                            | 1.27 | 135.2 | 131.6 | 131.7 | -3%   | -3%   | 0%  | 0%    | 0%  | 0% |
| 2500                               | 0.59       | 0.68     | 1.22 | 0.98 | 0.98 | 1.03 | 0.19 | 0.01           | 123.6    | 123.4                              | 124.8                    | 75.9 | 49.9 | 0.0                 | -1.4    | 2.6    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.62     | 0.72                            | 1.26 | 125.5 | 122.5 | 123.0 | -2%   | -1%   | 0%  | 0%    | 0%  | 0% |
| 3000                               | 0.57       | 0.66     | 1.18 | 0.95 | 0.97 | 0.70 | 0.19 | 0.01           | 78.9     | 78.5                               | 77.4                     | 48.2 | 48.0 | 0.0                 | 15.9    | -1.8   | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.63     | 0.72                            | 1.20 | 79.3  | 75.6  | 76.5  | -5%   | -4%   | 0%  | 0%    | 0%  | 0% |
| 3500                               | 0.58       | 0.67     | 1.15 | 0.96 | 0.95 | 1.15 | 0.20 | 0.02           | 253.6    | 253.1                              | 249.2                    | 65.8 | 51.6 | 0.0                 | 15.4    | 5.8    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.63     | 0.73                            | 1.27 | 257.1 | 248.8 | 244.8 | -3%   | -5%   | 0%  | 0%    | 0%  | 0% |
| 3700                               | 0.58       | 0.67     | 1.15 | 0.96 | 0.95 | 1.15 | 0.19 | 0.01           | 245.7    | 245.2                              | 241.7                    | 65.7 | 51.4 | 0.0                 | 14.9    | 7.8    | 0.61       | 0.70 | 2.00 | 0.00                         | 0.00   | 0.00   | 0.63     | 0.73                            | 1.27 | 251.1 | 241.0 | 237.1 | -4%   | -6%   | 0%  | 0%    | 0%  | 0% |
| 5000                               | 0.66       | 0.76     | 1.30 | 1.00 | 1.00 | 1.20 | 0.21 | 0.04           | 53.6     | 53.4                               | 53.5                     | 41.1 | 54.8 | 0.1                 | 3.6     | -1.1   | 0.61       | 0.70 | 2.00 | 0.01                         | 0.01   | 0.02   | 0.66     | 0.76                            | 1.30 | 50.8  | 51.5  | 51.5  | 1%    | 1%    | 0%  | 0%    | 0%  | 0% |
| 5500                               | 0.66       | 0.76     | 1.30 | 1.00 | 1.00 | 1.20 | 0.20 | 0.03           | 51.6     | 51.4                               | 51.6                     | 43.8 | 48.6 | 0.1                 | 8.5     | -1.0   | 0.61       | 0.70 | 2.00 | 0.01                         | 0.01   | 0.01   | 0.66     | 0.76                            | 1.31 | 49.7  | 49.5  | 48.0  | 0%    | -3%   | 0%  | 0%    | 0%  | 0% |
| 5800                               | 0.66       | 0.75     | 1.27 | 1.00 | 0.99 | 1.20 | 0.21 | 0.03           | 51.0     | 50.8                               | 50.3                     | 41.1 | 52.9 | 0.1                 | 4.1     | -3.2   | 0.61       | 0.70 | 2.00 | 0.01                         | 0.01   | 0.00   | 0.67     | 0.77                            | 1.32 | 48.9  | 48.7  | 49.5  | -1%   | 1%    | 0%  | 0%    | 0%  | 0% |



---

**Appendix E. UID specifications for HAC RFE**


The UID\_Summary are shown as follows.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |  |
|-------------------------|--|
| Name:                   | <b>GSM-FDD (TDMA, GMSK)</b>  |
| Group:                  | GSM  |
| UID:                    | 10021-DAC  |
| PAR: <sup>1</sup>       | <b>9.39 dB</b>   |
| MIF: <sup>2</sup>       | <b>3.63 dB</b>   |
| Standard Reference:     | ETSI TS 100 909 V8.9.0 (2005-01)<br>FCC OET KDB 941225, D03 and D04  |
| Category:               | Periodic pulsed modulation   |
| Modulation:             | GMSK   |
| Frequency Band:         | GSM 450 (450.4 - 457.6 MHz)<br>GSM 480 (478.8 - 486.0 MHz)<br>GSM 710 (698.0 - 716.0 MHz)<br>GSM 750 (747.0 - 763.0 MHz)<br>GSM 850 (824.0 - 849.0 MHz)<br>P-GSM 900 (890.0 - 915.0 MHz)<br>E-GSM 900 (880.0 - 915.0 MHz)<br>R-GSM 900 (876.0 - 915.0 MHz)<br>DCS 1800 (1710.0 - 1785.0 MHz)<br>PCS 1900 (1850.0 - 1910.0 MHz)<br>ER-GSM 900 (873.0 - 915.0 MHz)<br>Validation band (0.0 - 6000.0 MHz) |
| Detailed Specification: | Active Slot: TN0<br>Data: PN9 continuous<br>Frame: composed out of 8 Slots<br>Multiframe: 26th (IDLE) Frame set blank<br>Slottype & -timing: Normal burst for GMSK   |
| Bandwidth:              | 0.2 MHz  |
| Integration Time:       | 120.0 ms   |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

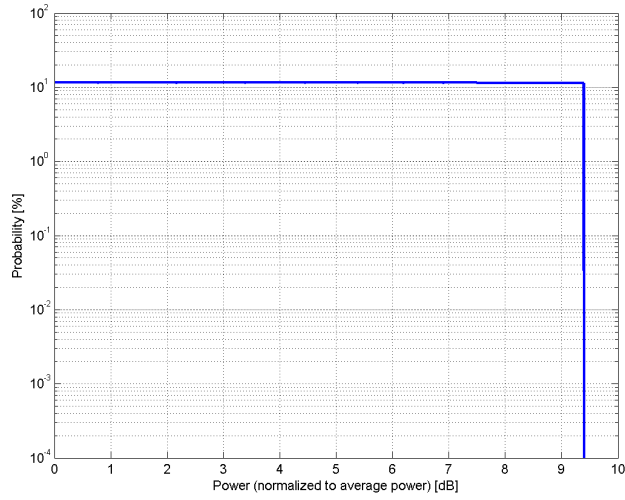

### Complementary Cumulative Distribution Function (CCDF)

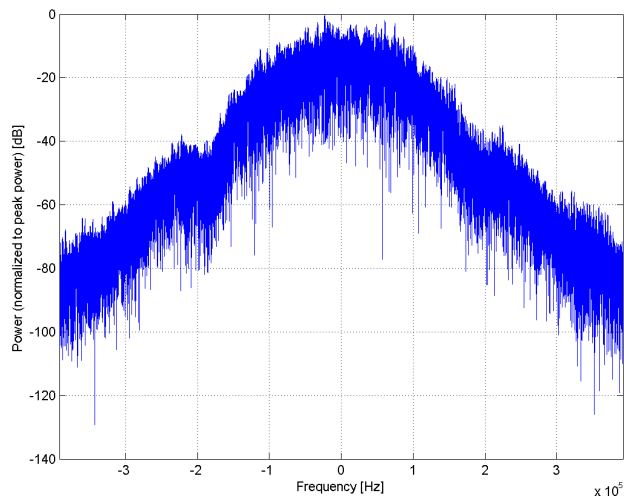

### Frequency Domain

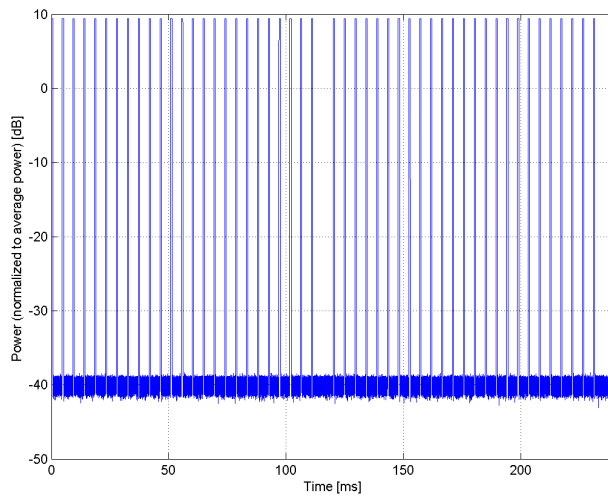

### Time Domain




**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |  |
|-------------------------|--|
| Name:                   | <b>EDGE-FDD (TDMA, 8PSK, TN 0)</b>   |
| Group:                  | GSM  |
| UID:                    | 10025-DAC  |
| PAR: <sup>1</sup>       | <b>12.62 dB</b>  |
| MIF: <sup>2</sup>       | <b>3.75 dB</b>   |
| Standard Reference:     | ETSI TS 100 909 V8.9.0 (2005-01)<br>FCC OET KDB 941225, D03 and D04  |
| Category:               | Periodic pulsed modulation   |
| Modulation:             | 8PSK   |
| Frequency Band:         | GSM 450 (450.4 - 457.6 MHz)<br>GSM 480 (478.8 - 486.0 MHz)<br>GSM 710 (698.0 - 716.0 MHz)<br>GSM 750 (747.0 - 763.0 MHz)<br>GSM 850 (824.0 - 849.0 MHz)<br>P-GSM 900 (890.0 - 915.0 MHz)<br>E-GSM 900 (880.0 - 915.0 MHz)<br>R-GSM 900 (876.0 - 915.0 MHz)<br>DCS 1800 (1710.0 - 1785.0 MHz)<br>PCS 1900 (1850.0 - 1910.0 MHz)<br>ER-GSM 900 (873.0 - 915.0 MHz)<br>Validation band (0.0 - 6000.0 MHz) |
| Detailed Specification: | Active Slot: TN0<br>Data: PN9 continuous<br>Frame: composed out of 8 Slots<br>Multiframe: 13th (PTCCH) and 26th (IDLE) Frame set blank<br>Slottype & -timing: Normal burst for 8PSK  |
| Bandwidth:              | 0.2 MHz  |
| Integration Time:       | 60.0 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

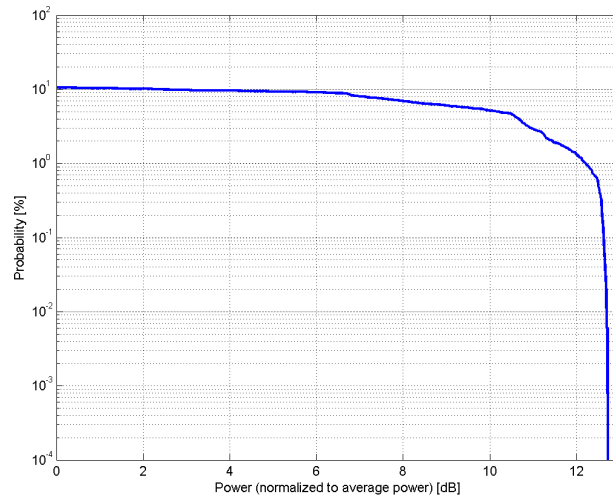

### Complementary Cumulative Distribution Function (CCDF)

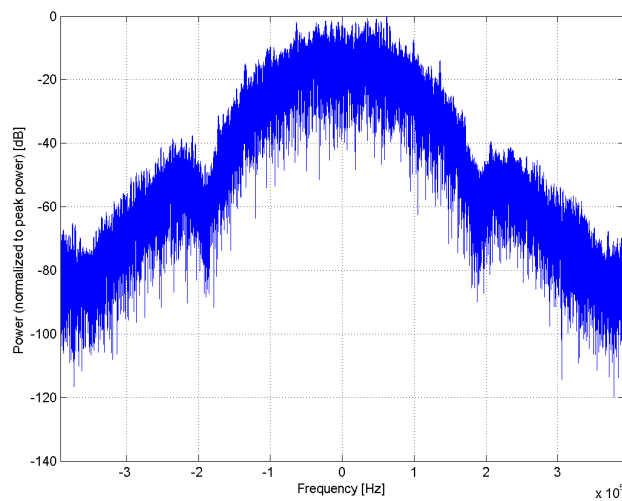

### Frequency Domain

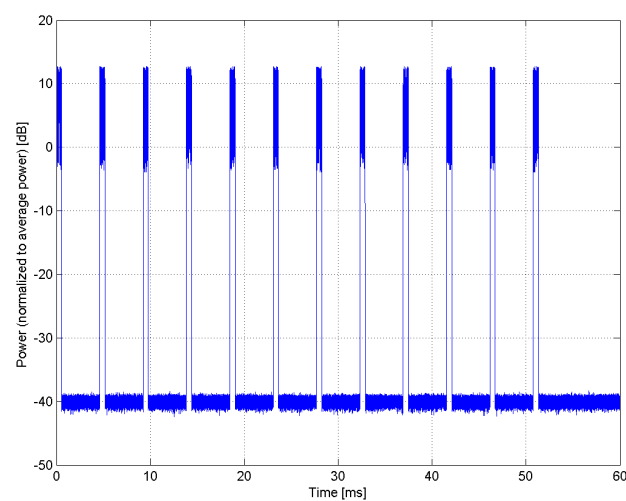


### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |   |
|-------------------------|---|
| Name:                   | <b>UMTS-FDD (WCDMA, AMR)</b>  |
| Group:                  | WCDMA   |
| UID:                    | 10460-AAA   |
| PAR: <sup>1</sup>       | <b>2.39 dB</b>  |
| MIF: <sup>2</sup>       | <b>-25.43 dB</b>  |
| Standard Reference:     | FCC OET KDB 941225 D01 SAR test for 3G devices v03  |
| Category:               | Random amplitude modulation   |
| Modulation:             | QPSK  |
| Frequency Band:         | Band 1, UTRA/FDD (1920.0-1980.0 MHz, 20000)<br>Band 2, UTRA/FDD (1850.0-1910.0 MHz, 20001)<br>Band 3, UTRA/FDD (1710.0-1785.0 MHz, 20002)<br>Band 4, UTRA/FDD (1710.0-1755.0 MHz, 20003)<br>Band 5, UTRA/FDD (824.0-849.0 MHz, 20004)<br>Band 6, UTRA/FDD (830.0-840.0 MHz, 20005)<br>Band 7, UTRA/FDD (2500.0-2570.0 MHz, 20006)<br>Band 8, UTRA/FDD (880.0-915.0 MHz, 20007)<br>Band 9, UTRA/FDD (1749.9-1784.9 MHz, 20008)<br>Band 10, UTRA/FDD (1710.0-1770.0 MHz, 20009)<br>Band 11, UTRA/FDD (1427.9-1452.9 MHz, 20010)<br>Band 12, UTRA/FDD (698.0-716.0 MHz, 20011)<br>Band 13, UTRA/FDD (777.0-787.0 MHz, 20012)<br>Band 14, UTRA/FDD (788.0-798.0 MHz, 20013)<br>Band 19, UTRA/FDD (830.0-845.0 MHz, 20130)<br>Band 20, UTRA/FDD (832.0-862.0 MHz, 20131)<br>Band 21, UTRA/FDD (1447.9-1462.9 MHz, 20132)<br>Band 22, UTRA/FDD (3410.0-3490.0 MHz, 20217)<br>Band 25, UTRA/FDD (1850.0-1915.0 MHz, 20218)<br>Band 26, UTRA/FDD (814.0-849.0 MHz, 20219) |
| Detailed Specification: | Dedicated Channel Type: 12.2 kbps AMR<br>3.4 kbps SRB   |
| Bandwidth:              | 5.0 MHz   |
| Integration Time:       | 100.0 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

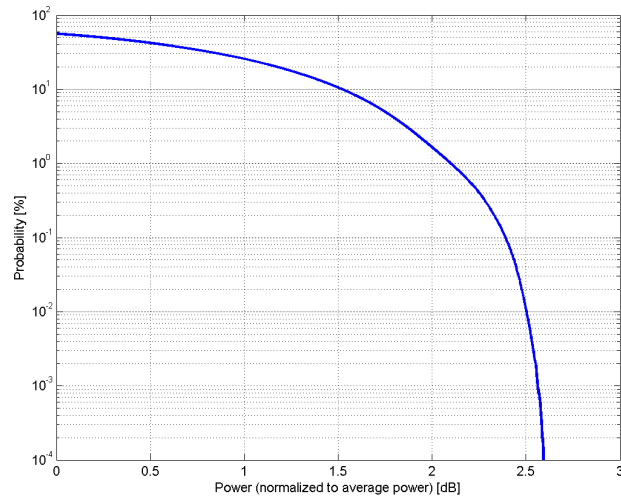

### Complementary Cumulative Distribution Function (CCDF)

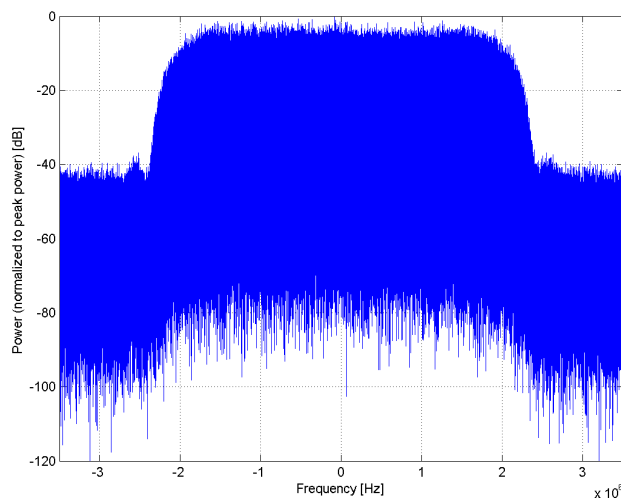

### Frequency Domain

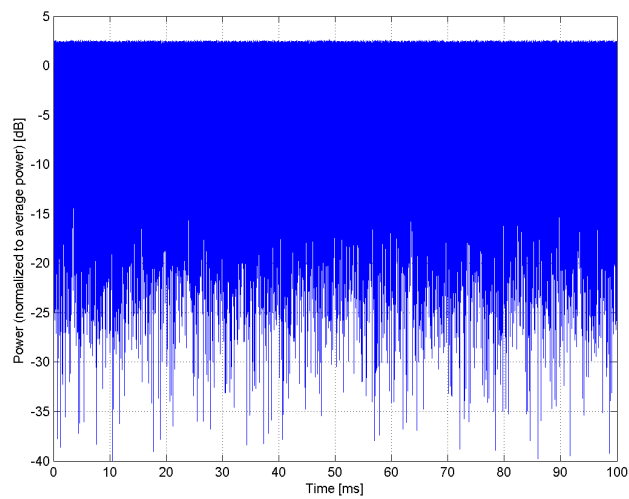


### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |   |
|-------------------------|---|
| Name:                   | <b>UMTS-FDD (HSPA+)</b>   |
| Group:                  | WCDMA   |
| UID:                    | 10225-CAB   |
| PAR: <sup>1</sup>       | <b>5.97 dB</b>  |
| MIF: <sup>2</sup>       | <b>-20.39 dB</b>  |
| Standard Reference:     | 3GPP Rel 7 TS 34.121<br>FCC OET KDB 941225 D01 SAR test for 3G devices v02<br>FCC OET KDB 941225 D02 Guidance for 3GPP R6 and R7 HSPA<br>v02v01   |
| Category:               | Random amplitude modulation   |
| Modulation:             | 16QAM   |
| Frequency Band:         | Band 1, UTRA/FDD (1920.0-1980.0 MHz, 20000)<br>Band 2, UTRA/FDD (1850.0-1910.0 MHz, 20001)<br>Band 3, UTRA/FDD (1710.0-1785.0 MHz, 20002)<br>Band 4, UTRA/FDD (1710.0-1755.0 MHz, 20003)<br>Band 5, UTRA/FDD (824.0-849.0 MHz, 20004)<br>Band 6, UTRA/FDD (830.0-840.0 MHz, 20005)<br>Band 7, UTRA/FDD (2500.0-2570.0 MHz, 20006)<br>Band 8, UTRA/FDD (880.0-915.0 MHz, 20007)<br>Band 9, UTRA/FDD (1749.9-1784.9 MHz, 20008)<br>Band 10, UTRA/FDD (1710.0-1770.0 MHz, 20009)<br>Band 11, UTRA/FDD (1427.9-1452.9 MHz, 20010)<br>Band 12, UTRA/FDD (698.0-716.0 MHz, 20011)<br>Band 13, UTRA/FDD (777.0-787.0 MHz, 20012)<br>Band 14, UTRA/FDD (788.0-798.0 MHz, 20013)<br>Band 19, UTRA/FDD (830.0-845.0 MHz, 20130)<br>Band 20, UTRA/FDD (832.0-862.0 MHz, 20131)<br>Band 21, UTRA/FDD (1447.9-1462.9 MHz, 20132)<br>Band 22, UTRA/FDD (3410.0-3490.0 MHz, 20217)<br>Band 25, UTRA/FDD (1850.0-1915.0 MHz, 20218)<br>Band 26, UTRA/FDD (814.0-849.0 MHz, 20219) |
| Detailed Specification: | 12.2 kbps RMC, FRC H-Set 2<br>CQI value: 2<br>Sub-test 2 Conditions:<br>DPCCH gain factor (Beta_c) = 6/15<br>DPDCH gain factor (Beta_d): 15/15<br>E-DPDCH Settings:<br>Symbol Rate: 2x1960 Mbps<br>Modulation 4PAM<br>Data Type: PN9  |
| Bandwidth:              | 5.0 MHz   |
| Integration Time:       | 100.0 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

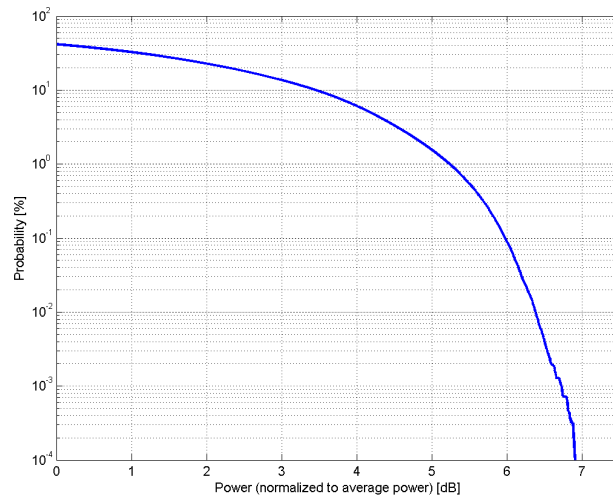

### Complementary Cumulative Distribution Function (CCDF)

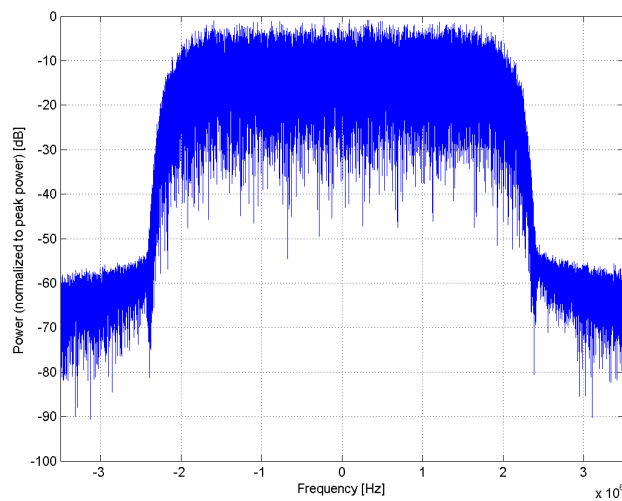

### Frequency Domain

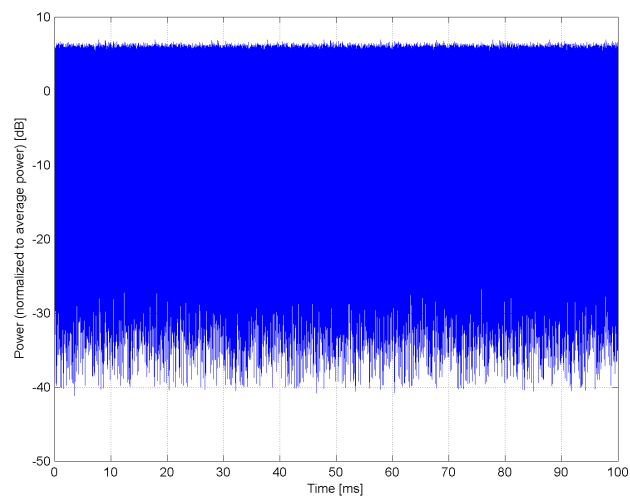


### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |  |
|-------------------------|--|
| Name:                   | <b>LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)</b>   |
| Group:                  | LTE-FDD  |
| UID:                    | 10170-CAE  |
| PAR: <sup>1</sup>       | <b>6.52 dB</b>   |
| MIF: <sup>2</sup>       | <b>-9.76 dB</b>  |
| Standard Reference:     | 3GPP / ETSI TS 136.101 V8.4.0<br>3GPP / ETSI TS 136.213 V8.4.0<br>FCC OET KDB 941225 D05 SAR for LTE Devices v01<br>Random amplitude modulation  |
| Category:               | 16-QAM   |
| Modulation:             | 16-QAM   |
| Frequency Band:         | Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz)<br>Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz)<br>Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz)<br>Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz)<br>Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz)<br>Band 9, E-UTRA/FDD (1749.9 - 1784.9 MHz)<br>Band 10, E-UTRA/FDD (1710.0 - 1770.0 MHz)<br>Band 20, E-UTRA/FDD (832.0 - 862.0 MHz)<br>Band 22, E-UTRA/FDD (3410.0 - 3490.0 MHz)<br>Band 23, E-UTRA/FDD (2000.0 - 2020.0 MHz)<br>Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz)<br>Band 28 E-UTRA/FDD (703.0 - 748.0 MHz)<br>Band 65, E-UTRA/FDD (1920.0 - 2010.0 MHz)<br>Band 66, E-UTRA/FDD (1710.0 - 1780.0 MHz)<br>Band 70, E-UTRA/FDD (1695.0 - 1710.0 MHz)<br>Band 71, E-UTRA/FDD (663.0 - 698.0 MHz)<br>Band 74, E-UTRA/FDD (1427.0 - 1470.0 MHz)<br>Validation band (0.0 - 6000.0 MHz) |
| Detailed Specification: | Modulation Scheme: SC-FDMA<br>Number of PUSCHs: 1<br>Settings for Subframe #0 to #9:<br>Modulation Scheme: 16QAM<br>Data Type: UL-SCH<br>Number RB: 1<br>Transport Block Size: 256<br>TBS Index: 14<br>MCS Index: 15<br>Data Type: PN9   |
| Bandwidth:              | 20.0 MHz   |
| Integration Time:       | 10.0 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

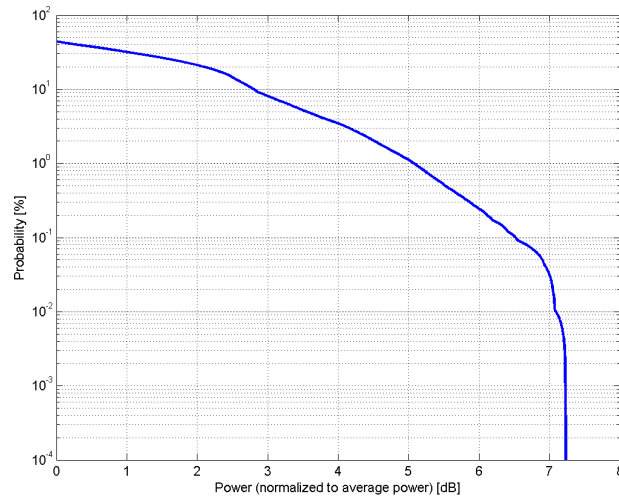

### Complementary Cumulative Distribution Function (CCDF)

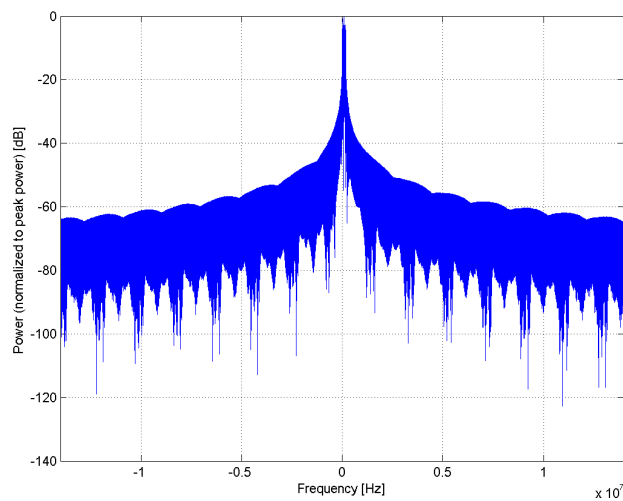

### Frequency Domain

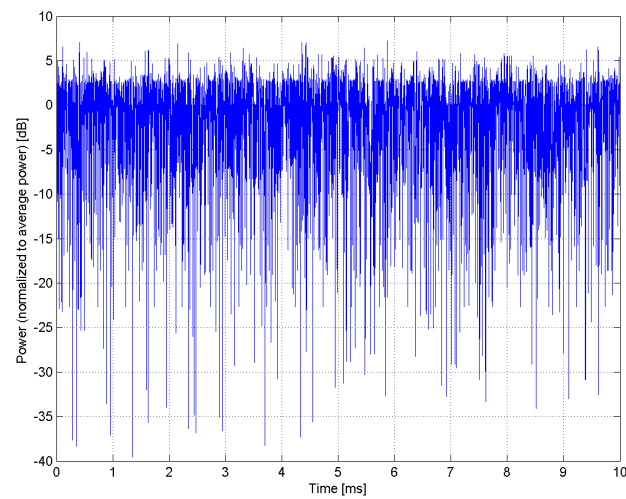

### Time Domain




**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |  |
|-------------------------|--|
| Name:                   | <b>LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)</b>   |
| Group:                  | LTE-TDD  |
| UID:                    | 10173-CAG  |
| PAR: <sup>1</sup>       | <b>9.48 dB</b>   |
| MIF: <sup>2</sup>       | <b>-1.44 dB</b>  |
| Standard Reference:     | 3GPP / ETSI TS 136.101 V8.4.0<br>3GPP / ETSI TS 136.213 V8.4.0<br>FCC OET KDB 941225 D05 SAR for LTE Devices v02<br>Random amplitude modulation  |
| Category:               | 16-QAM   |
| Modulation:             |  |
| Frequency Band:         | Band 33, E-UTRA/TDD (1900.0 - 1920.0 MHz)<br>Band 35, E-UTRA/TDD (1850.0 - 1910.0 MHz)<br>Band 36, E-UTRA/TDD (1930.0 - 1990.0 MHz)<br>Band 37, E-UTRA/TDD (1910.0 - 1930.0 MHz)<br>Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz)<br>Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz)<br>Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz)<br>Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz)<br>Band 42, E-UTRA/TDD (3400.0 - 3600.0 MHz)<br>Band 43, E-UTRA/TDD (3600.0 - 3800.0 MHz)<br>Band 44, E-UTRA/TDD (703.0 - 803.0 MHz)<br>Band 45, E-UTRA/FDD (1447.0 - 1467.0 MHz)<br>Band 46, E-UTRA/FDD (5150.0 - 5925.0 MHz)<br>Band 47, E-UTRA/TDD (5855.0 - 5925.0 MHz)<br>Band 48, E-UTRA/TDD (3550.0 - 3700.0 MHz)<br>Band 49, E-UTRA/TDD (3550.0 - 3700.0 MHz)<br>Band 50, E-UTRA/TDD (1432.0 - 1517.0 MHz)<br>Band 76, E-UTRA/FDD (3300.0 - 3400.0 MHz)<br>Validation band (0.0 - 6000.0 MHz) |
| Detailed Specification: | Modulation Scheme: SC-FDMA<br>Uplink-downlink configuration: 1<br>Special Subframe configuration: 4<br>Number of Frames: 1<br>Settings for UL Subframe 2,3,7,8:<br>Number of PUSCHs: 1<br>Modulation Scheme: 16QAM<br>Allocated RB: 1<br>Start Number of RB: 50<br>Data Type: PN9fix   |
| Bandwidth:              | 20.0 MHz   |
| Integration Time:       | 6.0 ms   |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

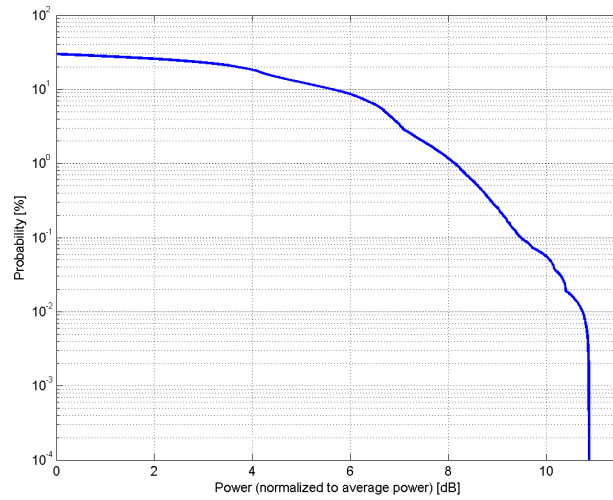

### Complementary Cumulative Distribution Function (CCDF)

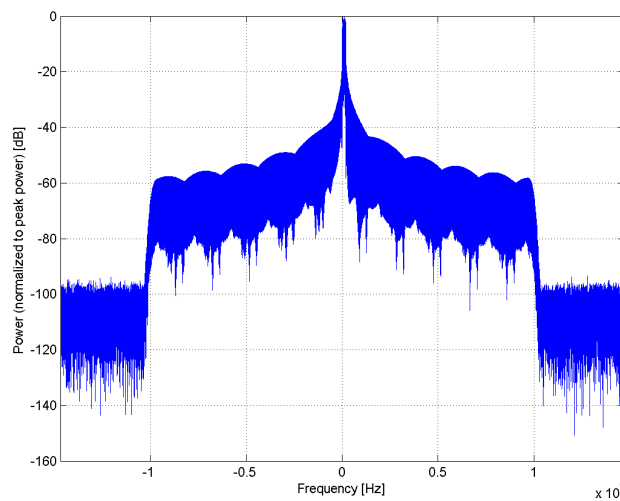

### Frequency Domain

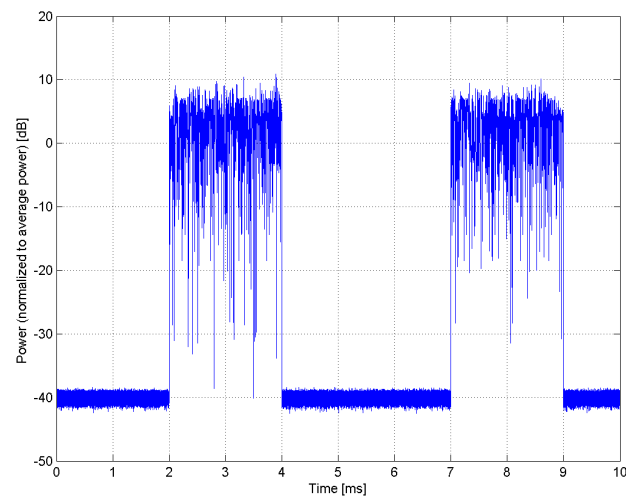


### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |   |
|-------------------------|---|
| Name:                   | <b>IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)</b>  |
| Group:                  | WLAN  |
| UID:                    | 10061-CAB   |
| PAR: <sup>1</sup>       | <b>3.60 dB</b>  |
| MIF: <sup>2</sup>       | <b>-2.02 dB</b>   |
| Standard Reference:     | IEEE 802.11b-1999 , Part 11, FCC SAR meas for 802 11 a b g<br>v01r02 (248227 D01)   |
| Category:               | Random amplitude modulation   |
| Modulation:             | DQPSK   |
| Frequency Band:         | WLAN 2.4GHz (2412.0-2484.0 MHz, 20230)  |
| Detailed Specification: | Data Rate: 11 Mbps<br>Spreading, Coding: CCK<br>PPDU format: Long Preamble & Heading<br>PSDU Length: 1024<br>PSDU Data: PN9 |
| Bandwidth:              | 20.0 MHz  |
| Integration Time:       | 1.5 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

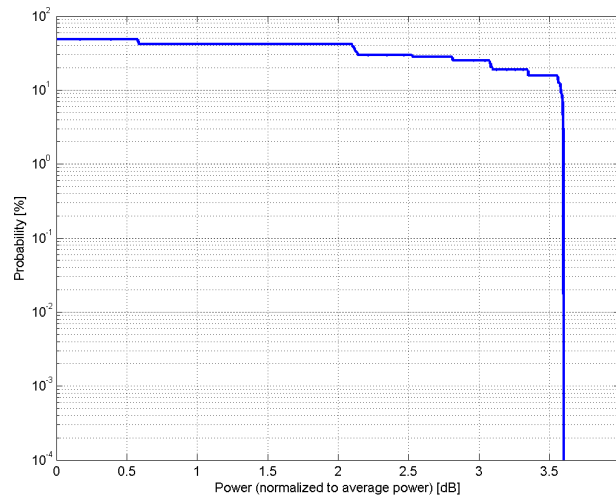

### Complementary Cumulative Distribution Function (CCDF)

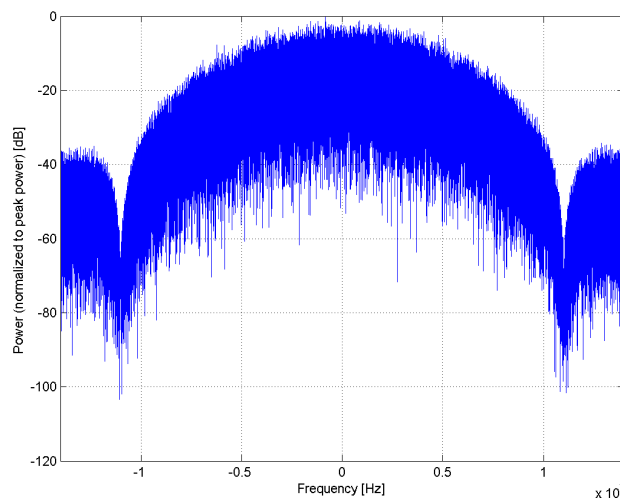

### Frequency Domain

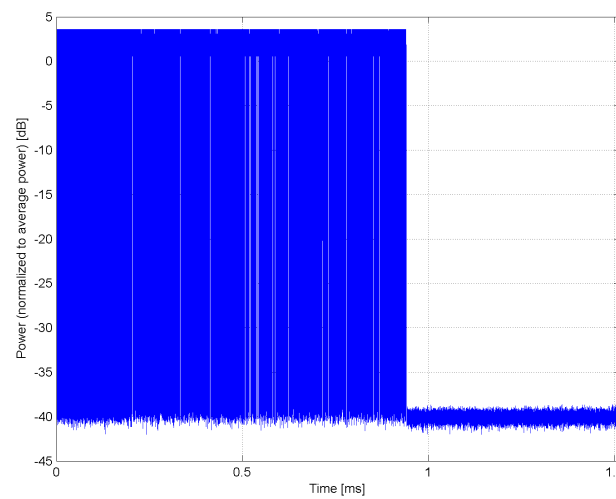

### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland

Name: **IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)**


Group: WLAN  
UID: 10077-CAB

PAR: <sup>1</sup> **11.00 dB**  
MIF: <sup>2</sup> **0.12 dB**


Standard Reference: IEEE 802.11g-2003 , Part 11  
FCC SAR meas for 802 11 a b g v01r02 (248227 D01)  
Category: Random amplitude modulation  
Modulation: 64-QAM  
Frequency Band: WLAN 2.4GHz (2412.0-2484.0 MHz, 20230)  
Detailed Specification: Data Rate: 54 Mbps  
Coding Rate: 3/4  
Coded bits per subcarrier: 6  
Coded bits per OFDM symbol: 288  
Data bits per OFDM symbol: 216  
PSDU Length: 1000 Bytes  
PSDU Data: PN9  
Bandwidth: 20.0 MHz  
Integration Time: 0.9 ms

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

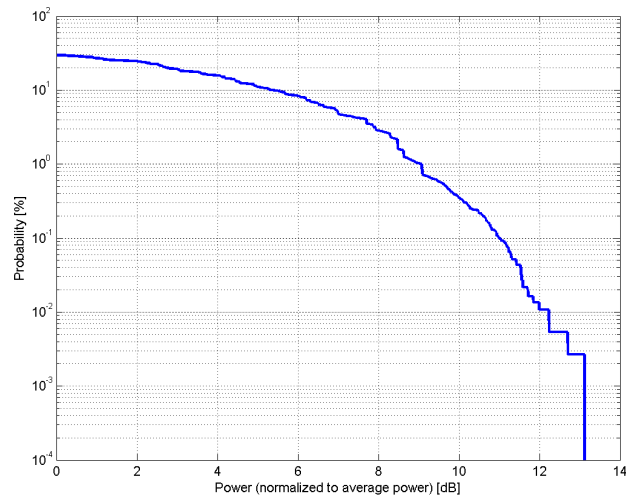

### Complementary Cumulative Distribution Function (CCDF)

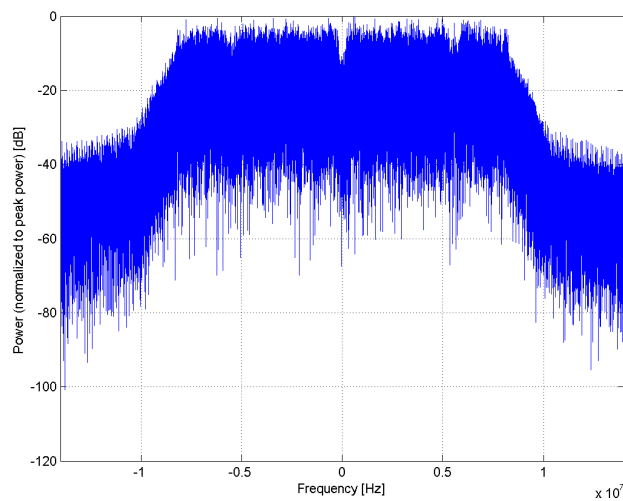

### Frequency Domain

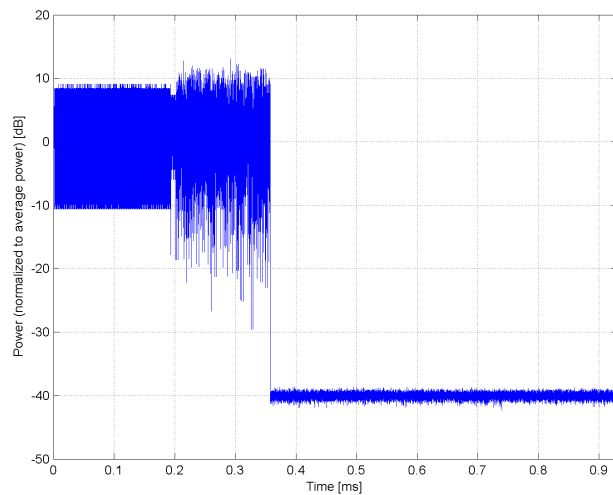

### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland

Name: **IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)**

Group: WLAN  
UID: 10427-AAC

PAR: <sup>1</sup> **8.41 dB**  
MIF: <sup>2</sup> **-13.44 dB**


Standard Reference: IEEE 802.11n-2009  
Category: Random amplitude modulation  
Modulation: BPSK  
Frequency Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz)  
WLAN 5GHz (4915.0 - 5825.0 MHz)  
U-NII-1, U-NII-2A (5170 - 5330 MHz)  
U-NII-2C Standalone (5490 - 5710 MHz)  
U-NII-2C <5.65 GHz (5490 - 5650 MHz)  
U-NII-3 Standalone (5735 - 5835 MHz)  
U-NII-2C, U-NII-3 (5650 - 5835 MHz)  
U-NII-4 (5.825 - 5.925 MHz)  
Validation band (0.0 - 6000.0 MHz)

Detailed Specification: Modulation: 64-QAM  
Data Rate: 150 Mbps  
PPDU Format: HT Greenfield  
PPDU Type: 40 MHz  
MCS Index: 7  
Guard Interval: Short  
Duty Cycle: 99%


Bandwidth: 40.0 MHz  
Integration Time: 2.0 ms

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

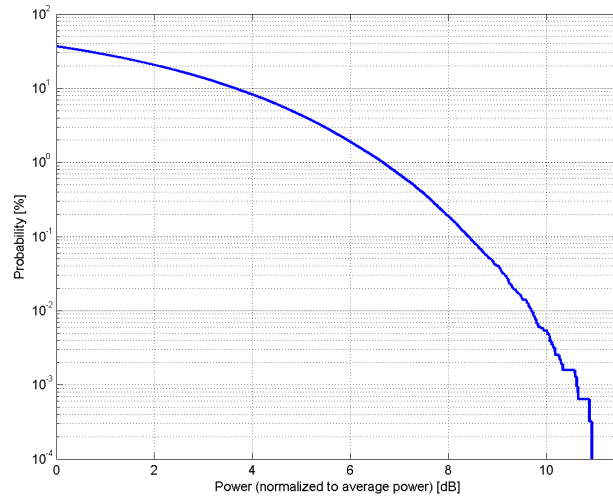

### Complementary Cumulative Distribution Function (CCDF)

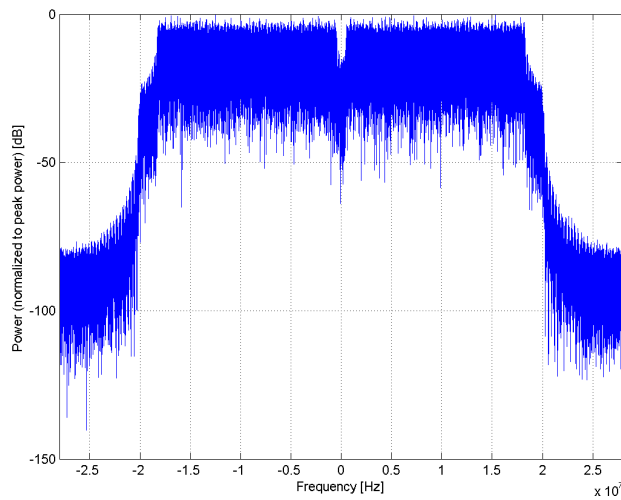

### Frequency Domain

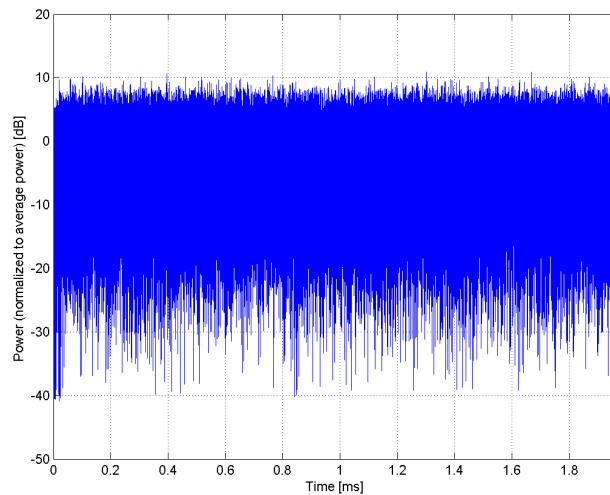

### Time Domain




**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland


|                         |   |
|-------------------------|---|
| Name:                   | <b>IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)</b>  |
| Group:                  | WLAN  |
| UID:                    | 10069-CAD   |
| PAR: <sup>1</sup>       | <b>10.56 dB</b>   |
| MIF: <sup>2</sup>       | <b>-3.15 dB</b>   |
| Standard Reference:     | IEEE 802.11a-1999 (R2003) , Part 11<br>IEEE 802.11h-2003 , Part 11<br>FCC SAR meas for 802 11 a b g v01r02 (248227 D01)   |
| Category:               | Random amplitude modulation   |
| Modulation:             | 64-QAM  |
| Frequency Band:         | WLAN 5GHz (4915.0 - 5825.0 MHz)<br>U-NII-1, U-NII-2A (5170 - 5330 MHz)<br>U-NII-2C Standalone (5490 - 5710 MHz)<br>U-NII-2C <5.65 GHz (5490 - 5650 MHz)<br>U-NII-3 Standalone (5735 - 5835 MHz)<br>U-NII-2C, U-NII-3 (5650 - 5835 MHz)<br>U-NII-4 (5.825 - 5.925 MHz)<br>Validation band (0.0 - 6000.0 MHz) |
| Detailed Specification: | Data Rate: 54 Mbps<br>Coding Rate: 3/4<br>Coded bits per subcarrier: 6<br>Coded bits per OFDM symbol: 288<br>Data bits per OFDM symbol: 216<br>PSDU Length: 1000 Bytes<br>PSDU Data: PN9  |
| Bandwidth:              | 20.0 MHz  |
| Integration Time:       | 0.3 ms  |

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

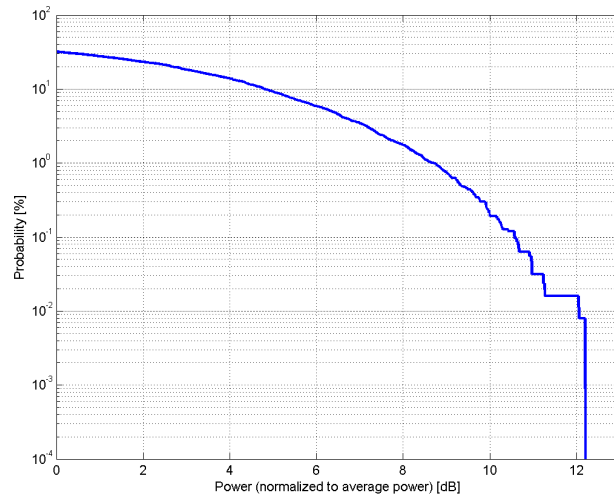

### Complementary Cumulative Distribution Function (CCDF)

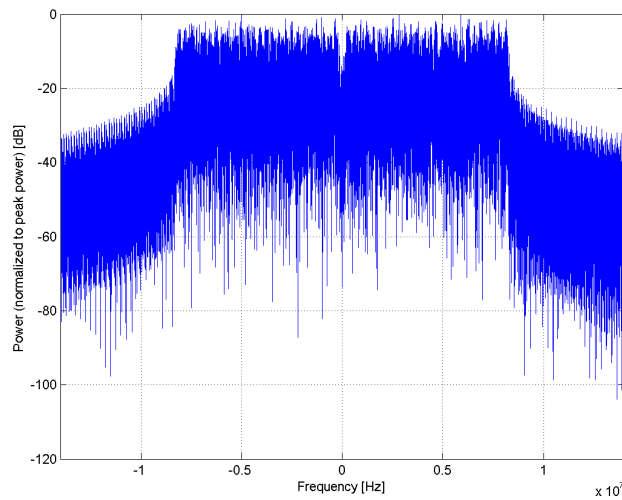

### Frequency Domain

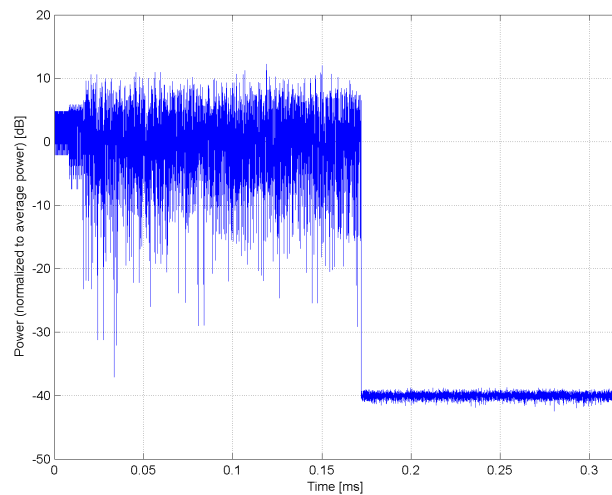

### Time Domain

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland

Name: **IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)**

Group: WLAN  
UID: 10616-AAC

PAR: <sup>1</sup> **8.82 dB**  
MIF: <sup>2</sup> **-5.57 dB**

Standard Reference: IEEE 802.11-2013  
FCC OET KDB 248227 D01 802.11 Wi-Fi SAR v02r01

Category: Random amplitude modulation

Modulation: BPSK


Frequency Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz)  
WLAN 5GHz (4915.0 - 5825.0 MHz)  
U-NII-1, U-NII-2A (5170 - 5330 MHz)  
U-NII-2C Standalone (5490 - 5710 MHz)  
U-NII-2C <5.65 GHz (5490 - 5650 MHz)  
U-NII-3 Standalone (5735 - 5835 MHz)  
U-NII-2C, U-NII-3 (5650 - 5835 MHz)  
U-NII-4 (5.825 - 5.925 MHz)  
Validation band (0.0 - 6000.0 MHz)

Detailed Specification: Bandwidth: 40MHz  
Duty cycle: 90%  
MCS: 0  
Number of spatial streams: 1  
MPDU length: 8192


Bandwidth: 40.0 MHz  
Integration Time: 5.4 ms

<sup>1</sup> PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"


<sup>2</sup> Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

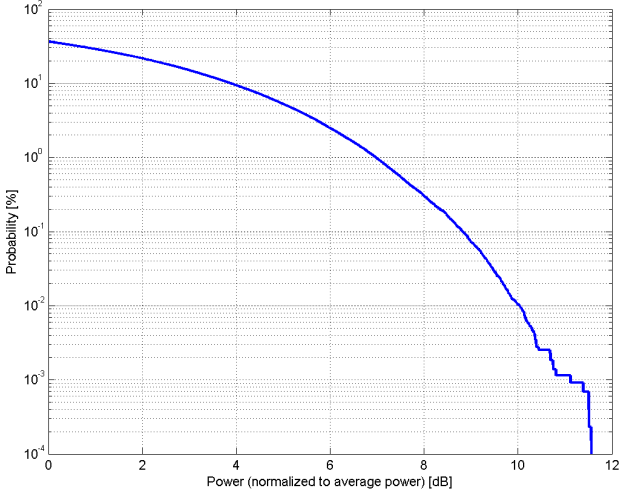

**Complementary Cumulative Distribution Function (CCDF)**

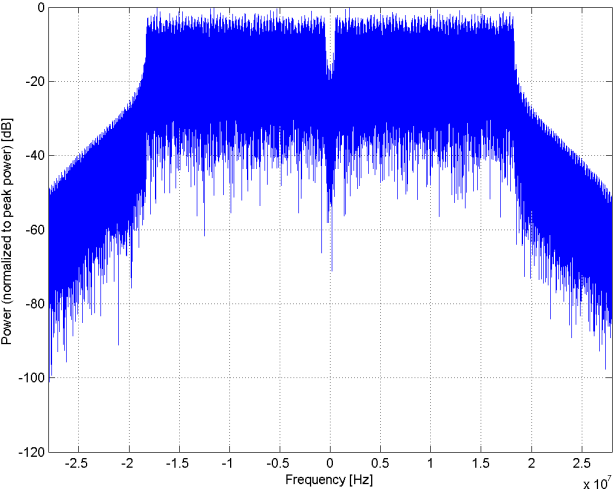

**Frequency Domain**

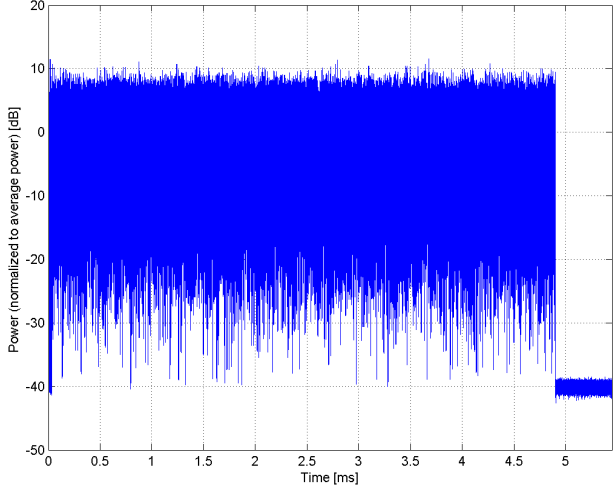

**Time Domain**