



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2243-1  
**FCC ID** : IHDT56AF5  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Jun. 15, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



## TABLE OF CONTENTS

REVISION HISTORY .....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification of Equipment Under Test .....	5
1.5 Modification of EUT .....	5
1.6 Specification of Accessory .....	6
1.7 Testing Location .....	6
1.8 Test Software .....	6
1.9 Applicable Standards .....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1 Test Mode .....	8
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration and system .....	9
2.4 Frequency List of Low/Middle/High Channels .....	9
<b>3 RADIATED TEST ITEMS .....</b>	<b>11</b>
3.1 Measuring Instruments .....	11
3.2 Test Setup .....	11
3.3 Test Result of Radiated Test .....	12
3.4 Radiated Spurious Emission .....	13
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>14</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>15</b>
<b>APPENDIX A. TEST RESULTS OF RADIATED TEST</b>	
<b>APPENDIX B. TEST SETUP PHOTOGRAPHS</b>	



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG242301F	Rev. 01	Initial issue of report	Jun. 29, 2022



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	§2.1046	Conducted Output Power	-	PASS	1
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt		1
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt		1
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		1
-	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	1
-	§2.1049	Occupied Bandwidth	-	PASS	1
-	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	1
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
-	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	1
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		
-	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	1
	§2.1055 §24.235 §27.54		Within Authorized Band		
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 26.52 dB at 10204.360 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		

**Remark 1 :**

The test items of inter band CA were cover by LTE single carrier due to the CA power is reduced according to 3GPP MPR.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2243-1
FCC ID	IHDT56AF5
IMEI Code	Radiation: 35359380019631
HW Version	DVT2
SW Version	SSJ32.60
EUT Stage	Identical Prototype

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz
Uplink CA Bands	2A-7A, 4A-5A, 4A-7A, 5A-7A
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory				
AC Adapter (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-681L
AC Adapter (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-682L
AC Adapter (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-683L
AC Adapter (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-685L
AC Adapter (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-686L
AC Adapter (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-687L
AC Adapter (PRC)	Brand Name	Motorola (Salcomp)	Model Name	MC-688L
AC Adapter (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-689L
Battery 1	Brand Name	Motorola (ATL)	Model Name	NP44
Battery 2	Brand Name	Motorola (Sunwoda)	Model Name	NP44
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	MD211(SH38D20195)
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MD211(SH38D41948)
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SC18D24968
Type C to HDMI HDMI/USBC Cable 1	Brand Name	Motorola (Linxee)	Model Name	SC18D02146
Type C to HDMI HDMI/USBC Cable 2	Brand Name	Motorola (Linxee)	Model Name	SC18D38847

### 1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a



## 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission (Y-Plane).

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel				
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H		
Radiated Spurious Emission	2A-7A	Worst Case															v	v	v
	4A-5A	Worst Case															v	v	v
	4A-7A	Worst Case															v	v	v
	5A-7A	Worst Case															v	v	v
Note	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "- " means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>																		

### 2.2 Connection Diagram of Test System

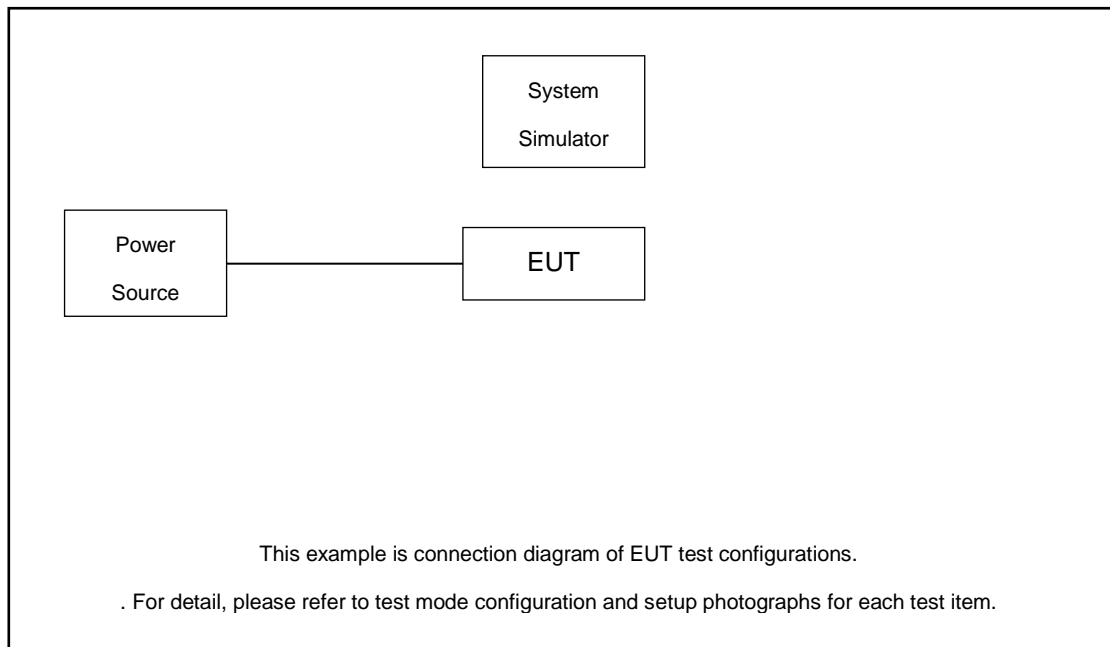





### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821	N/A	N/A	Unshielded,1.8m

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5



LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3


### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 For radiated test below 30MHz

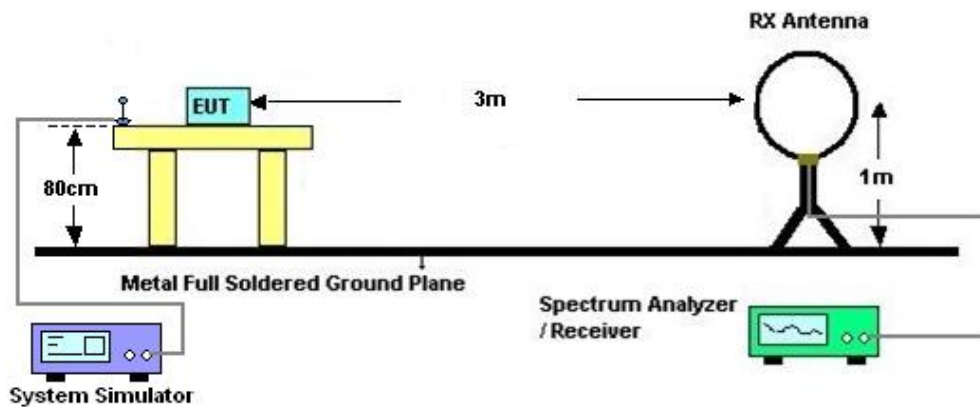

##### 3.2.2 For radiated test from 30MHz to 1GHz

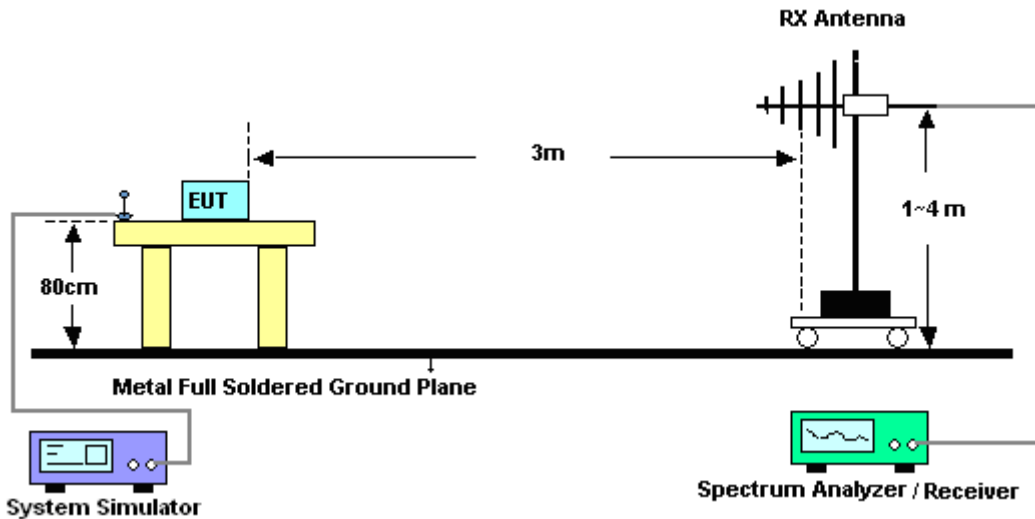

### 3.2.3 For radiated test above 1GHz

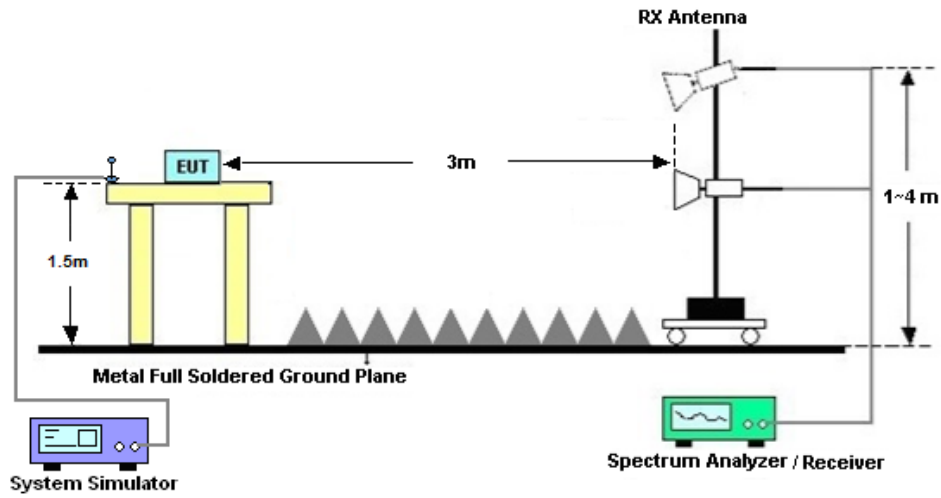

### 3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



### 3.4 Radiated Spurious Emission

#### 3.4.1 Description of Radiated Spurious Emission

For LTE Band 2, 4, 5

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For LTE Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. For Band 2, 4, 5  
The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$
13. For Band 7:  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Jun. 15, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2021	Jun. 15, 2022	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Jun. 15, 2022	Sep. 27, 2022	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 15, 2021	Jun. 15, 2022	Jul. 14, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 15, 2022	Jul. 12, 2022	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Jun. 15, 2022	Apr. 09, 2023	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Jun. 15, 2022	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 15, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 15, 2022	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.47 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.72 dB
---	---------

----- THE END -----



## Appendix A. Test Results of Radiated Test

### Radiated Spurious Emission

Test Engineer :	Zhaohui Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

ULCA_2A-7A for Ant. 0+1									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3702.18	-57.53	-13	-44.53	-80.53	-64.29	5.82	12.58	H
	5553.27	-57.55	-13	-44.55	-81.96	-63.27	7.28	13.00	H
	7404.36	-55.28	-13	-42.28	-82.03	-58.44	8.32	11.48	H
	3702.18	-55.26	-13	-42.26	-79.95	-62.02	5.82	12.58	V
	5553.27	-56.32	-13	-43.32	-81.16	-62.04	7.28	13.00	V
	7404.36	-55.09	-13	-42.09	-81.81	-58.25	8.32	11.48	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	5002.18	-59.02	-25	-34.02	-81.77	-64.58	7.12	12.68	H
	7503.27	-56.05	-25	-31.05	-82.39	-59.38	8.26	11.59	H
	10004.36	-53.68	-25	-28.68	-83.71	-55.21	10.45	11.98	H
	5002.18	-57.60	-25	-32.60	-82.03	-63.16	7.12	12.68	V
	7503.27	-55.99	-25	-30.99	-82.32	-59.32	8.26	11.59	V
	10004.36	-53.16	-25	-28.16	-83.83	-54.69	10.45	11.98	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3742.18	-57.62	-13	-44.62	-80.51	-64.37	5.85	12.60	H
	5613.27	-57.33	-13	-44.33	-81.61	-63.13	7.30	13.10	H
	7484.36	-55.97	-13	-42.97	-82.43	-59.12	8.35	11.50	H
	3742.18	-55.50	-13	-42.50	-80.4	-62.25	5.85	12.60	V
	5613.27	-56.26	-13	-43.26	-81.39	-62.06	7.30	13.10	V
	7484.36	-55.79	-13	-42.79	-82.23	-58.94	8.35	11.50	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.18	-58.46	-25	-33.46	-81.56	-64.02	7.14	12.70	H
	7578.27	-56.16	-25	-31.16	-82.24	-59.46	8.30	11.60	H
	10104.36	-52.91	-25	-27.91	-83.11	-54.43	10.48	12.00	H
	5052.18	-57.26	-25	-32.26	-81.69	-62.82	7.14	12.70	V
	7578.27	-55.87	-25	-30.87	-81.95	-59.17	8.30	11.60	V
	10104.36	-51.84	-25	-26.84	-83.02	-53.36	10.48	12.00	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3782.18	-58.03	-13	-45.03	-81.26	-64.77	5.88	12.62	H
	5673.27	-57.09	-13	-44.09	-81.41	-62.90	7.32	13.13	H
	7564.36	-56.22	-13	-43.22	-82.36	-59.38	8.38	11.54	H
	3782.18	-55.91	-13	-42.91	-80.63	-62.65	5.88	12.62	V
	5673.27	-57.28	-13	-44.28	-81.89	-63.09	7.32	13.13	V
	7564.36	-56.04	-13	-43.04	-82.17	-59.20	8.38	11.54	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5102.18	-57.91	-25	-32.91	-81.36	-63.47	7.16	12.72	H
	7653.27	-55.64	-25	-30.64	-81.51	-58.94	8.33	11.63	H
	10204.36	-53.23	-25	-28.23	-83.59	-54.83	10.50	12.10	H
	5102.18	-57.17	-25	-32.17	-81.6	-62.73	7.16	12.72	V
	7653.27	-54.53	-25	-29.53	-81.43	-57.83	8.33	11.63	V
	10204.36	-51.87	-25	-26.87	-83.5	-53.47	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





ULCA_4A-5A for Ant. 0+1									
Channel	Frequency ( MHz )	ERP/EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3422.18	-58.31	-13	-45.31	-78.89	-65.07	5.82	12.58	H
	5133.27	-58.21	-13	-45.21	-81.90	-63.93	7.28	13.00	H
	6844.36	-56.26	-13	-43.26	-81.87	-59.42	8.32	11.48	H
	3422.18	-56.95	-13	-43.95	-78.73	-63.71	5.82	12.58	V
	5133.27	-57.26	-13	-44.26	-81.69	-62.98	7.28	13.00	V
	6844.36	-54.58	-13	-41.58	-82.02	-57.74	8.32	11.48	V
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1649.18	-64.22	-13	-51.22	-75.78	-67.45	3.98	9.36	H
	2473.77	-59.18	-13	-46.18	-77.82	-62.73	4.85	10.55	H
	3298.36	-58.20	-13	-45.20	-78.98	-63.13	5.50	12.58	H
	1649.18	-63.48	-13	-50.48	-75.68	-66.71	3.98	9.36	V
	2473.77	-58.78	-13	-45.78	-77.74	-62.33	4.85	10.55	V
	3298.36	-57.59	-13	-44.59	-79.26	-62.52	5.50	12.58	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3447.18	-58.11	-13	-45.11	-79.27	-64.86	5.85	12.60	H
	5170.77	-57.95	-13	-44.95	-81.87	-63.75	7.30	13.10	H
	6894.36	-56.08	-13	-43.08	-81.75	-59.23	8.35	11.50	H
	3447.18	-57.42	-13	-44.42	-79.52	-64.17	5.85	12.60	V
	5170.77	-57.54	-13	-44.54	-81.96	-63.34	7.30	13.10	V
	6894.36	-54.89	-13	-41.89	-81.84	-58.04	8.35	11.50	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664.18	-64.31	-13	-51.31	-75.96	-67.56	4.00	9.40	H
	2496.27	-59.11	-13	-46.11	-77.88	-62.68	4.88	10.60	H
	3328.36	-58.58	-13	-45.58	-79.55	-63.51	5.52	12.60	H
	1664.18	-63.51	-13	-50.51	-75.83	-66.76	4.00	9.40	V
	2496.27	-58.52	-13	-45.52	-77.55	-62.09	4.88	10.60	V
	3328.36	-58.16	-13	-45.16	-79.63	-63.09	5.52	12.60	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3472.18	-57.45	-13	-44.45	-79.40	-64.19	5.88	12.62	H
	5208.27	-57.75	-13	-44.75	-81.97	-63.56	7.32	13.13	H
	6944.36	-56.44	-13	-43.44	-82.15	-59.60	8.38	11.54	H
	3472.18	-57.34	-13	-44.34	-79.09	-64.08	5.88	12.62	V
	5208.27	-57.26	-13	-44.26	-81.65	-63.07	7.32	13.13	V
	6944.36	-55.50	-13	-42.50	-81.94	-58.66	8.38	11.54	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1679.18	-64.51	-13	-51.51	-76.22	-67.68	4.10	9.42	H
	2518.77	-59.51	-13	-46.51	-78.43	-63.09	4.90	10.63	H
	3358.36	-58.88	-13	-45.88	-79.52	-63.80	5.55	12.62	H
	1679.18	-63.34	-13	-50.34	-75.76	-66.51	4.10	9.42	V
	2518.77	-58.51	-13	-45.51	-77.64	-62.09	4.90	10.63	V
	3358.36	-58.38	-13	-45.38	-79.67	-63.30	5.55	12.62	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-7A for Ant. 0+1									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B7 BW 20MHz Middle 1RB0,QPSK	5002.18	-59.03	-25	-34.03	-81.78	-64.59	7.12	12.68	H
	7503.27	-55.61	-25	-30.61	-81.95	-58.94	8.26	11.59	H
	10004.36	-53.68	-25	-28.68	-83.71	-55.21	10.45	11.98	H
	5002.18	-57.50	-25	-32.50	-81.93	-63.06	7.12	12.68	V
	7503.27	-55.82	-25	-30.82	-82.15	-59.15	8.26	11.59	V
	10004.36	-52.78	-25	-27.78	-83.45	-54.31	10.45	11.98	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3422.18	-57.85	-13	-44.85	-78.43	-64.61	5.82	12.58	H
	5133.27	-57.76	-13	-44.76	-81.45	-63.48	7.28	13.00	H
	6844.36	-56.22	-13	-43.22	-81.83	-59.38	8.32	11.48	H
	3422.18	-56.39	-13	-43.39	-78.17	-63.15	5.82	12.58	V
	5133.27	-57.23	-13	-44.23	-81.66	-62.95	7.28	13.00	V
	6844.36	-54.02	-13	-41.02	-81.46	-57.18	8.32	11.48	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3447.18	-58.18	-13	-45.18	-79.34	-64.93	5.85	12.60	H
	5170.77	-57.60	-13	-44.60	-81.52	-63.40	7.30	13.10	H
	6894.36	-56.17	-13	-43.17	-81.84	-59.32	8.35	11.50	H
	3447.18	-57.21	-13	-44.21	-79.31	-63.96	5.85	12.60	V
	5170.77	-57.56	-13	-44.56	-81.98	-63.36	7.30	13.10	V
	6894.36	-54.81	-13	-41.81	-81.76	-57.96	8.35	11.50	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.18	-58.45	-25	-33.45	-81.55	-64.01	7.14	12.70	H
	7578.27	-56.00	-25	-31.00	-82.08	-59.30	8.30	11.60	H
	10104.36	-53.04	-25	-28.04	-83.24	-54.56	10.48	12.00	H
	5052.18	-57.44	-25	-32.44	-81.87	-63.00	7.14	12.70	V
	7578.27	-56.40	-25	-31.40	-82.48	-59.70	8.30	11.60	V
	10104.36	-51.83	-25	-26.83	-83.01	-53.35	10.48	12.00	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3472.18	-57.65	-13	-44.65	-79.60	-64.39	5.88	12.62	H
	5208.27	-57.25	-13	-44.25	-81.47	-63.06	7.32	13.13	H
	6944.36	-56.21	-13	-43.21	-81.92	-59.37	8.38	11.54	H
	3472.18	-56.91	-13	-43.91	-78.66	-63.65	5.88	12.62	V
	5208.27	-57.31	-13	-44.31	-81.7	-63.12	7.32	13.13	V
	6944.36	-55.45	-13	-42.45	-81.89	-58.61	8.38	11.54	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5102.18	-58.26	-25	-33.26	-81.71	-63.82	7.16	12.72	H
	7653.27	-55.64	-25	-30.64	-81.51	-58.94	8.33	11.63	H
	10204.36	-52.77	-25	-27.77	-83.13	-54.37	10.50	12.10	H
	5102.18	-57.15	-25	-32.15	-81.58	-62.71	7.16	12.72	V
	7653.27	-54.38	-25	-29.38	-81.28	-57.68	8.33	11.63	V
	10204.36	-51.90	-25	-26.90	-83.53	-53.50	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-7A for Ant. 0+1									
Channel	Frequency ( MHz )	ERP/EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1649.18	-64.11	-13	-51.11	-75.67	-67.34	3.98	9.36	H
	2473.77	-58.93	-13	-45.93	-77.57	-62.48	4.85	10.55	H
	3298.36	-58.08	-13	-45.08	-78.86	-63.01	5.50	12.58	H
	1649.18	-63.05	-13	-50.05	-75.25	-66.28	3.98	9.36	V
	2473.77	-58.56	-13	-45.56	-77.52	-62.11	4.85	10.55	V
	3298.36	-57.28	-13	-44.28	-78.95	-62.21	5.50	12.58	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	5002.18	-58.96	-25	-33.96	-81.71	-64.52	7.12	12.68	H
	7503.27	-55.74	-25	-30.74	-82.08	-59.07	8.26	11.59	H
	10004.36	-53.69	-25	-28.69	-83.72	-55.22	10.45	11.98	H
	5002.18	-57.58	-25	-32.58	-82.01	-63.14	7.12	12.68	V
	7503.27	-55.94	-25	-30.94	-82.27	-59.27	8.26	11.59	V
	10004.36	-52.84	-25	-27.84	-83.51	-54.37	10.45	11.98	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664.18	-64.18	-13	-51.18	-75.83	-67.43	4.00	9.40	H
	2496.27	-58.76	-13	-45.76	-77.53	-62.33	4.88	10.60	H
	3328.36	-58.02	-13	-45.02	-78.99	-62.95	5.52	12.60	H
	1664.18	-63.15	-13	-50.15	-75.47	-66.40	4.00	9.40	V
	2496.27	-58.69	-13	-45.69	-77.72	-62.26	4.88	10.60	V
	3328.36	-57.43	-13	-44.43	-78.90	-62.36	5.52	12.60	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.18	-56.30	-25	-31.30	-79.40	-61.86	7.14	12.70	H
	7578.27	-56.16	-25	-31.16	-82.24	-59.46	8.30	11.60	H
	10104.36	-52.71	-25	-27.71	-82.91	-54.23	10.48	12.00	H
	5052.18	-56.88	-25	-31.88	-81.31	-62.44	7.14	12.70	V
	7578.27	-56.09	-25	-31.09	-82.17	-59.39	8.30	11.60	V
	10104.36	-51.92	-25	-26.92	-83.1	-53.44	10.48	12.00	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1679.18	-63.90	-13	-50.90	-75.61	-67.07	4.10	9.42	H
	2518.77	-59.15	-13	-46.15	-78.07	-62.73	4.90	10.63	H
	3358.36	-58.42	-13	-45.42	-79.06	-63.34	5.55	12.62	H
	1679.18	-63.16	-13	-50.16	-75.58	-66.33	4.10	9.42	V
	2518.77	-58.31	-13	-45.31	-77.44	-61.89	4.90	10.63	V
	3358.36	-57.94	-13	-44.94	-79.23	-62.86	5.55	12.62	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5102.18	-58.12	-25	-33.12	-81.57	-63.68	7.16	12.72	H
	7653.27	-56.03	-25	-31.03	-81.90	-59.33	8.33	11.63	H
	10204.36	-52.64	-25	-27.64	-83.00	-54.24	10.50	12.10	H
	5102.18	-56.99	-25	-31.99	-81.42	-62.55	7.16	12.72	V
	7653.27	-54.69	-25	-29.69	-81.59	-57.99	8.33	11.63	V
	10204.36	-51.52	-25	-26.52	-83.15	-53.12	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.