





11AX80MIMO_Ant1_7025_484Tone_RU66

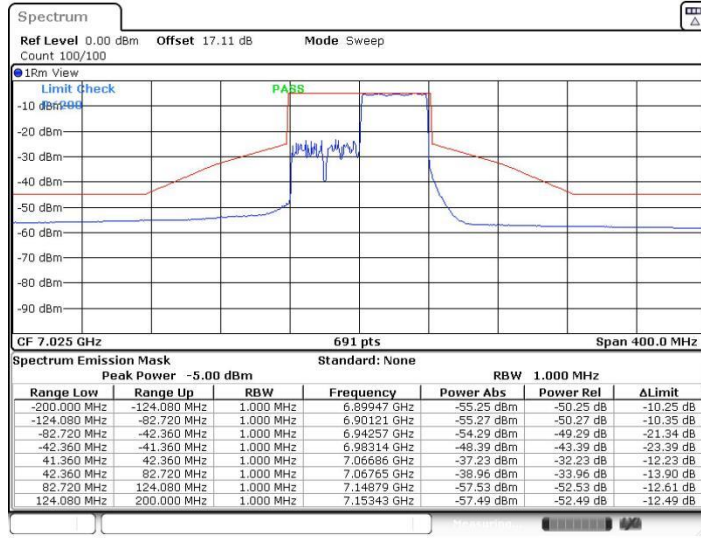

Date: 21.JUN.2022 13:22:25


11AX80MIMO_Ant2_7025_484Tone_RU66

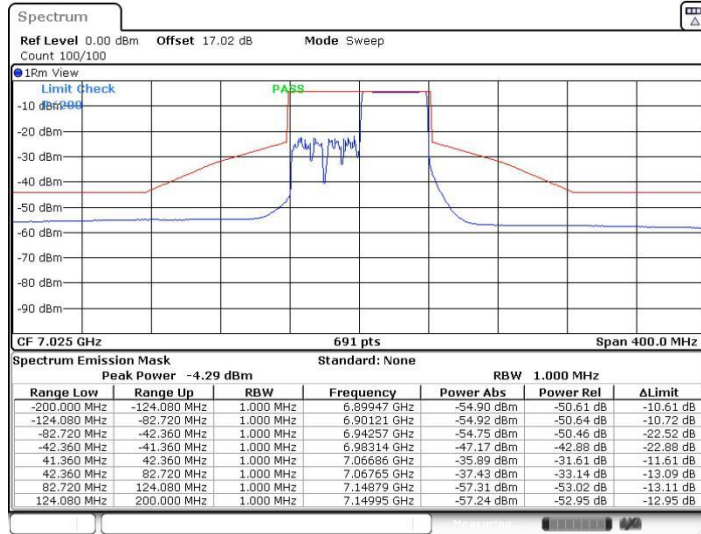

Date: 21.JUN.2022 13:22:54




11AX160MIMO_Ant1_6025_996Tone_Left-RU67

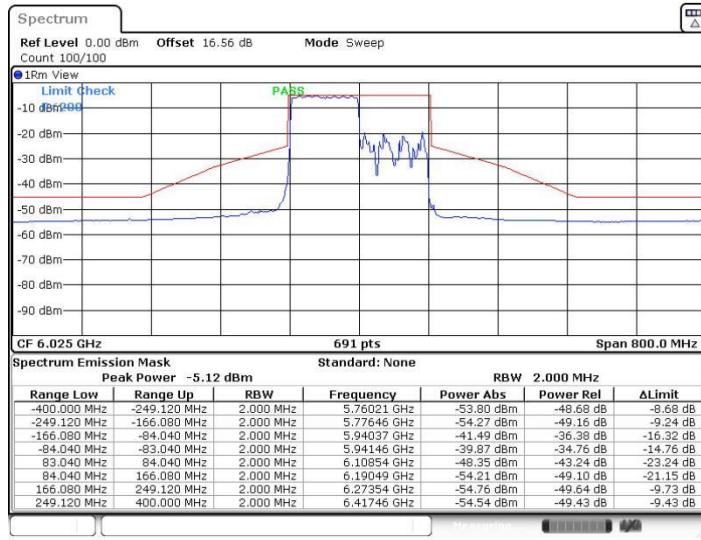

Date: 21.JUN.2022 13:24:56


11AX160MIMO_Ant2_6025_996Tone_Left-RU67

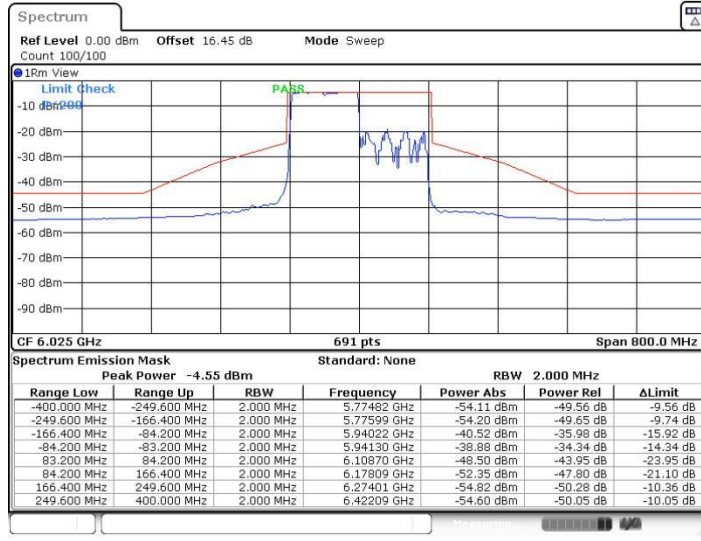

Date: 21.JUN.2022 13:25:24




11AX160MIMO_Ant1_6185_996Tone_Left-RU67

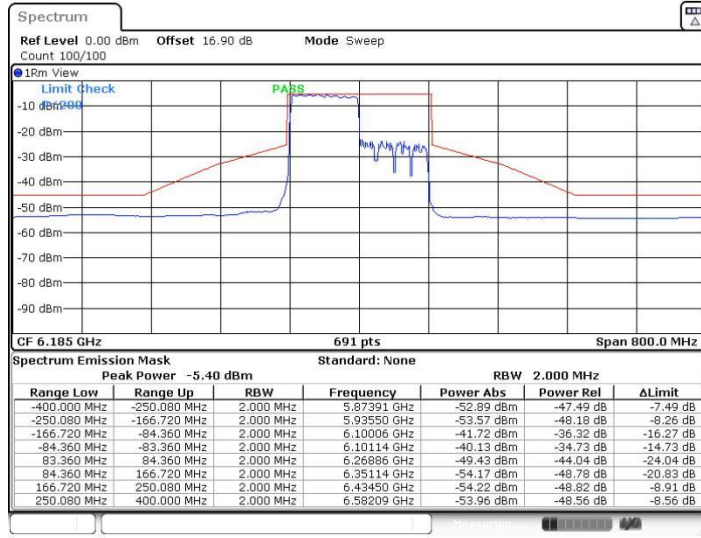

Date: 21.JUN.2022 13:26:57


11AX160MIMO_Ant2_6185_996Tone_Left-RU67

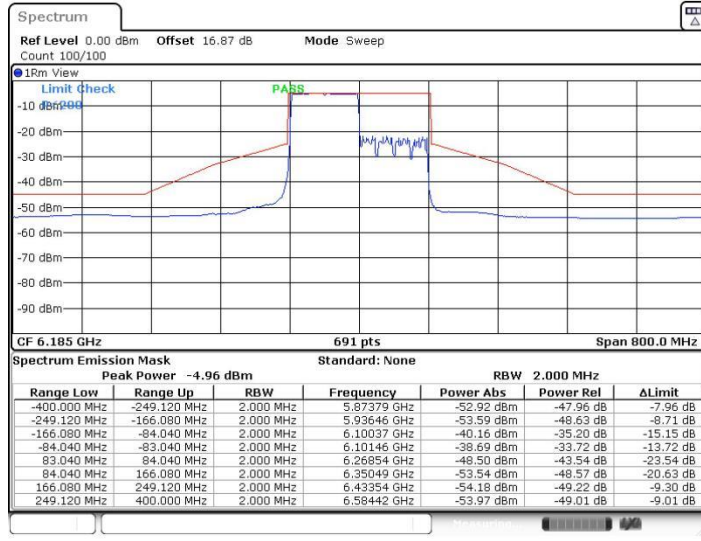

Date: 21.JUN.2022 13:27:26




11AX160MIMO_Ant1_6345_996Tone_Left-RU67

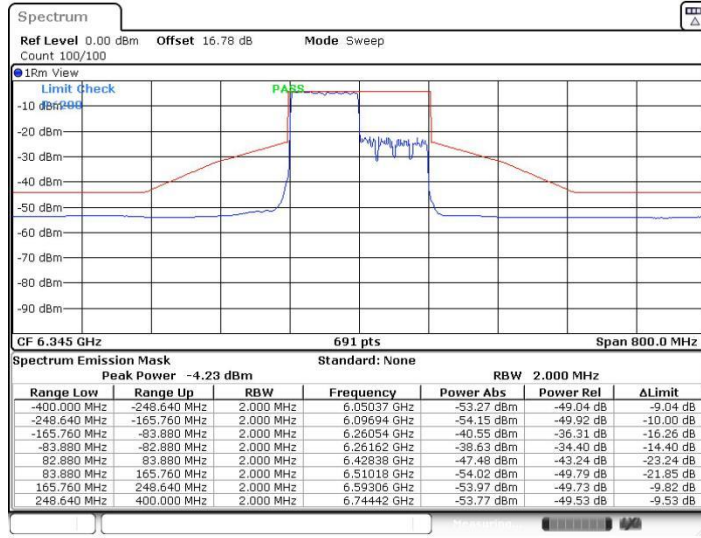

Date: 21.JUN.2022 13:33:39


11AX160MIMO_Ant2_6345_996Tone_Left-RU67

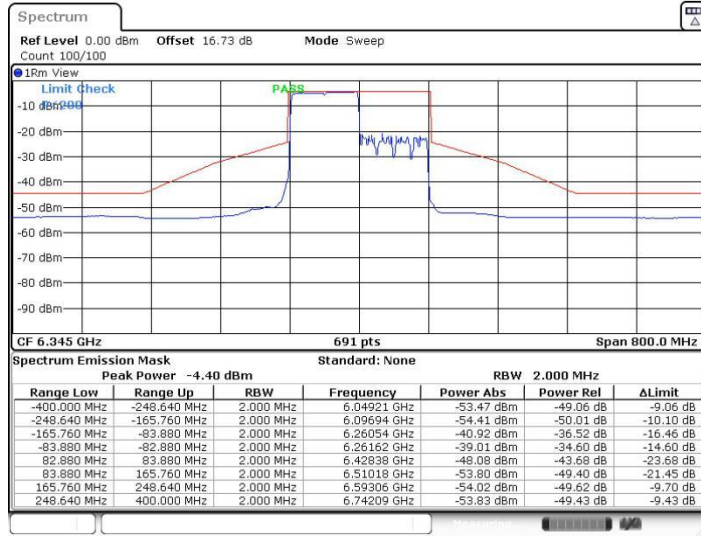

Date: 21.JUN.2022 13:34:07




11AX160MIMO_Ant1_6505_996Tone_Left-RU67

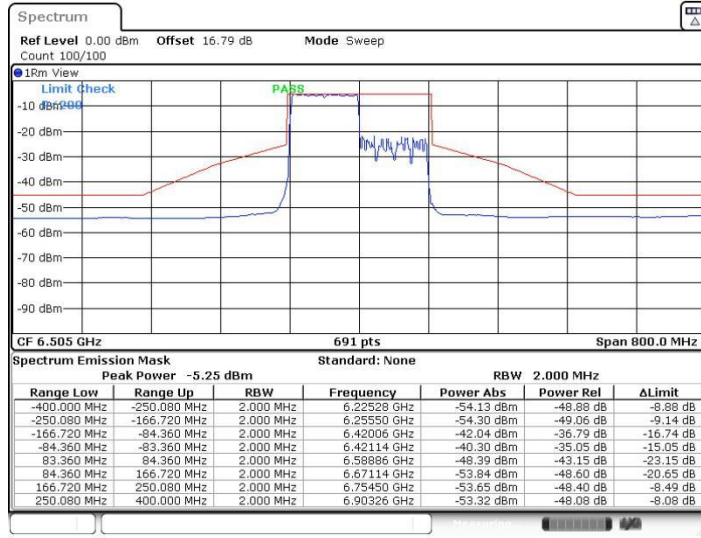

Date: 21.JUN.2022 13:35:12


11AX160MIMO_Ant1_6505_996Tone_Right-RU67

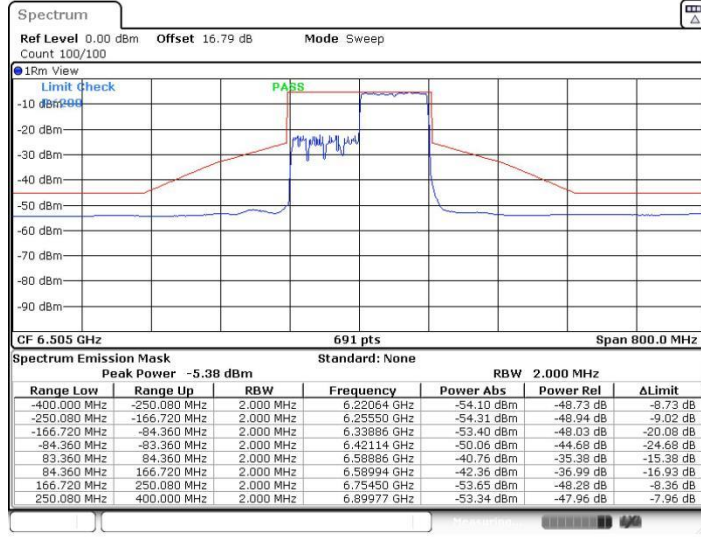

Date: 21.JUN.2022 13:36:23




11AX160MIMO_Ant2_6505_996Tone_Right-RU67

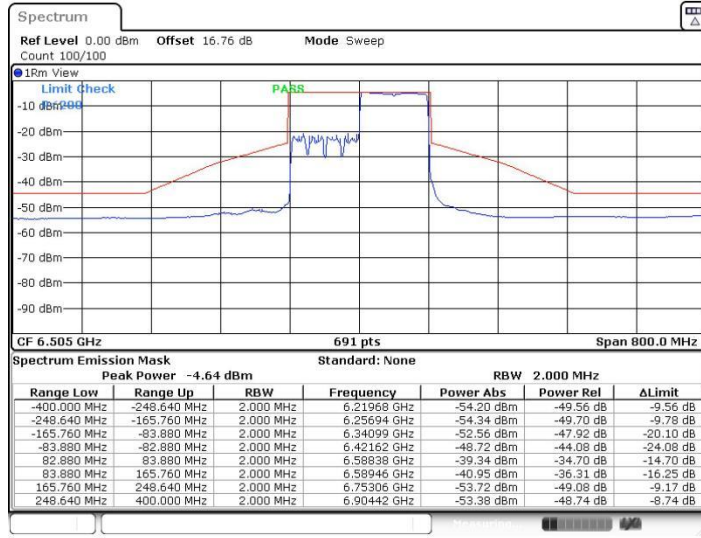

Date: 21.JUN.2022 13:36:55


11AX160MIMO_Ant2_6505_996Tone_Left-RU67

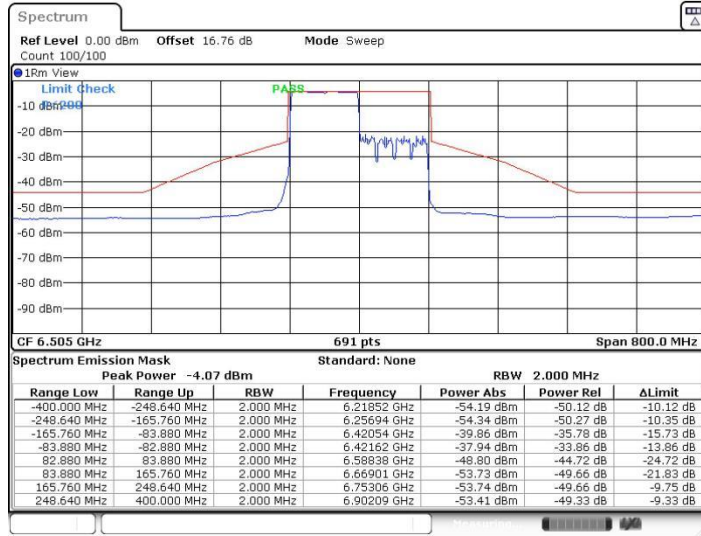

Date: 21.JUN.2022 13:35:40




11AX160MIMO_Ant1_6665_996Tone_Right-RU67

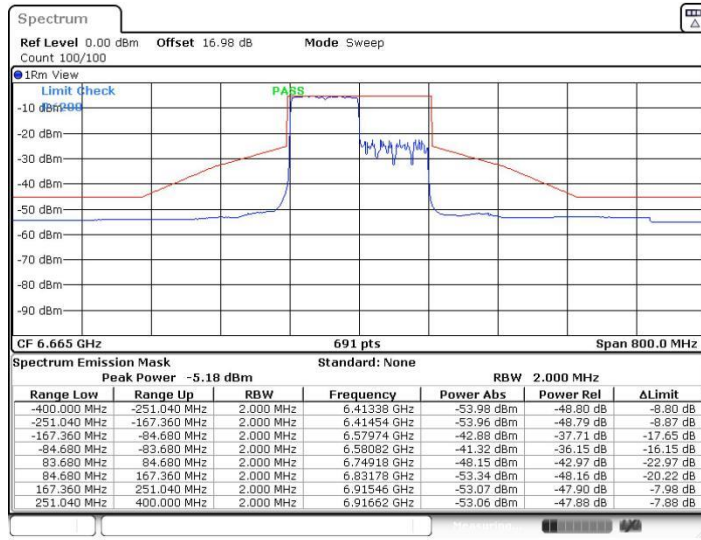

Date: 21.JUN.2022 13:38:17


11AX160MIMO_Ant2_6665_996Tone_Right-RU67

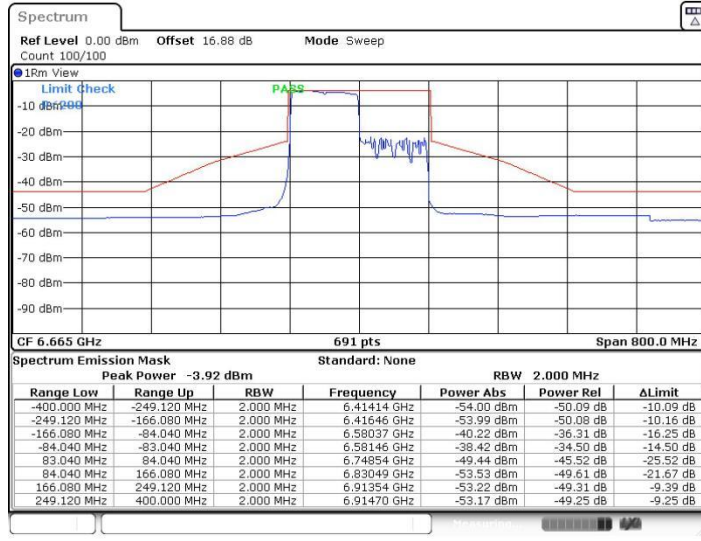

Date: 21.JUN.2022 13:38:45



11AX160MIMO_Ant1_6825_996Tone_Left-RU67

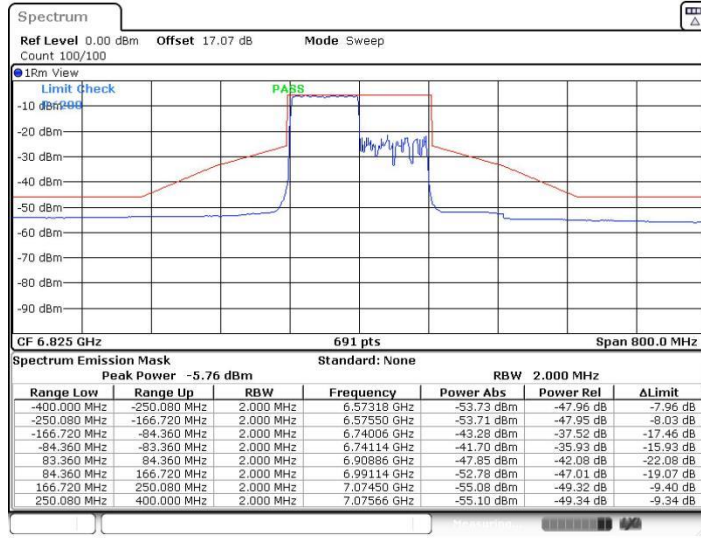

Date: 21.JUN.2022 13:40:08


11AX160MIMO_Ant1_6825_996Tone_Right-RU67



Date: 21.JUN.2022 13:41:22




11AX160MIMO_Ant2_6825_996Tone_Left-RU67

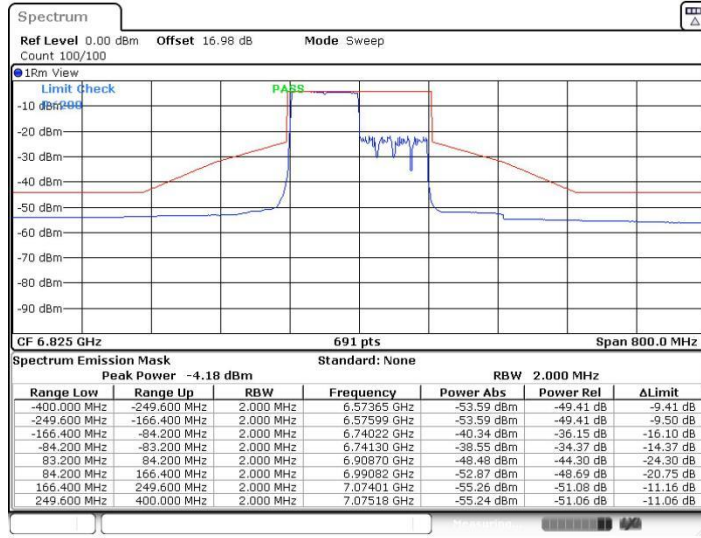

Date: 21.JUN.2022 13:40:37


11AX160MIMO_Ant2_6825_996Tone_Right-RU67

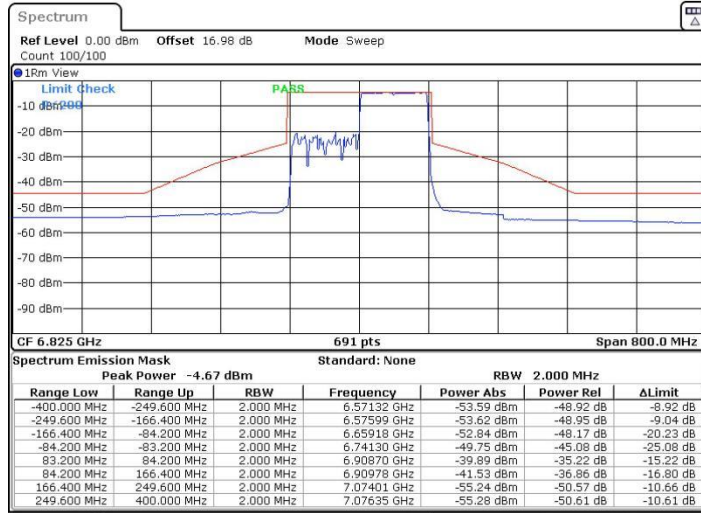

Date: 21.JUN.2022 13:41:53




11AX160MIMO_Ant1_6985_996Tone_Left-RU67

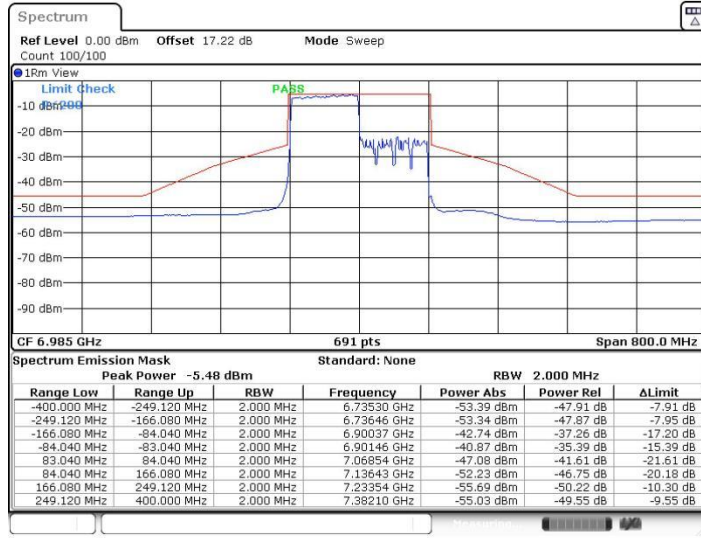

Date: 21.JUN.2022 13:50:59


11AX160MIMO_Ant1_6985_996Tone_Right-RU67

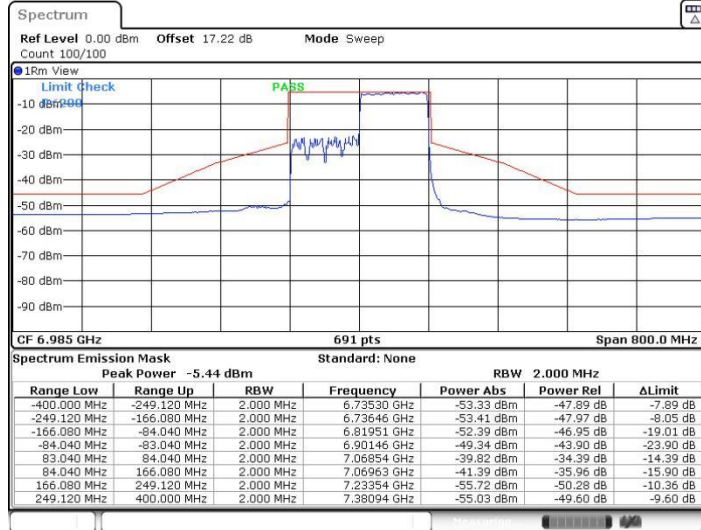

Date: 21.JUN.2022 13:52:05




11AX160MIMO_Ant2_6985_996Tone_Right-RU67

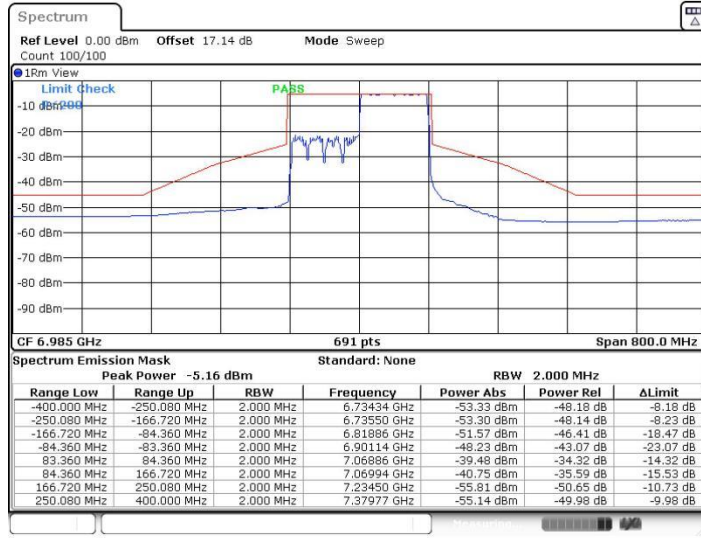

Date: 21.JUN.2022 13:52:36

11AX160MIMO_Ant2_6985_996Tone_Left-RU67

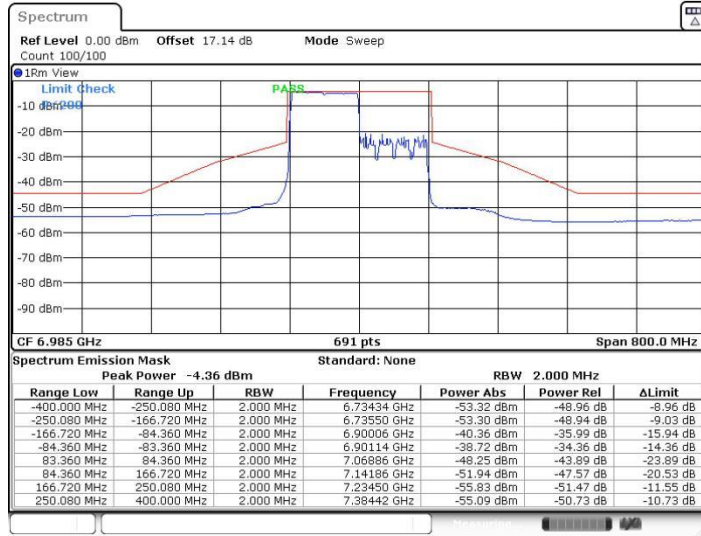


Date: 21.JUN.2022 13:51:27



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

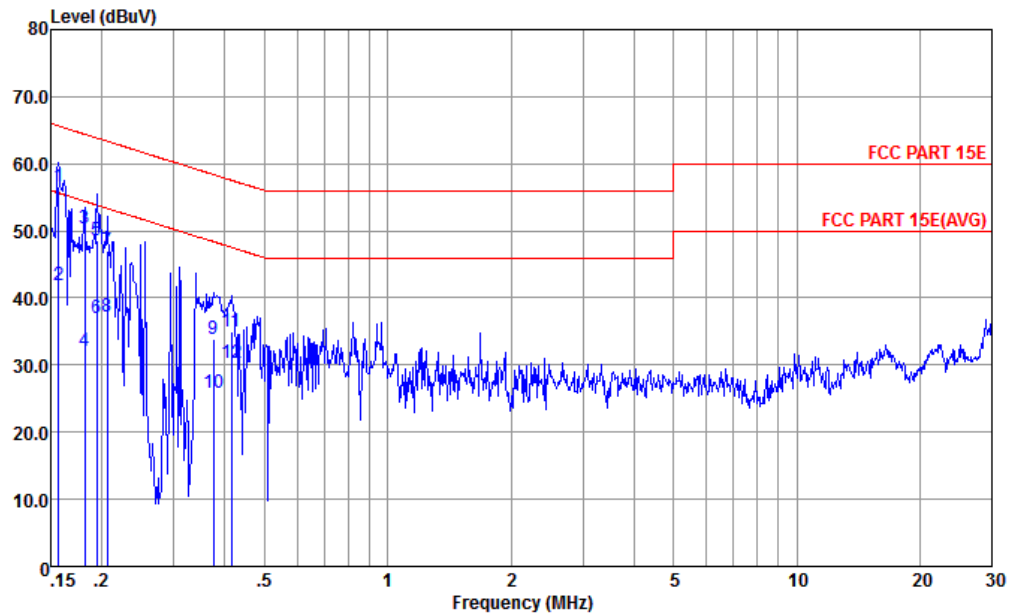


Site : CO01-KS
 Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.156	56.69	-8.96	65.65	46.21	0.02	10.46	QP
2	0.156	41.99	-13.66	55.65	31.51	0.02	10.46	Average
3	0.182	50.34	-14.08	64.42	39.91	0.03	10.40	QP
4	0.182	32.04	-22.38	54.42	21.61	0.03	10.40	Average
5	0.194	48.61	-15.23	63.84	38.20	0.04	10.37	QP
6	0.194	37.01	-16.83	53.84	26.60	0.04	10.37	Average
7	0.206	47.00	-16.36	63.36	36.60	0.04	10.36	QP
8	0.206	37.20	-16.16	53.36	26.80	0.04	10.36	Average
9	0.375	33.86	-24.53	58.39	23.50	0.08	10.28	QP
10	0.375	25.86	-22.53	48.39	15.50	0.08	10.28	Average
11	0.415	34.95	-22.60	57.55	24.60	0.09	10.26	QP
12	0.415	30.31	-17.24	47.55	19.96	0.09	10.26	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

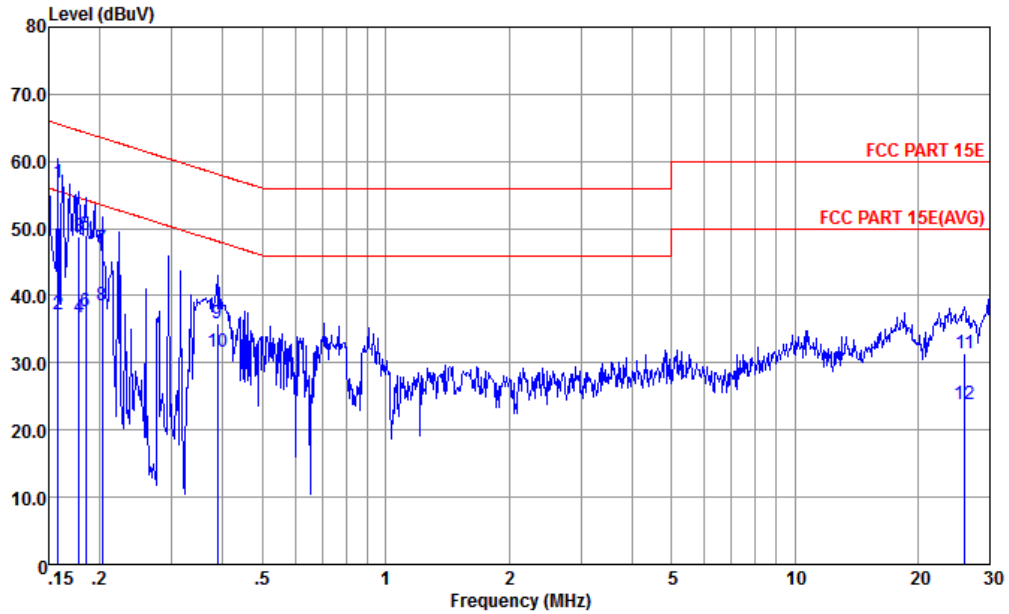

Site : CO01-KS
 Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.158	56.77	-8.79	65.56	46.20	0.11	10.46	QP
2	0.158	37.17	-18.39	55.56	26.60	0.11	10.46	Average
3	0.178	48.71	-15.88	64.59	38.20	0.10	10.41	QP
4	0.178	36.71	-17.88	54.59	26.20	0.10	10.41	Average
5	0.184	49.10	-15.18	64.28	38.60	0.10	10.40	QP
6	0.184	37.70	-16.58	54.28	27.20	0.10	10.40	Average
7	0.203	47.06	-16.43	63.49	36.60	0.10	10.36	QP
8	0.203	38.66	-14.83	53.49	28.20	0.10	10.36	Average
9	0.387	35.98	-22.14	58.12	25.60	0.11	10.27	QP
10	0.387	31.58	-16.54	48.12	21.20	0.11	10.27	Average
11	26.001	31.50	-28.50	60.00	20.20	0.72	10.58	QP
12	26.001	23.90	-26.10	50.00	12.60	0.72	10.58	Average



Appendix C. Radiated Spurious Emission

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 03 5965MHz		5924.96	54.09	-34.21	88.3	44.28	35.22	11.4	36.81	104	116	P	H
		5924.96	43.72	-24.58	68.3	33.91	35.22	11.4	36.81	104	116	A	H
	*	5950	101.76	---	---	91.92	35.24	11.43	36.83	104	116	P	H
		5950	94.13	---	---	84.29	35.24	11.43	36.83	104	116	A	H
		5924.96	53.09	-35.21	88.3	43.28	35.22	11.4	36.81	313	105	P	V
		5924.96	42.17	-26.13	68.3	32.36	35.22	11.4	36.81	313	105	A	V
	*	5950	100.47	---	---	90.63	35.24	11.43	36.83	313	105	P	V
		5959	91.47	---	---	81.62	35.26	11.43	36.84	313	105	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		11928	43.8	-30.2	74	54.8	38.46	16.63	66.09	300	0	P	H
CH 03 5965MHz		11928	43.81	-30.19	74	54.81	38.46	16.63	66.09	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE80 Full CH 07 5985MHz at various frequencies (5924.36, 5925, 5986, 5995, 5920.2, 5924.84, 5977).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		11968	44.05	-29.95	74	54.97	38.48	16.66	66.06	300	0	P	H
CH 07 5985MHz		11968	44.04	-29.96	74	54.96	38.48	16.66	66.06	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE80 Partial 484/65 CH 07 5985MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5911.4	54.53	-33.77	88.3	44.74	35.2	11.38	36.79	100	237	P	H
		5922.92	46.62	-21.68	68.3	36.81	35.22	11.4	36.81	100	237	A	H
	*	6013	94.44	---	---	84.53	35.31	11.48	36.88	100	237	P	H
		6013	86.39	---	---	76.48	35.31	11.48	36.88	100	237	A	H
		5923.56	53.58	-34.72	88.3	43.77	35.22	11.4	36.81	308	77	P	V
		5915.88	44.77	-23.53	68.3	34.96	35.2	11.4	36.79	308	77	A	V
	*	6067	93.03	---	---	83.04	35.34	11.52	36.87	308	77	P	V
	6049	84.91	---	---	74.94	35.33	11.51	36.87	308	77	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE160 Full and CH 15 6025MHz, and a Remark section.



U-NII 8 - 6875-7125MHzMHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 229 7095MHz		7200.84	52.67	-35.63	88.3	41.2	35.84	12.71	37.08	127	111	P	H
		7160.68	41.94	-26.36	68.3	30.55	35.83	12.66	37.1	127	111	A	H
	*	7093	102.25	---	---	90.96	35.82	12.59	37.12	127	111	P	H
		7093	93.79	---	---	82.5	35.82	12.59	37.12	127	111	A	H
		7170.6	52.11	-36.19	88.3	40.68	35.83	12.69	37.09	100	200	P	V
		7167.72	42.03	-26.27	68.3	30.6	35.83	12.69	37.09	100	200	A	V
	*	7102	103.65	---	---	92.35	35.82	12.59	37.11	100	200	P	V
		7102	95.95	---	---	84.65	35.82	12.59	37.11	100	200	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 229		14192	46.16	-42.14	88.3	53.93	38.99	18.16	64.92	300	0	P	H
7095MHz		14192	45.02	-43.28	88.3	52.79	38.99	18.16	64.92	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE20 Full CH 229 7095MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full		14192	45.44	-42.86	88.3	53.21	38.99	18.16	64.92	300	0	P	H
CH 229 7095MHz		14192	45.75	-42.55	88.3	53.52	38.99	18.16	64.92	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ax HE20 Partial 52/40 CH 229 7095MHz and a Remark section.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE40 Partial 242/62 CH 227 7085MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



U-NII 8 6875~7125MHz
WIFI 802.11ax HE160 Partial 996 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for frequencies 7128.68, 7195.56, 7048, 7057, 7126.44, 7199.08, 7021, and 7012. A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against Peak and Average limit line.'



Emission below 1GHz

WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full LF		167.74	16.31	-27.19	43.5	30.17	17.08	1.97	32.91	-	-	P	H
		216.24	21.64	-24.36	46	35.19	17.31	2.24	33.1	-	-	P	H
		283.17	17.87	-28.13	46	28.34	19.93	2.57	32.97	-	-	P	H
		408.3	22.36	-23.64	46	29.2	22.86	3.08	32.78	-	-	P	H
		616.85	24.42	-21.58	46	27.57	25.63	3.79	32.57	-	-	P	H
		805.03	27.24	-18.76	46	28.49	26.93	4.33	32.51	-	-	P	H
		203.63	16.9	-26.6	43.5	31.29	16.54	2.17	33.1	-	-	P	V
		328.76	18.59	-27.41	46	27.84	20.89	2.76	32.9	-	-	P	V
		479.11	25.33	-20.67	46	30.63	24.12	3.34	32.76	-	-	P	V
		606.18	26.24	-19.76	46	29.45	25.55	3.76	32.52	-	-	P	V
		672.14	28.04	-17.96	46	31.01	25.81	3.96	32.74	-	-	P	V
		803.09	30.82	-15.18	46	32.08	26.92	4.33	32.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<Co-location Modes>

BLE(2M)_Ch39+WIFI 6G 802.11ax HE160 Full_CH15+LTE B48_BW 20M

2.4GHz 2400~2483.5MHz

BLE(2M) (Band Edge @ 3m)

BLE(2M) Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH 39 2480MHz		2485.84	54.85	-19.15	74	51.44	32.98	7.25	36.82	134	74	P	H
		2485.3	45.33	-8.67	54	41.92	32.98	7.25	36.82	134	74	A	H
	*	2480	99.78	---	---	96.37	32.98	7.25	36.82	134	74	P	H
	*	2480	97.48	---	---	94.07	32.98	7.25	36.82	134	74	A	H
		2493.64	49.04	-24.96	74	45.57	33	7.28	36.81	260	344	P	V
		2486.62	40.2	-13.8	54	36.79	32.98	7.25	36.82	260	344	A	V
	*	2480	95.06	---	---	91.65	32.98	7.25	36.82	260	344	P	V
	*	2480	92.83	---	---	89.42	32.98	7.25	36.82	260	344	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE(2M) (Harmonic @ 3m)

BLE(2M) Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE(2M) CH 39 2480MHz		4905	40.77	-33.23	74	61.62	34.25	10.34	65.44	300	0	P	H
		7356	42.06	-31.94	74	59.52	35.87	12.73	66.06	300	0	P	H
		4905	39.93	-34.07	74	60.78	34.25	10.34	65.44	100	0	P	V
		7356	42.05	-31.95	74	59.51	35.87	12.73	66.06	100	0	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5907.24	56.92	-31.38	88.3	47.13	35.2	11.38	36.79	107	114	P	H
		5917.48	46.44	-21.86	68.3	36.63	35.2	11.4	36.79	107	114	A	H
	*	6076	98.29	---	---	88.29	35.35	11.52	36.87	107	114	P	H
	*	6067	90.94	---	---	80.95	35.34	11.52	36.87	107	114	A	H
		5925.16	53.12	-35.18	88.3	43.31	35.22	11.4	36.81	308	75	P	V
		5916.2	43.61	-24.69	68.3	33.8	35.2	11.4	36.79	308	75	A	V
	*	6049	93.06	---	---	83.09	35.33	11.51	36.87	308	75	P	V
*	6049	86.43	---	---	76.46	35.33	11.51	36.87	308	75	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full		12048	42.37	-31.63	74	53.15	38.53	16.7	66.01	300	0	P	H
CH 15 6025MHz		12048	41.86	-32.14	74	52.64	38.53	16.7	66.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 2.4G 802.11 ax HE40 Full_CH09+WIFI 6G 802.11ax HE160 Full_CH15+LTE B48_BW 20M

2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 09 2452MHz		2388.65	52.31	-21.69	74	49.19	32.88	7.1	36.86	137	95	P	H
		2389.95	42.49	-11.51	54	39.37	32.88	7.1	36.86	137	95	A	H
		2486.38	62.92	-11.08	74	59.51	32.98	7.25	36.82	137	95	P	H
		2483.5	49.24	-4.76	54	45.83	32.98	7.25	36.82	137	95	A	H
	*	2452	111.96	---	---	108.67	32.94	7.19	36.84	137	95	P	H
	*	2450	102.13	---	---	98.84	32.94	7.19	36.84	137	95	A	H
		2389.69	48.91	-25.09	74	45.79	32.88	7.1	36.86	265	342	P	V
		2389.95	37.9	-16.1	54	34.78	32.88	7.1	36.86	265	342	A	V
		2485.42	60.32	-13.68	74	56.91	32.98	7.25	36.82	265	342	P	V
		2484.46	47.42	-6.58	54	44.01	32.98	7.25	36.82	265	342	A	V
	*	2456	106.6	---	---	103.25	32.96	7.22	36.83	265	342	P	V
	*	2456	97.55	---	---	94.2	32.96	7.22	36.83	265	342	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		4905	37.78	-36.22	74	58.14	34.74	10.34	65.44	300	0	P	H
HE40 Full		7356	41.49	-32.51	74	58.16	36.66	12.73	66.06	300	0	P	H
CH 09		4905	38.49	-35.51	74	58.85	34.74	10.34	65.44	300	360	P	V
2452MHz		7356	41.18	-32.82	74	57.85	36.66	12.73	66.06	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 15 6025MHz		5914.92	56.98	-31.32	88.3	47.17	35.2	11.4	36.79	100	112	P	H
		5925.16	46.72	-21.58	68.3	36.91	35.22	11.4	36.81	100	112	A	H
	*	6058	96.78	---	---	86.8	35.34	11.51	36.87	100	112	P	H
	*	6067	89.74	---	---	79.75	35.34	11.52	36.87	100	112	A	H
		5914.28	51.73	-36.57	88.3	41.92	35.2	11.4	36.79	287	72	P	V
		5924.84	41.84	-26.46	68.3	32.03	35.22	11.4	36.81	287	72	A	V
	*	6004	91.43	---	---	81.54	35.3	11.47	36.88	287	72	P	V
	5986	84.8	---	---	74.93	35.28	11.45	36.86	287	72	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full		12049	45.2	-28.8	74	55.96	38.53	16.72	66.01	300	0	P	H
CH 15 6025MHz		12049	44.7	-29.3	74	55.46	38.53	16.72	66.01	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission

Note symbol

-L	Low channel location
-R	High channel location



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)





WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE40 Full CH03 5965MHz																																																																			
2+6	Horizontal	Fundamental																																																																		
Peak	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project : FR252601 Mode : 19 Plane : Z IWEI : Full-directivity+Earphone PowerSetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.96</td> <td>54.09</td> <td>-34.21</td> <td>88.30</td> <td>44.28</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>104</td> <td>116 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg	1 5924.96	54.09	-34.21	88.30	44.28	35.22	11.40	36.81	104	116 Peak	HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project : FR252601 Mode : 19 Plane : Z IWEI : Full-directivity+Earphone PowerSetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5950.00</td> <td>101.76</td> <td>13.40</td> <td>88.30</td> <td>91.92</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>104</td> <td>116 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg	1 * 5950.00	101.76	13.40	88.30	91.92	35.24	11.43	36.83	104	116 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg																																																										
1 5924.96	54.09	-34.21	88.30	44.28	35.22	11.40	36.81	104	116 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg																																																										
1 * 5950.00	101.76	13.40	88.30	91.92	35.24	11.43	36.83	104	116 Peak	HORIZONTAL																																																										
Avg.	<p>Site : 030905-KS Condition : WIFI 6E (AVG) 3m 3317.5M 75957 HORIZONTAL Project : FR252601 Mode : 19 Plane : Z IWEI : Full-directivity+Earphone PowerSetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.96</td> <td>43.72</td> <td>-24.58</td> <td>68.30</td> <td>33.91</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>104</td> <td>116 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg	1 5924.96	43.72	-24.58	68.30	33.91	35.22	11.40	36.81	104	116 Average	HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E (AVG) 3m 3317.5M 75957 HORIZONTAL Project : FR252601 Mode : 19 Plane : Z IWEI : Full-directivity+Earphone PowerSetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5950.00</td> <td>94.13</td> <td>25.83</td> <td>68.30</td> <td>84.29</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>104</td> <td>116 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg	1 * 5950.00	94.13	25.83	68.30	84.29	35.24	11.43	36.83	104	116 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg																																																										
1 5924.96	43.72	-24.58	68.30	33.91	35.22	11.40	36.81	104	116 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	ca	deg																																																										
1 * 5950.00	94.13	25.83	68.30	84.29	35.24	11.43	36.83	104	116 Average	HORIZONTAL																																																										



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE40 Full H03 5965MHZ																																																																	
2+6	Vertical	Fundamental																																																																
Peak	<p>Site : 032605-KS Condition : WIFI 6E PEAK 3m 3317 SN 79567 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : FR252601 Plane : X Polarization : Full-directivity+Earphone PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>53.09</td> <td>-35.21</td> <td>88.30</td> <td>43.28</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>313</td> <td>105 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5924.96	53.09	-35.21	88.30	43.28	35.22	11.40	36.81	313	105 Peak	VERTICAL	<p>Site : 032605-KS Condition : WIFI 6E PEAK 3m 3317 SN 79567 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : FR252601 Plane : X Polarization : Full-directivity+Earphone PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>100.47</td> <td>12.17</td> <td>88.30</td> <td>90.43</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>313</td> <td>105 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5950.00	100.47	12.17	88.30	90.43	35.24	11.43	36.83	313	105 Peak	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5924.96	53.09	-35.21	88.30	43.28	35.22	11.40	36.81	313	105 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5950.00	100.47	12.17	88.30	90.43	35.24	11.43	36.83	313	105 Peak	VERTICAL																																																							
Avg.	<p>Site : 032605-KS Condition : WIFI 6E (AVG) 3m 3317 SN 79567 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto Mode : FR252601 Plane : X Polarization : Full-directivity+Earphone PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>42.17</td> <td>-26.13</td> <td>68.30</td> <td>32.36</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>313</td> <td>105 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5924.96	42.17	-26.13	68.30	32.36	35.22	11.40	36.81	313	105 Average	VERTICAL	<p>Site : 032605-KS Condition : WIFI 6E (AVG) 3m 3317 SN 79567 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto Mode : FR252601 Plane : X Polarization : Full-directivity+Earphone PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>91.47</td> <td>23.17</td> <td>68.30</td> <td>81.62</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>313</td> <td>105 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5950.00	91.47	23.17	68.30	81.62	35.26	11.43	36.84	313	105 Average	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5924.96	42.17	-26.13	68.30	32.36	35.22	11.40	36.81	313	105 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5950.00	91.47	23.17	68.30	81.62	35.26	11.43	36.84	313	105 Average	VERTICAL																																																							



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

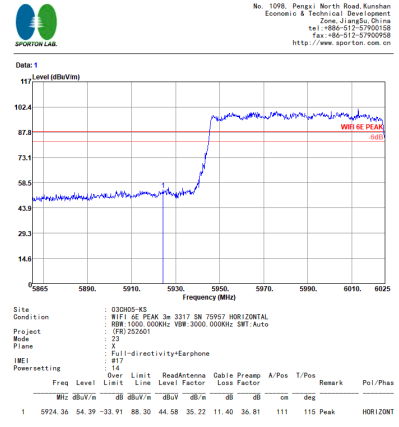
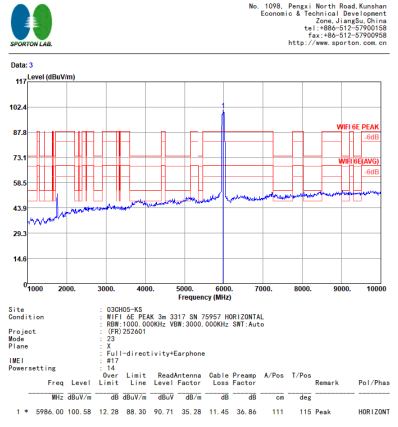
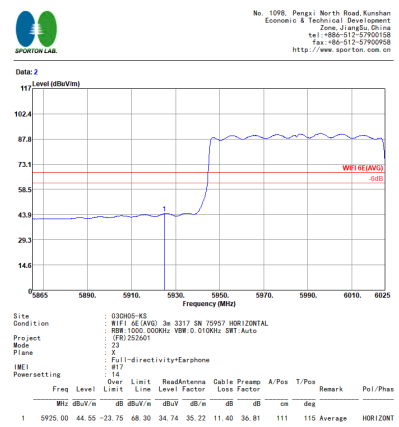
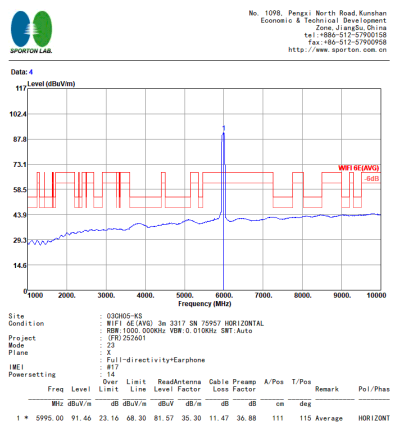
WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																															
ANT	802.11ax HE80 Full CH07 5985MHz																																																															
2+6	Horizontal	Fundamental																																																														
Peak	 <p>Site : 032005-KS Condition : RIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SMT Auto Mode : 23 Plane : 2 IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.36</td> <td>54.39</td> <td>-33.91</td> <td>88.30</td> <td>44.58</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>111</td> <td>115</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5924.36	54.39	-33.91	88.30	44.58	35.22	11.40	36.81	111	115	Peak	HORIZONT	 <p>Site : 032005-KS Condition : RIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SMT Auto Mode : 23 Plane : 2 IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5986.00</td> <td>100.58</td> <td>12.29</td> <td>88.30</td> <td>90.71</td> <td>35.28</td> <td>11.45</td> <td>36.86</td> <td>111</td> <td>115</td> <td>Peak</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5986.00	100.58	12.29	88.30	90.71	35.28	11.45	36.86	111	115	Peak	HORIZONT
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	5924.36	54.39	-33.91	88.30	44.58	35.22	11.40	36.81	111	115	Peak	HORIZONT																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	5986.00	100.58	12.29	88.30	90.71	35.28	11.45	36.86	111	115	Peak	HORIZONT																																																				
Avg.	 <p>Site : 032005-KS Condition : RIFI 6E (AVG) 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SMT Auto Mode : 23 Plane : 2 IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.00</td> <td>44.55</td> <td>-23.75</td> <td>68.30</td> <td>34.74</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>111</td> <td>115</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5925.00	44.55	-23.75	68.30	34.74	35.22	11.40	36.81	111	115	Average	HORIZONT	 <p>Site : 032005-KS Condition : RIFI 6E (AVG) 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VBR 0.010KHz SMT Auto Mode : 23 Plane : 2 IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5995.00</td> <td>91.44</td> <td>23.16</td> <td>68.30</td> <td>81.57</td> <td>35.30</td> <td>11.47</td> <td>36.88</td> <td>111</td> <td>115</td> <td>Average</td> <td>HORIZONT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5995.00	91.44	23.16	68.30	81.57	35.30	11.47	36.88	111	115	Average	HORIZONT
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	5925.00	44.55	-23.75	68.30	34.74	35.22	11.40	36.81	111	115	Average	HORIZONT																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	5995.00	91.44	23.16	68.30	81.57	35.30	11.47	36.88	111	115	Average	HORIZONT																																																				



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE80 Full CH07 5985MHz																																																																	
2+6	Vertical	Fundamental																																																																
Peak	<p>Site : 030805-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 VERTICAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT:Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : 817 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.20</td> <td>52.31</td> <td>-35.99</td> <td>88.30</td> <td>42.50</td> <td>35.20</td> <td>11.40</td> <td>35.79</td> <td>300</td> <td>74 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5920.20	52.31	-35.99	88.30	42.50	35.20	11.40	35.79	300	74 Peak	VERTICAL	<p>Site : 030805-KS Condition : WIFI 6E PEAK 3m 3317.5M 75957 VERTICAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT:Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : 817 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5977.00</td> <td>95.30</td> <td>7.00</td> <td>88.30</td> <td>85.43</td> <td>35.28</td> <td>11.45</td> <td>36.86</td> <td>300</td> <td>74 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5977.00	95.30	7.00	88.30	85.43	35.28	11.45	36.86	300	74 Peak	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5920.20	52.31	-35.99	88.30	42.50	35.20	11.40	35.79	300	74 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5977.00	95.30	7.00	88.30	85.43	35.28	11.45	36.86	300	74 Peak	VERTICAL																																																							
Avg.	<p>Site : 030805-KS Condition : WIFI 6E (AVG) 3m 3317.5M 75957 VERTICAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT:Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : 817 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.84</td> <td>42.52</td> <td>-25.78</td> <td>68.30</td> <td>32.71</td> <td>35.22</td> <td>11.40</td> <td>35.81</td> <td>300</td> <td>74 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5924.84	42.52	-25.78	68.30	32.71	35.22	11.40	35.81	300	74 Average	VERTICAL	<p>Site : 030805-KS Condition : WIFI 6E (AVG) 3m 3317.5M 75957 VERTICAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT:Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : 817 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5977.00</td> <td>87.36</td> <td>19.06</td> <td>68.30</td> <td>77.49</td> <td>35.28</td> <td>11.45</td> <td>36.86</td> <td>300</td> <td>74 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			1	5977.00	87.36	19.06	68.30	77.49	35.28	11.45	36.86	300	74 Average	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5924.84	42.52	-25.78	68.30	32.71	35.22	11.40	35.81	300	74 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																											
1	5977.00	87.36	19.06	68.30	77.49	35.28	11.45	36.86	300	74 Average	VERTICAL																																																							



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

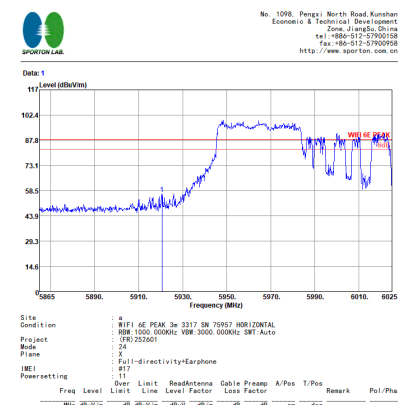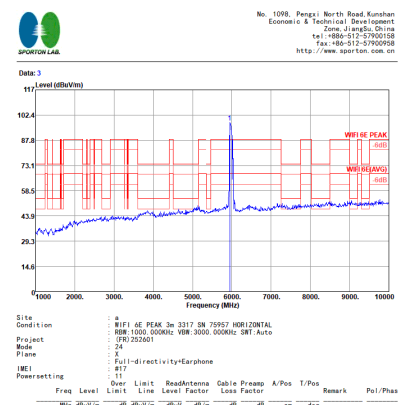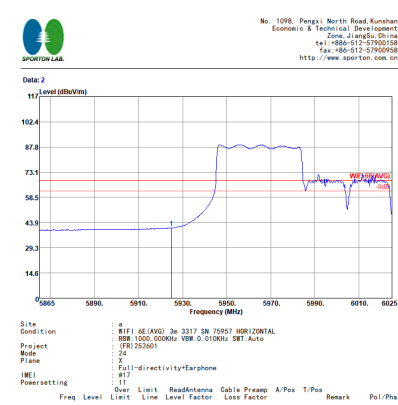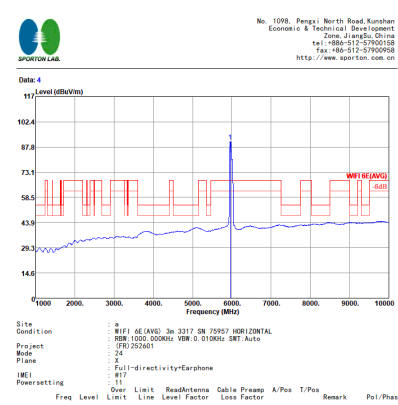WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																	
2+6	Horizontal	Fundamental																																																																
Peak	 <p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: 24 Plane: Full-directivity+Earphone MEI: #1 Powersetting: #1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.68</td> <td>56.69</td> <td>-31.61</td> <td>88.30</td> <td>46.88</td> <td>35.20</td> <td>11.40</td> <td>36.79</td> <td>100</td> <td>115 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg		1	5920.68	56.69	-31.61	88.30	46.88	35.20	11.40	36.79	100	115 Peak	HORIZONTAL	 <p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: 24 Plane: Full-directivity+Earphone MEI: #1 Powersetting: #1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5950.00</td> <td>98.23</td> <td>9.93</td> <td>88.30</td> <td>88.39</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>100</td> <td>115 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg		1	5950.00	98.23	9.93	88.30	88.39	35.24	11.43	36.83	100	115 Peak	HORIZONTAL
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg																																																										
1	5920.68	56.69	-31.61	88.30	46.88	35.20	11.40	36.79	100	115 Peak	HORIZONTAL																																																							
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg																																																										
1	5950.00	98.23	9.93	88.30	88.39	35.24	11.43	36.83	100	115 Peak	HORIZONTAL																																																							
Avg.	 <p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: 24 Plane: Full-directivity+Earphone MEI: #1 Powersetting: #1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.00</td> <td>40.84</td> <td>-27.46</td> <td>68.30</td> <td>31.03</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>100</td> <td>115 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg		1	5925.00	40.84	-27.46	68.30	31.03	35.22	11.40	36.81	100	115 Average	HORIZONTAL	 <p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: 24 Plane: Full-directivity+Earphone MEI: #1 Powersetting: #1</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5959.00</td> <td>91.01</td> <td>22.71</td> <td>68.30</td> <td>81.16</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>100</td> <td>115 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg		1	5959.00	91.01	22.71	68.30	81.16	35.26	11.43	36.84	100	115 Average	HORIZONTAL
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg																																																										
1	5925.00	40.84	-27.46	68.30	31.03	35.22	11.40	36.81	100	115 Average	HORIZONTAL																																																							
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	deg	deg																																																										
1	5959.00	91.01	22.71	68.30	81.16	35.26	11.43	36.84	100	115 Average	HORIZONTAL																																																							







WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																			
2+6	Vertical	Fundamental																																																																		
Peak	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: 24 Plane: X IMEI: Full-directivity+Earphone Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5923.24</td> <td>53.66</td> <td>-34.64</td> <td>88.30</td> <td>43.85</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>299</td> <td>104 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg	1 5923.24	53.66	-34.64	88.30	43.85	35.22	11.40	36.81	299	104 Peak	VERTICAL	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: 24 Plane: X IMEI: Full-directivity+Earphone Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 + 5950.00</td> <td>94.12</td> <td>5.82</td> <td>88.30</td> <td>84.28</td> <td>35.24</td> <td>11.43</td> <td>36.83</td> <td>299</td> <td>104 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg	1 + 5950.00	94.12	5.82	88.30	84.28	35.24	11.43	36.83	299	104 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg																																																										
1 5923.24	53.66	-34.64	88.30	43.85	35.22	11.40	36.81	299	104 Peak	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg																																																										
1 + 5950.00	94.12	5.82	88.30	84.28	35.24	11.43	36.83	299	104 Peak	VERTICAL																																																										
Avg.	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: 24 Plane: X IMEI: Full-directivity+Earphone Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.52</td> <td>39.82</td> <td>-28.48</td> <td>68.30</td> <td>30.01</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>299</td> <td>104 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg	1 5924.52	39.82	-28.48	68.30	30.01	35.22	11.40	36.81	299	104 Average	VERTICAL	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: 24 Plane: X IMEI: Full-directivity+Earphone Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 + 5959.00</td> <td>87.79</td> <td>19.49</td> <td>68.30</td> <td>77.94</td> <td>35.26</td> <td>11.43</td> <td>36.84</td> <td>299</td> <td>104 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg	1 + 5959.00	87.79	19.49	68.30	77.94	35.26	11.43	36.84	299	104 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg																																																										
1 5924.52	39.82	-28.48	68.30	30.01	35.22	11.40	36.81	299	104 Average	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	cm	deg																																																										
1 + 5959.00	87.79	19.49	68.30	77.94	35.26	11.43	36.84	299	104 Average	VERTICAL																																																										



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																					
ANT	802.11ax HE160 Full CH15 6025MHz																																																																					
2+6	Horizontal	Fundamental																																																																				
Peak	<p>Site: 032905-KS Condition: WIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project: RRM 1000.000KHz VBR 0.010KHz SWT Auto Mode: 27 Plane: 2 IPE: Full-directivity+Earphone Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5911.40</td> <td>54.53</td> <td>-33.77</td> <td>88.30</td> <td>44.74</td> <td>35.20</td> <td>11.38</td> <td>36.79</td> <td>100</td> <td>237 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg		1	5911.40	54.53	-33.77	88.30	44.74	35.20	11.38	36.79	100	237 Peak	HORIZONTAL	<p>Site: 032905-KS Condition: WIFI 6E PEAK 3m 3317.5M 75957 HORIZONTAL Project: RRM 1000.000KHz VBR 0.010KHz SWT Auto Mode: 27 Plane: 2 IPE: Full-directivity+Earphone Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6013.00</td> <td>94.44</td> <td>6.14</td> <td>88.30</td> <td>84.53</td> <td>35.31</td> <td>11.48</td> <td>36.88</td> <td>100</td> <td>237 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg		1	6013.00	94.44	6.14	88.30	84.53	35.31	11.48	36.88	100	237 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg																																																													
1	5911.40	54.53	-33.77	88.30	44.74	35.20	11.38	36.79	100	237 Peak	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg																																																													
1	6013.00	94.44	6.14	88.30	84.53	35.31	11.48	36.88	100	237 Peak	HORIZONTAL																																																											
Avg.	<p>Site: 032905-KS Condition: WIFI 6E(AVG) 3m 3317.5M 75957 HORIZONTAL Project: RRM 1000.000KHz VBR 0.010KHz SWT Auto Mode: 27 Plane: 2 IPE: Full-directivity+Earphone Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.92</td> <td>46.62</td> <td>-21.68</td> <td>68.30</td> <td>36.81</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>100</td> <td>237 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg		1	5922.92	46.62	-21.68	68.30	36.81	35.22	11.40	36.81	100	237 Average	HORIZONTAL	<p>Site: 032905-KS Condition: WIFI 6E(AVG) 3m 3317.5M 75957 HORIZONTAL Project: RRM 1000.000KHz VBR 0.010KHz SWT Auto Mode: 27 Plane: 2 IPE: Full-directivity+Earphone Powersetting: 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6013.00</td> <td>86.39</td> <td>18.09</td> <td>68.30</td> <td>76.48</td> <td>35.31</td> <td>11.48</td> <td>36.88</td> <td>100</td> <td>237 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg		1	6013.00	86.39	18.09	68.30	76.48	35.31	11.48	36.88	100	237 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg																																																													
1	5922.92	46.62	-21.68	68.30	36.81	35.22	11.40	36.81	100	237 Average	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	deg																																																													
1	6013.00	86.39	18.09	68.30	76.48	35.31	11.48	36.88	100	237 Average	HORIZONTAL																																																											

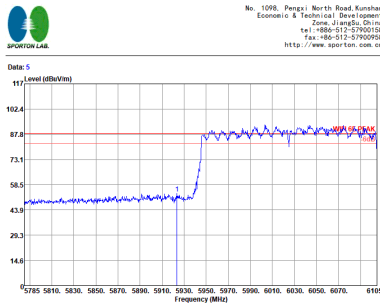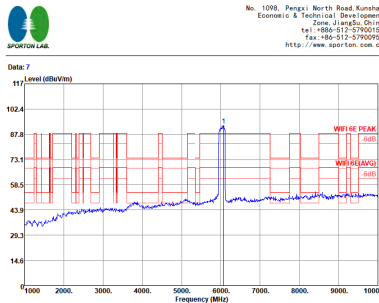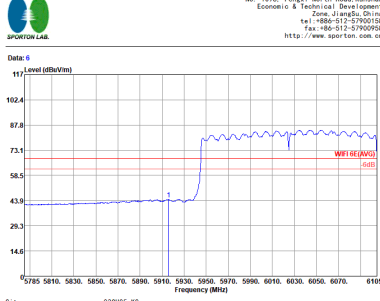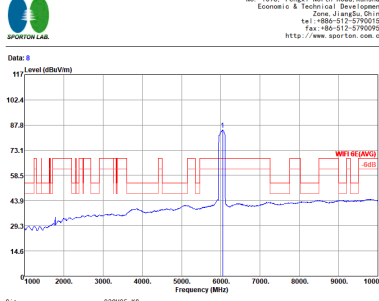

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE160 Full CH15 6025MHz																																																																			
2+6	Vertical	Fundamental																																																																		
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032605-KS Condition : WIFI @ PEAK @ 3317.5M 75957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : #1 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.58</td> <td>53.58</td> <td>-34.72</td> <td>88.30</td> <td>43.77</td> <td>35.22</td> <td>11.40</td> <td>36.81</td> <td>308</td> <td>77 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1	5925.58	53.58	-34.72	88.30	43.77	35.22	11.40	36.81	308	77 Peak VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032605-KS Condition : WIFI @ PEAK @ 3317.5M 75957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : #1 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6047.00</td> <td>93.03</td> <td>4.73</td> <td>88.30</td> <td>83.04</td> <td>35.34</td> <td>11.52</td> <td>36.87</td> <td>308</td> <td>77 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1	6047.00	93.03	4.73	88.30	83.04	35.34	11.52	36.87	308	77 Peak VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																												
1	5925.58	53.58	-34.72	88.30	43.77	35.22	11.40	36.81	308	77 Peak VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																												
1	6047.00	93.03	4.73	88.30	83.04	35.34	11.52	36.87	308	77 Peak VERTICAL																																																										
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032605-KS Condition : WIFI @ (AVG) @ 3317.5M 75957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 000kHz SRT Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : #1 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5915.88</td> <td>44.77</td> <td>-23.53</td> <td>68.30</td> <td>34.96</td> <td>35.20</td> <td>11.40</td> <td>36.79</td> <td>308</td> <td>77 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1	5915.88	44.77	-23.53	68.30	34.96	35.20	11.40	36.79	308	77 Average VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032605-KS Condition : WIFI @ (AVG) @ 3317.5M 75957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 000kHz SRT Auto Mode : (FR) 252601 Plane : X Antenna : Full-directivity+Earphone IMEI : #1 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6049.00</td> <td>84.91</td> <td>16.61</td> <td>68.30</td> <td>74.94</td> <td>35.33</td> <td>11.51</td> <td>36.87</td> <td>308</td> <td>77 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg			1	6049.00	84.91	16.61	68.30	74.94	35.33	11.51	36.87	308	77 Average VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																												
1	5915.88	44.77	-23.53	68.30	34.96	35.20	11.40	36.79	308	77 Average VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB	dB	cm	deg																																																												
1	6049.00	84.91	16.61	68.30	74.94	35.33	11.51	36.87	308	77 Average VERTICAL																																																										



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE40 Full CH03 5965MHz																																																																			
2+6	Horizontal	Vertical																																																																		
Peak Avg.	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3317 CM 79937 HORIZONTAL Project : RSM 1000, 0000KHz VBR 3000, 0000KHz SRT Auto Mode : 19 Plane : Z File : Full-directivity+Earphone IWEI : #17 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11928.00</td> <td>43.80</td> <td>-30.20</td> <td>74.00</td> <td>54.80</td> <td>38.46</td> <td>16.43</td> <td>66.09</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	1 11928.00	43.80	-30.20	74.00	54.80	38.46	16.43	66.09	300	0 Peak	HORIZONTAL	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3317 CM 79937 VERTICAL Project : RSM 1000, 0000KHz VBR 3000, 0000KHz SRT Auto Mode : 19 Plane : X File : Full-directivity+Earphone IWEI : #17 PowerSetting : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11928.00</td> <td>43.81</td> <td>-30.19</td> <td>74.00</td> <td>54.81</td> <td>38.46</td> <td>16.43</td> <td>66.09</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	1 11928.00	43.81	-30.19	74.00	54.81	38.46	16.43	66.09	100	0 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB																																																										
1 11928.00	43.80	-30.20	74.00	54.80	38.46	16.43	66.09	300	0 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB																																																										
1 11928.00	43.81	-30.19	74.00	54.81	38.46	16.43	66.09	100	0 Peak	VERTICAL																																																										



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																	
ANT	802.11ax HE80 Full CH07 5985MHz																																																																	
2+6	Horizontal	Vertical																																																																
Peak Avg.	<p>Site : 032005-KS Condition : RIFI 6E PEAK 3m 3317 5M 75957 HORIZONTAL Project : R98 1000 000MHz V98 3000 000MHz GRT Auto Mode : 23 Plane : X Ant : Full-directivity+Earphone MEI : 417 Powersetting : 14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11968.00</td> <td>44.05</td> <td>-29.95</td> <td>74.00</td> <td>54.97</td> <td>38.48</td> <td>16.66</td> <td>66.06</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	11968.00	44.05	-29.95	74.00	54.97	38.48	16.66	66.06	300	0 Peak	HORIZONTAL	<p>Site : 032005-KS Condition : RIFI 6E PEAK 3m 3317 5M 75957 VERTICAL Project : R98 1000 000MHz V98 3000 000MHz GRT Auto Mode : 23 Plane : X Ant : Full-directivity+Earphone MEI : 417 Powersetting : 14</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11968.00</td> <td>44.04</td> <td>-29.96</td> <td>74.00</td> <td>54.96</td> <td>38.48</td> <td>16.66</td> <td>66.06</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	11968.00	44.04	-29.96	74.00	54.96	38.48	16.66	66.06	100	0 Peak	VERTICAL
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1	11968.00	44.05	-29.95	74.00	54.97	38.48	16.66	66.06	300	0 Peak	HORIZONTAL																																																							
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																									
1	11968.00	44.04	-29.96	74.00	54.96	38.48	16.66	66.06	100	0 Peak	VERTICAL																																																							



**U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)**

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE160 Full CH15 6025MHz																																																																			
2+6	Horizontal	Vertical																																																																		
Peak Avg.	<p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 79957 HORIZONTAL Project : 808-1000-0000Hz V98-3000-0000Hz CRT-Auto Mode : (FR) 252601 Node : 27 Plane : 4 Full-directivity+Earphone ME1 : 81 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12048.00</td> <td>44.31</td> <td>-29.69</td> <td>74.00</td> <td>55.09</td> <td>38.53</td> <td>16.70</td> <td>66.01</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	ME1	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	12048.00	44.31	-29.69	74.00	55.09	38.53	16.70	66.01	300	0 Peak HORIZONTAL	<p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 79957 VERTICAL Project : 808-1000-0000Hz V98-3000-0000Hz CRT-Auto Mode : (FR) 252601 Node : 27 Plane : 4 Full-directivity+Earphone ME1 : 81 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12048.00</td> <td>44.29</td> <td>-29.71</td> <td>74.00</td> <td>55.07</td> <td>38.53</td> <td>16.70</td> <td>66.01</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	ME1	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	12048.00	44.29	-29.71	74.00	55.07	38.53	16.70	66.01	100	0 Peak VERTICAL
	ME1	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	12048.00	44.31	-29.69	74.00	55.09	38.53	16.70	66.01	300	0 Peak HORIZONTAL																																																										
ME1	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	12048.00	44.29	-29.71	74.00	55.07	38.53	16.70	66.01	100	0 Peak VERTICAL																																																										



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE160 Full CH15 6025MHz	
2+6	Horizontal	Vertical
Peak Avg.	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03CBIS-R3 Condition : TEST OF PEAK In AREA0 CH101070 HORIZONTAL Project : REF 1856, 000MHz YEW 3000, 000MHz SPT Auto Mode : 27 Plane : X File : Full-directivity*Earphone IMEI : 811 PowerSetting : 13</p>	<p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03CBIS-R3 Condition : TEST OF PEAK In AREA0 CH101070 VERTICAL Project : REF 1856, 000MHz YEW 3000, 000MHz SPT Auto Mode : 27 Plane : X File : Full-directivity*Earphone IMEI : 811 PowerSetting : 13</p>

Remark: Only the worst harmonic (18G-40G) are shown in the report



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																													
ANT	802.11a CH229 7095MHz																																																													
2+6	Horizontal	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3317.5M 70957 HORIZONTAL RSM 1000.000kHz VBR 3.000.000kHz SRT Auto Project : (FR) 252601 Mode : 12 Plane : Z Full-directivity+Earphone IPE1 : #17 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7200.84</td> <td>52.67</td> <td>-35.63</td> <td>88.30</td> <td>41.20</td> <td>35.84</td> <td>12.71</td> <td>37.08</td> <td>127</td> <td>111 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg		1 7200.84	52.67	-35.63	88.30	41.20	35.84	12.71	37.08	127	111 Peak HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m 3317.5M 70957 HORIZONTAL RSM 1000.000kHz VBR 3.000.000kHz SRT Auto Project : (FR) 252601 Mode : 12 Plane : Z Full-directivity+Earphone IPE1 : #17 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 7093.00</td> <td>102.25</td> <td>13.95</td> <td>88.30</td> <td>90.96</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>127</td> <td>111 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg		1 * 7093.00	102.25	13.95	88.30	90.96	35.82	12.59	37.12	127	111 Peak HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg																																																						
1 7200.84	52.67	-35.63	88.30	41.20	35.84	12.71	37.08	127	111 Peak HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg																																																						
1 * 7093.00	102.25	13.95	88.30	90.96	35.82	12.59	37.12	127	111 Peak HORIZONTAL																																																					
Avg.	<p>Site : 030905-KS Condition : WIFI 6E (AVG) 3m 3317.5M 70957 HORIZONTAL RSM 1000.000kHz VBR 3.000.000kHz SRT Auto Project : (FR) 252601 Mode : 12 Plane : Z Full-directivity+Earphone IPE1 : #17 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7160.68</td> <td>41.94</td> <td>-26.36</td> <td>68.30</td> <td>30.55</td> <td>35.83</td> <td>12.66</td> <td>37.10</td> <td>127</td> <td>111 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg		1 7160.68	41.94	-26.36	68.30	30.55	35.83	12.66	37.10	127	111 Average HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E (AVG) 3m 3317.5M 70957 HORIZONTAL RSM 1000.000kHz VBR 3.000.000kHz SRT Auto Project : (FR) 252601 Mode : 12 Plane : Z Full-directivity+Earphone IPE1 : #17 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 7093.00</td> <td>93.79</td> <td>25.49</td> <td>68.30</td> <td>82.50</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>127</td> <td>111 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg		1 * 7093.00	93.79	25.49	68.30	82.50	35.82	12.59	37.12	127	111 Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg																																																						
1 7160.68	41.94	-26.36	68.30	30.55	35.83	12.66	37.10	127	111 Average HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	deg																																																						
1 * 7093.00	93.79	25.49	68.30	82.50	35.82	12.59	37.12	127	111 Average HORIZONTAL																																																					







WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																											
ANT	802.11a CH229 7095MHz																																																											
2+6	Vertical	Fundamental																																																										
Peak	<p>Site : 030805-KS Condition : WIFI DE PEAK 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto FR252601 Mode : 12 Plane : X Full-directivity+Earphone IMEI : #1 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7170.40</td> <td>52.11</td> <td>-36.19</td> <td>88.30</td> <td>40.68</td> <td>35.83</td> <td>12.69</td> <td>37.09</td> <td>100</td> <td>200</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	7170.40	52.11	-36.19	88.30	40.68	35.83	12.69	37.09	100	200	Peak	VERTICAL	<p>Site : 030805-KS Condition : WIFI DE PEAK 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto FR252601 Mode : 12 Plane : X Full-directivity+Earphone IMEI : #1 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>103.65</td> <td>15.35</td> <td>88.30</td> <td>92.35</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>100</td> <td>200</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	7102.00	103.65	15.35	88.30	92.35	35.82	12.59	37.11	100	200	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	7170.40	52.11	-36.19	88.30	40.68	35.83	12.69	37.09	100	200	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	7102.00	103.65	15.35	88.30	92.35	35.82	12.59	37.11	100	200	Peak	VERTICAL																																																
Avg.	<p>Site : 030805-KS Condition : WIFI DE (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto FR252601 Mode : 12 Plane : X Full-directivity+Earphone IMEI : #1 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7167.72</td> <td>42.03</td> <td>-26.27</td> <td>68.30</td> <td>30.60</td> <td>35.83</td> <td>12.69</td> <td>37.09</td> <td>100</td> <td>200</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	7167.72	42.03	-26.27	68.30	30.60	35.83	12.69	37.09	100	200	Average	VERTICAL	<p>Site : 030805-KS Condition : WIFI DE (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto FR252601 Mode : 12 Plane : X Full-directivity+Earphone IMEI : #1 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>95.95</td> <td>27.65</td> <td>68.30</td> <td>84.65</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>100</td> <td>200</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	7102.00	95.95	27.65	68.30	84.65	35.82	12.59	37.11	100	200	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	7167.72	42.03	-26.27	68.30	30.60	35.83	12.69	37.09	100	200	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	7102.00	95.95	27.65	68.30	84.65	35.82	12.59	37.11	100	200	Average	VERTICAL																																																



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Full CH229 7095MHz																																																																			
2+6	Horizontal	Fundamental																																																																		
Peak	<p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000.0000Hz VBR 3000.0000Hz SWT Auto Mode : S3 Plane : X IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7142.92</td> <td>52.21</td> <td>-36.09</td> <td>88.30</td> <td>40.84</td> <td>35.83</td> <td>12.64</td> <td>37.10</td> <td>115</td> <td>113</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1 7142.92	52.21	-36.09	88.30	40.84	35.83	12.64	37.10	115	113	Peak HORIZONTAL	<p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000.0000Hz VBR 3000.0000Hz SWT Auto Mode : S3 Plane : X IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 7093.00</td> <td>100.81</td> <td>12.51</td> <td>88.30</td> <td>89.52</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>115</td> <td>113</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1 * 7093.00	100.81	12.51	88.30	89.52	35.82	12.59	37.12	115	113	Peak HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																											
1 7142.92	52.21	-36.09	88.30	40.84	35.83	12.64	37.10	115	113	Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																											
1 * 7093.00	100.81	12.51	88.30	89.52	35.82	12.59	37.12	115	113	Peak HORIZONTAL																																																										
Avg.	<p>Site : 032005-KS Condition : WIFI 6E(AVG) 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000.0000Hz VBR 0.0100Hz SWT Auto Mode : S3 Plane : X IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 7177.48</td> <td>41.87</td> <td>-26.43</td> <td>68.30</td> <td>30.44</td> <td>35.83</td> <td>12.69</td> <td>37.09</td> <td>115</td> <td>113</td> <td>Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1 7177.48	41.87	-26.43	68.30	30.44	35.83	12.69	37.09	115	113	Average HORIZONTAL	<p>Site : 032005-KS Condition : WIFI 6E(AVG) 3m 3317 5N 75957 HORIZONTAL Project : RRM 1000.0000Hz VBR 0.0100Hz SWT Auto Mode : S3 Plane : X IPE1 : Full-directivity+Earphone Powersetting : #17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 7093.00</td> <td>93.31</td> <td>25.01</td> <td>68.30</td> <td>82.02</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>115</td> <td>113</td> <td>Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg		1 * 7093.00	93.31	25.01	68.30	82.02	35.82	12.59	37.12	115	113	Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																											
1 7177.48	41.87	-26.43	68.30	30.44	35.83	12.69	37.09	115	113	Average HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	dB	cm	deg																																																											
1 * 7093.00	93.31	25.01	68.30	82.02	35.82	12.59	37.12	115	113	Average HORIZONTAL																																																										

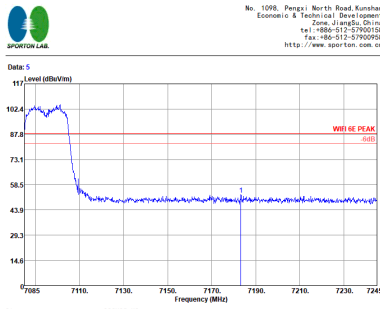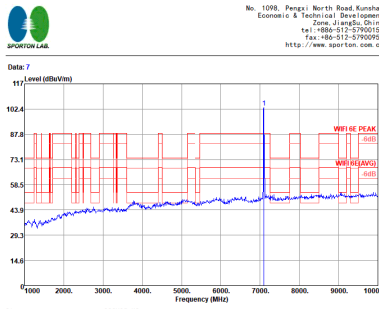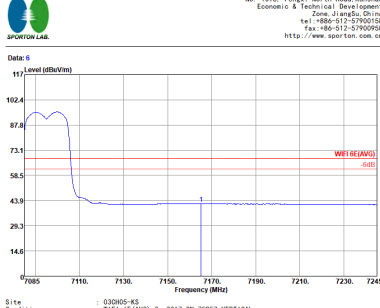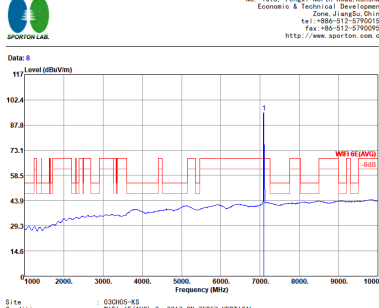

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Full CH229 7095MHz																																																													
2+6	Vertical	Fundamental																																																												
Peak	 <p>Site : 030905-KS Condition : WIFI DE PEAK 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : FR2 252601 Plane : X IME1 : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7176.24</td> <td>52.68</td> <td>-35.62</td> <td>88.30</td> <td>41.24</td> <td>35.84</td> <td>12.69</td> <td>37.09</td> <td>110</td> <td>197 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	cm	deg			7176.24	52.68	-35.62	88.30	41.24	35.84	12.69	37.09	110	197 Peak VERTICAL	 <p>Site : 030905-KS Condition : WIFI DE PEAK 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 3000, 000kHz SRT Auto Mode : FR2 252601 Plane : X IME1 : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7102.00</td> <td>103.31</td> <td>15.01</td> <td>88.30</td> <td>92.01</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>110</td> <td>197 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	cm	deg			7102.00	103.31	15.01	88.30	92.01	35.82	12.59	37.11	110	197 Peak VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																							
7176.24	52.68	-35.62	88.30	41.24	35.84	12.69	37.09	110	197 Peak VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																							
7102.00	103.31	15.01	88.30	92.01	35.82	12.59	37.11	110	197 Peak VERTICAL																																																					
Avg.	 <p>Site : 030905-KS Condition : WIFI DE (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto Mode : FR2 252601 Plane : X IME1 : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7165.16</td> <td>41.96</td> <td>-26.34</td> <td>68.30</td> <td>30.56</td> <td>35.83</td> <td>12.66</td> <td>37.09</td> <td>110</td> <td>197 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	cm	deg			7165.16	41.96	-26.34	68.30	30.56	35.83	12.66	37.09	110	197 Average VERTICAL	 <p>Site : 030905-KS Condition : WIFI DE (AVG) 3m 3317 SN 70957 VERTICAL Project : RSM 1000, 000kHz VBR 0, 0100kHz SRT Auto Mode : FR2 252601 Plane : X IME1 : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7102.00</td> <td>95.29</td> <td>26.99</td> <td>68.30</td> <td>83.99</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>110</td> <td>197 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dB	dB	cm	deg			7102.00	95.29	26.99	68.30	83.99	35.82	12.59	37.11	110	197 Average VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																							
7165.16	41.96	-26.34	68.30	30.56	35.83	12.66	37.09	110	197 Average VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																							
7102.00	95.29	26.99	68.30	83.99	35.82	12.59	37.11	110	197 Average VERTICAL																																																					



U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Partial 52/40 CH229 7095MHz																																																													
2+6	Horizontal	Fundamental																																																												
Peak	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SS Plane: X MEI: Full-directivity+Earphone Powersetting: S</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7131.56</td> <td>51.13</td> <td>-37.17</td> <td>88.30</td> <td>39.76</td> <td>35.83</td> <td>12.64</td> <td>37.10</td> <td>109</td> <td>76 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1	7131.56	51.13	-37.17	88.30	39.76	35.83	12.64	37.10	109	76 Peak	HORIZONTAL	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SS Plane: X MEI: Full-directivity+Earphone Powersetting: S</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>91.00</td> <td>2.70</td> <td>88.30</td> <td>79.70</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>109</td> <td>76 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1	7102.00	91.00	2.70	88.30	79.70	35.82	12.59	37.11	109	76 Peak	HORIZONTAL
MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																							
1	7131.56	51.13	-37.17	88.30	39.76	35.83	12.64	37.10	109	76 Peak	HORIZONTAL																																																			
MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																							
1	7102.00	91.00	2.70	88.30	79.70	35.82	12.59	37.11	109	76 Peak	HORIZONTAL																																																			
Avg.	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SS Plane: X MEI: Full-directivity+Earphone Powersetting: S</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7204.52</td> <td>40.22</td> <td>-28.08</td> <td>68.30</td> <td>28.75</td> <td>35.84</td> <td>12.71</td> <td>37.08</td> <td>109</td> <td>76 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1	7204.52	40.22	-28.08	68.30	28.75	35.84	12.71	37.08	109	76 Average	HORIZONTAL	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SS Plane: X MEI: Full-directivity+Earphone Powersetting: S</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>84.58</td> <td>16.28</td> <td>68.30</td> <td>73.28</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>109</td> <td>76 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1	7102.00	84.58	16.28	68.30	73.28	35.82	12.59	37.11	109	76 Average	HORIZONTAL
MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																							
1	7204.52	40.22	-28.08	68.30	28.75	35.84	12.71	37.08	109	76 Average	HORIZONTAL																																																			
MEI	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																							
1	7102.00	84.58	16.28	68.30	73.28	35.82	12.59	37.11	109	76 Average	HORIZONTAL																																																			



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																																															
ANT	802.11ax HE20 Partial 52/40 CH229 7095MHZ																																																																																															
2+6	Vertical	Fundamental																																																																																														
<p style="text-align: center;">Peak</p>	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: S Plane: X IPE1: Full-directivity+Earphone PowerSetting: S</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>IPE1</th> <th>PowerSetting</th> </tr> </thead> <tbody> <tr> <td>#</td> <td>WIFI AE PEAK 3m 3317.5M 70957 VERTICAL</td> <td>FR252601</td> <td>S</td> <td>X</td> <td>Full-directivity+Earphone</td> <td>S</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7131.88</td> <td>50.21</td> <td>-38.09</td> <td>88.30</td> <td>38.84</td> <td>35.83</td> <td>12.64</td> <td>37.10</td> <td>100</td> <td>197 Peak VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	IPE1	PowerSetting	#	WIFI AE PEAK 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg			1	7131.88	50.21	-38.09	88.30	38.84	35.83	12.64	37.10	100	197 Peak VERTICAL	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: S Plane: X IPE1: Full-directivity+Earphone PowerSetting: S</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>IPE1</th> <th>PowerSetting</th> </tr> </thead> <tbody> <tr> <td>#</td> <td>WIFI AE PEAK 3m 3317.5M 70957 VERTICAL</td> <td>FR252601</td> <td>S</td> <td>X</td> <td>Full-directivity+Earphone</td> <td>S</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>94.06</td> <td>5.76</td> <td>88.30</td> <td>82.76</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>100</td> <td>197 Peak VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	IPE1	PowerSetting	#	WIFI AE PEAK 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg			1	7102.00	94.06	5.76	88.30	82.76	35.82	12.59	37.11	100	197 Peak VERTICAL
Site	Condition	Project	Mode	Plane	IPE1	PowerSetting																																																																																										
#	WIFI AE PEAK 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S																																																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																																																								
1	7131.88	50.21	-38.09	88.30	38.84	35.83	12.64	37.10	100	197 Peak VERTICAL																																																																																						
Site	Condition	Project	Mode	Plane	IPE1	PowerSetting																																																																																										
#	WIFI AE PEAK 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S																																																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																																																								
1	7102.00	94.06	5.76	88.30	82.76	35.82	12.59	37.11	100	197 Peak VERTICAL																																																																																						
<p style="text-align: center;">Avg.</p>	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: S Plane: X IPE1: Full-directivity+Earphone PowerSetting: S</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>IPE1</th> <th>PowerSetting</th> </tr> </thead> <tbody> <tr> <td>#</td> <td>WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL</td> <td>FR252601</td> <td>S</td> <td>X</td> <td>Full-directivity+Earphone</td> <td>S</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7200.52</td> <td>40.27</td> <td>-28.03</td> <td>68.30</td> <td>28.80</td> <td>35.84</td> <td>12.71</td> <td>37.08</td> <td>100</td> <td>197 Average VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	IPE1	PowerSetting	#	WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg			1	7200.52	40.27	-28.03	68.30	28.80	35.84	12.71	37.08	100	197 Average VERTICAL	<p>Site: No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Project: FR252601 Mode: S Plane: X IPE1: Full-directivity+Earphone PowerSetting: S</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>Plane</th> <th>IPE1</th> <th>PowerSetting</th> </tr> </thead> <tbody> <tr> <td>#</td> <td>WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL</td> <td>FR252601</td> <td>S</td> <td>X</td> <td>Full-directivity+Earphone</td> <td>S</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7102.00</td> <td>88.09</td> <td>19.79</td> <td>68.30</td> <td>76.79</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>100</td> <td>197 Average VERTICAL</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	Plane	IPE1	PowerSetting	#	WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg			1	7102.00	88.09	19.79	68.30	76.79	35.82	12.59	37.11	100	197 Average VERTICAL
Site	Condition	Project	Mode	Plane	IPE1	PowerSetting																																																																																										
#	WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S																																																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																																																								
1	7200.52	40.27	-28.03	68.30	28.80	35.84	12.71	37.08	100	197 Average VERTICAL																																																																																						
Site	Condition	Project	Mode	Plane	IPE1	PowerSetting																																																																																										
#	WIFI AE (AVG) 3m 3317.5M 70957 VERTICAL	FR252601	S	X	Full-directivity+Earphone	S																																																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																																																								
1	7102.00	88.09	19.79	68.30	76.79	35.82	12.59	37.11	100	197 Average VERTICAL																																																																																						



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)





WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																					
ANT	802.11ax HE40 Partial 242/62 H227 7085MHz																																																																					
2+6	Horizontal	Fundamental																																																																				
Peak	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SF Plane: X Full-directivity+Earphone MEI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7131.96</td> <td>57.79</td> <td>-30.51</td> <td>88.30</td> <td>46.42</td> <td>35.83</td> <td>12.64</td> <td>37.10</td> <td>110</td> <td>111 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7131.96	57.79	-30.51	88.30	46.42	35.83	12.64	37.10	110	111 Peak	HORIZONTAL	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SF Plane: X Full-directivity+Earphone MEI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>96.71</td> <td>8.41</td> <td>88.30</td> <td>85.42</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>110</td> <td>111 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7093.00	96.71	8.41	88.30	85.42	35.82	12.59	37.12	110	111 Peak	HORIZONTAL
MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																													
1	7131.96	57.79	-30.51	88.30	46.42	35.83	12.64	37.10	110	111 Peak	HORIZONTAL																																																											
MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																													
1	7093.00	96.71	8.41	88.30	85.42	35.82	12.59	37.12	110	111 Peak	HORIZONTAL																																																											
Avg.	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SF Plane: X Full-directivity+Earphone MEI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.20</td> <td>40.50</td> <td>-27.80</td> <td>68.30</td> <td>29.18</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>110</td> <td>111 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7126.20	40.50	-27.80	68.30	29.18	35.82	12.61	37.11	110	111 Average	HORIZONTAL	<p>Site: No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Project: (FR) 252601 Mode: SF Plane: X Full-directivity+Earphone MEI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.00</td> <td>88.44</td> <td>20.14</td> <td>68.30</td> <td>77.15</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>110</td> <td>111 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	7093.00	88.44	20.14	68.30	77.15	35.82	12.59	37.12	110	111 Average	HORIZONTAL
MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																													
1	7126.20	40.50	-27.80	68.30	29.18	35.82	12.61	37.11	110	111 Average	HORIZONTAL																																																											
MEI	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																													
1	7093.00	88.44	20.14	68.30	77.15	35.82	12.59	37.12	110	111 Average	HORIZONTAL																																																											



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																													
ANT	802.11ax HE40 Partial 242/62 H227 7085MHz																																																													
2+6	Vertical	Fundamental																																																												
Peak	<p>Site Condition: # : WiFi AE PEAK 3m 3317.5M 70957 VERTICAL Economic & Technical Development Zone, Jiangsu China Project: RSM 1000.000kHz VBR 3000.000kHz SRT Auto FR252601 Mode: SF Plane: X Full-directivity+Earphone IMEI: #17 PowerSetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7126.92</td> <td>62.83</td> <td>-25.47</td> <td>88.30</td> <td>51.51</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>100</td> <td>198 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			7126.92	62.83	-25.47	88.30	51.51	35.82	12.61	37.11	100	198 Peak VERTICAL	<p>Site Condition: # : WiFi AE PEAK 3m 3317.5M 70957 VERTICAL Economic & Technical Development Zone, Jiangsu China Project: RSM 1000.000kHz VBR 3000.000kHz SRT Auto FR252601 Mode: SF Plane: X Full-directivity+Earphone IMEI: #17 PowerSetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7093.00</td> <td>97.57</td> <td>9.27</td> <td>88.30</td> <td>86.28</td> <td>35.82</td> <td>12.59</td> <td>37.12</td> <td>100</td> <td>198 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			7093.00	97.57	9.27	88.30	86.28	35.82	12.59	37.12	100	198 Peak VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																							
7126.92	62.83	-25.47	88.30	51.51	35.82	12.61	37.11	100	198 Peak VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																							
7093.00	97.57	9.27	88.30	86.28	35.82	12.59	37.12	100	198 Peak VERTICAL																																																					
Avg.	<p>Site Condition: # : WiFi AE (AVG) 3m 3317.5M 70957 VERTICAL Economic & Technical Development Zone, Jiangsu China Project: RSM 1000.000kHz VBR 3000.000kHz SRT Auto FR252601 Mode: SF Plane: X Full-directivity+Earphone IMEI: #17 PowerSetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7126.92</td> <td>40.78</td> <td>-27.52</td> <td>68.30</td> <td>29.46</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>100</td> <td>198 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			7126.92	40.78	-27.52	68.30	29.46	35.82	12.61	37.11	100	198 Average VERTICAL	<p>Site Condition: # : WiFi AE (AVG) 3m 3317.5M 70957 VERTICAL Economic & Technical Development Zone, Jiangsu China Project: RSM 1000.000kHz VBR 3000.000kHz SRT Auto FR252601 Mode: SF Plane: X Full-directivity+Earphone IMEI: #17 PowerSetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>7102.00</td> <td>91.15</td> <td>22.85</td> <td>68.30</td> <td>79.85</td> <td>35.82</td> <td>12.59</td> <td>37.11</td> <td>100</td> <td>198 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg			7102.00	91.15	22.85	68.30	79.85	35.82	12.59	37.11	100	198 Average VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																							
7126.92	40.78	-27.52	68.30	29.46	35.82	12.61	37.11	100	198 Average VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/1m	dB	dBm/1m	dB	dB	cm	deg																																																							
7102.00	91.15	22.85	68.30	79.85	35.82	12.59	37.11	100	198 Average VERTICAL																																																					



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE160 Partial 996 (Band Edge @ 3m)

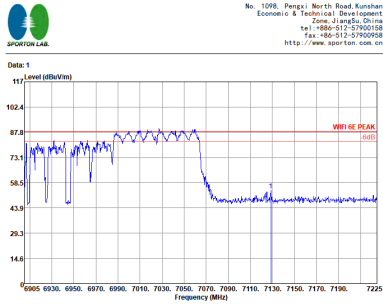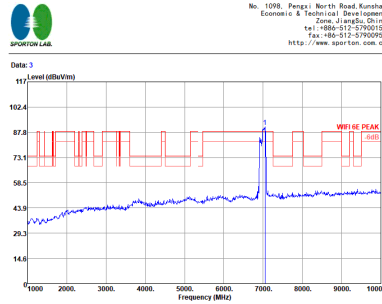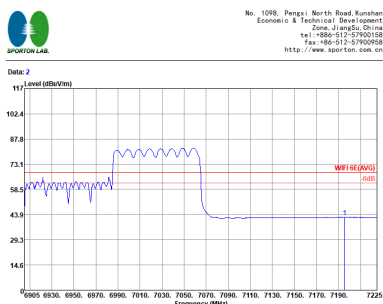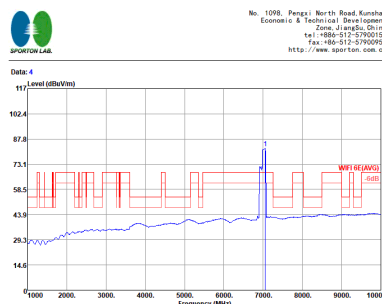WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE160 Partial 996/S67 CH207 6985MHz																																																																			
2+6	Horizontal	Fundamental																																																																		
Peak	 <p>Site: # Condition: RIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project: RSM 1000 0000Hz VBR 0.0100Hz SWT Auto Mode: 04 Plane: 2 Full-directivity+Earphone IREI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7128.68</td> <td>54.10</td> <td>-34.20</td> <td>88.30</td> <td>42.73</td> <td>35.83</td> <td>12.64</td> <td>37.10</td> <td>104</td> <td>110 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg		1	7128.68	54.10	-34.20	88.30	42.73	35.83	12.64	37.10	104	110 Peak	 <p>Site: # Condition: RIFI 6E PEAK 3m 3317 5N 75957 HORIZONTAL Project: RSM 1000 0000Hz VBR 0.0100Hz SWT Auto Mode: 04 Plane: 2 Full-directivity+Earphone IREI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7048.00</td> <td>90.80</td> <td>2.50</td> <td>88.30</td> <td>79.61</td> <td>35.81</td> <td>12.51</td> <td>37.13</td> <td>104</td> <td>110 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg		1	7048.00	90.80	2.50	88.30	79.61	35.81	12.51	37.13	104	110 Peak
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																											
1	7128.68	54.10	-34.20	88.30	42.73	35.83	12.64	37.10	104	110 Peak																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																											
1	7048.00	90.80	2.50	88.30	79.61	35.81	12.51	37.13	104	110 Peak																																																										
Avg.	 <p>Site: # Condition: RIFI 6E (AVG) 3m 3317 5N 75957 HORIZONTAL Project: RSM 1000 0000Hz VBR 0.0100Hz SWT Auto Mode: 04 Plane: 2 Full-directivity+Earphone IREI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7195.56</td> <td>42.27</td> <td>-26.03</td> <td>68.30</td> <td>30.81</td> <td>35.84</td> <td>12.71</td> <td>37.09</td> <td>104</td> <td>110 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg		1	7195.56	42.27	-26.03	68.30	30.81	35.84	12.71	37.09	104	110 Average	 <p>Site: # Condition: RIFI 6E (AVG) 3m 3317 5N 75957 HORIZONTAL Project: RSM 1000 0000Hz VBR 0.0100Hz SWT Auto Mode: 04 Plane: 2 Full-directivity+Earphone IREI: #17 Powersetting: 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7057.00</td> <td>82.54</td> <td>14.24</td> <td>68.30</td> <td>71.33</td> <td>35.81</td> <td>12.53</td> <td>37.13</td> <td>104</td> <td>110 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg		1	7057.00	82.54	14.24	68.30	71.33	35.81	12.53	37.13	104	110 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																											
1	7195.56	42.27	-26.03	68.30	30.81	35.84	12.71	37.09	104	110 Average																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	on	deg																																																											
1	7057.00	82.54	14.24	68.30	71.33	35.81	12.53	37.13	104	110 Average																																																										



WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE160 Partial 996/S67 CH207 6985MHZ																																																																	
2+6	Vertical	Fundamental																																																																
Peak	<p>Site: # Condition: # Project: # Mode: # Plane: # IMEI: # PowerSetting: #</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.44</td> <td>52.82</td> <td>-35.48</td> <td>88.30</td> <td>41.50</td> <td>35.82</td> <td>12.61</td> <td>37.11</td> <td>100</td> <td>177 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	7126.44	52.82	-35.48	88.30	41.50	35.82	12.61	37.11	100	177 Peak	VERTICAL	<p>Site: # Condition: # Project: # Mode: # Plane: # IMEI: # PowerSetting: #</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7021.00</td> <td>91.07</td> <td>2.77</td> <td>88.30</td> <td>79.93</td> <td>35.80</td> <td>12.48</td> <td>37.14</td> <td>100</td> <td>177 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	7021.00	91.07	2.77	88.30	79.93	35.80	12.48	37.14	100	177 Peak	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	7126.44	52.82	-35.48	88.30	41.50	35.82	12.61	37.11	100	177 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	7021.00	91.07	2.77	88.30	79.93	35.80	12.48	37.14	100	177 Peak	VERTICAL																																																							
Avg.	<p>Site: # Condition: # Project: # Mode: # Plane: # IMEI: # PowerSetting: #</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7199.08</td> <td>40.58</td> <td>-27.72</td> <td>68.30</td> <td>29.11</td> <td>35.84</td> <td>12.71</td> <td>37.08</td> <td>100</td> <td>177 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	7199.08	40.58	-27.72	68.30	29.11	35.84	12.71	37.08	100	177 Average	VERTICAL	<p>Site: # Condition: # Project: # Mode: # Plane: # IMEI: # PowerSetting: #</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7012.00</td> <td>83.44</td> <td>15.14</td> <td>68.30</td> <td>72.32</td> <td>35.80</td> <td>12.46</td> <td>37.14</td> <td>100</td> <td>177 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	7012.00	83.44	15.14	68.30	72.32	35.80	12.46	37.14	100	177 Average	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	7199.08	40.58	-27.72	68.30	29.11	35.84	12.71	37.08	100	177 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	7012.00	83.44	15.14	68.30	72.32	35.80	12.46	37.14	100	177 Average	VERTICAL																																																							







U-NII 8 - 6875-7125MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m	
ANT	802.11a CH229 7095 MHz	
2+6	Horizontal	Vertical
Peak Avg.	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3317.5M 7095.7 HORIZONTAL Project : RSM-1050_000MHz_VBR_3000_000MHz_SRT-Auto Mode : FR252601 Plane : Z Full-directivity+Earphone Power setting : 10 Over Limit : 15 Frag Level : 15 Limit : 15 ReadAntenna : 53.93 Cable Preamp : 38.99 Loss Factor : 18.16 A/Pos : 64.92 T/Pos : 300 Remark : 0 Peak Pol/Phas : HORIZONTAL</p>	<p>Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3317.5M 7095.7 VERTICAL Project : RSM-1050_000MHz_VBR_3000_000MHz_SRT-Auto Mode : FR252601 Plane : Z Full-directivity+Earphone Power setting : 10 Over Limit : 15 Frag Level : 15 Limit : 15 ReadAntenna : 52.79 Cable Preamp : 38.99 Loss Factor : 18.16 A/Pos : 64.92 T/Pos : 100 Remark : 0 Peak Pol/Phas : VERTICAL</p>



**U-NII 8 - 6875-7125MHz
WIFI 802.11ax HE20 Full (Harmonic @ 3m)**

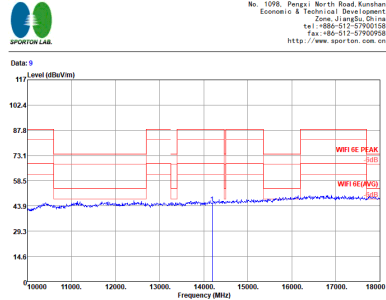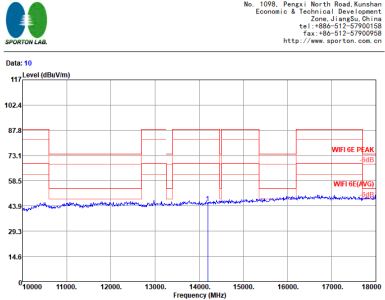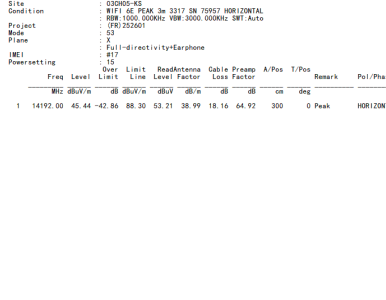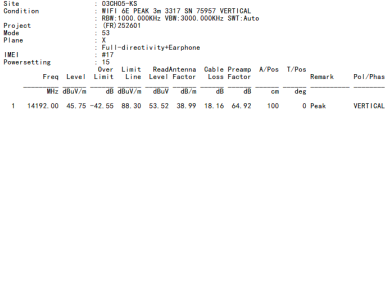WIFI	U-NII 8 - 6875-7125MHz Harmonic @ 3m																																																																	
ANT	802.11ax HE20 Full CH229 7095 MHz																																																																	
2+6	Horizontal	Vertical																																																																
Peak Avg.	 <p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 7957 HORIZONTAL Project : R08-1000-000MHz V08-3000-000MHz CRT-Auto Mode : FR1 252601 Plane : S Antenna : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14192.00</td> <td>45.44</td> <td>-42.86</td> <td>88.30</td> <td>53.21</td> <td>38.99</td> <td>18.16</td> <td>64.92</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg	1	14192.00	45.44	-42.86	88.30	53.21	38.99	18.16	64.92	300	0 Peak	HORIZONTAL	 <p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 7957 VERTICAL Project : R08-1000-000MHz V08-3000-000MHz CRT-Auto Mode : FR1 252601 Plane : S Antenna : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14192.00</td> <td>45.75</td> <td>-42.55</td> <td>88.30</td> <td>53.52</td> <td>38.99</td> <td>18.16</td> <td>64.92</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg	1	14192.00	45.75	-42.55	88.30	53.52	38.99	18.16	64.92	100	0 Peak	VERTICAL
	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																									
1	14192.00	45.44	-42.86	88.30	53.21	38.99	18.16	64.92	300	0 Peak	HORIZONTAL																																																							
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																									
1	14192.00	45.75	-42.55	88.30	53.52	38.99	18.16	64.92	100	0 Peak	VERTICAL																																																							
	 <p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 7957 HORIZONTAL Project : R08-1000-000MHz V08-3000-000MHz CRT-Auto Mode : FR1 252601 Plane : S Antenna : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14192.00</td> <td>45.44</td> <td>-42.86</td> <td>88.30</td> <td>53.21</td> <td>38.99</td> <td>18.16</td> <td>64.92</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg	1	14192.00	45.44	-42.86	88.30	53.21	38.99	18.16	64.92	300	0 Peak	HORIZONTAL	 <p>Site : 032005-KS Condition : WIFI 6E PEAK 3m 3317 5M 7957 VERTICAL Project : R08-1000-000MHz V08-3000-000MHz CRT-Auto Mode : FR1 252601 Plane : S Antenna : Full-directivity+Earphone Powersetting : 15</p> <table border="1"> <thead> <tr> <th>MEI</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14192.00</td> <td>45.75</td> <td>-42.55</td> <td>88.30</td> <td>53.52</td> <td>38.99</td> <td>18.16</td> <td>64.92</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg	1	14192.00	45.75	-42.55	88.30	53.52	38.99	18.16	64.92	100	0 Peak	VERTICAL
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																									
1	14192.00	45.44	-42.86	88.30	53.21	38.99	18.16	64.92	300	0 Peak	HORIZONTAL																																																							
MEI	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cn	deg																																																									
1	14192.00	45.75	-42.55	88.30	53.52	38.99	18.16	64.92	100	0 Peak	VERTICAL																																																							



Emission below 1GHz
5GHz WIFI 802.11ax HE160 Full (LF)

WIFI	5GHz WIFI																																																																																																																																																																																																	
ANT	802.11ax HE160 Full LF																																																																																																																																																																																																	
2+6	Horizontal	Vertical																																																																																																																																																																																																
QP / Peak	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m C8L1110 SN23188 HORIZONTAL Project : RSM 100.000000 VSR 300.000000 SRT Auto Mode : 27 Plane : 2 IME1 : Full-directivity-Earphone</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>167.74</td><td>16.31</td><td>-27.19</td><td>43.50</td><td>30.17</td><td>17.08</td><td>1.97</td><td>33.91</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>2</td><td>216.24</td><td>21.64</td><td>-28.28</td><td>46.00</td><td>33.19</td><td>17.31</td><td>2.24</td><td>33.10</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>3</td><td>282.17</td><td>17.87</td><td>-28.13</td><td>46.00</td><td>28.24</td><td>19.93</td><td>2.57</td><td>33.97</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>4</td><td>408.30</td><td>22.56</td><td>-23.64</td><td>46.00</td><td>29.20</td><td>22.66</td><td>3.08</td><td>32.78</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>5</td><td>616.85</td><td>24.42</td><td>-21.58</td><td>46.00</td><td>27.57</td><td>25.63</td><td>3.79</td><td>33.57</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>6</td><td>803.03</td><td>27.24</td><td>-18.76</td><td>46.00</td><td>28.49</td><td>26.73</td><td>4.33</td><td>32.51</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr> </tbody> </table>	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn	deg			1	167.74	16.31	-27.19	43.50	30.17	17.08	1.97	33.91	---	Peak	HORIZONTAL	2	216.24	21.64	-28.28	46.00	33.19	17.31	2.24	33.10	---	Peak	HORIZONTAL	3	282.17	17.87	-28.13	46.00	28.24	19.93	2.57	33.97	---	Peak	HORIZONTAL	4	408.30	22.56	-23.64	46.00	29.20	22.66	3.08	32.78	---	Peak	HORIZONTAL	5	616.85	24.42	-21.58	46.00	27.57	25.63	3.79	33.57	---	Peak	HORIZONTAL	6	803.03	27.24	-18.76	46.00	28.49	26.73	4.33	32.51	---	Peak	HORIZONTAL	<p>Site : 030905-KS Condition : WIFI 6E PEAK 3m C8L1110 SN23188 VERTICAL Project : RSM 100.000000 VSR 300.000000 SRT Auto Mode : 27 Plane : 2 IME1 : Full-directivity-Earphone</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>203.63</td><td>16.90</td><td>-26.40</td><td>43.50</td><td>31.29</td><td>16.54</td><td>2.17</td><td>33.10</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>2</td><td>238.76</td><td>18.29</td><td>-27.41</td><td>46.00</td><td>27.84</td><td>20.89</td><td>2.76</td><td>32.90</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>3</td><td>429.11</td><td>25.23</td><td>-20.47</td><td>46.00</td><td>30.63</td><td>24.12</td><td>3.34</td><td>32.76</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>4</td><td>606.18</td><td>26.24</td><td>-19.76</td><td>46.00</td><td>29.45</td><td>25.25</td><td>3.76</td><td>32.62</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>5</td><td>672.14</td><td>28.94</td><td>-17.96</td><td>46.00</td><td>31.01</td><td>25.81</td><td>3.96</td><td>32.74</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>6</td><td>803.09</td><td>30.87</td><td>-15.18</td><td>46.00</td><td>32.08</td><td>26.92</td><td>4.33</td><td>32.51</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr> </tbody> </table>	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn	deg			1	203.63	16.90	-26.40	43.50	31.29	16.54	2.17	33.10	---	Peak	VERTICAL	2	238.76	18.29	-27.41	46.00	27.84	20.89	2.76	32.90	---	Peak	VERTICAL	3	429.11	25.23	-20.47	46.00	30.63	24.12	3.34	32.76	---	Peak	VERTICAL	4	606.18	26.24	-19.76	46.00	29.45	25.25	3.76	32.62	---	Peak	VERTICAL	5	672.14	28.94	-17.96	46.00	31.01	25.81	3.96	32.74	---	Peak	VERTICAL	6	803.09	30.87	-15.18	46.00	32.08	26.92	4.33	32.51	---	Peak	VERTICAL
	Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn	deg																																																																																																																																																																																									
1	167.74	16.31	-27.19	43.50	30.17	17.08	1.97	33.91	---	Peak	HORIZONTAL																																																																																																																																																																																							
2	216.24	21.64	-28.28	46.00	33.19	17.31	2.24	33.10	---	Peak	HORIZONTAL																																																																																																																																																																																							
3	282.17	17.87	-28.13	46.00	28.24	19.93	2.57	33.97	---	Peak	HORIZONTAL																																																																																																																																																																																							
4	408.30	22.56	-23.64	46.00	29.20	22.66	3.08	32.78	---	Peak	HORIZONTAL																																																																																																																																																																																							
5	616.85	24.42	-21.58	46.00	27.57	25.63	3.79	33.57	---	Peak	HORIZONTAL																																																																																																																																																																																							
6	803.03	27.24	-18.76	46.00	28.49	26.73	4.33	32.51	---	Peak	HORIZONTAL																																																																																																																																																																																							
Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn	deg																																																																																																																																																																																									
1	203.63	16.90	-26.40	43.50	31.29	16.54	2.17	33.10	---	Peak	VERTICAL																																																																																																																																																																																							
2	238.76	18.29	-27.41	46.00	27.84	20.89	2.76	32.90	---	Peak	VERTICAL																																																																																																																																																																																							
3	429.11	25.23	-20.47	46.00	30.63	24.12	3.34	32.76	---	Peak	VERTICAL																																																																																																																																																																																							
4	606.18	26.24	-19.76	46.00	29.45	25.25	3.76	32.62	---	Peak	VERTICAL																																																																																																																																																																																							
5	672.14	28.94	-17.96	46.00	31.01	25.81	3.96	32.74	---	Peak	VERTICAL																																																																																																																																																																																							
6	803.09	30.87	-15.18	46.00	32.08	26.92	4.33	32.51	---	Peak	VERTICAL																																																																																																																																																																																							




Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1/2	802.11a	98.97	-	-	10Hz
1/2	802.11ax HE20-Full RU	100	-	-	10Hz
1/2	802.11ax HE20-RU26	100	-	-	10Hz
1/2	802.11ax HE20-RU52	100	-	-	10Hz
1/2	802.11ax HE20-RU106	100	-	-	10Hz
1/2	802.11ax HE40-Full RU	100	-	-	10Hz
1/2	802.11ax HE40-RU242	100	-	-	10Hz
1/2	802.11ax HE80-Full RU	100	-	-	10Hz
1/2	802.11ax HE80-RU484	99.04	-	-	10Hz
1/2	802.11ax HE160-Full RU	100	-	-	10Hz
1/2	802.11ax HE160-RU996	98.95	-	-	10Hz



802.11a

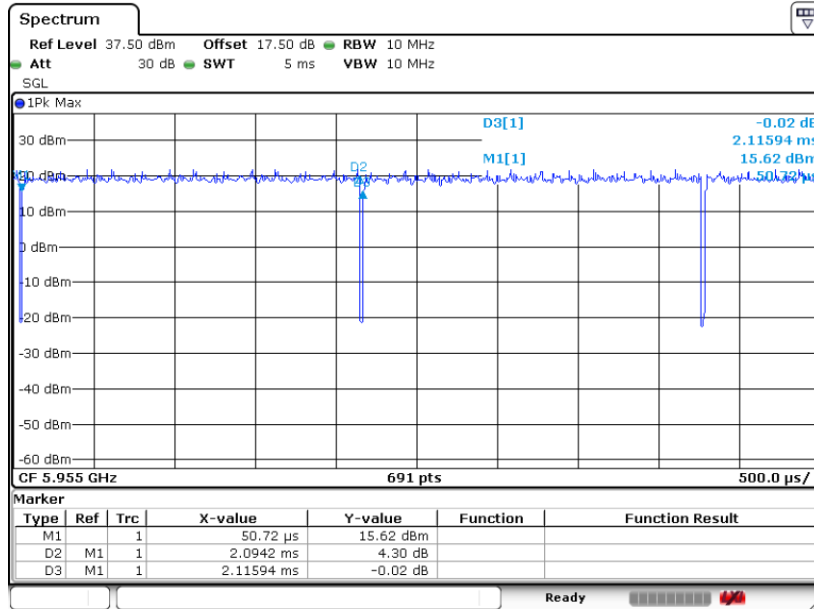


802.11ax HE20-Full RU

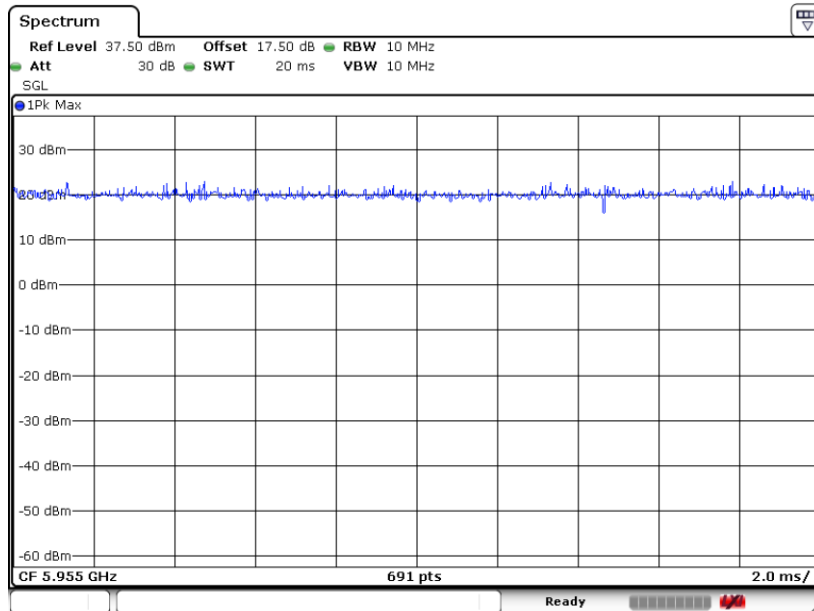




802.11ax HE20-RU26

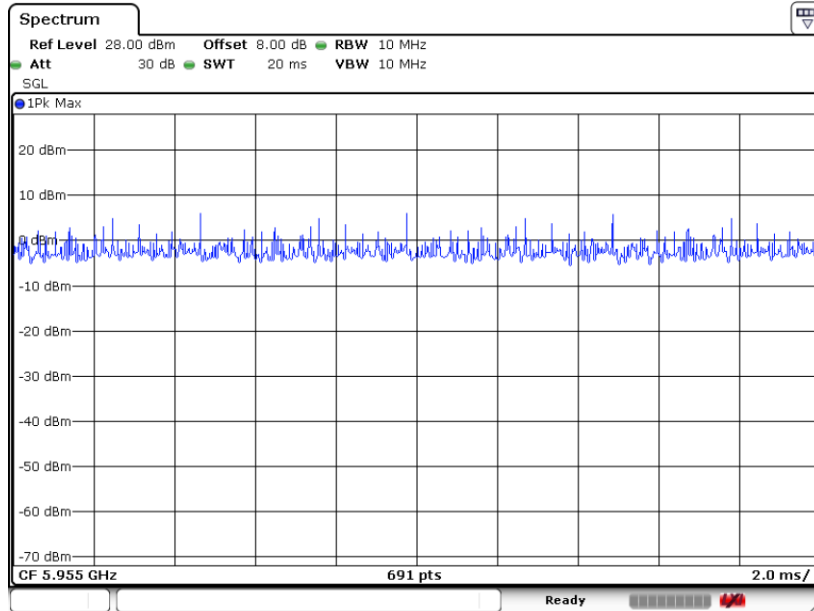


802.11ax HE20-RU52

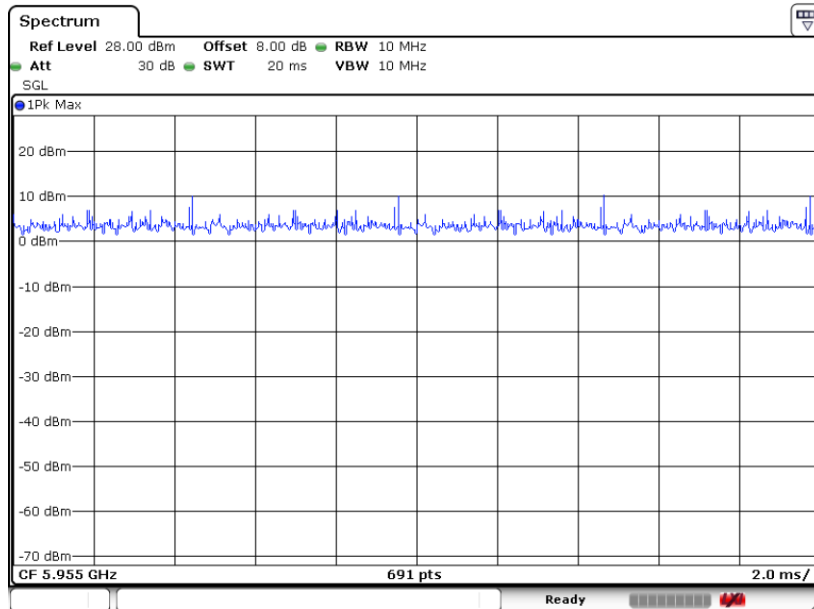




802.11ax HE20-RU106

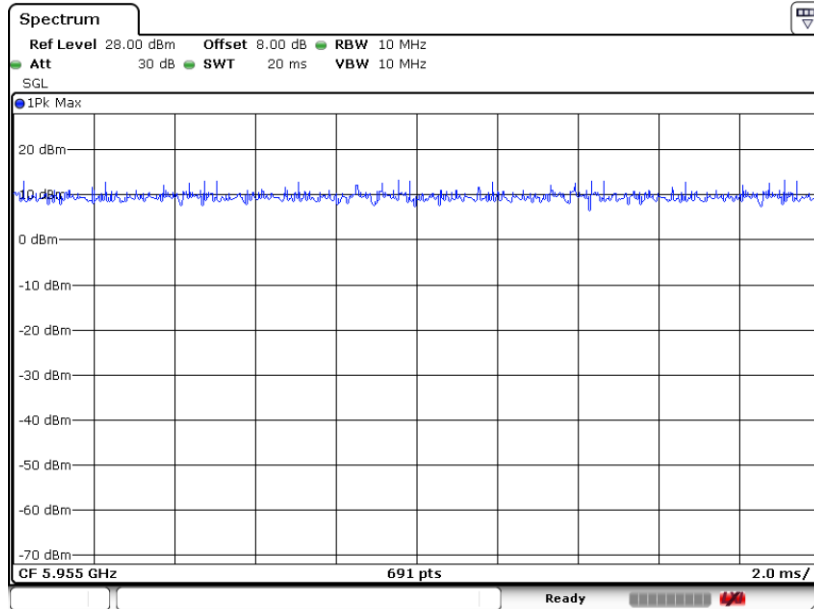


802.11ax HE40-Full RU

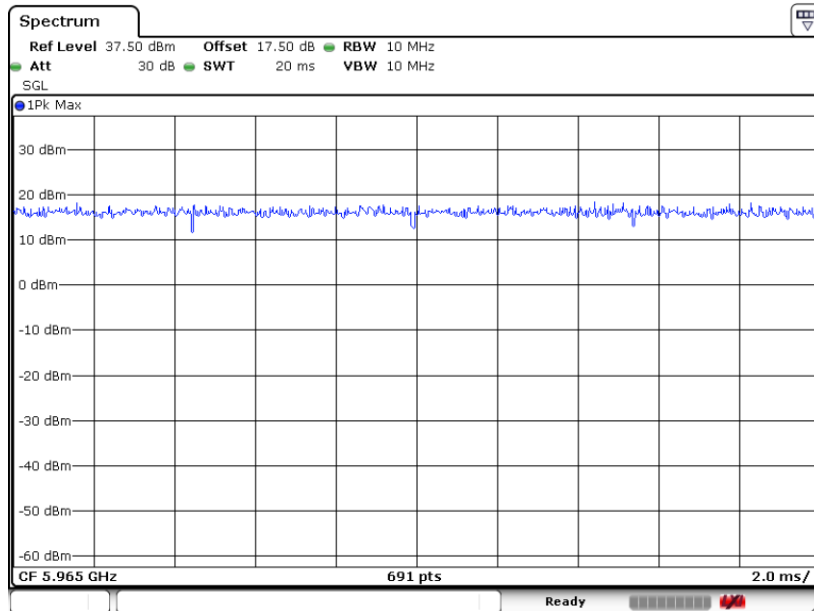




802.11ax HE40-RU242

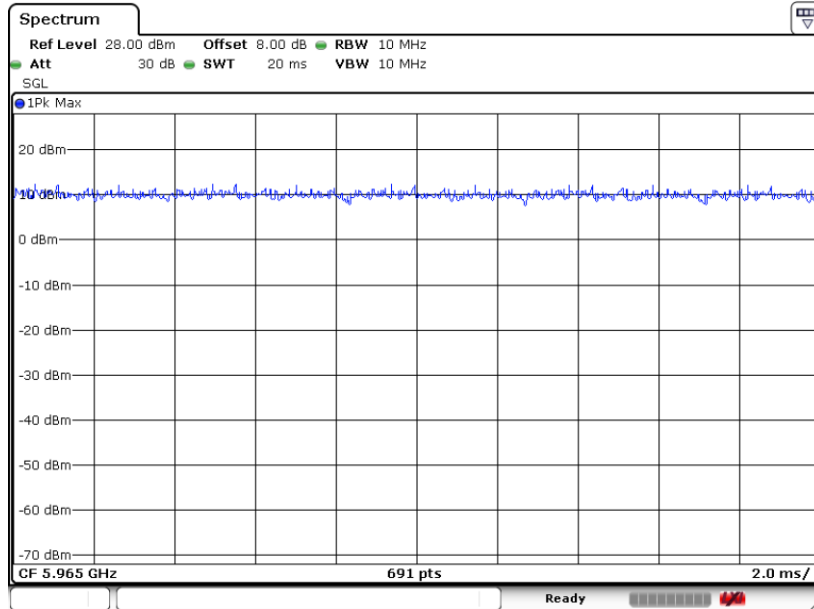


802.11ax HE80-Full RU

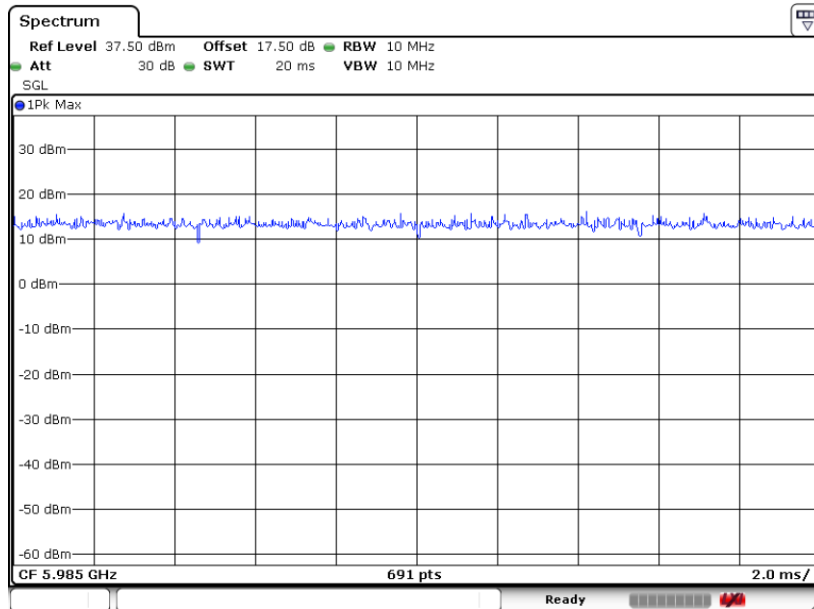



802.11ax HE80-RU484

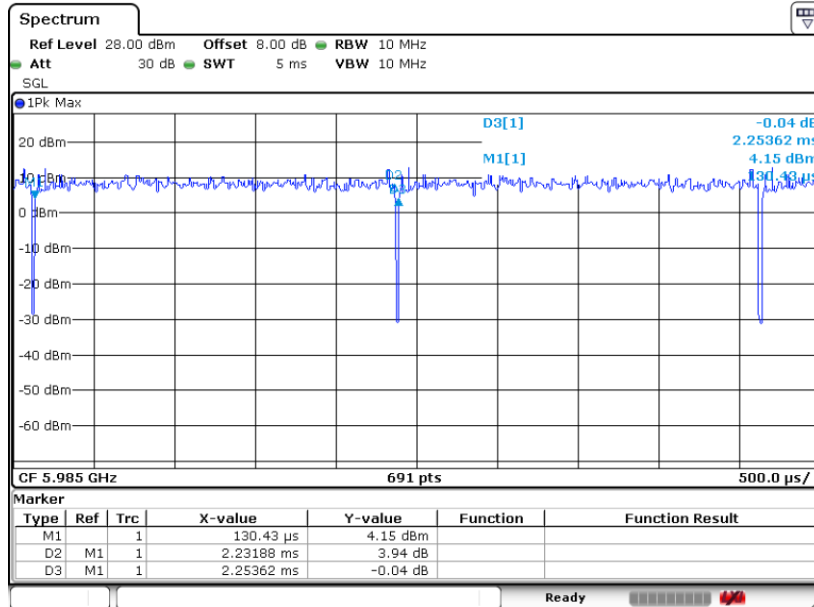

802.11ax HE160-Full RU

