APPLICANT : Motorola Mobility LLC EQUIPMENT : Mobile Cellular Phone

BRAND NAME : Motorola

MODEL NAME : XT2245-1

FCC ID : IHDT56AF9

STANDARD : 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

TEST DATE(S) : Jun. 28, 2022 ~ Jul. 07, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia





Report No.: FG253001D

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 1 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

TABLE OF CONTENTS

RE	VISIO	ON HISTORY	3
SL	ІММА	RY OF TEST RESULT	4
1	GEN	IERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	5
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	5
	1.6	Maximum Conducted Power and Emission Designator	6
	1.7	Testing Site	6
	1.8	Test Software	6
	1.9	Applied Standards	7
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	TES	T RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	13
	3.4	Emissions Mask – Out Of Band Emissions Measurement	15
	3.5	Field Strength of Spurious Radiation Measurement	16
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNC	ERTAINTY OF EVALUATION	22
ΔΕ	PENI	DIX A. TEST RESULTS OF CONDUCTED TEST	
AF	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑF	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 2 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG253001D	Rev. 01	Initial issue of report	Jul. 30, 2022

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 3 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

SUMMARY OF TEST RESULT

Report FCC Rule		Description	Limit	Result	Remark	
3.1	§2.1046	Conducted Output Power	_	Report only	-	
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	_	Report only	-	
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-	
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-	
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 39.40 dB at 2444.250 MHz	
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 4 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

	Product Feature
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2245-1
FCC ID	IHDT56AF9
IMEI Code	Conducted: 357398930011686
IIWEI Code	Radiation: 357398930011330
HW Version	DVT2
SW Version	S3SSM32.29
EUT Stage	Identical Prototype

Report No.: FG253001D

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	LTE Band 26 : 814 MHz ~ 824 MHz						
Rx Frequency	LTE Band 26 : 859 MHz ~ 869 MHz						
Bandwidth	LTE Band 26: 1.4MHz/3MHz/5MHz/10MHz/15MHz						
Maximum Output Power to Antenna	LTE Band 26 : 22.55 dBm						
Antenna Gain	LTE Band 26 : -4.1 dBi						
Antenna Type	IFA Antenna						
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM						

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

 Sporton International Inc. (ShenZhen)
 Page Number
 : 5 of 22

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 30, 2022

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID : IHDT56AF9 Report Template No.: BU5-FWLTE Version 2.0

1.6 Maximum Conducted Power and Emission Designator

Ľ	TE Band 26	QP	SK	16QAM/64QAM/256QAM			
BW Frequency Range (MHz)		Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)		
1.4	814.7 ~ 823.3	0.1770	1M10G7D	0.1507	1M09W7D		
3	815.5 ~ 822.5	0.1758	2M75G7D	0.1538	2M73W7D		
5	816.5 ~ 821.5	0.1766	4M50G7D	0.1517	4M50W7D		
10	819.0	0.1730	9M11G7D	0.1517	9M05W7D		
15	821.5 0.1799		13M5G7D	0.1570	13M5W7D		

Report No.: FG253001D

Note: All modulations have been tested, only the worst modulation of PSK/QAM is shown in the report.

1.7 Testing Site

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)								
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595								
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.						
1331 3113 1161	TH01-SZ	CN1256	421272						

Test Firm	Sporton International Inc. (Shenzhen)						
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398						
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.					
	03CH01-SZ	CN1256	421272				

1.8 Test Software

I	Item Site		Manufacturer	Name	Version		
	1.	03CH01-SZ	AUDIX	E3	6.2009-8-24		

 Sporton International Inc. (ShenZhen)
 Page Number
 : 6 of 22

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 30, 2022

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID : IHDT56AF9 Report Template No.: BU5-FWLTE Version 2.0

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 7 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.(X-Plane)


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Took Home	Donal	Bandwidth (MHz)						Modulation			RB#			Test Channel			
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	М	Н
Max. Output Power	26	v	٧	٧	٧	٧	•	v	v	v	v	٧	v	v	٧	v	v
26dB and 99% Bandwidth	26	v	٧	v	v	٧	•	v	v	v	-			v	٧	v	v
Emission masks In-band emissions	26	v	٧	٧	٧	٧	•	v	٧	v	-	٧		v	٧		v
Emission masks Out of band emissions	26	v	v	v	v	v	-	v	v	v	-	v			v	v	v
Frequency Stability	26				v		-	v			-			٧		v	
Radiated Spurious Emission	26	26 Worst case v v v							v								
1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency which falls within part 22 also complies. 4. For 256QAM, the Output Power is lower than 16QAM/64QAM, thus 16QAM/64QAM would be performe						spec	trum										

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 8 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

2.2 Connection Diagram of Test System

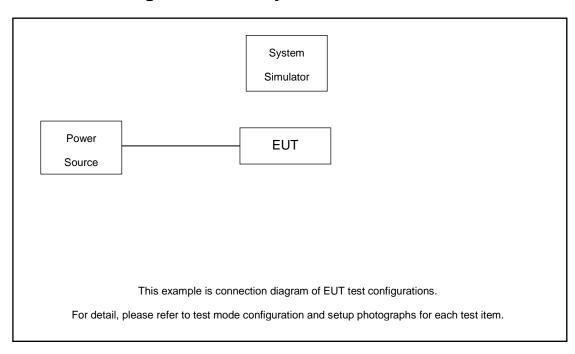

2.3 Support Unit used in test configuration and system

Item Equipment		Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

$$Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$$

= 4.0 + 10 = 14.0 (dB)

Report No.: FG253001D

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
15	Channel	26765	-	-					
15	Frequency	821.5	-	-					
10	Channel	-	26740	-					
10	Frequency	-	819	-					
5	Channel	26715	26740	26765					
5	Frequency	816.5	819	821.5					
3	Channel	26705	26740	26775					
3	Frequency	815.5	819	822.5					
1.4	Channel	26697	26740	26783					
1.4	Frequency	814.7	819	823.3					

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 10 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 11 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

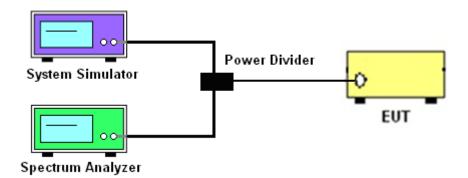

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 12 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

Page Number : 13 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

3.3.4 Test Setup

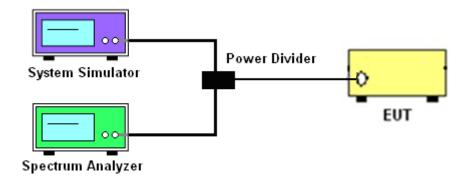

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 14 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

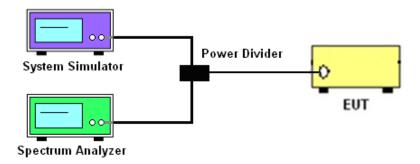

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 15 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)


Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 16 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01


Report No.: FG253001D

3.5.4 Test Setup

For radiated test from 30MHz

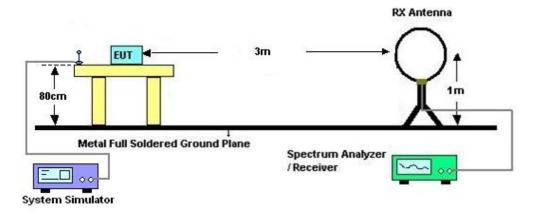


For radiated test from 30MHz to 1GHz

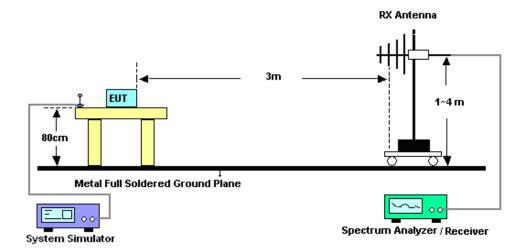

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 17 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

For radiated test above 1GHz

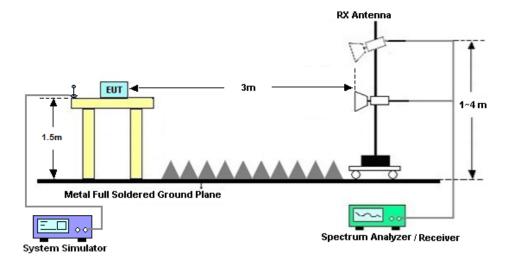

3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 18 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.


Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

Report Issued Date: Jul. 30, 2022

Page Number

: 19 of 22

3.6.5 Test Setup

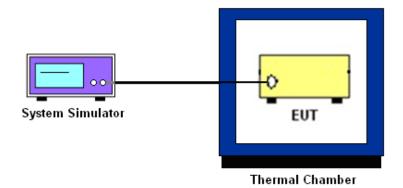

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 20 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Jul. 06, 2022~ Jul. 07, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jul. 06, 2022~ Jul. 07, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jul. 06, 2022~ Jul. 07, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Jun. 28, 2022	Dec. 26, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 21, 2022	Jun. 28, 2022	Jun. 20, 2023	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 28, 2022	Oct. 21, 2022	Radiation (03CH01-SZ
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Jun. 28, 2022	Sep. 27, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jun. 28, 2022	Jul. 17, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Jun. 28, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Jun. 28, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 28, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 28, 2022	Jul. 12, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 28, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 28, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 28, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 21 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report No.: FG253001D

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty				
Conducted Power	±1.34 dB				
Conducted Emissions	±1.34 dB				
Occupied Channel Bandwidth	±0.13 %				

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	2.48dB
of 95% (U = 2Uc(y))	2.40UB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	3.53dB
of 95% (U = 2Uc(y))	3.53QB

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of Confidence	4.02dB
of 95% (U = 2Uc(y))	4.0206

----- THE END -----

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : 22 of 22
Report Issued Date : Jul. 30, 2022
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Appendix A. Test Results of Conducted Test

Test Engineer :	Sam Zheng	Temperature :	24~26°C
rest Engineer .	Sam Zheng	Relative Humidity :	50~53%

Report No.: FG253001D

Conducted Output Power (Average power)

LTE Band 26:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
	Cha	nnel		26765		
	Frequen	cy (MHz)	821.5			
15	QPSK	QPSK 1		22.55		
15	QPSK	1	37	22.50		
15	QPSK	1	74	22.37		
15	QPSK	36	0	21.75		
15	QPSK	36	20	21.70		
15	QPSK	36	39	21.37		
15	QPSK	75	0	21.57		
15	16QAM	1	0	21.75		
15	16QAM	1	37	21.96		
15	16QAM	1	74	21.81		
15	16QAM	36	0	20.58		
15	16QAM	36	20	20.56		
15	16QAM	36	39	20.54		
15	16QAM	75	0	20.70		
15	64QAM	1	0	20.83		
15	64QAM	1	37	20.88		
15	64QAM	1	74	20.82		
15	64QAM	36	0	19.68		
15	64QAM	36	20	19.58		
15	64QAM	36	39	19.82		
15	64QAM	75	0	19.67		
15	256QAM	1	0	17.81		
15	256QAM	1	37	17.75		
15	256QAM	1	74	17.75		
15	256QAM	36	0	17.49		
15	256QAM	36	20	17.66		
15	256QAM	36	39	17.67		
15	256QAM	75	0	17.61		
	Cha	nnel			26740	
	Frequen	cy (MHz)			819	
10	QPSK	1	0		22.30	
10	QPSK	1	25		22.38	
10	QPSK	1	49		22.38	
10	QPSK	25	0		21.53	
10	QPSK	25	12		21.39	

Page Number

: A1 of A45

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9



10 QPSK 25 25 21.42	
10 QPSK 50 0 21.46	
10 16QAM 1 0 21.68	
10 16QAM 1 25 21.77	
10 16QAM 1 49 21.81	
10 16QAM 25 0 20.58	
10 16QAM 25 12 20.62	
10 16QAM 25 25 20.57	
10 16QAM 50 0 20.37	
10 64QAM 1 0 20.69	
10 64QAM 1 25 20.64	
10 64QAM 1 49 20.70	
10 64QAM 25 0 19.44	
10 64QAM 25 12 19.54	
10 64QAM 25 25 19.55	
10 64QAM 50 0 19.48	
10 256QAM 1 0 17.63	
10 256QAM 1 25 17.57	
10 256QAM 1 49 17.71	
10 256QAM 25 0 17.49	
10 256QAM 25 12 17.52	
10 256QAM 25 25 17.52	
10 256QAM 50 0 17.52	
Channel 26715 26740	26765
Frequency (MHz) 816.5 819	821.5
5 QPSK 1 0 22.35 22.41	22.47
5 QPSK 1 12 22.33 22.33	22.35
5 QPSK 1 24 22.43 22.39	22.33
5 QPSK 12 0 21.37 21.46	21.46
5 QPSK 12 7 21.47 21.52	21.51
5 QPSK 12 13 21.39 21.56	21.49
5 QPSK 25 0 21.41 21.29	21.43
5 16QAM 1 0 21.78 21.77	21.68
5 16QAM 1 12 21.73 21.81	21.72
5 16QAM 1 24 21.68 21.67	21.68
5 16QAM 12 0 20.48 20.37	20.45
5 16QAM 12 7 20.41 20.49	20.55
5 16QAM 12 13 20.54 20.55	20.43
5 16QAM 25 0 20.60 20.33	20.38
5 64QAM 1 0 20.64 20.58	20.76
5 64QAM 1 12 20.60 20.57	20.58
5 64QAM 1 24 20.65 20.55	20.51
5 64QAM 12 0 19.46 19.55	19.64
	19.63
5 64QAM 12 7 19.47 19.66	10.55
5 64QAM 12 7 19.47 19.66 5 64QAM 12 13 19.46 19.40	19.55
	19.55
5 64QAM 12 13 19.46 19.40	
5 64QAM 12 13 19.46 19.40 5 64QAM 25 0 19.44 19.42	19.42
5 64QAM 12 13 19.46 19.40 5 64QAM 25 0 19.44 19.42 5 256QAM 1 0 17.49 17.52	19.42 17.76

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number

: A2 of A45



_	2500414	40	7	47.50	47.00	47.50
5	256QAM	12	7	17.53	17.60	17.59
5	256QAM	12	13	17.42	17.42	17.64
5	256QAM	25	0	17.46	17.54	17.45
		nnel	26705	26740	26775	
_	Frequen			815.5	819	822.5
3	QPSK	1	0	22.35	22.42	22.25
3	QPSK	1	8	22.39	22.30	22.38
3	QPSK	1	14	22.45	22.42	22.26
3	QPSK	8	0	21.45	21.40	21.50
3	QPSK	8	4	21.43	21.53	21.38
3	QPSK	8	7	21.50	21.42	21.47
3	QPSK	15	0	21.49	21.44	21.45
3	16QAM	1	0	21.77	21.74	21.71
3	16QAM	1	8	21.87	21.76	21.73
3	16QAM	1	14	21.66	21.59	21.78
3	16QAM	8	0	20.51	20.37	20.57
3	16QAM	8	4	20.58	20.57	20.66
3	16QAM	8	7	20.54	20.43	20.54
3	16QAM	15	0	20.52	20.39	20.40
3	64QAM	1	0	20.56	20.50	20.64
3	64QAM	1	8	20.75	20.59	20.69
3	64QAM	1	14	20.60	20.67	20.70
3	64QAM	8	0	19.52	19.48	19.48
3	64QAM	8	4	19.57	19.49	19.49
3	64QAM	8	7	19.60	19.64	19.51
3	64QAM	15	0	19.48	19.34	19.45
3	256QAM	1	0	17.60	17.61	17.64
3	256QAM	1	8	17.62	17.63	17.49
3	256QAM	1	14	17.57	17.70	17.68
3	256QAM	8	0	17.43	17.52	17.44
3	256QAM	8	4	17.48	17.44	17.62
3	256QAM	8	7	17.59	17.54	17.51
3	256QAM	15	0	17.47	17.62	17.59
	Cha	nnel		26697	26740	26783
	Frequen	cy (MHz)		814.7	819	823.3
1.4	QPSK	1	0	22.25	22.32	22.27
1.4	QPSK	1	3	22.37	22.28	22.22
1.4	QPSK	1	5	22.22	22.25	22.22
1.4	QPSK	3	0	22.48	22.44	22.27
1.4	QPSK	3	1	22.40	22.34	22.36
1.4	QPSK	3	3	22.38	22.28	22.31
1.4	QPSK	6	0	21.42	21.39	21.27
1.4	16QAM	1	0	21.67	21.64	21.62
1.4	16QAM	1	3	21.64	21.78	21.62
1.4	16QAM	1	5	21.71	21.66	21.66
1.4	16QAM	3	0	21.40	21.40	21.39
1.4	16QAM	3	1	21.48	21.33	21.42
1.4	16QAM	3	3	21.41	21.49	21.27
1.4	16QAM	6	0	20.67	20.44	20.36
1.4	64QAM	1	0	20.52	20.62	20.49

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number

: A3 of A45



1.4	64QAM	1	3	20.75	20.68	20.54
1.4	64QAM	1	5	20.66	20.67	20.43
1.4	64QAM	3	0	20.49	20.37	20.34
1.4	64QAM	3	1	20.56	20.40	20.56
1.4	64QAM	3	3	20.57	20.57	20.58
1.4	64QAM	6	0	19.40	19.29	19.38
1.4	256QAM	1	0	17.71	17.55	17.69
1.4	256QAM	1	3	17.41	17.50	17.71
1.4	256QAM	1	5	17.68	17.81	17.75
1.4	256QAM	3	0	17.55	17.45	17.50
1.4	256QAM	3	1	17.59	17.44	17.47
1.4	256QAM	3	3	17.52	17.67	17.62
1.4	256QAM	6	0	17.45	17.49	17.54

Sporton International Inc. (ShenZhen)


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : A4 of A45


LTE Band 26


26dB Bandwidth


Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	ИHz	3M	3MHz		5MHz		ЛHz	15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.23	3.03	3.05	4.87	4.86	-	-	14.48	14.33	-	-
Middle CH	1.24	1.24	3.08	3.03	5.00	4.93	9.83	9.85	-	-	-	-
Highest CH	1.24	1.24	2.97	2.99	4.93	4.88	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ИHz	3M	3MHz		Hz	101	ЛHz	15N	ИHz	201	ИHz
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.23	-	3.03	-	4.94	-	-	-	14.30	-	-	-
Middle CH	1.23	-	3.04	-	4.88	-	9.89	-	-	-	-	-
Highest CH	1.21	-	3.00	-	4.87	-	-	-	-	-	-	-


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : A5 of A45

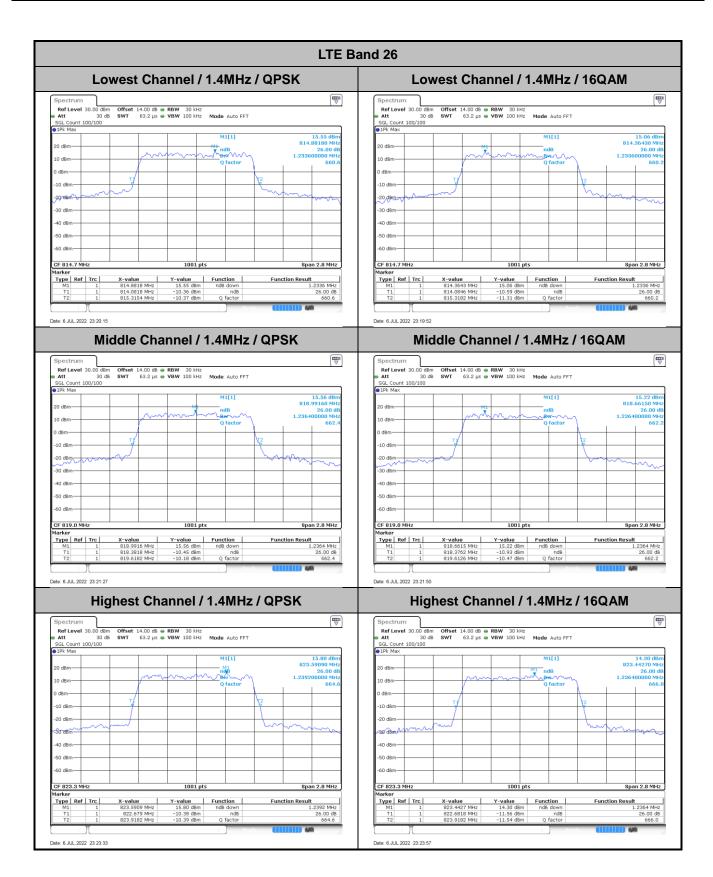

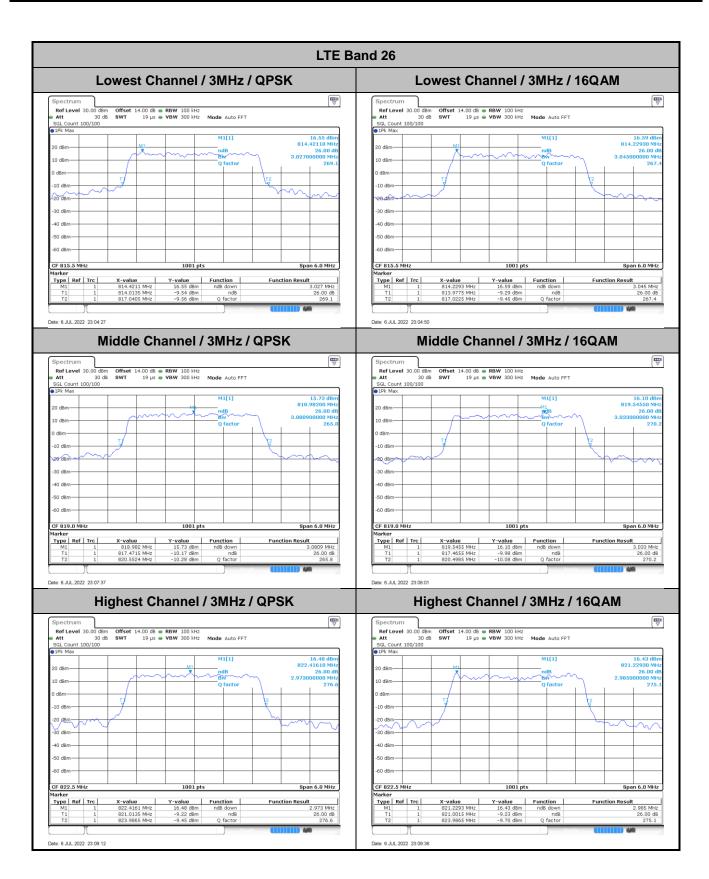


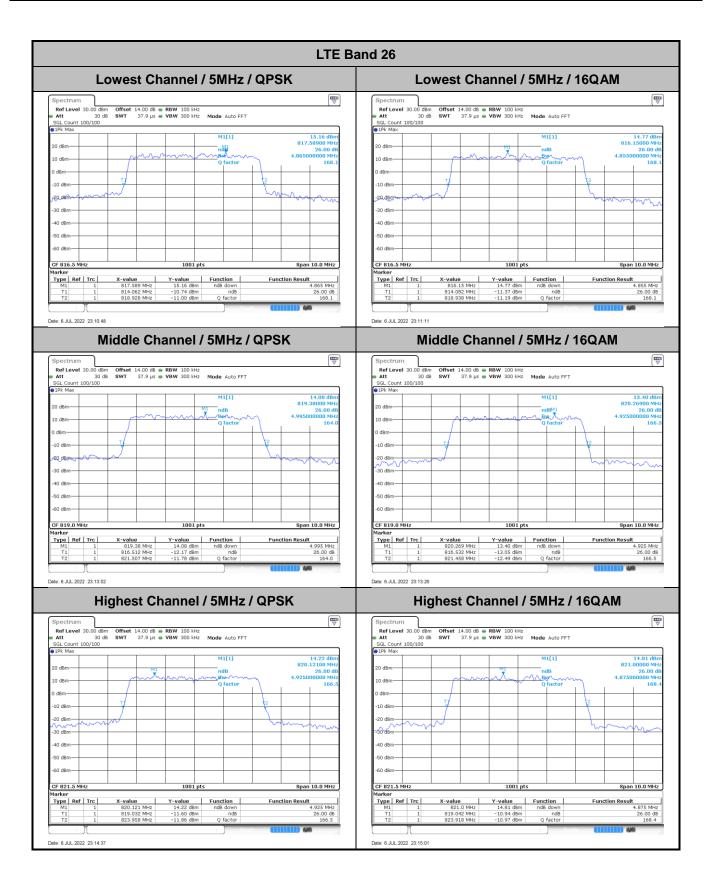


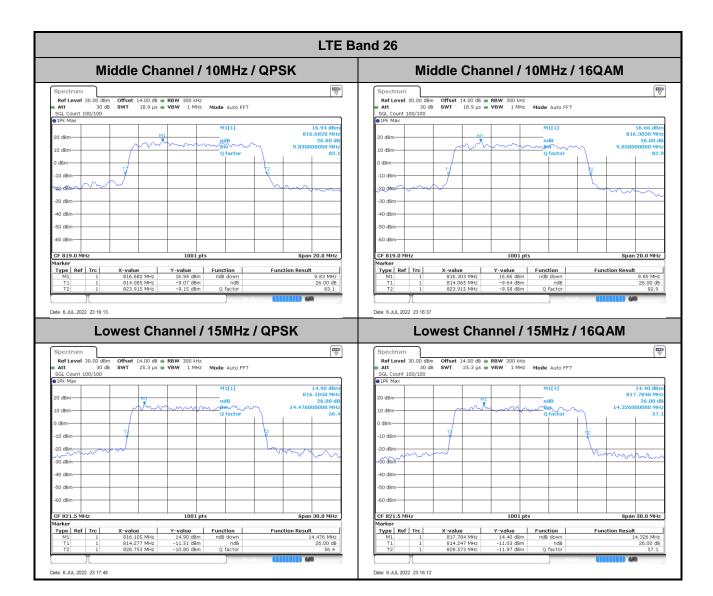

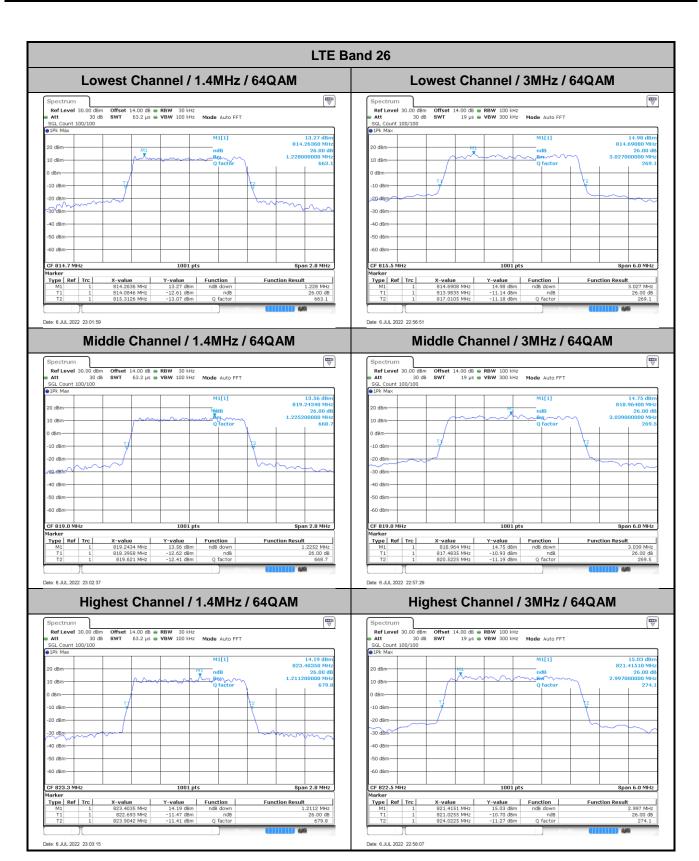

: A10 of A45

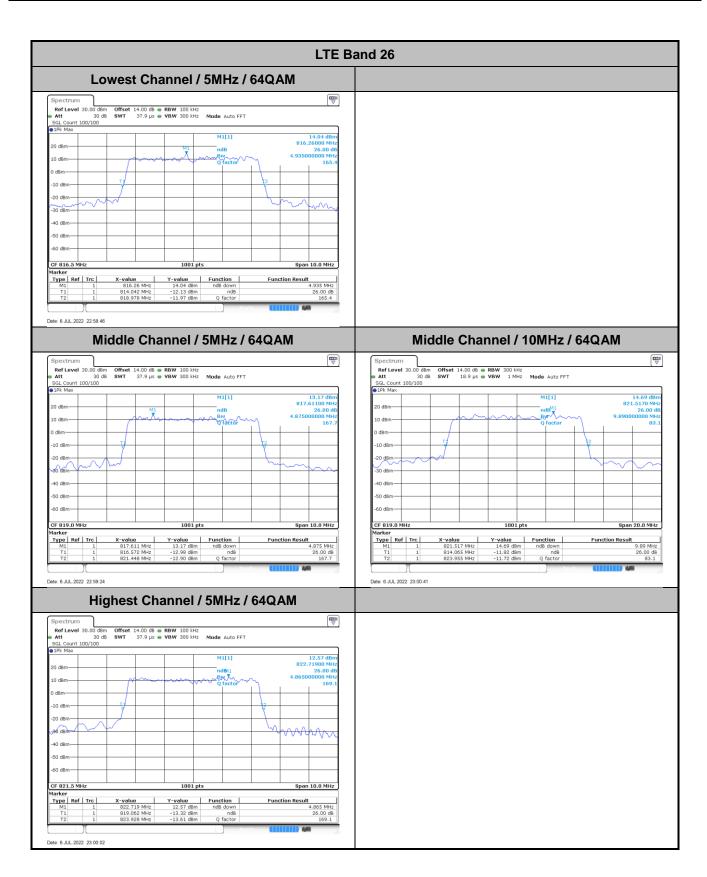

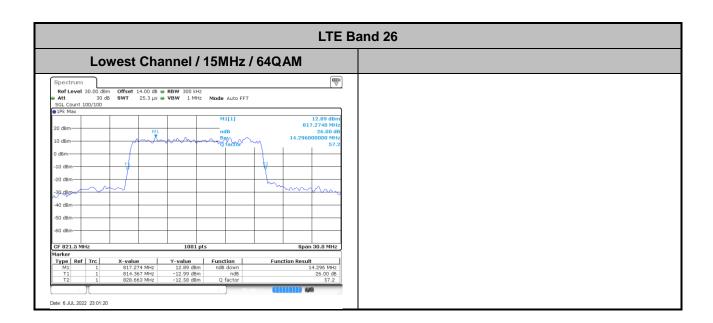



Occupied Bandwidth


Mode		LTE Band 26 : 99%OBW(MHz)										
BW	1.4	ИНz	3M	3MHz		5MHz		10MHz		ЛHz	20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.73	4.49	4.48	-	-	13.46	13.46	-	-
Middle CH	1.09	1.09	2.75	2.72	4.48	4.47	9.11	9.05	-	-	-	-
Highest CH	1.10	1.09	2.72	2.72	4.50	4.50	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	99%OBV	V(MHz)				
BW	1.4	ИНz	3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.72	-	4.50	-	-	-	13.46	-	-	-
Middle CH	1.09	-	2.72	-	4.49	-	9.05	-	-	-	-	-
Highest CH	1.09	-	2.73	-	4.49	-	-	-	-	-	-	-


Sporton International Inc. (ShenZhen)


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : A13 of A45

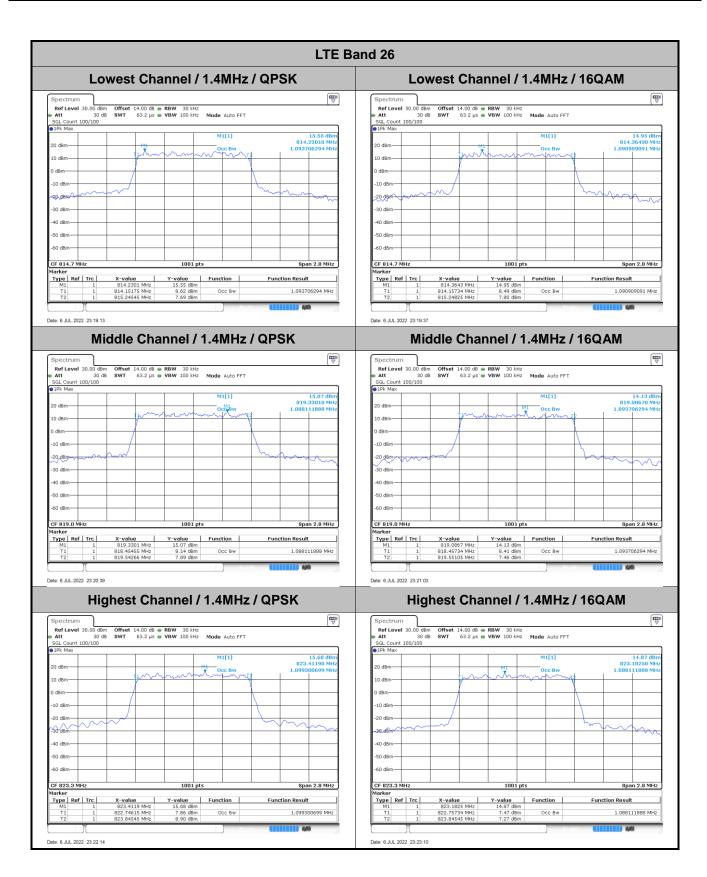

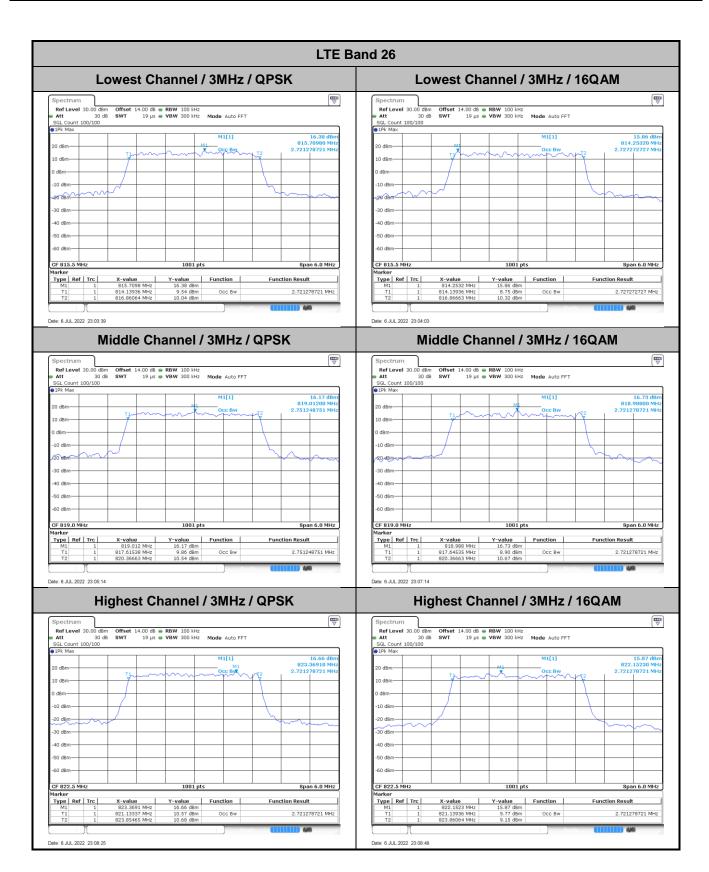


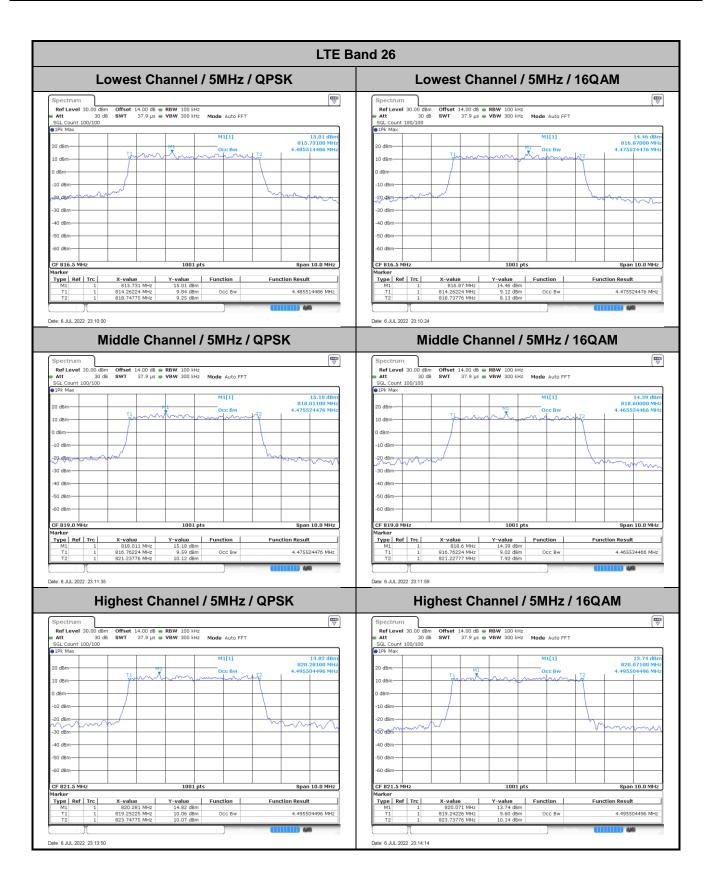


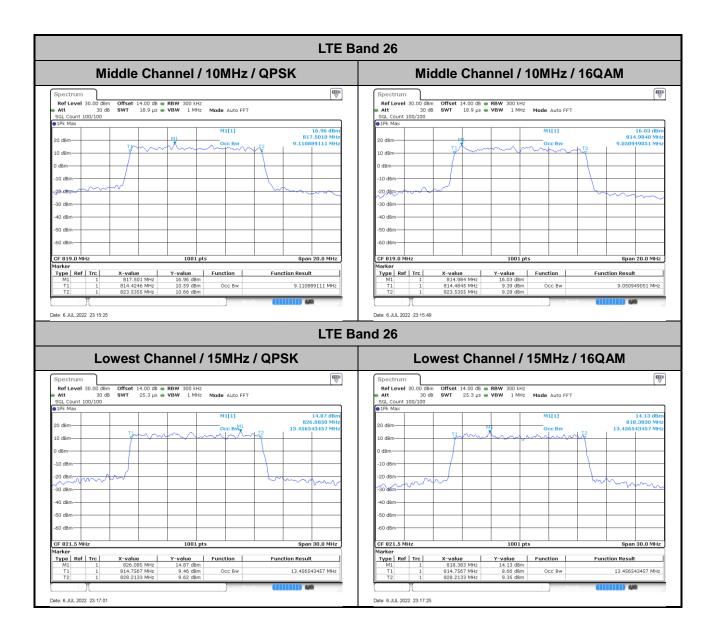

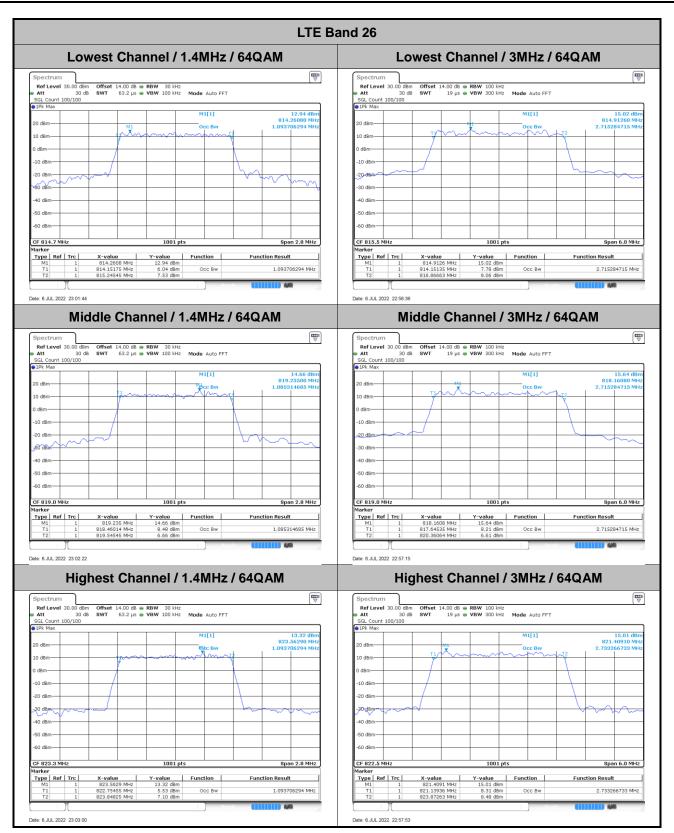


: A18 of A45

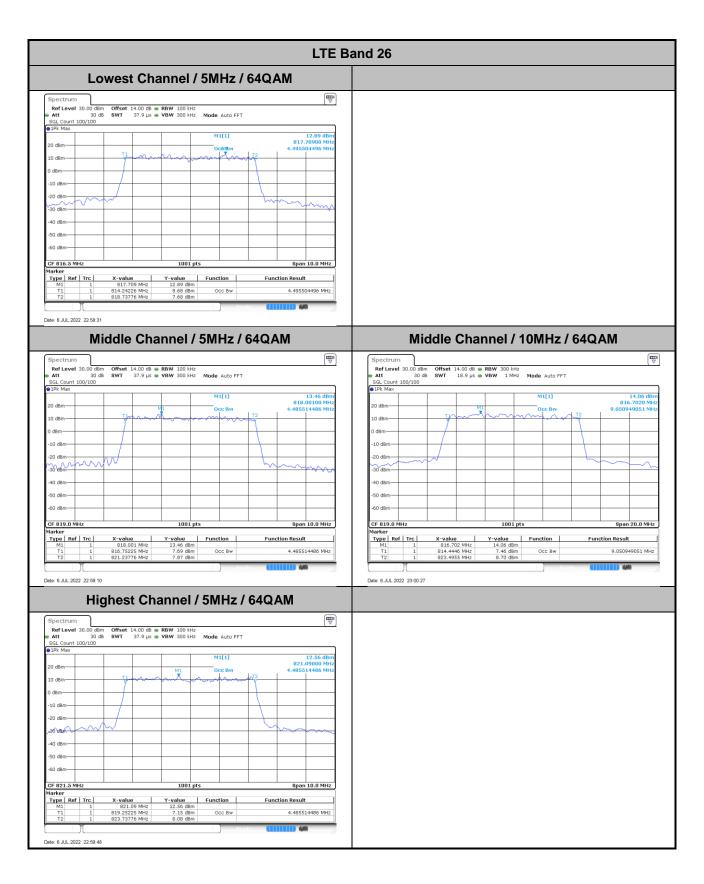

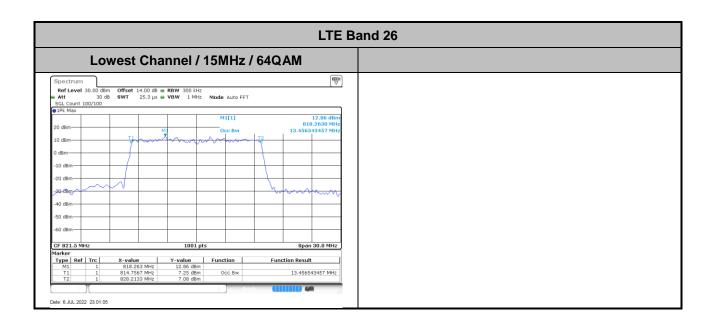

Conducted Band Edge

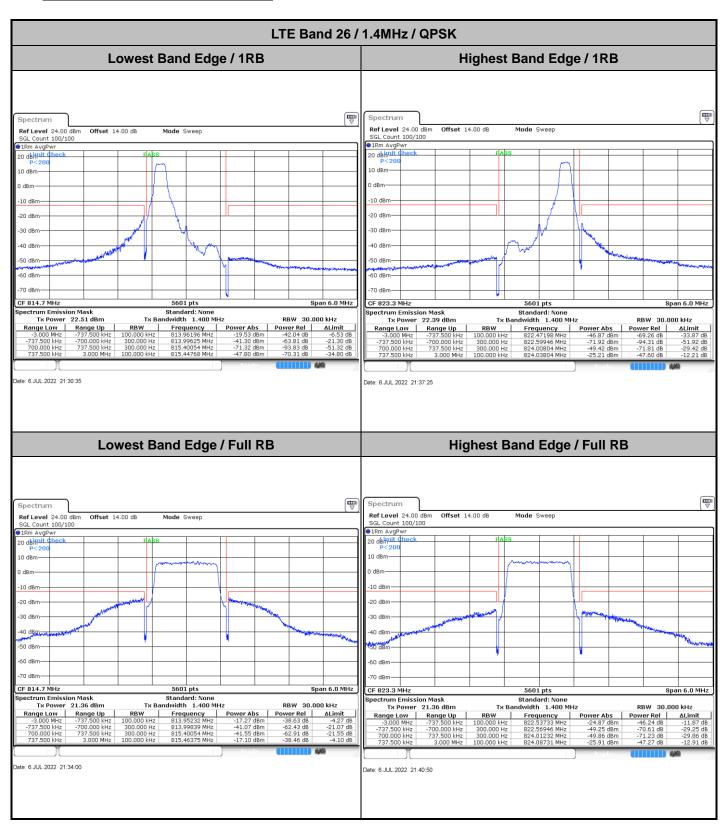

Sporton International Inc. (ShenZhen)

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: IHDT56AF9 Page Number : A21 of A45

