

1_HAC RF GSM850_ANT0_Voice_Ch128

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.27 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.52 dBV/m


MIF scaled E-field

Grid 1 M4 31.4 dBV/m	Grid 2 M4 32.7 dBV/m	Grid 3 M4 32.4 dBV/m
Grid 4 M4 31.98 dBV/m	Grid 5 M4 32.57 dBV/m	Grid 6 M4 32.39 dBV/m
Grid 7 M4 33.52 dBV/m	Grid 8 M4 33.42 dBV/m	Grid 9 M4 32.78 dBV/m

Total = 33.52 dBV/m

E Category: M4

Location: 14.5, 20.5, 8.7 mm

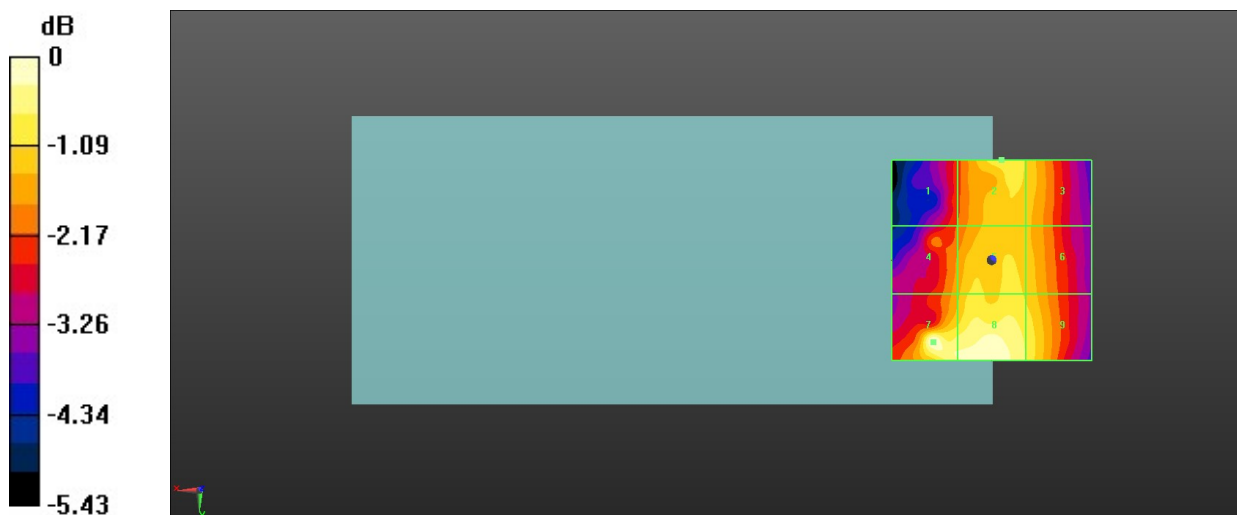

0 dB = 47.42 V/m = 33.52 dBV/m

2_HAC RF GSM850_ANT0_Voice_Ch189

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 39.18 V/m; Power Drift = -0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.95 dBV/m


MIF scaled E-field

Grid 1 M4 31.17 dBV/m	Grid 2 M4 32.19 dBV/m	Grid 3 M4 33.53 dBV/m
Grid 4 M4 32.66 dBV/m	Grid 5 M4 33.01 dBV/m	Grid 6 M4 32.46 dBV/m
Grid 7 M4 33.87 dBV/m	Grid 8 M4 33.95 dBV/m	Grid 9 M4 32.92 dBV/m

Total = 33.95 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

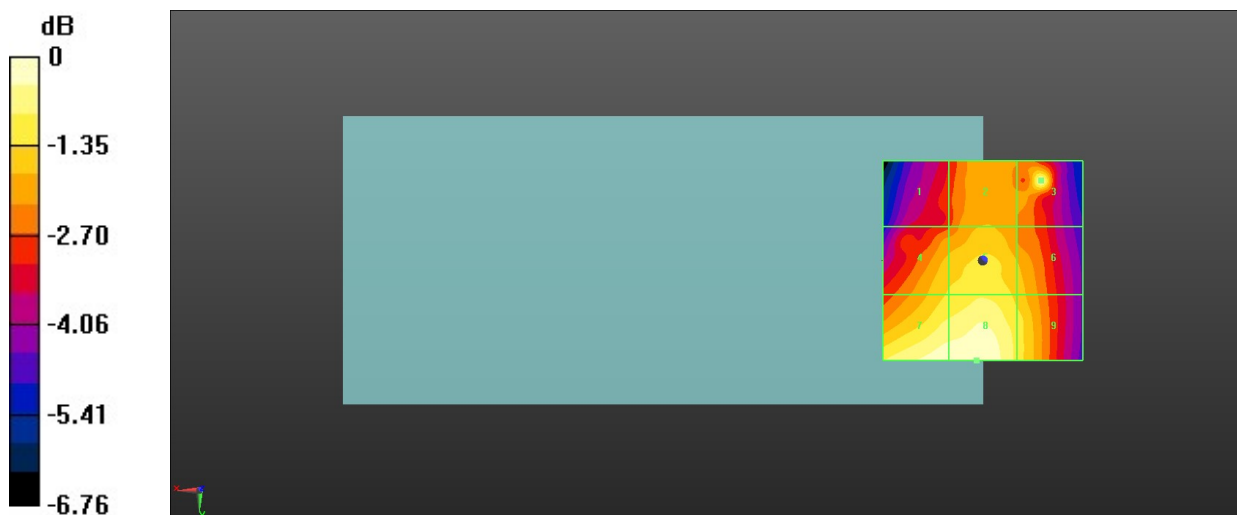

0 dB = 49.85 V/m = 33.95 dBV/m

3_HAC RF GSM850_ANT0_Voice_Ch251

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 43.71 V/m; Power Drift = -0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.03 dBV/m


MIF scaled E-field

Grid 1 M4 32.34 dBV/m	Grid 2 M4 33.42 dBV/m	Grid 3 M4 33.19 dBV/m
Grid 4 M4 33.1 dBV/m	Grid 5 M4 33.85 dBV/m	Grid 6 M4 33.49 dBV/m
Grid 7 M4 33.93 dBV/m	Grid 8 M4 34.03 dBV/m	Grid 9 M4 33.53 dBV/m

Total = 34.03 dBV/m

E Category: M4

Location: 2, 25, 8.7 mm

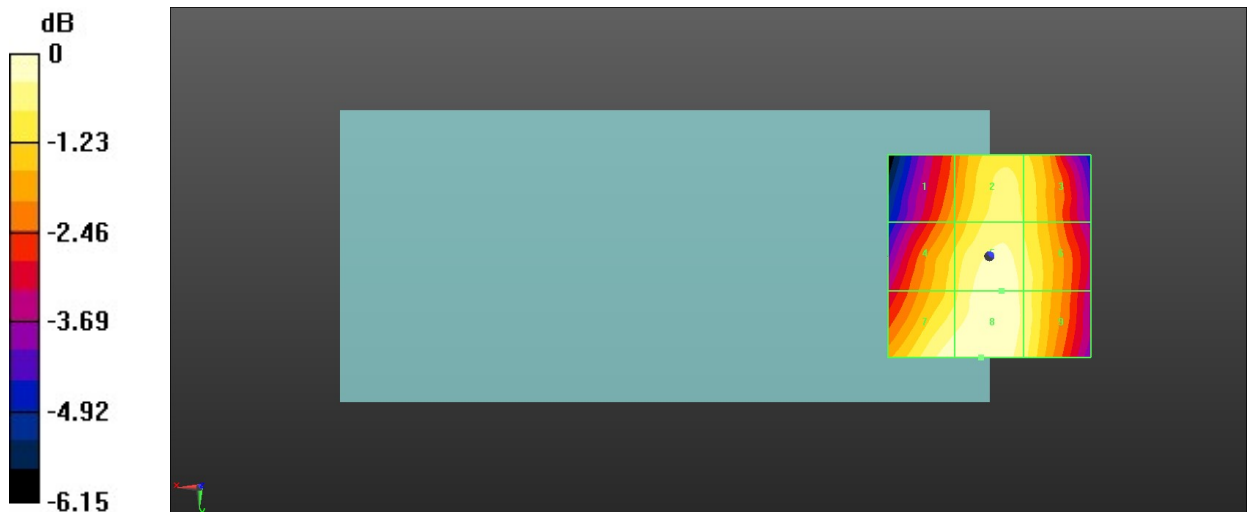

0 dB = 50.32 V/m = 34.03 dBV/m

4_HAC RF GSM850_ANT1_Voice_Ch128

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 37.91 V/m; Power Drift = 0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.75 dBV/m


MIF scaled E-field

Grid 1 M4 30.95 dBV/m	Grid 2 M4 32.48 dBV/m	Grid 3 M4 32.35 dBV/m
Grid 4 M4 31.73 dBV/m	Grid 5 M4 32.81 dBV/m	Grid 6 M4 32.7 dBV/m
Grid 7 M4 32.94 dBV/m	Grid 8 M4 33.75 dBV/m	Grid 9 M4 33.42 dBV/m

Total = 33.75 dBV/m

E Category: M4

Location: -3, 25, 8.7 mm

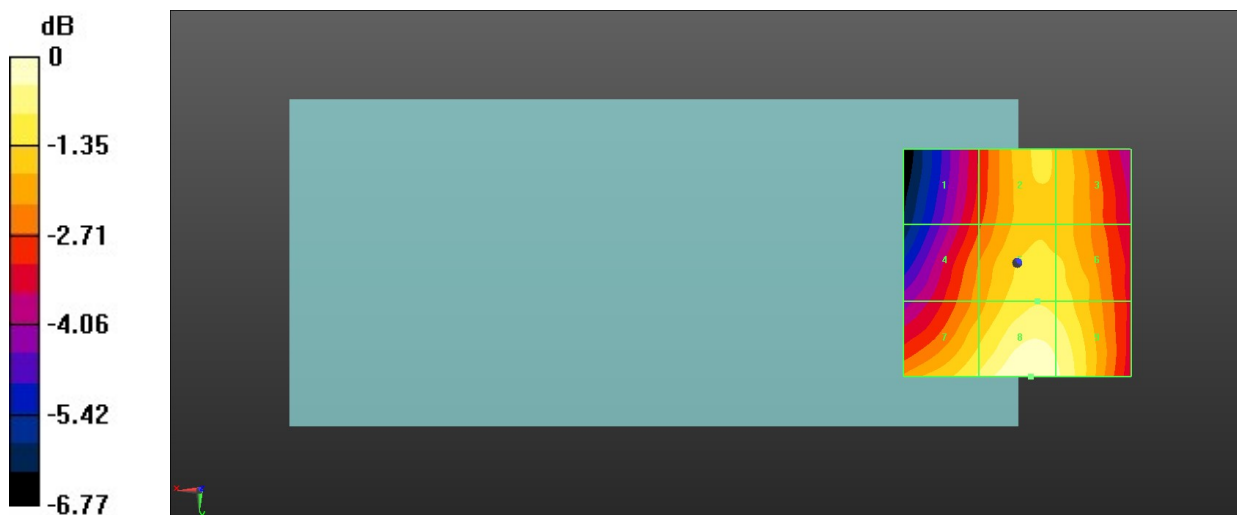

0 dB = 48.70 V/m = 33.75 dBV/m

5_HAC RF GSM850_ANT1_Voice_Ch189

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.50 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.06 dBV/m


MIF scaled E-field

Grid 1 M4 31.38 dBV/m	Grid 2 M4 32.52 dBV/m	Grid 3 M4 32.38 dBV/m
Grid 4 M4 32.54 dBV/m	Grid 5 M4 33.23 dBV/m	Grid 6 M4 32.96 dBV/m
Grid 7 M4 33.8 dBV/m	Grid 8 M4 34.06 dBV/m	Grid 9 M4 33.39 dBV/m

Total = 34.06 dBV/m

E Category: M4

Location: 1, 25, 8.7 mm

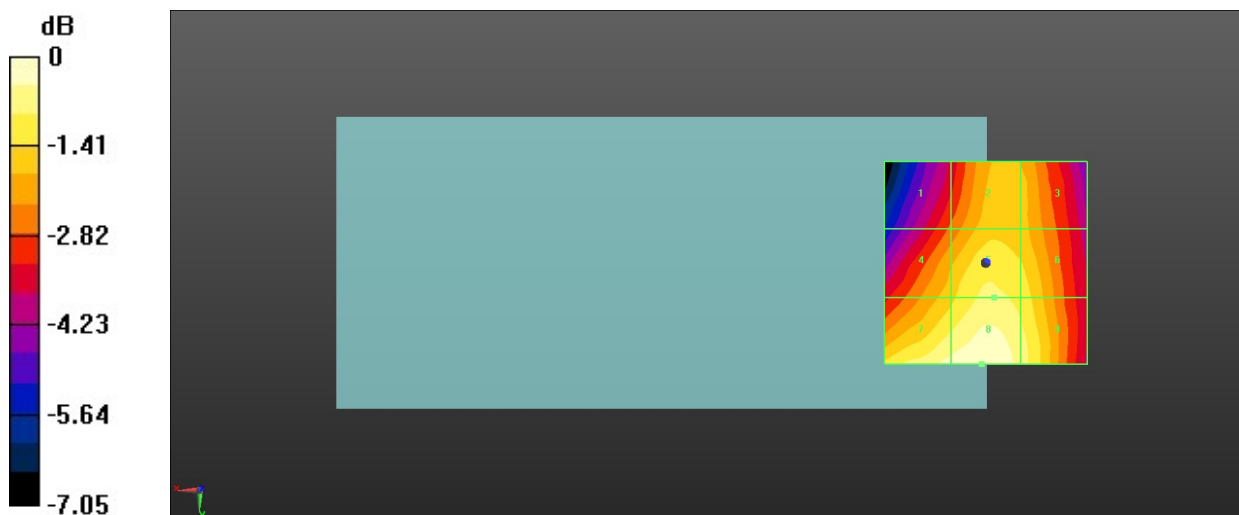

0 dB = 50.48 V/m = 34.06 dBV/m

6_HAC RF GSM850_ANT1_Voice_Ch251

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.88 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.99 dBV/m


MIF scaled E-field

Grid 1 M4 31.93 dBV/m	Grid 2 M4 33.08 dBV/m	Grid 3 M4 32.94 dBV/m
Grid 4 M4 32.91 dBV/m	Grid 5 M4 33.63 dBV/m	Grid 6 M4 33.36 dBV/m
Grid 7 M4 33.76 dBV/m	Grid 8 M4 33.99 dBV/m	Grid 9 M4 33.41 dBV/m

Total = 33.99 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

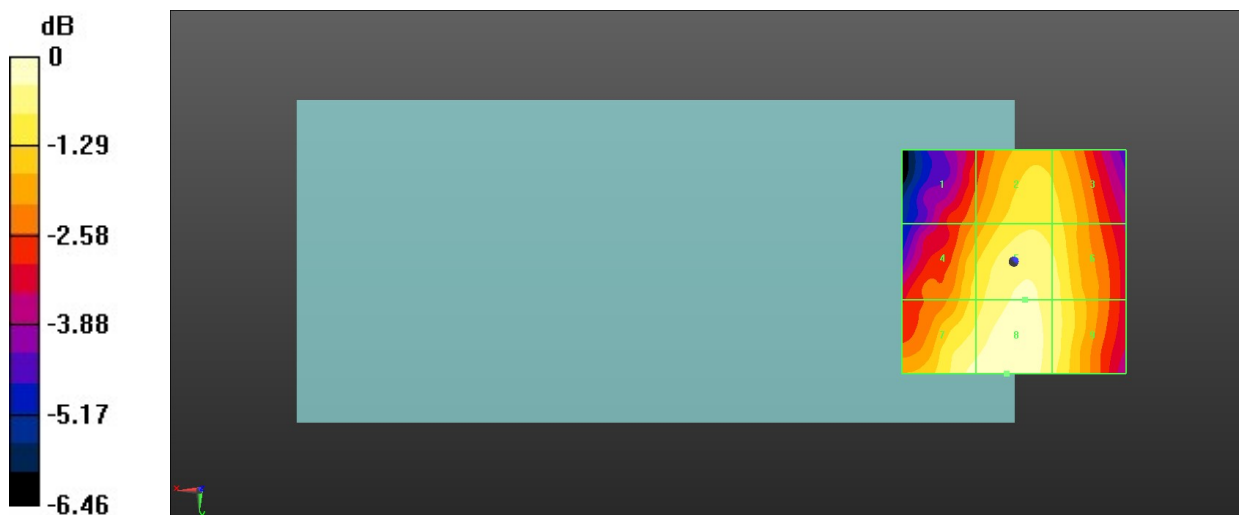

0 dB = 50.07 V/m = 33.99 dBV/m

7_HAC RF GSM1900_ANT0_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.352 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.19 dBV/m


MIF scaled E-field

Grid 1 M4 26.78 dBV/m	Grid 2 M4 27.19 dBV/m	Grid 3 M4 25.63 dBV/m
Grid 4 M4 21.61 dBV/m	Grid 5 M4 21.34 dBV/m	Grid 6 M4 20.24 dBV/m
Grid 7 M4 23.15 dBV/m	Grid 8 M4 23.17 dBV/m	Grid 9 M4 21.78 dBV/m

Total = 27.19 dBV/m

E Category: M4

Location: 1.5, -25, 8.7 mm

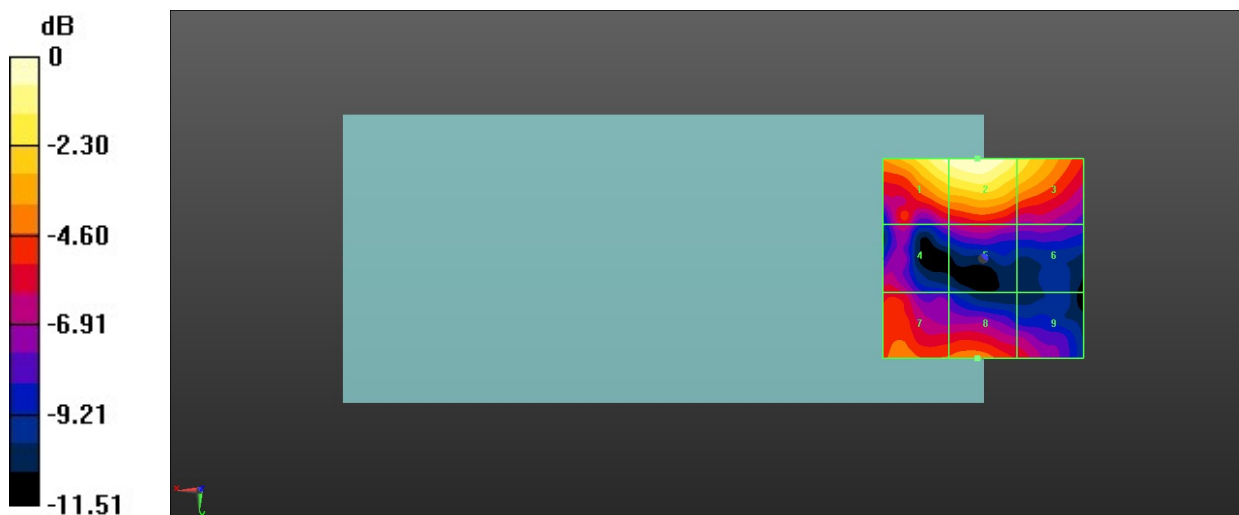

0 dB = 22.88 V/m = 27.19 dBV/m

8_HAC RF GSM1900_ANT0_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.873 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.59 dBV/m


MIF scaled E-field

Grid 1 M4 25.46 dBV/m	Grid 2 M4 26.59 dBV/m	Grid 3 M4 25.33 dBV/m
Grid 4 M4 21.75 dBV/m	Grid 5 M4 20.33 dBV/m	Grid 6 M4 22.46 dBV/m
Grid 7 M4 23.5 dBV/m	Grid 8 M4 23.54 dBV/m	Grid 9 M4 21.18 dBV/m

Total = 26.59 dBV/m

E Category: M4

Location: -0.5, -25, 8.7 mm

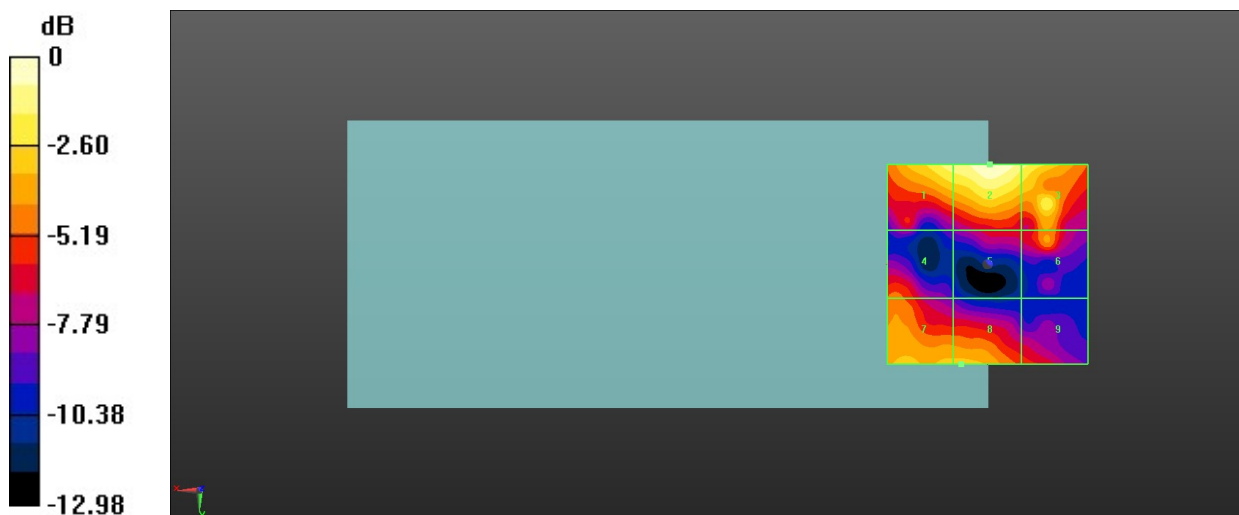

0 dB = 21.34 V/m = 26.59 dBV/m

9_HAC RF GSM1900_ANT0_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.408 V/m; Power Drift = -0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.26 dBV/m


MIF scaled E-field

Grid 1 M4 25.56 dBV/m	Grid 2 M4 26.26 dBV/m	Grid 3 M4 25.71 dBV/m
Grid 4 M4 21.23 dBV/m	Grid 5 M4 21.06 dBV/m	Grid 6 M4 20.74 dBV/m
Grid 7 M4 23.17 dBV/m	Grid 8 M4 23.37 dBV/m	Grid 9 M4 22.24 dBV/m

Total = 26.26 dBV/m

E Category: M4

Location: 0, -25, 8.7 mm

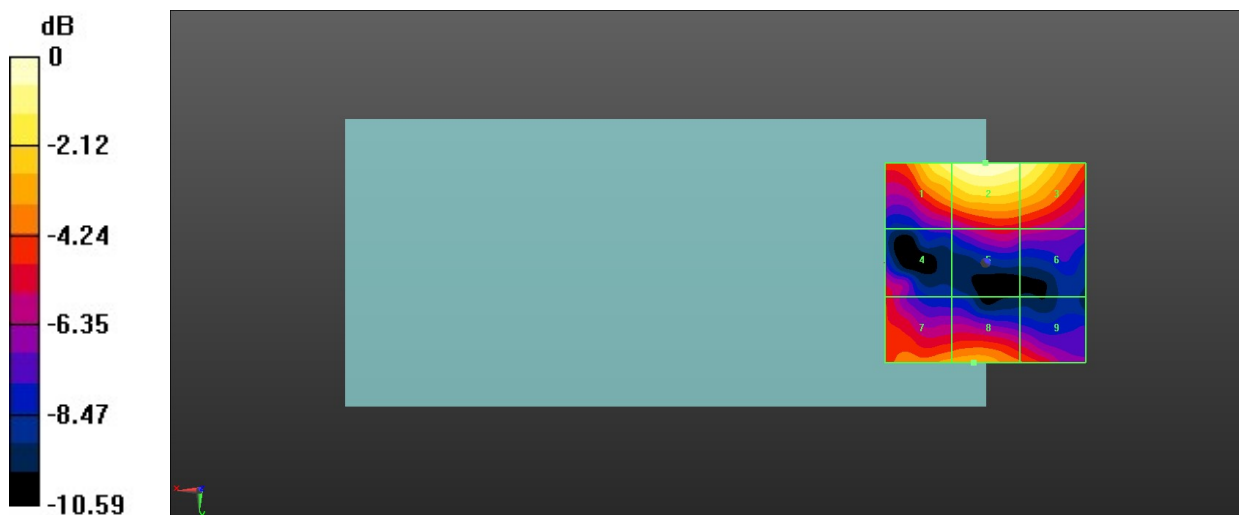

0 dB = 20.55 V/m = 26.26 dBV/m

10_HAC RF GSM1900_ANT1_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.708 V/m; Power Drift = -0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.88 dBV/m


MIF scaled E-field

Grid 1 M4 25.15 dBV/m	Grid 2 M4 25.88 dBV/m	Grid 3 M4 25.15 dBV/m
Grid 4 M4 21.49 dBV/m	Grid 5 M4 20.97 dBV/m	Grid 6 M4 20.97 dBV/m
Grid 7 M4 22.09 dBV/m	Grid 8 M4 21.91 dBV/m	Grid 9 M4 21.63 dBV/m

Total = 25.88 dBV/m

E Category: M4

Location: 0, -25, 8.7 mm

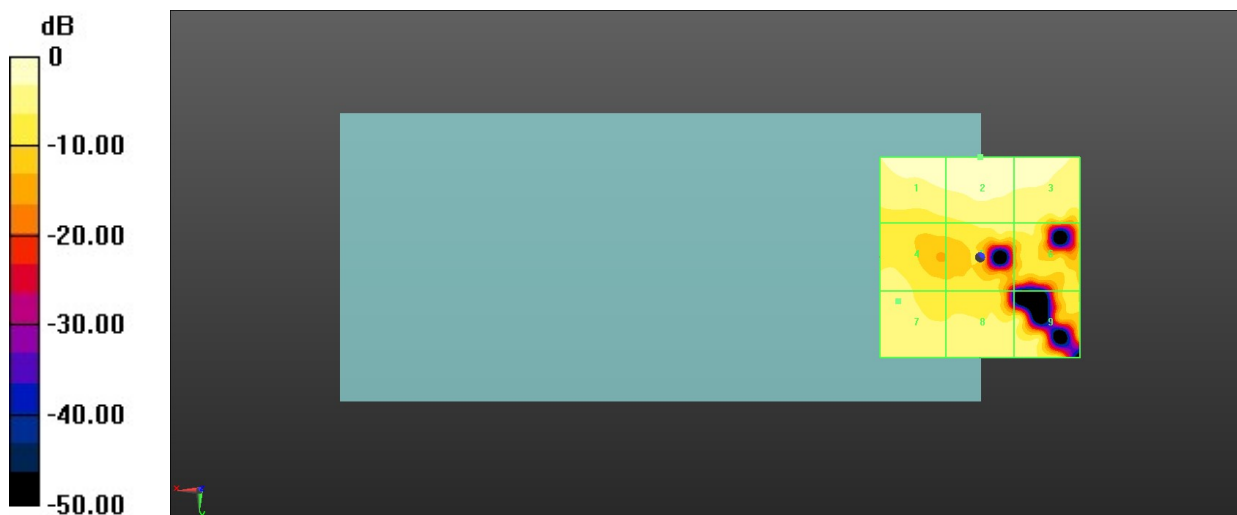

0 dB = 19.68 V/m = 25.88 dBV/m

11_HAC RF GSM1900_ANT1_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.822 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.58 dBV/m


MIF scaled E-field

Grid 1 M4 24.98 dBV/m	Grid 2 M4 25.58 dBV/m	Grid 3 M4 24.35 dBV/m
Grid 4 M4 19.4 dBV/m	Grid 5 M4 19.86 dBV/m	Grid 6 M4 18.88 dBV/m
Grid 7 M4 22.2 dBV/m	Grid 8 M4 22.27 dBV/m	Grid 9 M4 21.43 dBV/m

Total = 25.58 dBV/m

E Category: M4

Location: 0.5, -25, 8.7 mm

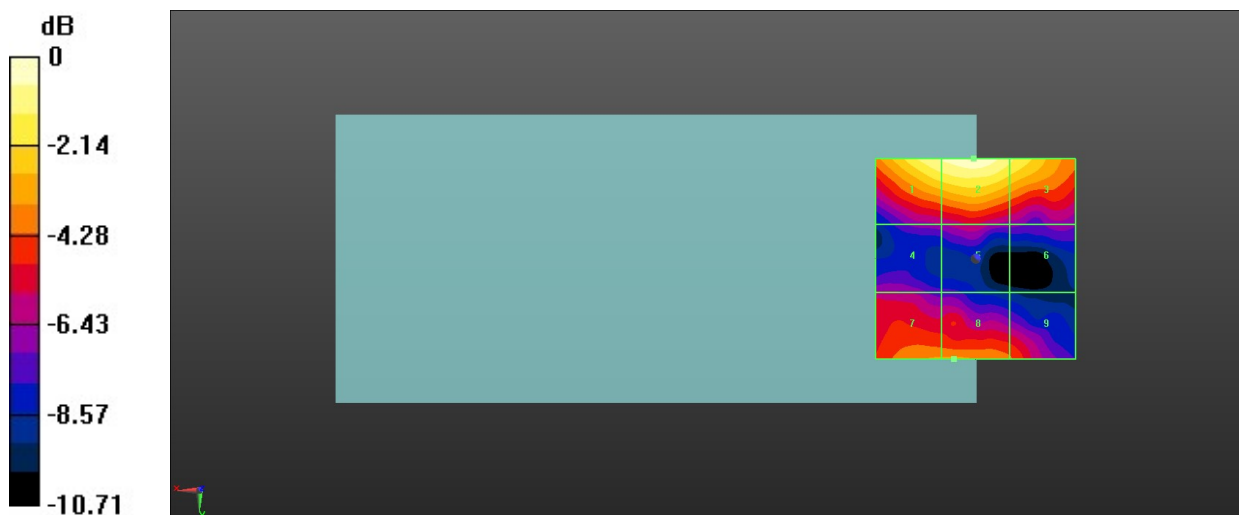

0 dB = 19.00 V/m = 25.58 dBV/m

12_HAC RF GSM1900_ANT1_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.298 V/m; Power Drift = -0.11 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.47 dBV/m


MIF scaled E-field

Grid 1 M4 23.47 dBV/m	Grid 2 M4 24.47 dBV/m	Grid 3 M4 24.05 dBV/m
Grid 4 M4 19.32 dBV/m	Grid 5 M4 19.76 dBV/m	Grid 6 M4 19.51 dBV/m
Grid 7 M4 20.23 dBV/m	Grid 8 M4 20.41 dBV/m	Grid 9 M4 19.51 dBV/m

Total = 24.47 dBV/m

E Category: M4

Location: -3.5, -25, 8.7 mm

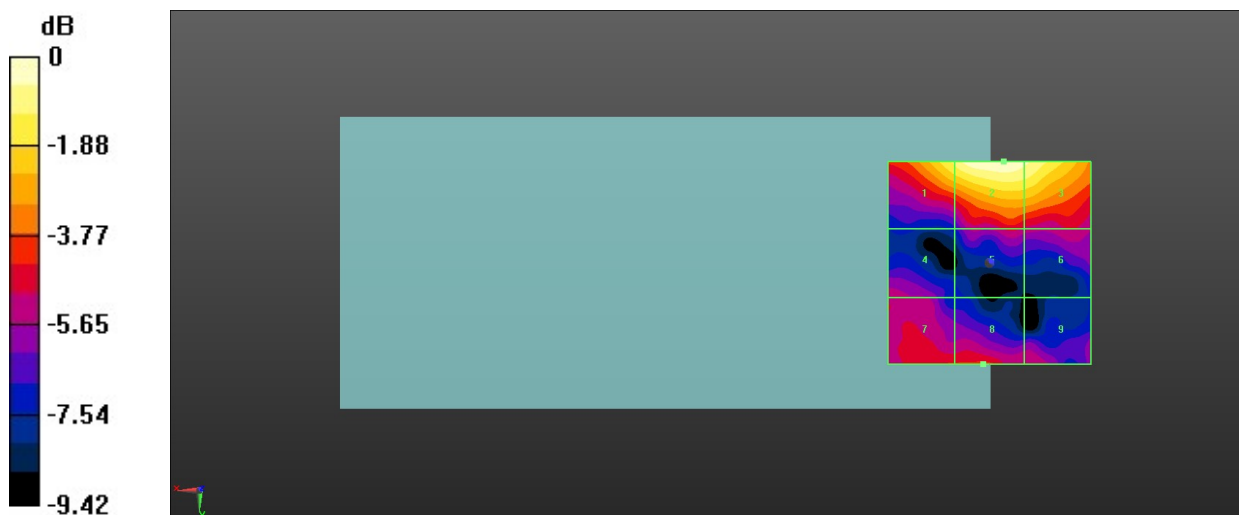

0 dB = 16.74 V/m = 24.47 dBV/m

13_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch39750

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.975 V/m; Power Drift = -0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.29 dBV/m


MIF scaled E-field

Grid 1 M4 17.67 dBV/m	Grid 2 M4 17.73 dBV/m	Grid 3 M4 17.43 dBV/m
Grid 4 M4 18.26 dBV/m	Grid 5 M4 16 dBV/m	Grid 6 M4 16.49 dBV/m
Grid 7 M4 18.29 dBV/m	Grid 8 M4 13.86 dBV/m	Grid 9 M4 14.4 dBV/m

Total = 18.29 dBV/m

E Category: M4

Location: 25, 10, 8.7 mm

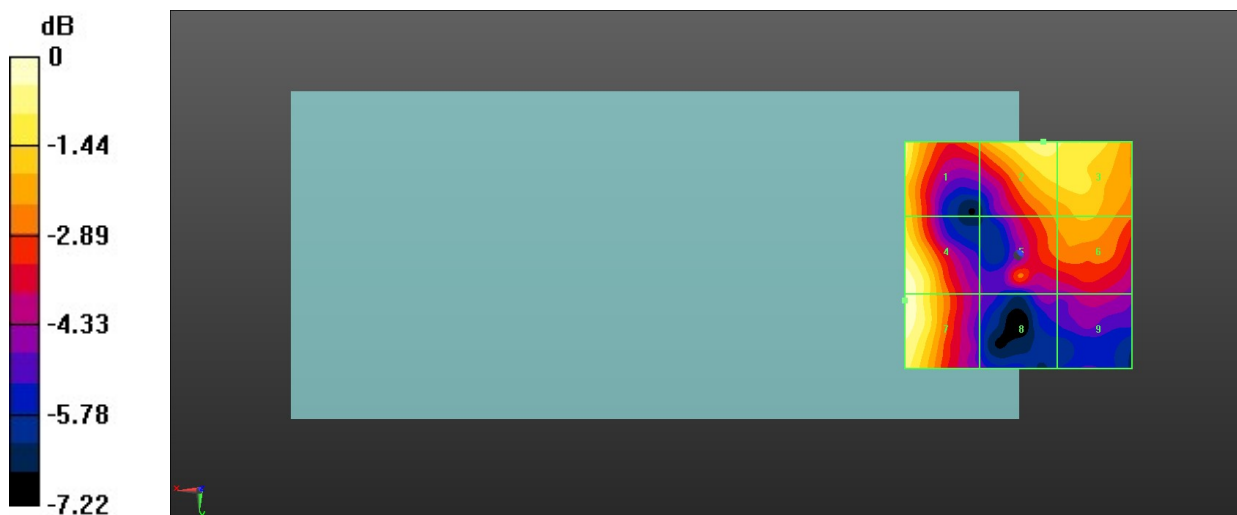

0 dB = 8.213 V/m = 18.29 dBV/m

14_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch40185

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.185 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.44 dBV/m


MIF scaled E-field

Grid 1 M4 18.28 dBV/m	Grid 2 M4 19.13 dBV/m	Grid 3 M4 19.24 dBV/m
Grid 4 M4 19.35 dBV/m	Grid 5 M4 17.89 dBV/m	Grid 6 M4 18.33 dBV/m
Grid 7 M4 19.44 dBV/m	Grid 8 M4 17.15 dBV/m	Grid 9 M4 17.69 dBV/m

Total = 19.44 dBV/m

E Category: M4

Location: 25, 11, 8.7 mm

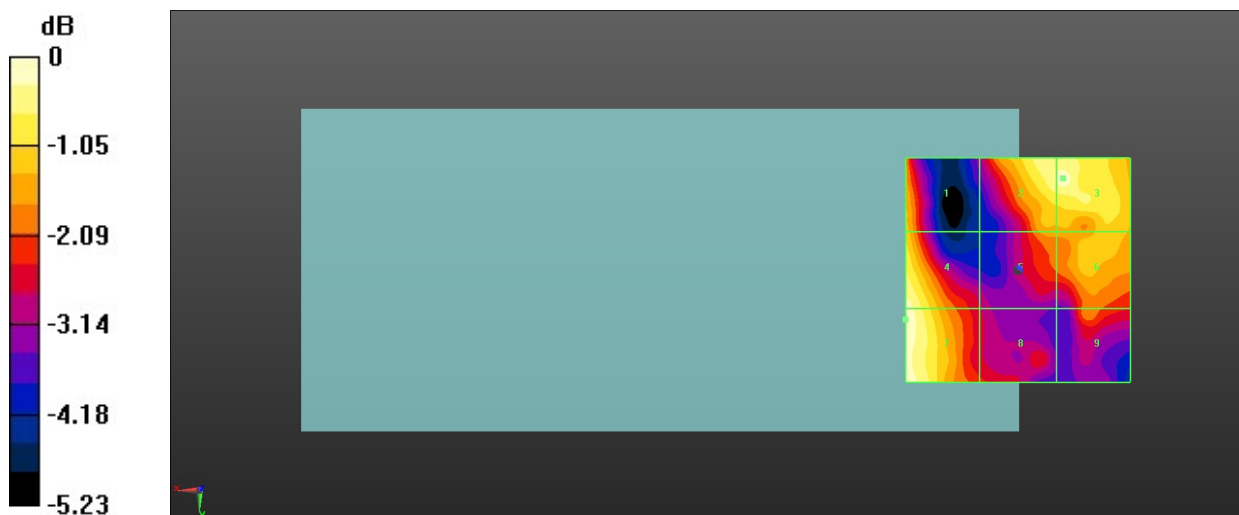

0 dB = 9.374 V/m = 19.44 dBV/m

15_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch40620

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.794 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.59 dBV/m


MIF scaled E-field

Grid 1 M4 17.41 dBV/m	Grid 2 M4 17.37 dBV/m	Grid 3 M4 17.18 dBV/m
Grid 4 M4 18.45 dBV/m	Grid 5 M4 15.96 dBV/m	Grid 6 M4 15.96 dBV/m
Grid 7 M4 18.59 dBV/m	Grid 8 M4 14.75 dBV/m	Grid 9 M4 14.42 dBV/m

Total = 18.59 dBV/m

E Category: M4

Location: 25, 12.5, 8.7 mm

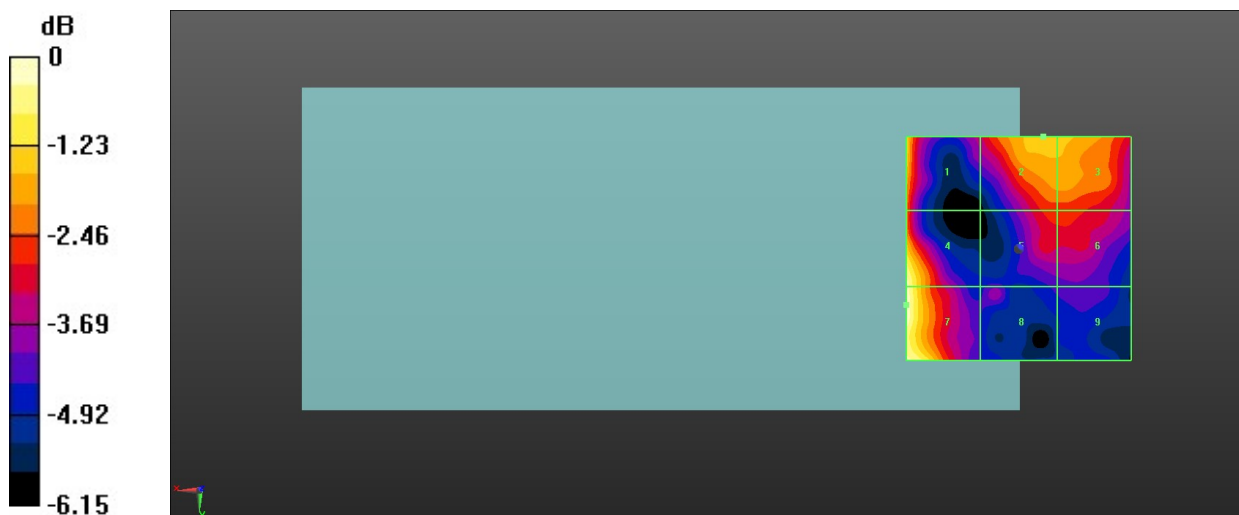

0 dB = 8.497 V/m = 18.59 dBV/m

16_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch41055

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.200 V/m; Power Drift = 0.08 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.41 dBV/m


MIF scaled E-field

Grid 1 M4 16.79 dBV/m	Grid 2 M4 15.45 dBV/m	Grid 3 M4 15.52 dBV/m
Grid 4 M4 16.85 dBV/m	Grid 5 M4 15.25 dBV/m	Grid 6 M4 15.65 dBV/m
Grid 7 M4 17.41 dBV/m	Grid 8 M4 14.84 dBV/m	Grid 9 M4 15.59 dBV/m

Total = 17.41 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

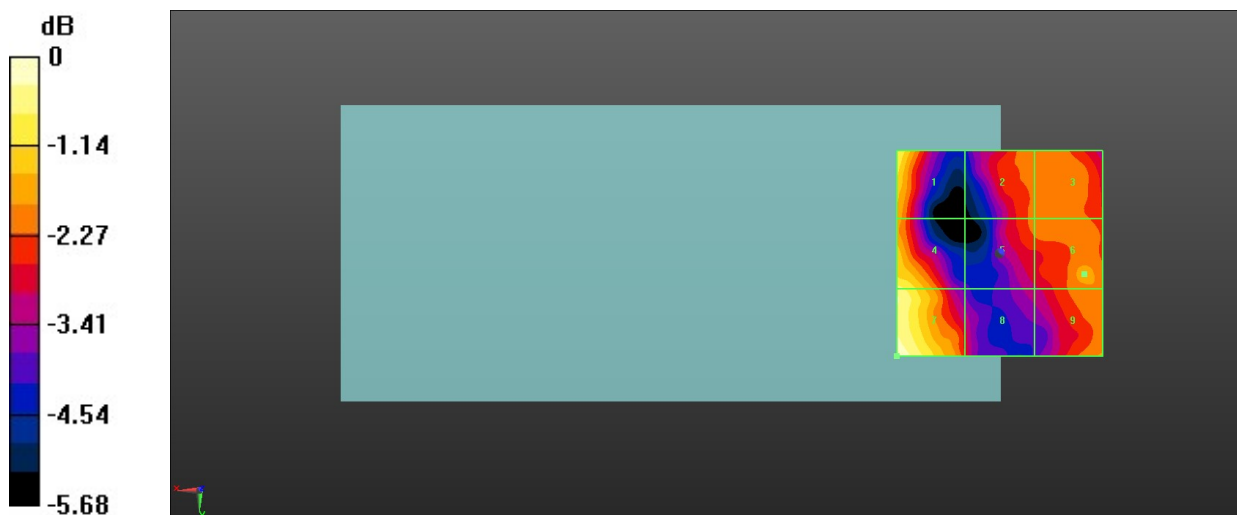

0 dB = 7.423 V/m = 17.41 dBV/m

17_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch41490

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.860 V/m; Power Drift = -0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.79 dBV/m


MIF scaled E-field

Grid 1 M4 17.79 dBV/m	Grid 2 M4 15.39 dBV/m	Grid 3 M4 15.64 dBV/m
Grid 4 M4 16.72 dBV/m	Grid 5 M4 14.66 dBV/m	Grid 6 M4 14.82 dBV/m
Grid 7 M4 16.76 dBV/m	Grid 8 M4 14.2 dBV/m	Grid 9 M4 13.89 dBV/m

Total = 17.79 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

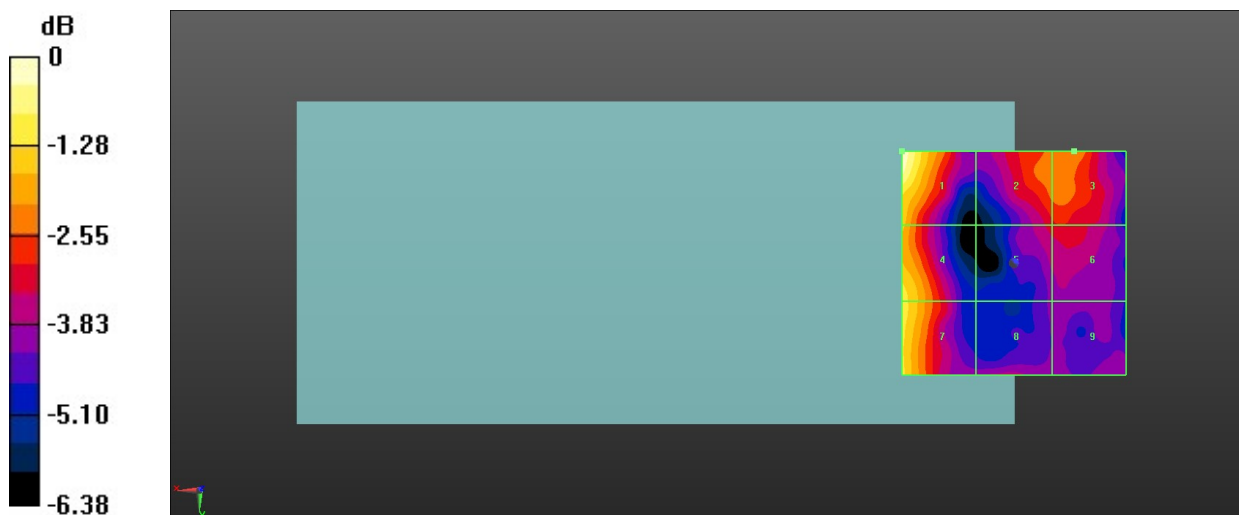

0 dB = 7.752 V/m = 17.79 dBV/m

18_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch39750

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.460 V/m; Power Drift = -0.12 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.15 dBV/m


MIF scaled E-field

Grid 1 M4 17.24 dBV/m	Grid 2 M4 15.22 dBV/m	Grid 3 M4 14.55 dBV/m
Grid 4 M4 18.03 dBV/m	Grid 5 M4 17.45 dBV/m	Grid 6 M4 16.56 dBV/m
Grid 7 M4 18.15 dBV/m	Grid 8 M4 15.43 dBV/m	Grid 9 M4 12.22 dBV/m

Total = 18.15 dBV/m

E Category: M4

Location: 25, 10.5, 8.7 mm

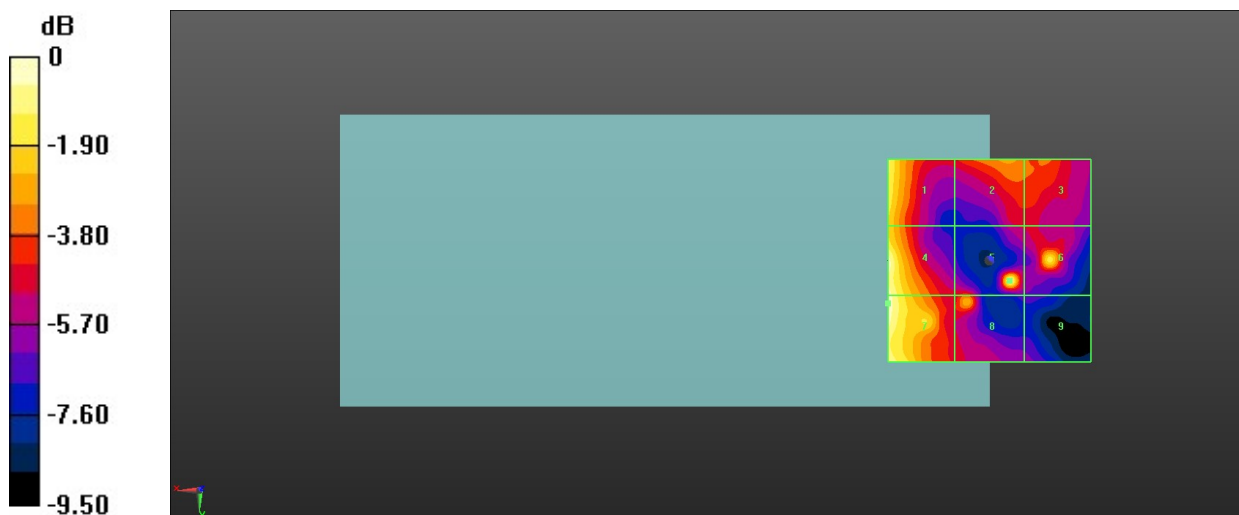

0 dB = 8.083 V/m = 18.15 dBV/m

19_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch40185

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.447 V/m; Power Drift = -0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.87 dBV/m


MIF scaled E-field

Grid 1 M4 16.37 dBV/m	Grid 2 M4 17.08 dBV/m	Grid 3 M4 17.14 dBV/m
Grid 4 M4 17.32 dBV/m	Grid 5 M4 15.91 dBV/m	Grid 6 M4 16.18 dBV/m
Grid 7 M4 17.87 dBV/m	Grid 8 M4 16.57 dBV/m	Grid 9 M4 14.67 dBV/m

Total = 17.87 dBV/m

E Category: M4

Location: 25, 23, 8.7 mm

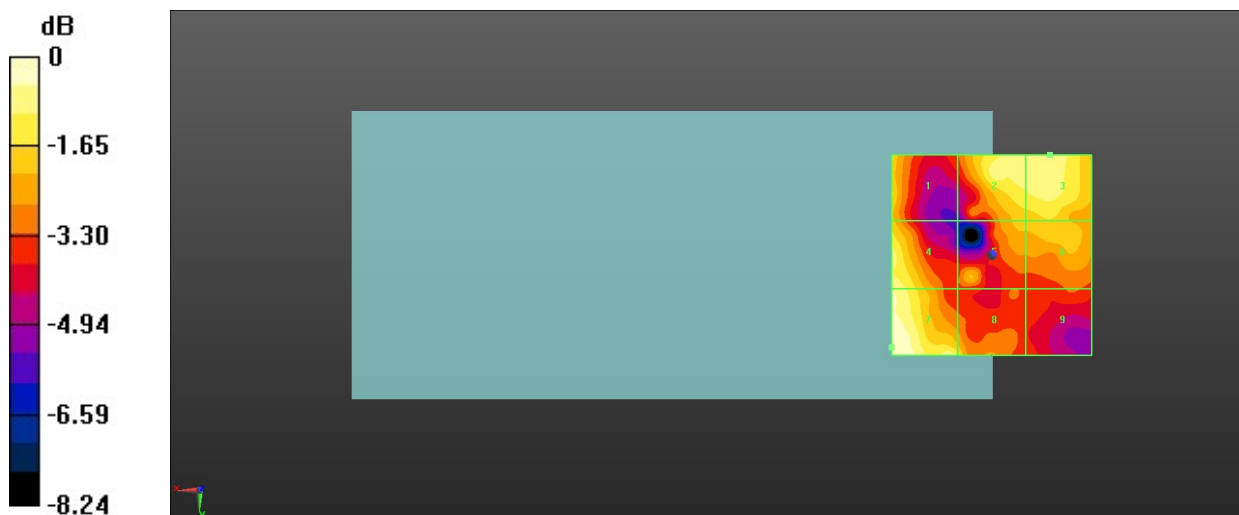

0 dB = 7.823 V/m = 17.87 dBV/m

20_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch40620

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.759 V/m; Power Drift = -0.13 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.53 dBV/m


MIF scaled E-field

Grid 1 M4 15.78 dBV/m	Grid 2 M4 16.46 dBV/m	Grid 3 M4 16.53 dBV/m
Grid 4 M4 16.95 dBV/m	Grid 5 M4 15.69 dBV/m	Grid 6 M4 15.73 dBV/m
Grid 7 M4 17.53 dBV/m	Grid 8 M4 14.19 dBV/m	Grid 9 M4 14.28 dBV/m

Total = 17.53 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

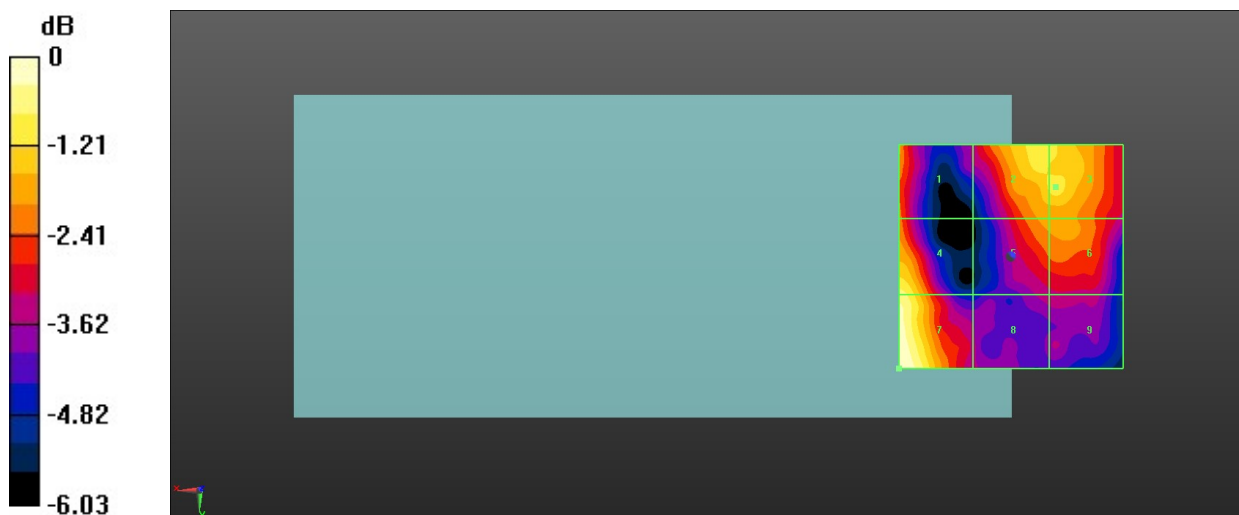

0 dB = 7.527 V/m = 17.53 dBV/m

21_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch41055

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.656 V/m; Power Drift = -0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.96 dBV/m


MIF scaled E-field

Grid 1 M4 16.16 dBV/m	Grid 2 M4 14.65 dBV/m	Grid 3 M4 14.55 dBV/m
Grid 4 M4 16.84 dBV/m	Grid 5 M4 14.16 dBV/m	Grid 6 M4 14.33 dBV/m
Grid 7 M4 17.96 dBV/m	Grid 8 M4 14.66 dBV/m	Grid 9 M4 14.34 dBV/m

Total = 17.96 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

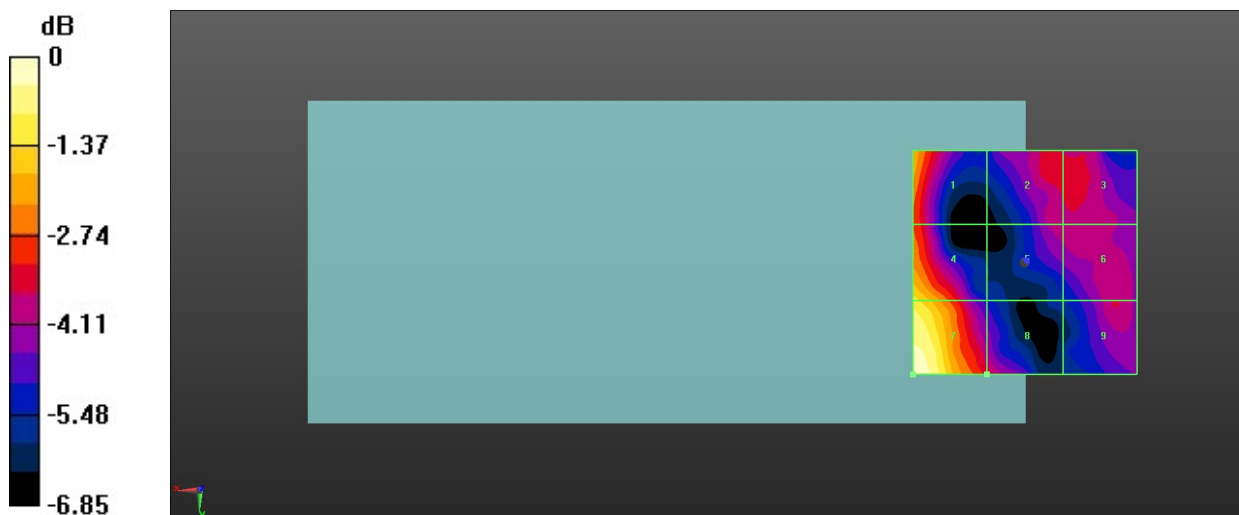

0 dB = 7.909 V/m = 17.96 dBV/m

22_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch41490

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.558 V/m; Power Drift = 0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.33 dBV/m


MIF scaled E-field

Grid 1 M4 16.99 dBV/m	Grid 2 M4 16.24 dBV/m	Grid 3 M4 16.31 dBV/m
Grid 4 M4 16.34 dBV/m	Grid 5 M4 15.61 dBV/m	Grid 6 M4 15.67 dBV/m
Grid 7 M4 17.33 dBV/m	Grid 8 M4 15.1 dBV/m	Grid 9 M4 14.33 dBV/m

Total = 17.33 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

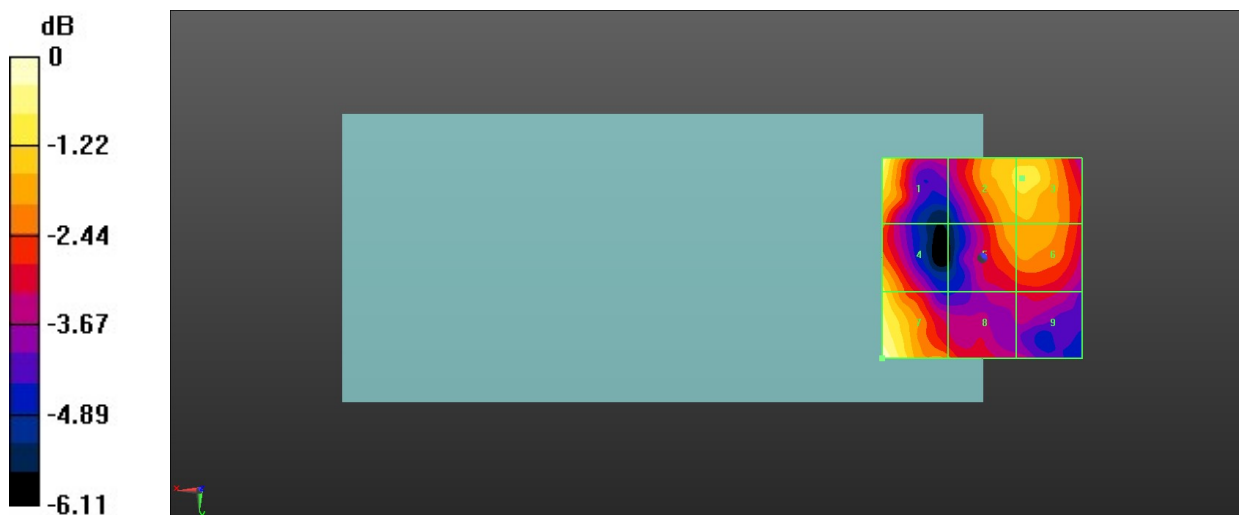

0 dB = 7.353 V/m = 17.33 dBV/m

23_HAC RF LTE B48_20M_ANT 2_QPSK_1RB_0Offset_Ch55340

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3560 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55340/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.09 V/m; Power Drift = -0.13 dB

Applied MIF = -1.44 dB

RF audio interference level = 28.41 dBV/m


MIF scaled E-field

Grid 1 M4 28.41 dBV/m	Grid 2 M4 28.17 dBV/m	Grid 3 M4 25.58 dBV/m
Grid 4 M4 19.63 dBV/m	Grid 5 M4 23.07 dBV/m	Grid 6 M4 23.73 dBV/m
Grid 7 M4 17.83 dBV/m	Grid 8 M4 21.85 dBV/m	Grid 9 M4 22.46 dBV/m

Total = 28.41 dBV/m

E Category: M4

Location: 12, -25, 8.7 mm

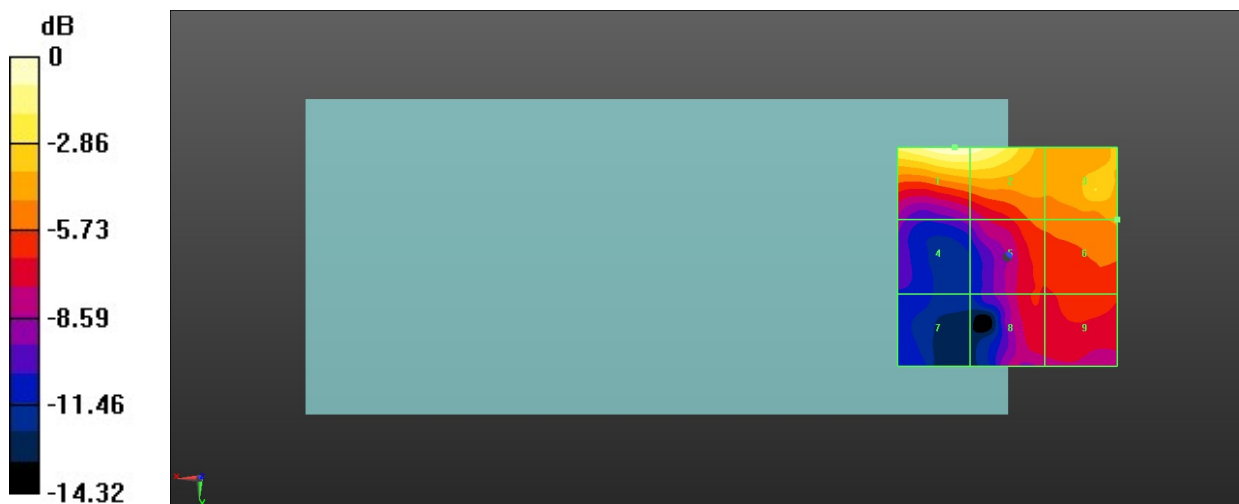

0 dB = 26.33 V/m = 28.41 dBV/m

24_HAC RF LTE B48_20M_ANT 2_QPSK_1RB_0Offset_Ch55830

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3609 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55830/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.03 V/m; Power Drift = -0.17 dB

Applied MIF = -1.44 dB

RF audio interference level = 28.53 dBV/m


MIF scaled E-field

Grid 1 M4 28.53 dBV/m	Grid 2 M4 28.46 dBV/m	Grid 3 M4 25.55 dBV/m
Grid 4 M4 20.92 dBV/m	Grid 5 M4 24.07 dBV/m	Grid 6 M4 24.1 dBV/m
Grid 7 M4 17.11 dBV/m	Grid 8 M4 21.48 dBV/m	Grid 9 M4 21.59 dBV/m

Total = 28.53 dBV/m

E Category: M4

Location: 11.5, -25, 8.7 mm

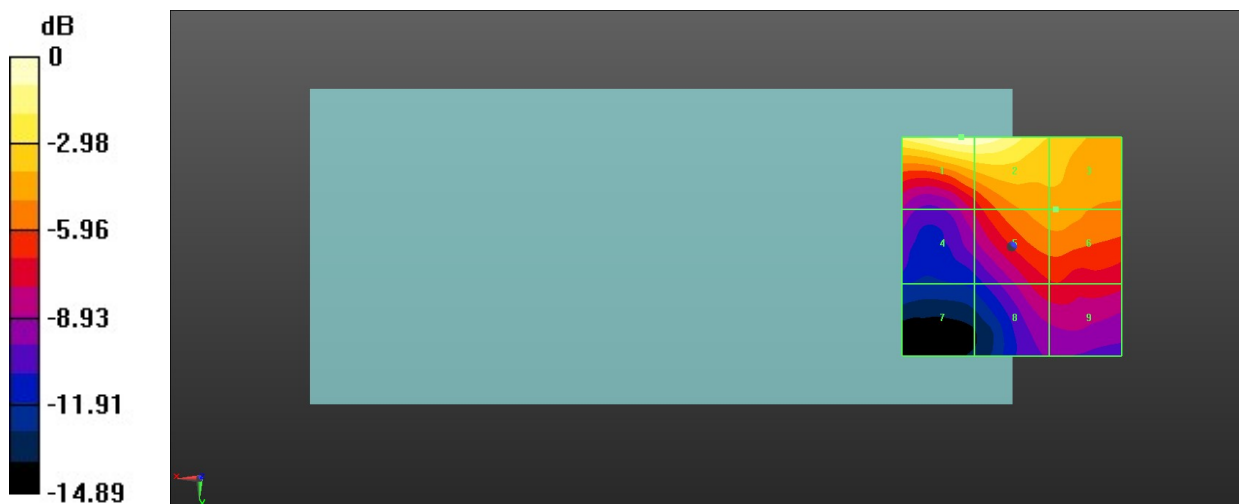

0 dB = 26.70 V/m = 28.53 dBV/m

25_HAC RF LTE B48_20M_ANT 2_QPSK_1RB_0Offset_Ch56150

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3641 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch56150/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21.59 V/m; Power Drift = 0.08 dB

Applied MIF = -1.44 dB

RF audio interference level = 28.46 dBV/m


MIF scaled E-field

Grid 1 M4 28.46 dBV/m	Grid 2 M4 28.46 dBV/m	Grid 3 M4 25.95 dBV/m
Grid 4 M4 21.48 dBV/m	Grid 5 M4 24.13 dBV/m	Grid 6 M4 24.1 dBV/m
Grid 7 M4 19.26 dBV/m	Grid 8 M4 21.9 dBV/m	Grid 9 M4 22.23 dBV/m

Total = 28.46 dBV/m

E Category: M4

Location: 9, -25, 8.7 mm

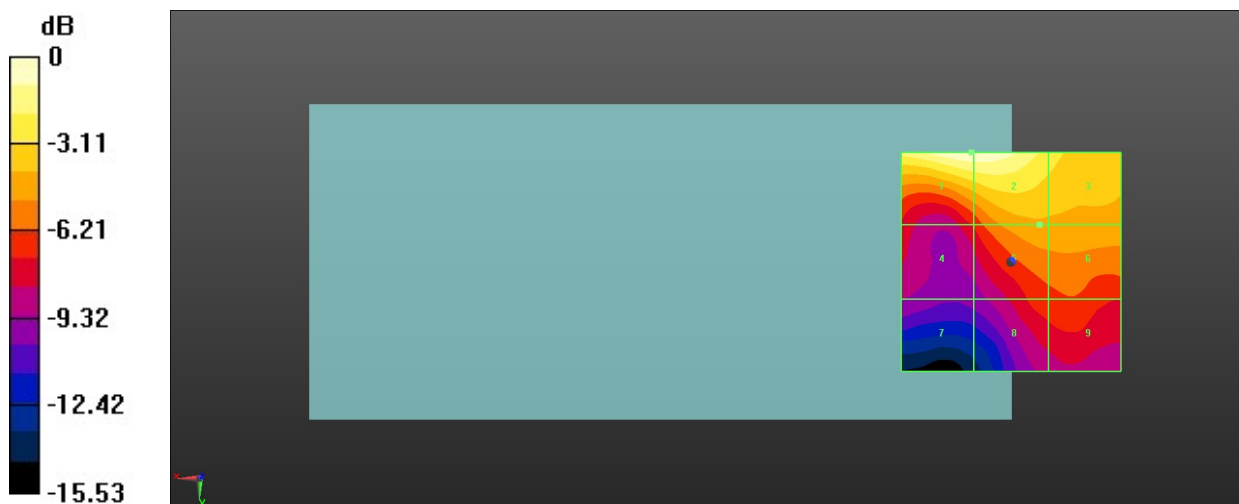

0 dB = 26.50 V/m = 28.46 dBV/m

26_HAC RF LTE B48_20M_ANT 2_QPSK_1RB_0Offset_Ch56640

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3690 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch56640/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.99 V/m; Power Drift = 0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 28.12 dBV/m


MIF scaled E-field

Grid 1 M4 28.12 dBV/m	Grid 2 M4 28.12 dBV/m	Grid 3 M4 26.64 dBV/m
Grid 4 M4 20.76 dBV/m	Grid 5 M4 23.74 dBV/m	Grid 6 M4 23.63 dBV/m
Grid 7 M4 19.14 dBV/m	Grid 8 M4 21.05 dBV/m	Grid 9 M4 21.18 dBV/m

Total = 28.12 dBV/m

E Category: M4

Location: 8.5, -25, 8.7 mm

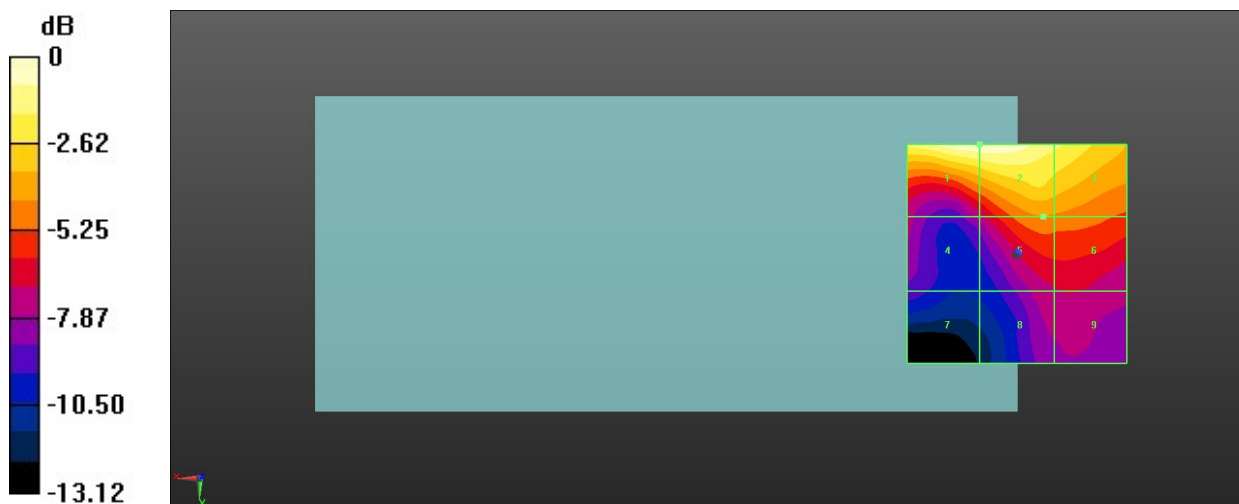

0 dB = 25.45 V/m = 28.11 dBV/m

27_HAC RF WLAN2.4GHz_Ant 3+6_802.11g 6Mbps_Ch1

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);
 Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.55 V/m; Power Drift = 0.08 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.47 dBV/m


MIF scaled E-field

Grid 1 M4 28.4 dBV/m	Grid 2 M3 30.08 dBV/m	Grid 3 M3 30.06 dBV/m
Grid 4 M4 29.91 dBV/m	Grid 5 M3 32.38 dBV/m	Grid 6 M3 32.2 dBV/m
Grid 7 M4 29.95 dBV/m	Grid 8 M3 32.47 dBV/m	Grid 9 M3 32.28 dBV/m

Total = 32.47 dBV/m

E Category: M3

Location: -5, 12.5, 8.7 mm

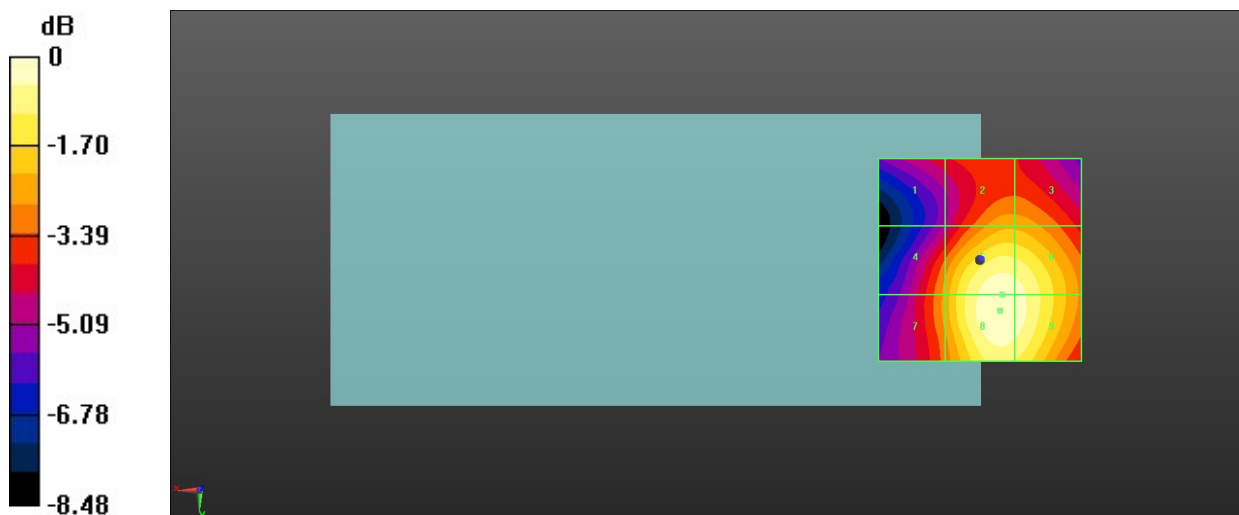

0 dB = 42.04 V/m = 32.47 dBV/m

28_HAC RF WLAN2.4GHz_Ant 3+6_802.11g 6Mbps_Ch6

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);
 Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.64 V/m; Power Drift = 0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.38 dBV/m


MIF scaled E-field

Grid 1 M4 29.1 dBV/m	Grid 2 M3 31.14 dBV/m	Grid 3 M3 31.1 dBV/m
Grid 4 M3 30.95 dBV/m	Grid 5 M3 33.37 dBV/m	Grid 6 M3 33.05 dBV/m
Grid 7 M3 30.96 dBV/m	Grid 8 M3 33.38 dBV/m	Grid 9 M3 33.05 dBV/m

Total = 33.38 dBV/m

E Category: M3

Location: -4, 10, 8.7 mm

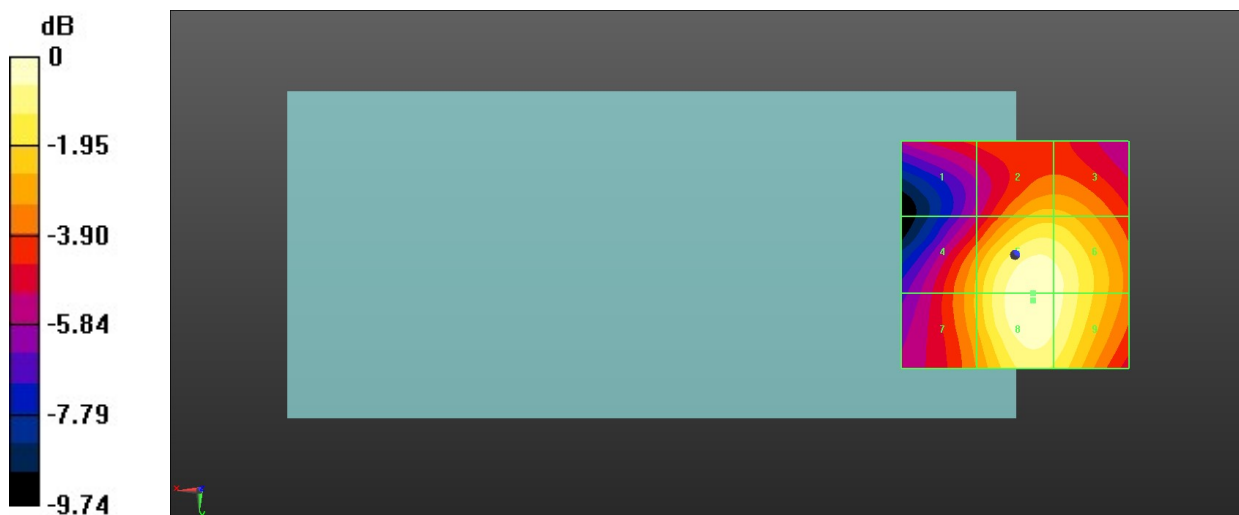

0 dB = 46.68 V/m = 33.38 dBV/m

29_HAC RF WLAN2.4GHz_Ant 3+6_802.11g 6Mbps_Ch11

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);
 Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.76 V/m; Power Drift = -0.07 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.78 dBV/m


MIF scaled E-field

Grid 1 M4 27.39 dBV/m	Grid 2 M3 30.63 dBV/m	Grid 3 M3 30.57 dBV/m
Grid 4 M3 30.3 dBV/m	Grid 5 M3 32.78 dBV/m	Grid 6 M3 32.52 dBV/m
Grid 7 M3 30.25 dBV/m	Grid 8 M3 32.78 dBV/m	Grid 9 M3 32.51 dBV/m

Total = 32.78 dBV/m

E Category: M3

Location: -4.5, 8, 8.7 mm

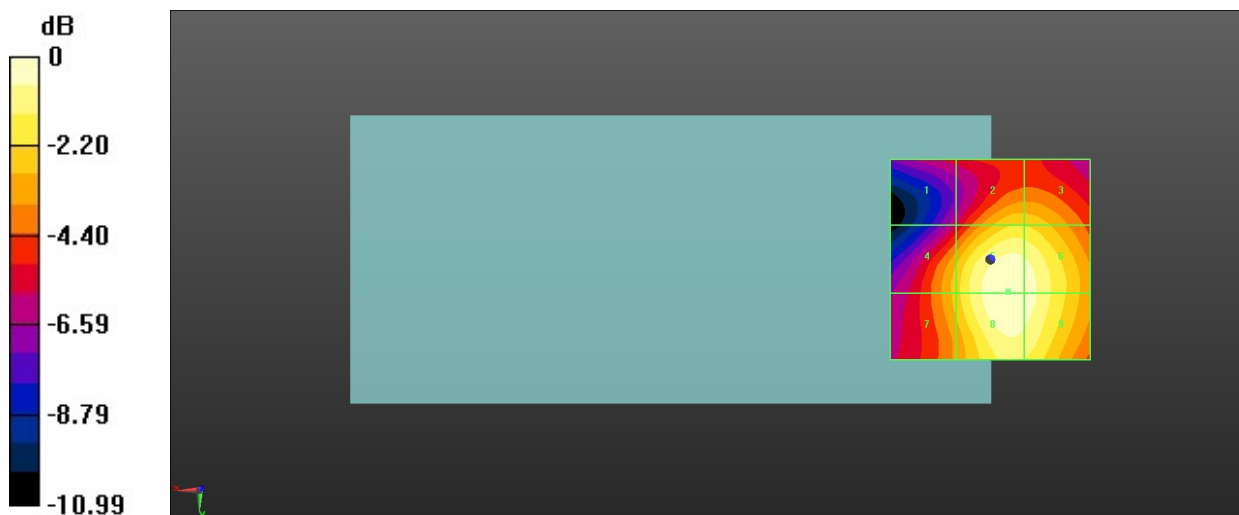

0 dB = 43.56 V/m = 32.78 dBV/m