



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2331-1, XT2333-1
FCC ID : IHDT56AH6
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Oct. 18, 2022 ~ Oct. 19, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 7

 1.7. Test Software 7

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 14

 2.3. Support Unit used in test configuration and system 14

 2.4. EUT Operation Test Setup 15

3. TEST RESULT 16

 3.1. Test of AC Conducted Emission Measurement 16

 3.2. Test of Radiated Emission Measurement 20

4. LIST OF MEASURING EQUIPMENT 25

5. UNCERTAINTY OF EVALUATION 26

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 3.39 dB at 0.156 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.16 dB at 46.49 MHz for Quasi-Peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2331-1, XT2333-1
FCC ID	IHDT56AH6
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/ FM
IMEI Code	Conduction: 355650970025493/355650970025501 for Sample 1 354648960009460 for Sample 2 354696570012499/354696570012507 for Sample 3 353417140003590 for Sample 4 Radiation: 355650970022953/355650970022961 for Sample 1 354648960009478/354648960009433 for Sample 2 354696570018173/354696570018181 for Sample 3 353417140003392/353417140003378 for Sample 4
HW Version	DVT2
SW Version	THA33.23
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT, the sample 1/2 model name is XT2331-1 and the sample 3/4 model name is XT2333-1, the differences could be referred to the XT2331-1, XT2333-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to full test and the sample 2/3/4 is verified for the difference.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : Fixed Internal Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna FM : External Earphone Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM



	DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM
--	---

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.9. Specification of Accessory

Accessories Information				
For XT2331-1				
AC Adapter 1(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-103
AC Adapter 1(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-104
AC Adapter 1(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 4(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 4(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 4(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 4(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207L
AC Adapter 4(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-209L
AC Adapter 5(US)	Brand Name	Motorola (AOHAI)	Model Name	MC-201L
AC Adapter 5(EU)	Brand Name	Motorola (AOHAI)	Model Name	MC-202L
AC Adapter 5(AR)	Brand Name	Motorola (AOHAI)	Model Name	MC-206L
AC Adapter 5(CHILE)	Brand Name	Motorola (AOHAI)	Model Name	MC-209L
AC Adapter 6(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-207
Battery 1	Brand Name	Motorola(SUNWODA)	Model Name	NH50
Battery 2	Brand Name	Motorola(ATL)	Model Name	NH50
Earphone 1	Brand Name	Motorola(Xinlide)	Model Name	MH202
Earphone 2	Brand Name	Motorola(Lianyun)	Model Name	MH202
USB Cable 1	Brand Name	Motorola(KingPower)	Model Name	K235-08073-H0
USB Cable 2	Brand Name	Motorola(Broad)	Model Name	HO0004
USB Cable 3	Brand Name	Motorola(KINGHOME)	Model Name	4G data cable



For XT2333-1				
AC Adapter 7(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-331
AC Adapter 7(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-332
AC Adapter 7(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-333
AC Adapter 7(IN)	Brand Name	Motorola (Salcomp)	Model Name	MC-334
AC Adapter 7(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-335
AC Adapter 7(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-337
AC Adapter 7(CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-339
AC Adapter 8(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331
AC Adapter 8(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332
AC Adapter 8(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-335
AC Adapter 8(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336
AC Adapter 8(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337
AC Adapter 8(PRC)	Brand Name	Motorola(Chenyang)	Model Name	MC-338
AC Adapter 9(US)	Brand Name	Motorola(Acbel)	Model Name	MC-331
AC Adapter 9(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-332
AC Adapter 9(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-333
Battery 3	Brand Name	Motorola(ATL)	Model Name	PH50
Battery 4	Brand Name	Motorola(SUNWODA)	Model Name	PH50
USB Cable 4	Brand Name	Motorola(KingPower)	Model Name	K235-08074-H0
USB Cable 5	Brand Name	Motorola(Broad)	Model Name	HO0003
USB Cable 6	Brand Name	Motorola(KINGHOME)	Model Name	5G data cable



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1 GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) +Earphone 1 + USB Cable 1 (Charging from Adapter 1) + Battery 1 + SIM 1 For Sample 1
	Mode 2: WCDMA 1900 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera (Front) +Earphone 2 + USB Cable 2 (Charging from Adapter 2) + Battery 1 + SIM 2 For Sample 1
	Mode 3: WCDMA Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) +Earphone 1 + USB Cable 3 (Charging from Adapter 3) + Battery 1 + SIM 1 For Sample 1
	Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 3 (Charging from Adapter 4) + Battery 1 + SIM 2 For Sample 1
	Mode 5: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx +Earphone 1 + USB Cable 3 (Charging from Adapter 5) + Battery 1 + SIM 1 For Sample 1
	Mode 6: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 3 (Charging from Adapter 6) + Battery 1 + SIM 2 For Sample 1
	Mode 7: LTE Band 2 Rx + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98) +Earphone 1 + USB Cable 1 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB+ Battery 1 + SIM 1 For Sample 1
	Mode 8: LTE Band 66 Rx + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 1 (Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + Battery 1 + SIM 2 For Sample 1
	Mode 9: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98) +Earphone 1 + USB Cable1 (Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + Battery 1 + SIM 2 For Sample 1
	Mode 10 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable1 (Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery 1 + SIM 2 For Sample 1
	Mode 11 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98) +Earphone 1 + USB Cable2 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 1 + SIM 2 For Sample 1



Mode 12 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable3 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 1 + SIM 2 For Sample 1
Mode 13 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) +Earphone 1 + USB Cable 3 (Charging from Adapter4) + Battery 2 + SIM 2 For Sample 2
Mode 14 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98) +Earphone 1 + USB Cable1 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 2 + SIM 1 For Sample 2
Mode 15 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) +Earphone 1 + USB Cable 4(Charging from Adapter7) + Battery 3 For Sample 3
Mode 16 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) +Earphone 1 + USB Cable 5(Charging from Adapter8) + Battery 3 For Sample 3
Mode 17 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 6(Charging from Adapter9) + Battery 3 For Sample 3
Mode 18 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 4(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 3 For Sample 3
Mode 19 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 5(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 3 For Sample 3
Mode 20 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 6(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 3 For Sample 3
Mode 21 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) +Earphone 1 + USB Cable 5(Charging from Adapter8) + Battery 4 For Sample 4
Mode 22 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98) +Earphone 1 + USB Cable 4(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery 4 For Sample 4



Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) +Earphone 1 + USB Cable 1(Charging from Adapter1) + Battery1 + SIM 1 For Sample 1
	Mode 2: WCDMA 1900 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) +Earphone 2 + USB Cable 2(Charging from Adapter2) + Battery1 + SIM 2 For Sample 1
	Mode 3: WCDMA Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) +Earphone 2 + USB Cable 3(Charging from Adapter3) + Battery1 + SIM 1 For Sample 1
	Mode 4: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 2(Charging from Adapter4) + Battery1 + SIM 2 For Sample 1
	Mode 5: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx +Earphone 2 + USB Cable 2(Charging from Adapter5) + Battery1 + SIM 1 For Sample 1
	Mode 6: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 2(Charging from Adapter6) + Battery1 + SIM 2 For Sample 1
	Mode 7: LTE Band 2 Rx + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable1 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery1 + SIM 2 For Sample 1
	Mode 8: LTE Band 66 Rx + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable1 (Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + Battery1 + SIM 2 For Sample 1
	Mode 9: LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable1 (Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + Battery1 + SIM 2 For Sample 1
	Mode 10 : LTE Band 13 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable1 (Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery1 + SIM 2 For Sample 1
	Mode 11 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable2 (Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + Battery1 + SIM 2 For Sample 1
	Mode 12 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 3(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery1 + SIM 2 For Sample 1
	Mode 13 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + Camera(Front) +Earphone 2 + USB Cable 2(Charging from Adapter4) + Battery2 + SIM 2 For Sample 2
	Mode 14 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 1 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery2 + SIM 2 For Sample 2
	Mode 15 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) +Earphone 2 + USB Cable 4(Charging from Adapter7) + Battery3 + SIM 2 For Sample 3




Mode 16 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + Camera(Front) +Earphone 2 + USB Cable 5(Charging from Adapter8) + Battery3 + SIM 2 For Sample 3
Mode 17 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 6(Charging from Adapter9) + Battery3 + SIM 2 For Sample 3
Mode 18 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 4(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery3 + SIM 2 For Sample 3
Mode 19 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 5(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery3 + SIM 2 For Sample 3
Mode 20 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + FM Rx(98)Mhz +Earphone 2 + USB Cable 6(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + Battery3 + SIM 2 For Sample 3
Mode 21 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) +Earphone 2 + USB Cable 4(Charging from Adapter7) + Battery4 + SIM 2 For Sample 4
Mode 22 : LTE Band 13 Rx(High)+ Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) +Earphone 2 + USB Cable 1 (Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + Battery4 + SIM 2 For Sample 4

Remark:

1. The worst case of AC is mode 16; only the test data of this mode is reported.
2. The worst case of RE is mode 15; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 13/26/5 the worst channel was recorded in this report.

2.2. Connection Diagram of Test System

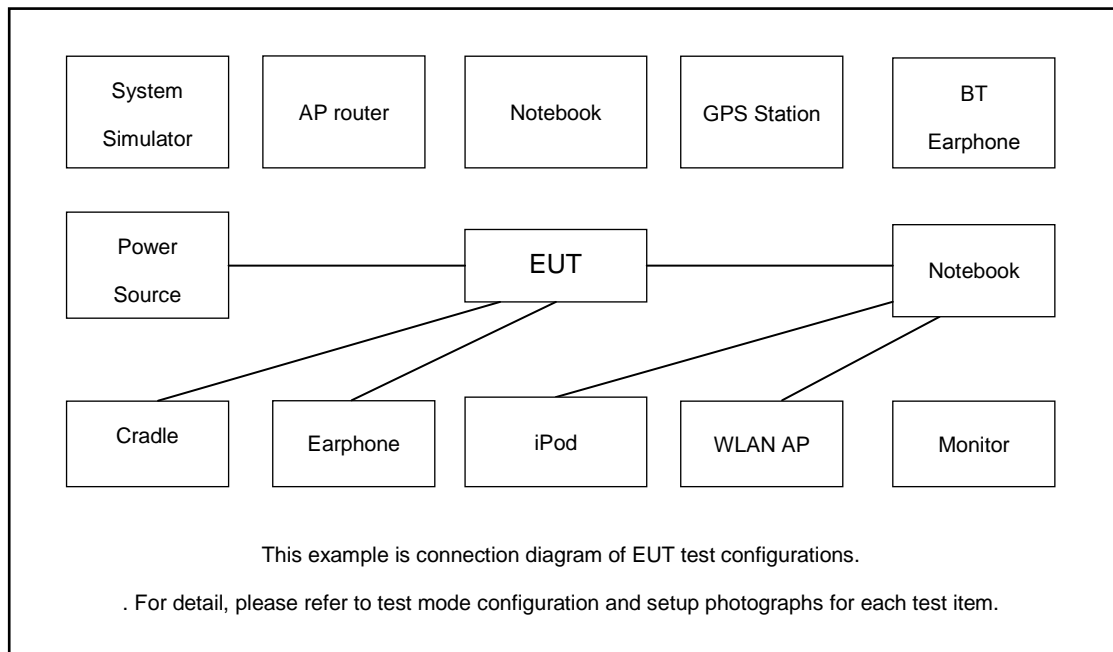

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3	Notebook	Lenovo	V130-15IKB005	N/A	N/A	Notebook
4	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
6	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
7	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
8	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	Bluetooth Earphone
9	LTE Base Station	Anritus	MT8820C	N/A	N/A	LTE Base Station
10	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Router
11	Notebook	Lenovo	V130-14IKB001	N/A	N/A	Notebook
12	SD Card	SanDisk	Uitra	N/A	N/A	SD Card
13	Hard disk	KINGSHARE	KSP6120G	N/A	N/A	Hard disk
14	LTE Base Station	Anritus	MT8820C	N/A	N/A	LTE Base Station
15	Signal Generator	R&S	SMBV100A	N/A	N/A	Signal Generator



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

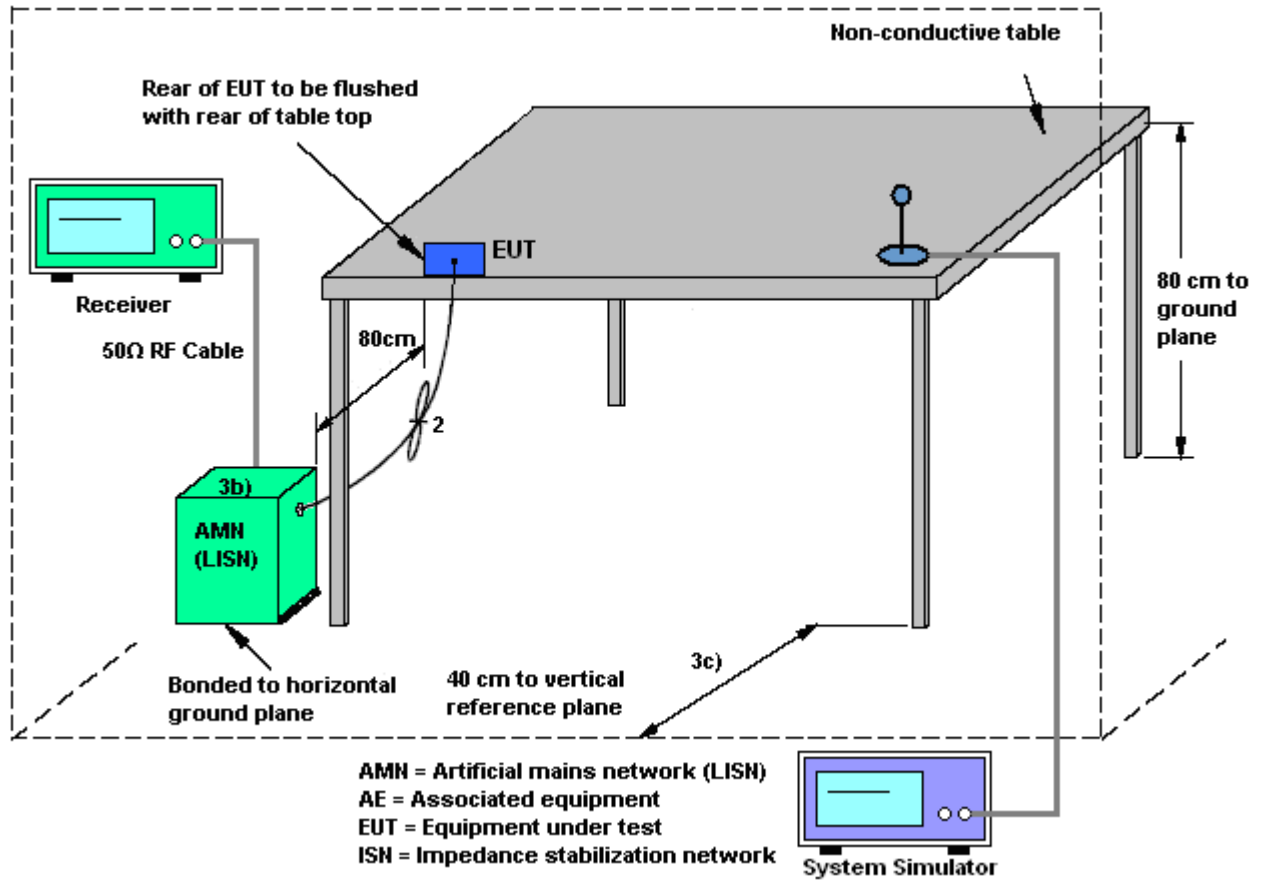



Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

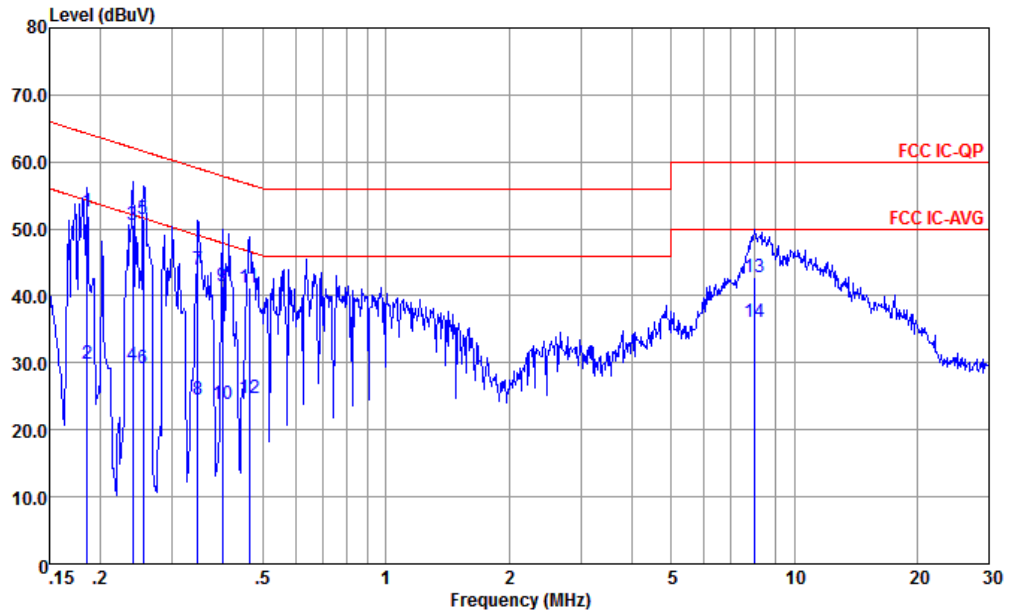


Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.185	52.66	-11.58	64.24	42.21	0.03	10.42	QP
2	0.185	29.96	-24.28	54.24	19.51	0.03	10.42	Average
3	0.240	50.63	-11.45	62.08	40.20	0.04	10.39	QP
4	0.240	29.73	-22.35	52.08	19.30	0.04	10.39	Average
5 *	0.255	51.52	-10.08	61.60	41.10	0.04	10.38	QP
6	0.255	29.22	-22.38	51.60	18.80	0.04	10.38	Average
7	0.346	43.86	-15.19	59.05	33.51	0.03	10.32	QP
8	0.346	24.56	-24.49	49.05	14.21	0.03	10.32	Average
9	0.398	41.51	-16.39	57.90	31.20	0.01	10.30	QP
10	0.398	23.81	-24.09	47.90	13.50	0.01	10.30	Average
11	0.464	41.32	-15.31	56.63	31.10	-0.02	10.24	QP
12	0.464	24.72	-21.91	46.63	14.50	-0.02	10.24	Average
13	8.020	42.85	-17.15	60.00	32.60	-0.15	10.40	QP
14	8.020	36.15	-13.85	50.00	25.90	-0.15	10.40	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

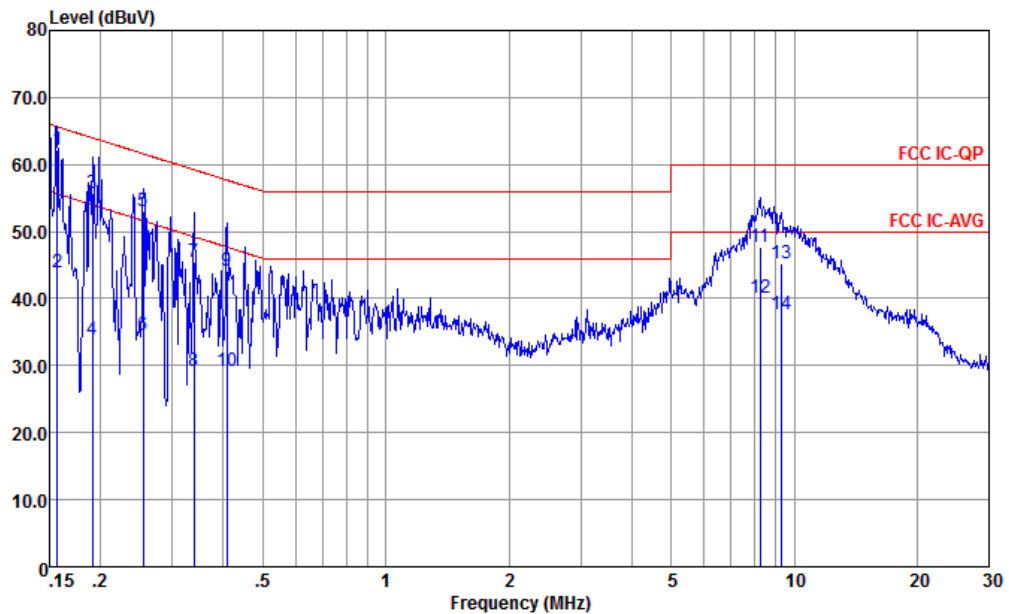

Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.156	62.26	-3.39	65.65	51.80	0.03	10.43	QP
2	0.156	43.96	-11.69	55.65	33.50	0.03	10.43	Average
3	0.191	55.67	-8.31	63.98	45.20	0.05	10.42	QP
4	0.191	33.77	-20.21	53.98	23.30	0.05	10.42	Average
5	0.255	52.97	-8.63	61.60	42.60	-0.01	10.38	QP
6	0.255	34.57	-17.03	51.60	24.20	-0.01	10.38	Average
7	0.339	45.37	-13.85	59.22	35.10	-0.06	10.33	QP
8	0.339	29.17	-20.05	49.22	18.90	-0.06	10.33	Average
9	0.408	44.02	-13.66	57.68	33.80	-0.07	10.29	QP
10	0.408	29.12	-18.56	47.68	18.90	-0.07	10.29	Average
11	8.235	47.78	-12.22	60.00	37.50	-0.15	10.43	QP
12	8.235	40.18	-9.82	50.00	29.90	-0.15	10.43	Average
13	9.302	45.19	-14.81	60.00	34.81	-0.18	10.56	QP
14	9.302	37.69	-12.31	50.00	27.31	-0.18	10.56	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

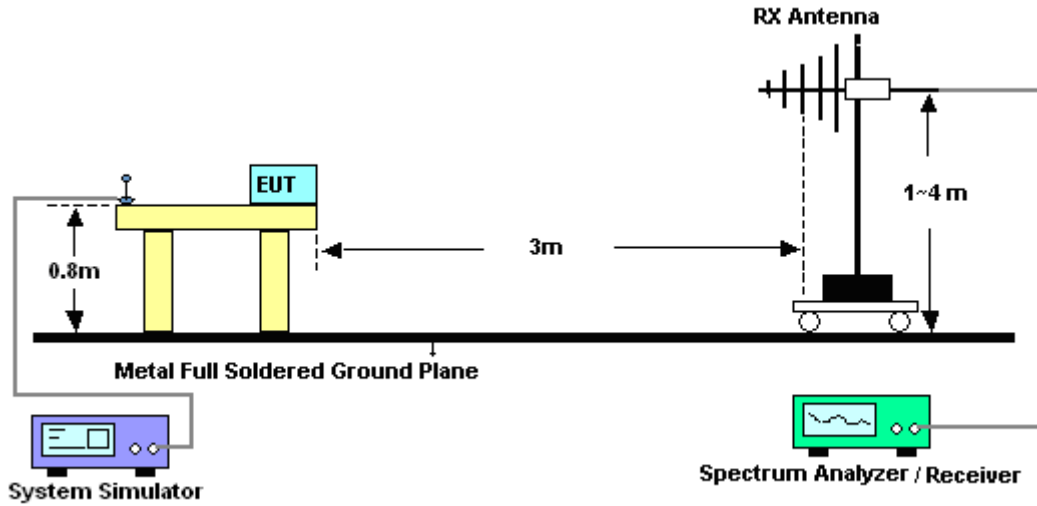


For radiated emissions above 1GHz

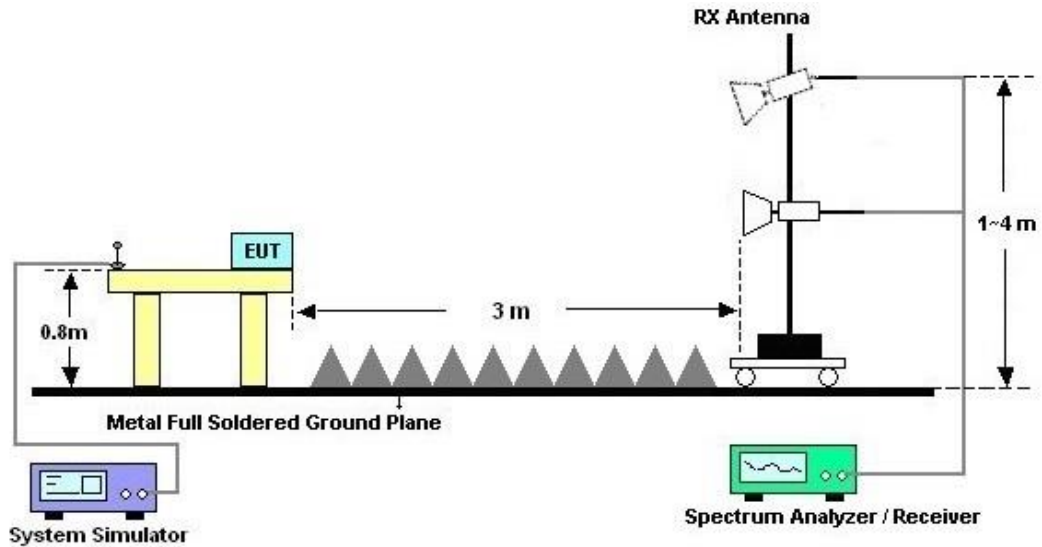



3.2.5. Test Result of Radiated Emission

Test Engineer :	Peng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

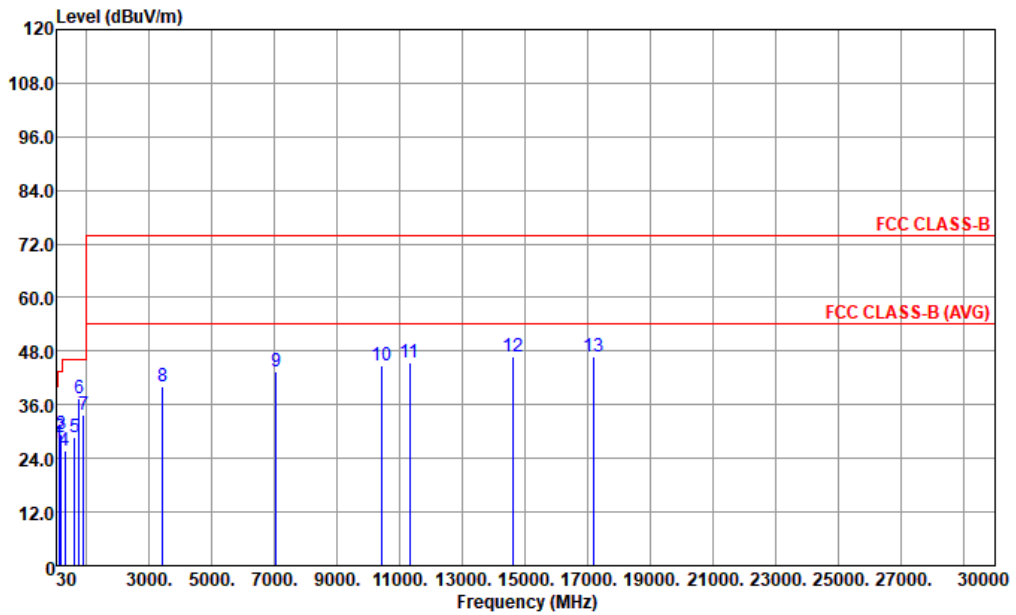


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49921 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	104.69	27.49	-16.01	43.50	41.98	16.40	1.51	32.40	---	---	Peak
2	136.70	28.87	-14.63	43.50	41.99	17.56	1.72	32.40	---	---	Peak
3	191.99	29.42	-14.08	43.50	44.74	15.04	2.04	32.40	---	---	Peak
4	297.72	25.75	-20.25	46.00	36.32	19.29	2.54	32.40	---	---	Peak
5	621.70	28.87	-17.13	46.00	31.29	26.30	3.68	32.40	---	---	Peak
6	753.62			46.00	38.26	27.51	4.08	32.28	---	---	Peak
7	900.09	33.71	-12.29	46.00	31.64	29.09	4.48	31.50	---	---	Peak
8	3431.00	40.25	-33.75	74.00	62.52	33.43	8.95	64.65	---	---	Peak
9	7052.00	43.30	-30.70	74.00	59.51	35.73	13.21	65.15	---	---	Peak
10	10435.00	44.81	-29.19	74.00	57.03	38.52	16.25	66.99	---	---	Peak
11	11302.00	45.34	-28.66	74.00	55.76	39.15	16.91	66.48	---	---	Peak
12	14600.00	46.91	-27.09	74.00	51.54	40.93	19.29	64.85	---	---	Peak
13	17201.00	46.86	-27.14	74.00	49.41	41.24	21.09	64.88	---	---	Peak



Test Engineer :	Peng	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

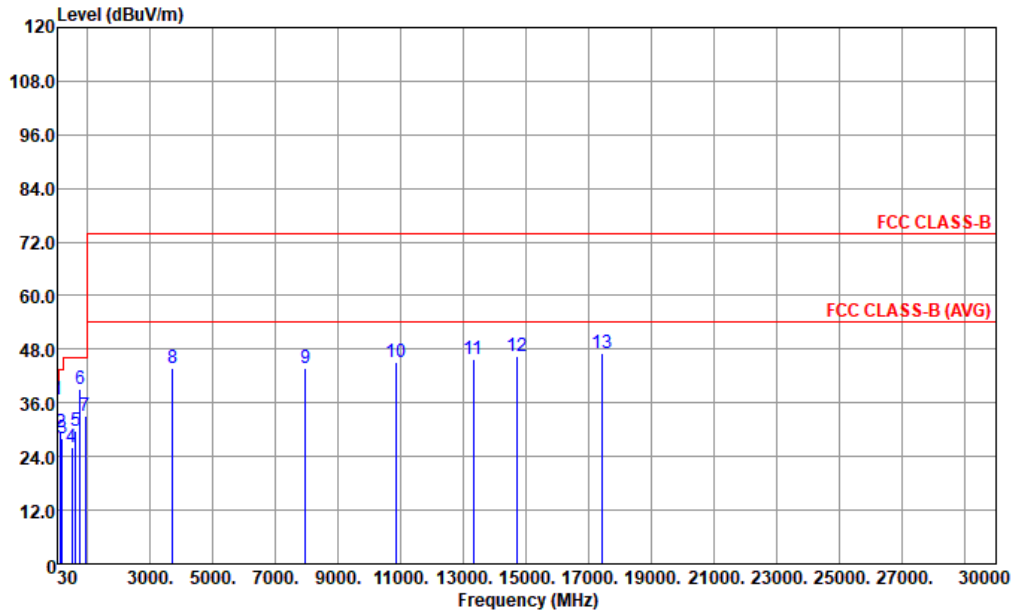

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49921 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	46.49	36.84	-3.16	40.00	52.09	16.19	0.96	32.40	100	239	QP
2	139.61	29.56	-13.94	43.50	42.66	17.56	1.74	32.40	---	---	Peak
3	192.96	28.21	-15.29	43.50	43.54	15.03	2.04	32.40	---	---	Peak
4	483.96	26.01	-19.99	46.00	31.58	23.69	3.14	32.40	---	---	Peak
5	619.76	29.85	-16.15	46.00	32.28	26.29	3.68	32.40	---	---	Peak
6	753.62			46.00	39.92	27.51	4.08	32.28	---	---	Peak
7	912.70	33.08	-12.92	46.00	30.69	29.28	4.51	31.40	---	---	Peak
8	3703.00	43.84	-30.16	74.00	65.09	34.37	9.30	64.92	---	---	Peak
9	7953.00	43.88	-30.12	74.00	61.29	35.55	13.37	66.33	---	---	Peak
10	10860.00	45.07	-28.93	74.00	56.34	38.83	16.52	66.62	---	---	Peak
11	13308.00	45.89	-28.11	74.00	53.29	39.54	18.42	65.36	---	---	Peak
12	14702.00	46.57	-27.43	74.00	51.04	41.03	19.33	64.83	---	---	Peak
13	17422.00	47.27	-26.73	74.00	49.67	41.28	21.16	64.84	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 12, 2022	Oct. 19, 2022	Oct. 11, 2023	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2022	Oct. 19, 2022	Oct. 15, 2023	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Oct. 19, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 8, 2021	Oct. 19, 2022	Nov. 7, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Oct. 19, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Oct. 19, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	Oct. 19, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060806	1GHz~18GHz	Oct. 12, 2022	Oct. 19, 2022	Oct. 11, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 19, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 19, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 19, 2022	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May. 24, 2022	Oct. 18, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2022	Oct. 18, 2022	Oct. 13, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Oct. 18, 2022	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2022	Oct. 18, 2022	Oct. 13, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------