

01_HAC RF GSM850_ANT0_Voice_Ch128

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.89 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 30.68 dBV/m


MIF scaled E-field

Grid 1 M4 29.92 dBV/m	Grid 2 M4 30.4 dBV/m	Grid 3 M4 29.66 dBV/m
Grid 4 M4 30.68 dBV/m	Grid 5 M4 30.49 dBV/m	Grid 6 M4 29.63 dBV/m
Grid 7 M4 29.27 dBV/m	Grid 8 M4 29.73 dBV/m	Grid 9 M4 29.44 dBV/m

Total = 30.68 dBV/m

E Category: M4

Location: 14, 0, 8.7 mm

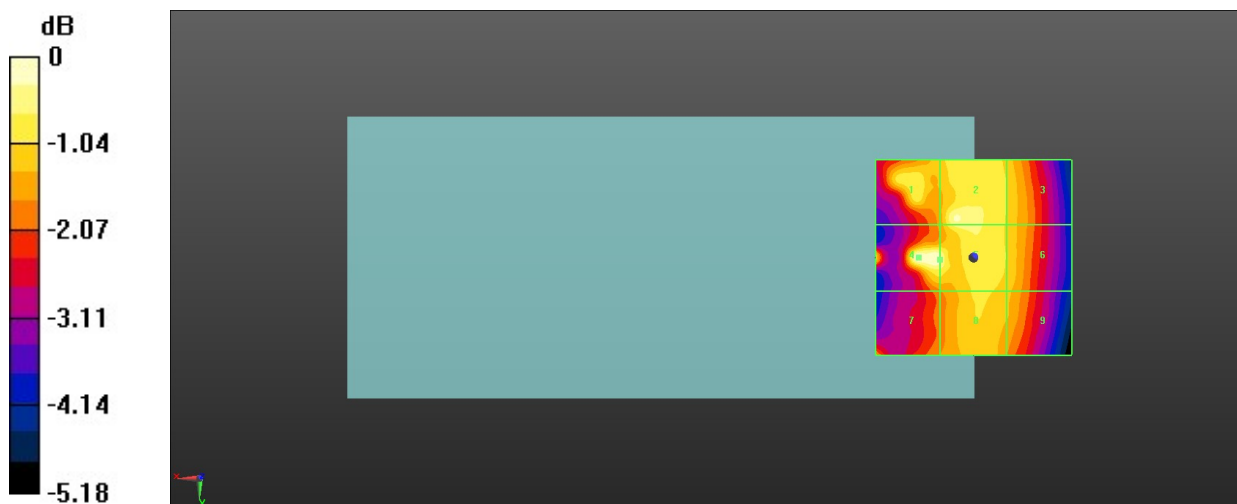

0 dB = 34.21 V/m = 30.68 dBV/m

02_HAC RF GSM850_ANT0_Voice_Ch189

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.19 V/m; Power Drift = 0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 30.89 dBV/m


MIF scaled E-field

Grid 1 M4 30.09 dBV/m	Grid 2 M4 30.78 dBV/m	Grid 3 M4 29.78 dBV/m
Grid 4 M4 30.89 dBV/m	Grid 5 M4 30.86 dBV/m	Grid 6 M4 29.79 dBV/m
Grid 7 M4 30.45 dBV/m	Grid 8 M4 30.37 dBV/m	Grid 9 M4 29.63 dBV/m

Total = 30.89 dBV/m

E Category: M4

Location: 9, -5, 8.7 mm

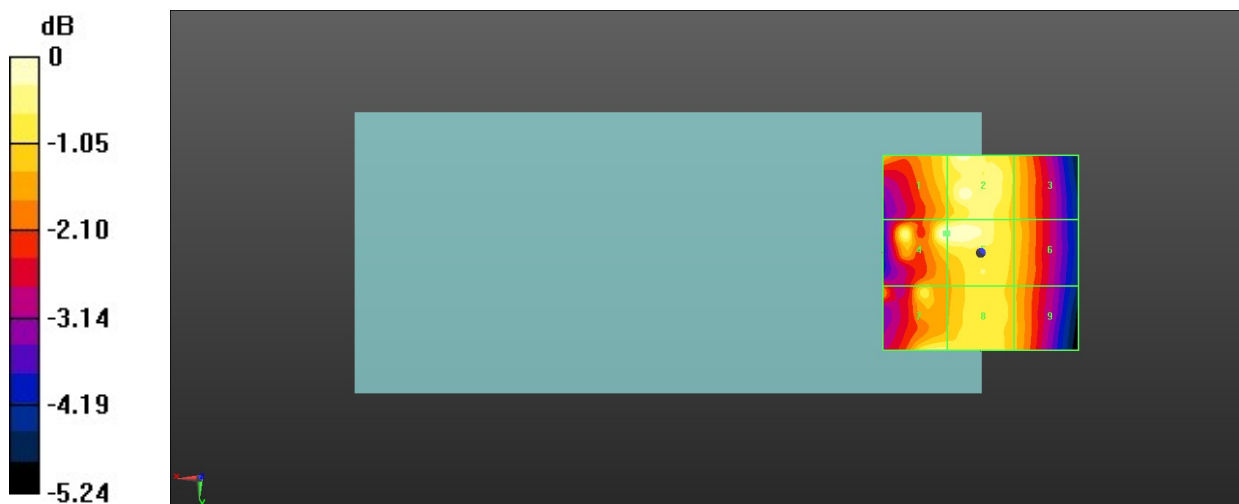

0 dB = 35.02 V/m = 30.89 dBV/m

03_HAC RF GSM850_ANT0_Voice_Ch251

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.25 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.57 dBV/m


MIF scaled E-field

Grid 1 M4 30.77 dBV/m	Grid 2 M4 31.57 dBV/m	Grid 3 M4 30.98 dBV/m
Grid 4 M4 31.18 dBV/m	Grid 5 M4 31.44 dBV/m	Grid 6 M4 30.91 dBV/m
Grid 7 M4 29.94 dBV/m	Grid 8 M4 30.87 dBV/m	Grid 9 M4 30.64 dBV/m

Total = 31.57 dBV/m

E Category: M4

Location: -0.5, -25, 8.7 mm

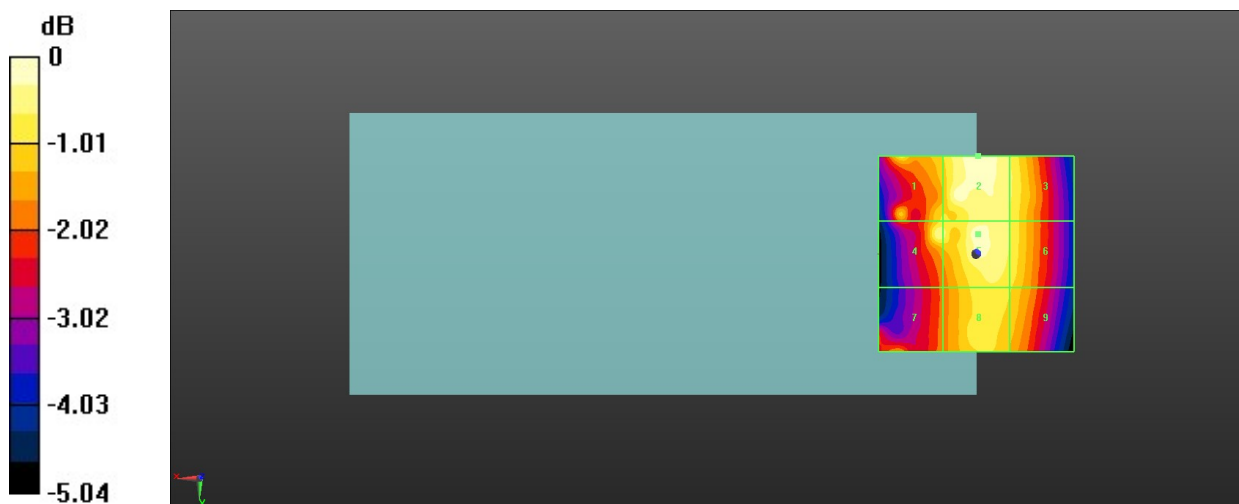

0 dB = 37.89 V/m = 31.57 dBV/m

04_HAC RF GSM850_ANT1_Voice_Ch128

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.26 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.96 dBV/m


MIF scaled E-field

Grid 1 M4 27.53 dBV/m	Grid 2 M4 25.04 dBV/m	Grid 3 M4 24.3 dBV/m
Grid 4 M4 27.96 dBV/m	Grid 5 M4 24.83 dBV/m	Grid 6 M4 24.18 dBV/m
Grid 7 M4 27.1 dBV/m	Grid 8 M4 26.36 dBV/m	Grid 9 M4 23.76 dBV/m

Total = 27.96 dBV/m

E Category: M4

Location: 25, 0, 8.7 mm

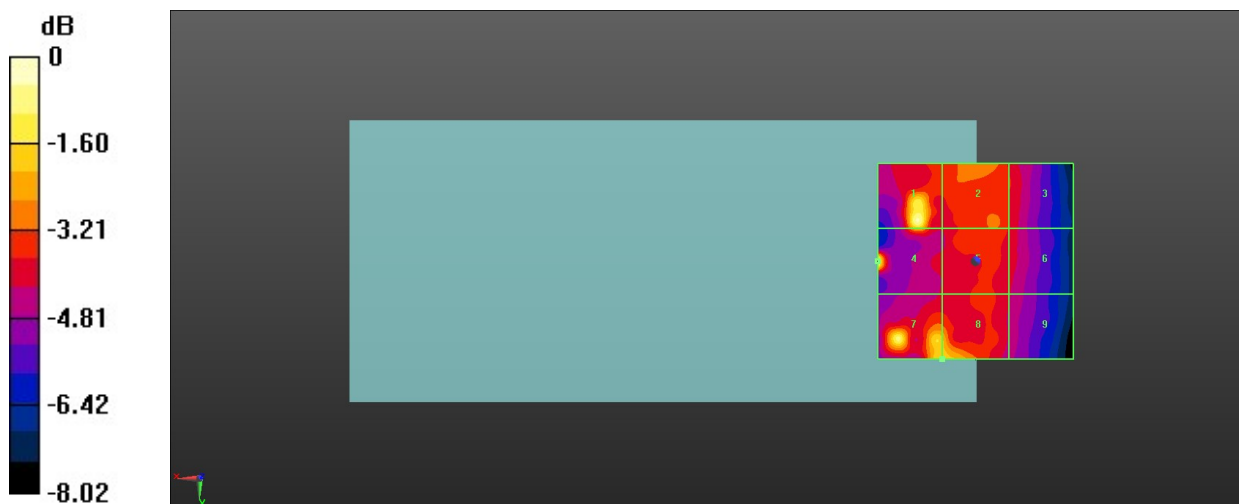

0 dB = 25.01 V/m = 27.96 dBV/m

05_HAC RF GSM850_ANT1_Voice_Ch189

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.19 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 28.55 dBV/m


MIF scaled E-field

Grid 1 M4 27.11 dBV/m	Grid 2 M4 26.68 dBV/m	Grid 3 M4 25.08 dBV/m
Grid 4 M4 28.55 dBV/m	Grid 5 M4 27.41 dBV/m	Grid 6 M4 25.17 dBV/m
Grid 7 M4 27.29 dBV/m	Grid 8 M4 25.03 dBV/m	Grid 9 M4 24.56 dBV/m

Total = 28.55 dBV/m

E Category: M4

Location: 13.5, -4, 8.7 mm

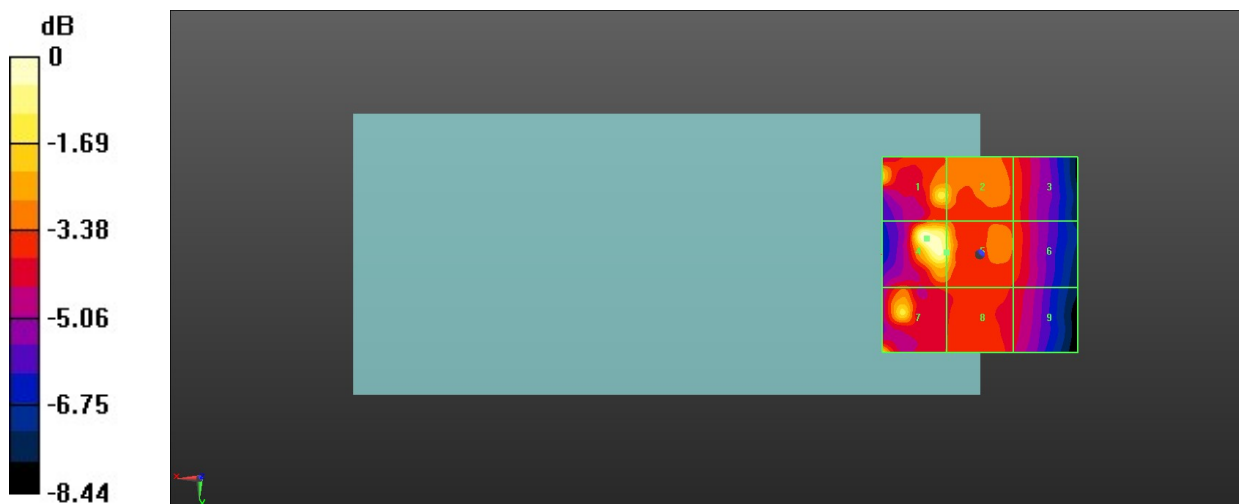

0 dB = 26.77 V/m = 28.55 dBV/m

06_HAC RF GSM850_ANT1_Voice_Ch251

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.79 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 28.90 dBV/m


MIF scaled E-field

Grid 1 M4 27.79 dBV/m	Grid 2 M4 27.41 dBV/m	Grid 3 M4 26.3 dBV/m
Grid 4 M4 28.9 dBV/m	Grid 5 M4 28.22 dBV/m	Grid 6 M4 26.29 dBV/m
Grid 7 M4 28.02 dBV/m	Grid 8 M4 27.41 dBV/m	Grid 9 M4 26.06 dBV/m

Total = 28.90 dBV/m

E Category: M4

Location: 15.5, 0.5, 8.7 mm

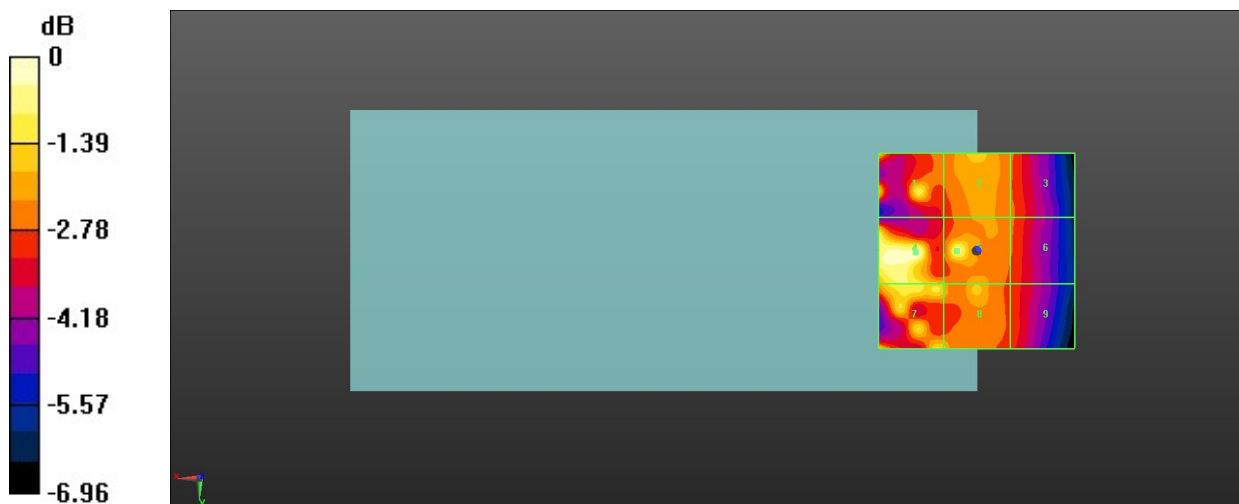

0 dB = 27.87 V/m = 28.90 dBV/m

07_HAC RF GSM1900_ANT0_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.564 V/m; Power Drift = 0.16 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.73 dBV/m


MIF scaled E-field

Grid 1 M4 24.72 dBV/m	Grid 2 M4 22.38 dBV/m	Grid 3 M4 14.93 dBV/m
Grid 4 M4 26.73 dBV/m	Grid 5 M4 23.73 dBV/m	Grid 6 M4 13.44 dBV/m
Grid 7 M4 26.03 dBV/m	Grid 8 M4 22.94 dBV/m	Grid 9 M4 14.23 dBV/m

Total = 26.73 dBV/m

E Category: M4

Location: 14.5, 0, 8.7 mm

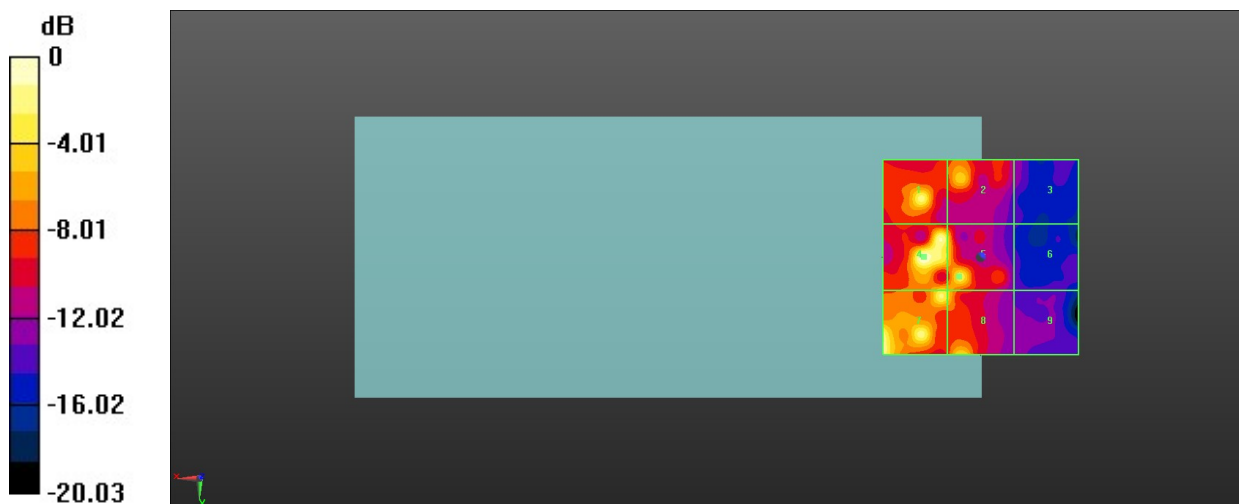

0 dB = 21.70 V/m = 26.73 dBV/m

08_HAC RF GSM1900_ANT0_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.250 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.18 dBV/m


MIF scaled E-field

Grid 1 M4 24.66 dBV/m	Grid 2 M4 22.1 dBV/m	Grid 3 M4 14.28 dBV/m
Grid 4 M4 22.14 dBV/m	Grid 5 M4 24.08 dBV/m	Grid 6 M4 12.97 dBV/m
Grid 7 M4 25.18 dBV/m	Grid 8 M4 22.82 dBV/m	Grid 9 M4 14.72 dBV/m

Total = 25.18 dBV/m

E Category: M4

Location: 20, 15, 8.7 mm

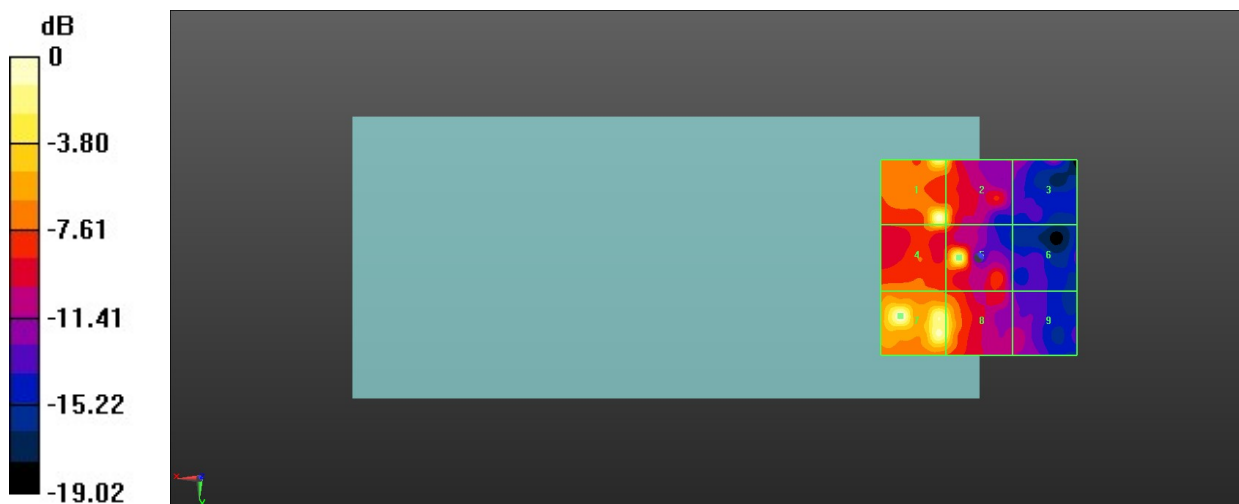

0 dB = 18.16 V/m = 25.18 dBV/m

09_HAC RF GSM1900_ANT0_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.93 V/m; Power Drift = -0.10 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.46 dBV/m


MIF scaled E-field

Grid 1 M4 25.34 dBV/m	Grid 2 M4 23.2 dBV/m	Grid 3 M4 12.81 dBV/m
Grid 4 M4 26.46 dBV/m	Grid 5 M4 23.24 dBV/m	Grid 6 M4 13.98 dBV/m
Grid 7 M4 25.21 dBV/m	Grid 8 M4 18.3 dBV/m	Grid 9 M4 14.47 dBV/m

Total = 26.46 dBV/m

E Category: M4

Location: 20, 5.5, 8.7 mm

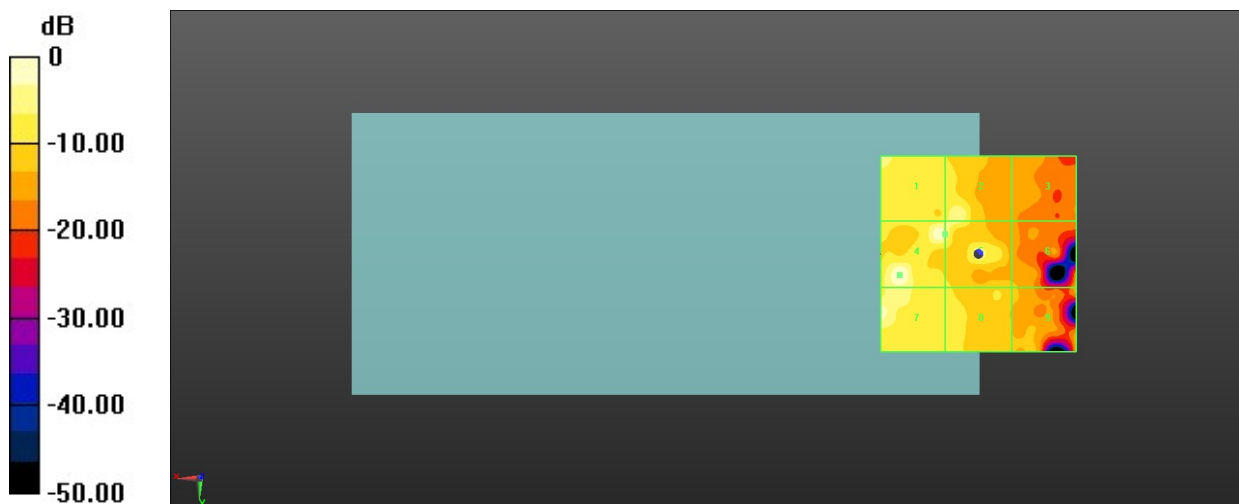

0 dB = 21.04 V/m = 26.46 dBV/m

10_HAC RF GSM1900_ANT1_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.565 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.60 dBV/m


MIF scaled E-field

Grid 1 M4 24.58 dBV/m	Grid 2 M4 21.67 dBV/m	Grid 3 M4 14.08 dBV/m
Grid 4 M4 26.6 dBV/m	Grid 5 M4 23.49 dBV/m	Grid 6 M4 14.42 dBV/m
Grid 7 M4 26.12 dBV/m	Grid 8 M4 24.14 dBV/m	Grid 9 M4 14.68 dBV/m

Total = 26.60 dBV/m

E Category: M4

Location: 20, -5, 8.7 mm

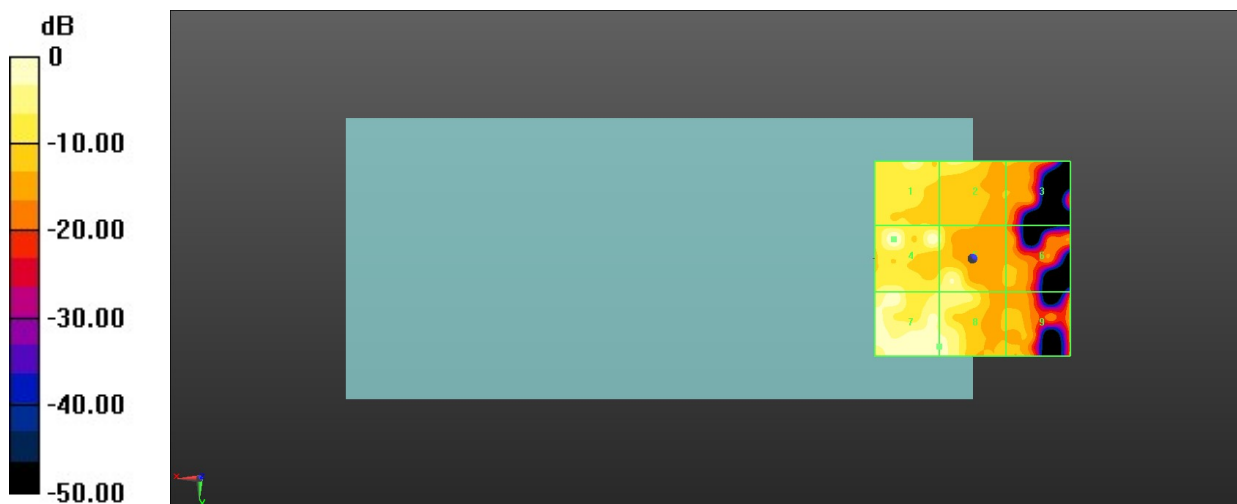

0 dB = 21.39 V/m = 26.60 dBV/m

11_HAC RF GSM1900_ANT1_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.286 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.53 dBV/m


MIF scaled E-field

Grid 1 M4 25.86 dBV/m	Grid 2 M4 23.95 dBV/m	Grid 3 M4 13.66 dBV/m
Grid 4 M4 26.53 dBV/m	Grid 5 M4 24.42 dBV/m	Grid 6 M4 12.32 dBV/m
Grid 7 M4 25.39 dBV/m	Grid 8 M4 24.5 dBV/m	Grid 9 M4 13.42 dBV/m

Total = 26.53 dBV/m

E Category: M4

Location: 25, 5.5, 8.7 mm

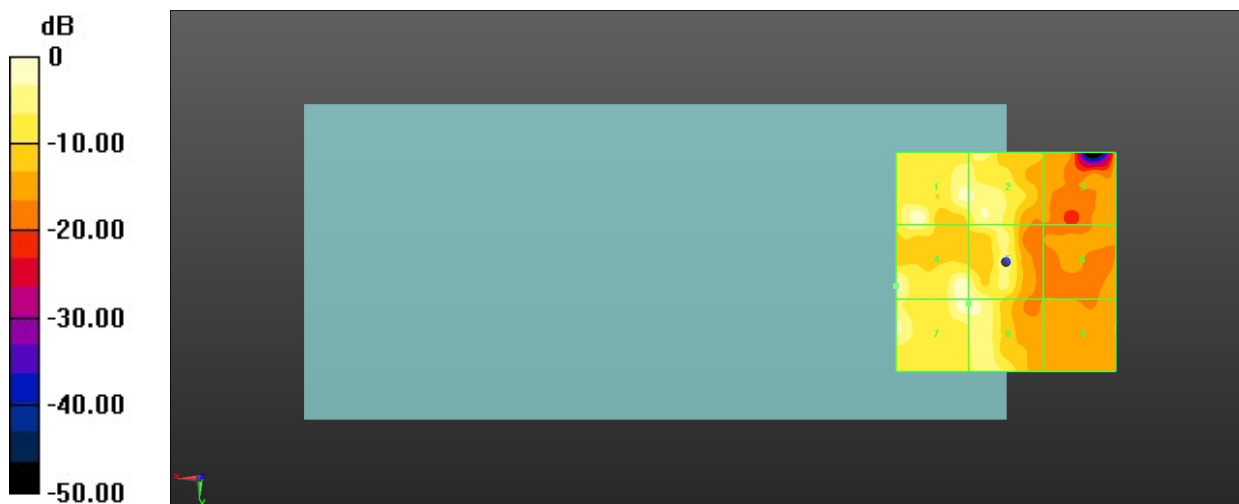

0 dB = 21.21 V/m = 26.53 dBV/m

12_HAC RF GSM1900_ANT1_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.78 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.88 dBV/m


MIF scaled E-field

Grid 1 M4 26.18 dBV/m	Grid 2 M4 21.34 dBV/m	Grid 3 M4 14.12 dBV/m
Grid 4 M4 26.88 dBV/m	Grid 5 M4 25.46 dBV/m	Grid 6 M4 14.94 dBV/m
Grid 7 M4 25.16 dBV/m	Grid 8 M4 24 dBV/m	Grid 9 M4 15.01 dBV/m

Total = 26.88 dBV/m

E Category: M4

Location: 20.5, -0.5, 8.7 mm

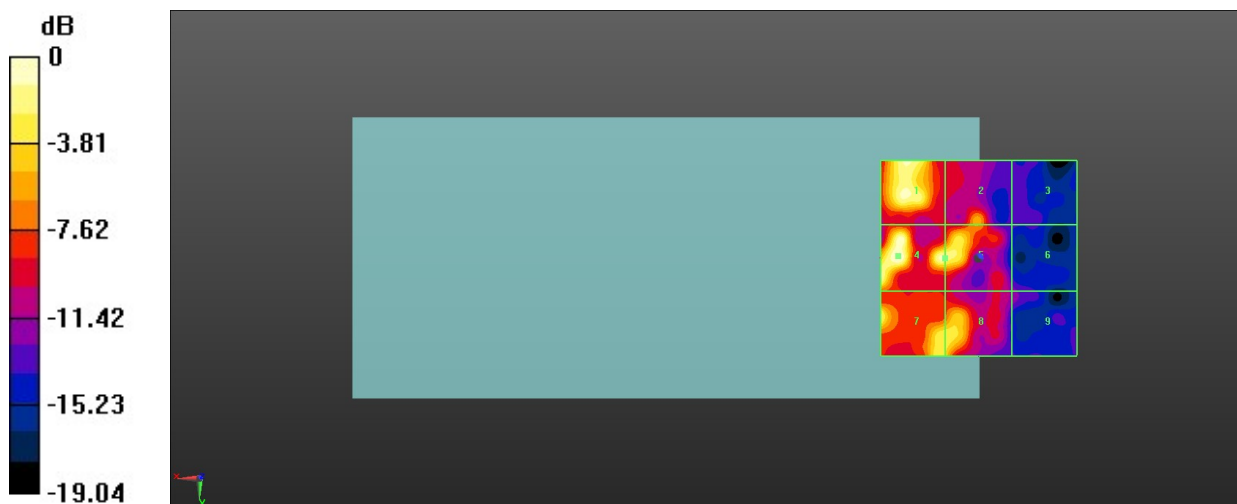

0 dB = 22.08 V/m = 26.88 dBV/m

13_HAC RF GSM1900_ANT2_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.22 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.59 dBV/m


MIF scaled E-field

Grid 1 M4 20.31 dBV/m	Grid 2 M4 20.25 dBV/m	Grid 3 M4 19.47 dBV/m
Grid 4 M4 21.08 dBV/m	Grid 5 M4 22.97 dBV/m	Grid 6 M4 22.52 dBV/m
Grid 7 M4 21.86 dBV/m	Grid 8 M4 23.59 dBV/m	Grid 9 M4 23.46 dBV/m

Total = 23.59 dBV/m

E Category: M4

Location: -4.5, 17, 8.7 mm

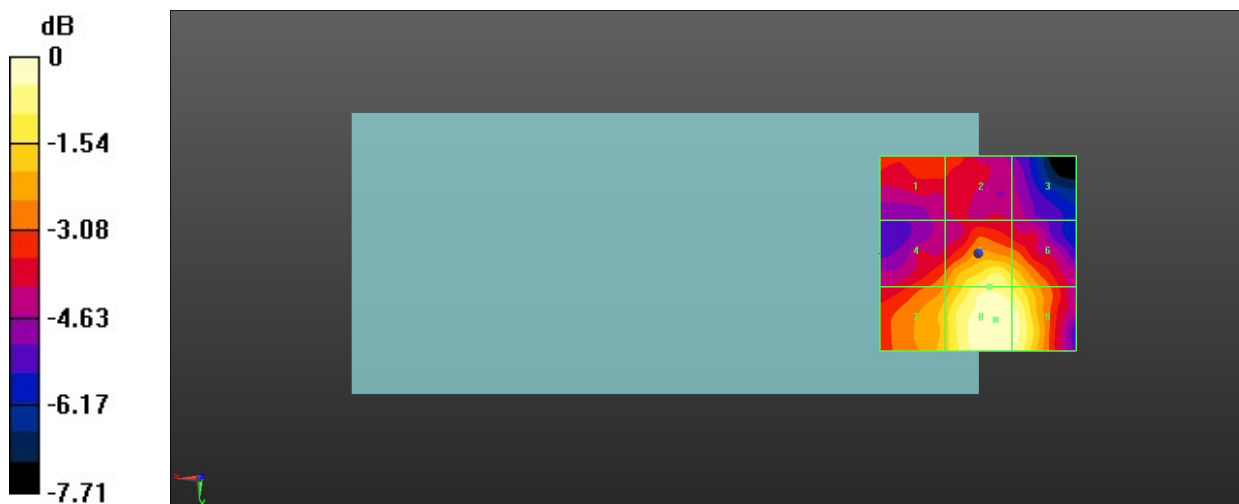

0 dB = 15.12 V/m = 23.59 dBV/m

14_HAC RF GSM1900_ANT2_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.60 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.88 dBV/m


MIF scaled E-field

Grid 1 M4 20.8 dBV/m	Grid 2 M4 20.78 dBV/m	Grid 3 M4 19.8 dBV/m
Grid 4 M4 21.76 dBV/m	Grid 5 M4 22.95 dBV/m	Grid 6 M4 22.67 dBV/m
Grid 7 M4 22.6 dBV/m	Grid 8 M4 23.88 dBV/m	Grid 9 M4 23.51 dBV/m

Total = 23.88 dBV/m

E Category: M4

Location: -4, 20, 8.7 mm

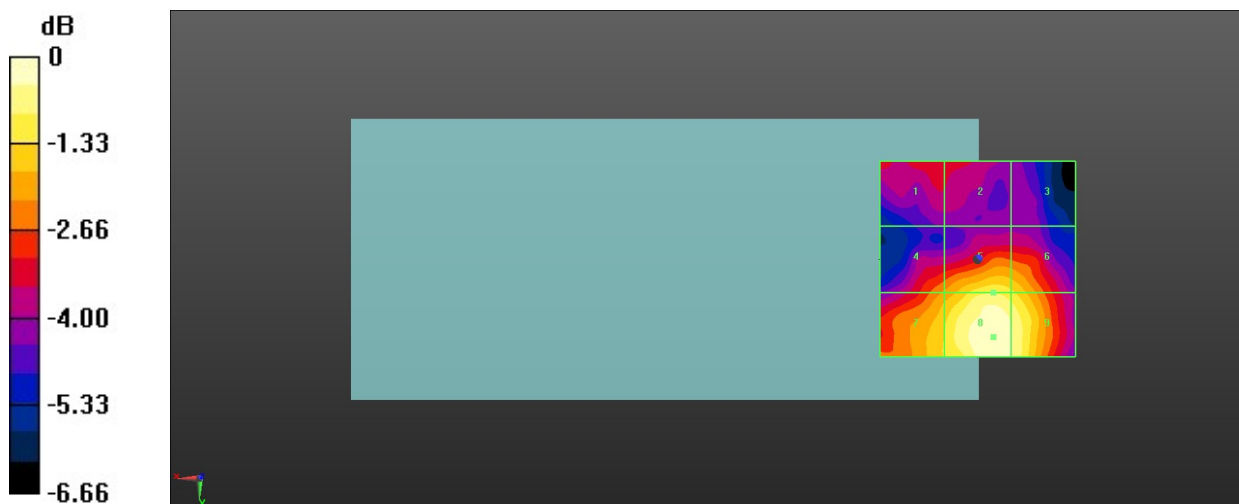

0 dB = 15.63 V/m = 23.88 dBV/m

15_HAC RF GSM1900_ANT2_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.58 V/m; Power Drift = -0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.55 dBV/m


MIF scaled E-field

Grid 1 M4 20.03 dBV/m	Grid 2 M4 19.9 dBV/m	Grid 3 M4 19.1 dBV/m
Grid 4 M4 21.76 dBV/m	Grid 5 M4 22.57 dBV/m	Grid 6 M4 22.52 dBV/m
Grid 7 M4 22.46 dBV/m	Grid 8 M4 23.55 dBV/m	Grid 9 M4 23.32 dBV/m

Total = 23.55 dBV/m

E Category: M4

Location: -4, 22, 8.7 mm

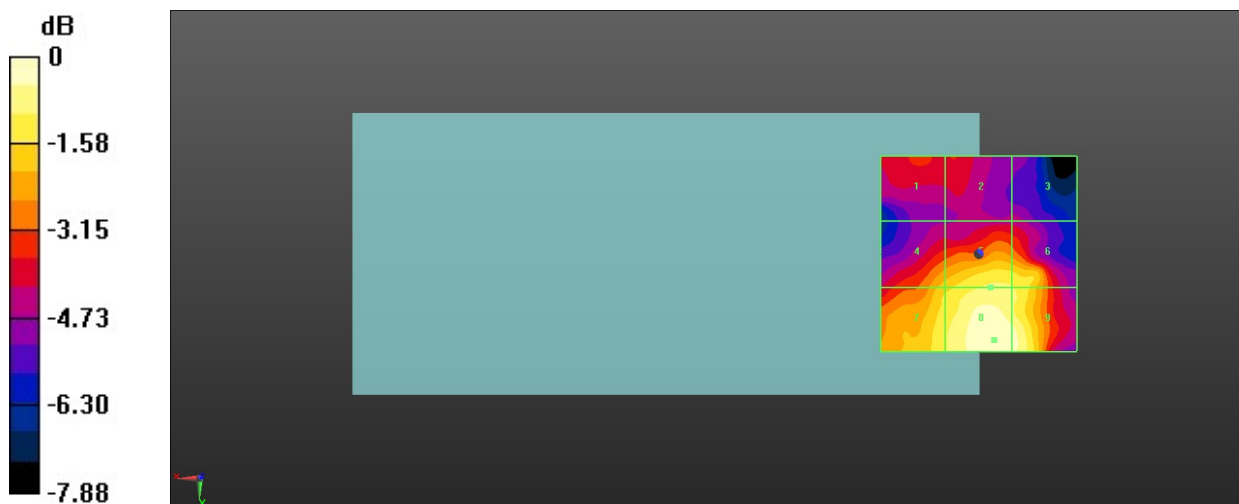

0 dB = 15.04 V/m = 23.54 dBV/m

16_HAC RF GSM1900_ANT3_Voice_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.12 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.17 dBV/m


MIF scaled E-field

Grid 1 M4 22.89 dBV/m	Grid 2 M4 21.78 dBV/m	Grid 3 M4 20.07 dBV/m
Grid 4 M4 24.17 dBV/m	Grid 5 M4 22.8 dBV/m	Grid 6 M4 21.88 dBV/m
Grid 7 M4 23.52 dBV/m	Grid 8 M4 23.68 dBV/m	Grid 9 M4 22.51 dBV/m

Total = 24.17 dBV/m

E Category: M4

Location: 25, -3.5, 8.7 mm

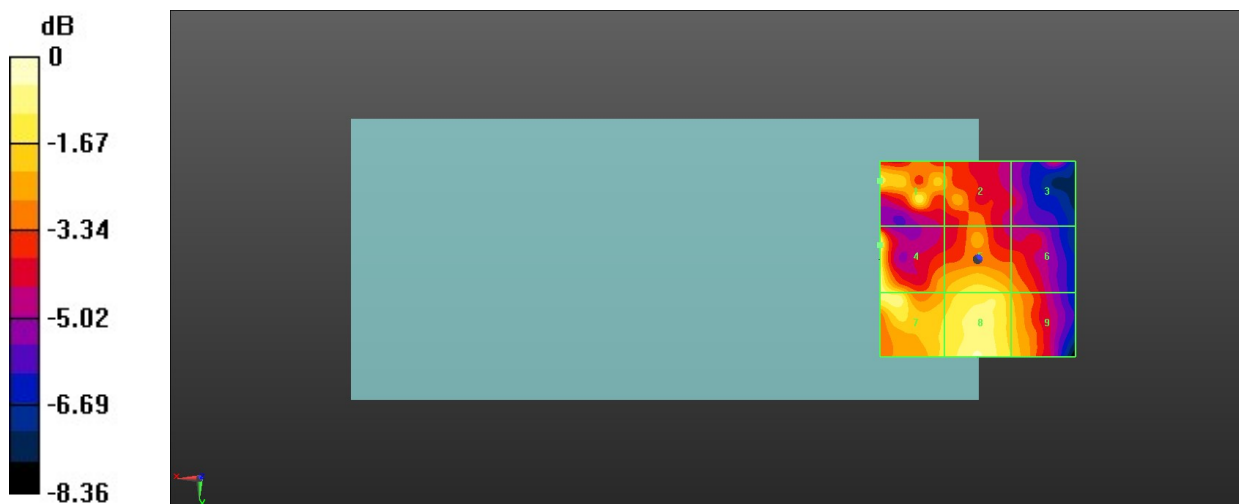

0 dB = 16.17 V/m = 24.17 dBV/m

17_HAC RF GSM1900_ANT3_Voice_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.48 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.38 dBV/m


MIF scaled E-field

Grid 1 M4 23.01 dBV/m	Grid 2 M4 22.56 dBV/m	Grid 3 M4 20.54 dBV/m
Grid 4 M4 24.35 dBV/m	Grid 5 M4 23.13 dBV/m	Grid 6 M4 22.46 dBV/m
Grid 7 M4 24.38 dBV/m	Grid 8 M4 24.01 dBV/m	Grid 9 M4 22.91 dBV/m

Total = 24.38 dBV/m

E Category: M4

Location: 13, 20, 8.7 mm

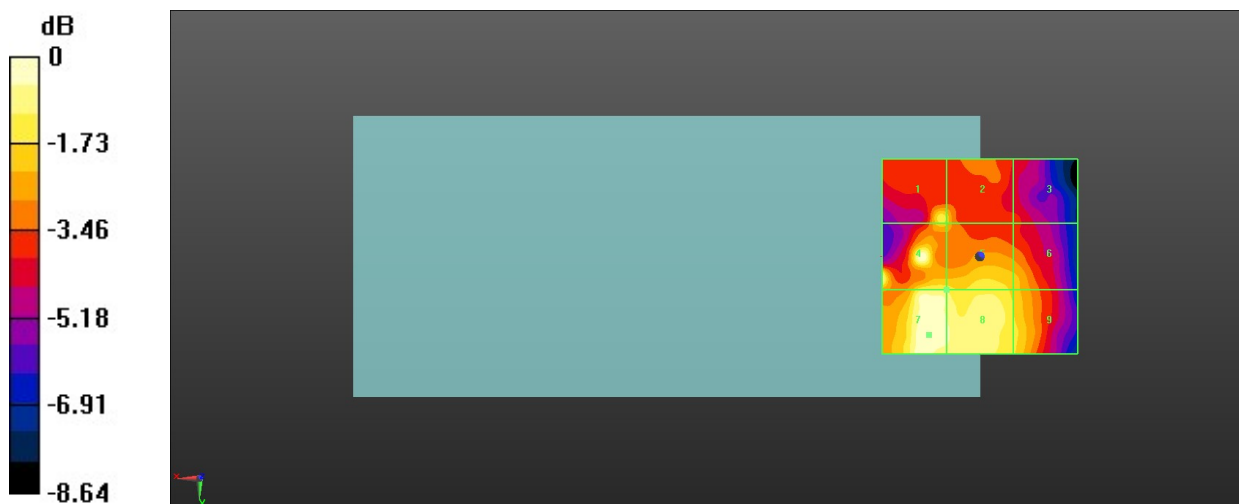

0 dB = 16.56 V/m = 24.38 dBV/m

18_HAC RF GSM1900_ANT3_Voice_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.24 V/m; Power Drift = -0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.57 dBV/m


MIF scaled E-field

Grid 1 M4 21.13 dBV/m	Grid 2 M4 20.8 dBV/m	Grid 3 M4 19.55 dBV/m
Grid 4 M4 23.12 dBV/m	Grid 5 M4 23.1 dBV/m	Grid 6 M4 22.17 dBV/m
Grid 7 M4 24.57 dBV/m	Grid 8 M4 24.23 dBV/m	Grid 9 M4 22.56 dBV/m

Total = 24.57 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

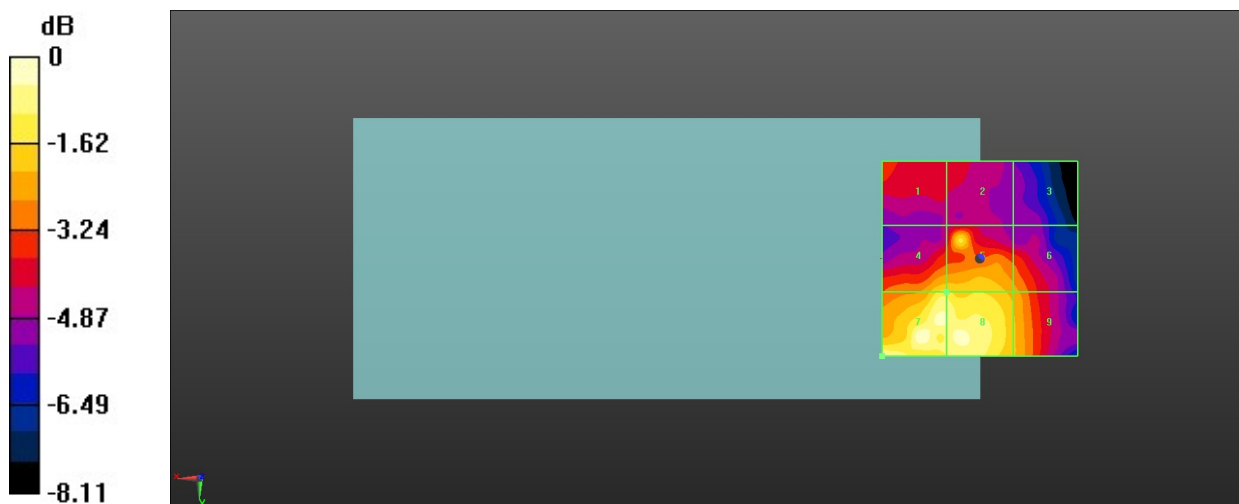

0 dB = 16.92 V/m = 24.57 dBV/m

19_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch39750

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.39 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.05 dBV/m


MIF scaled E-field

Grid 1 M4 15.87 dBV/m	Grid 2 M4 17.58 dBV/m	Grid 3 M4 17.59 dBV/m
Grid 4 M4 15.47 dBV/m	Grid 5 M4 18.03 dBV/m	Grid 6 M4 18.05 dBV/m
Grid 7 M4 17.62 dBV/m	Grid 8 M4 17.78 dBV/m	Grid 9 M4 17.51 dBV/m

Total = 18.05 dBV/m

E Category: M4

Location: -9, 0, 8.7 mm

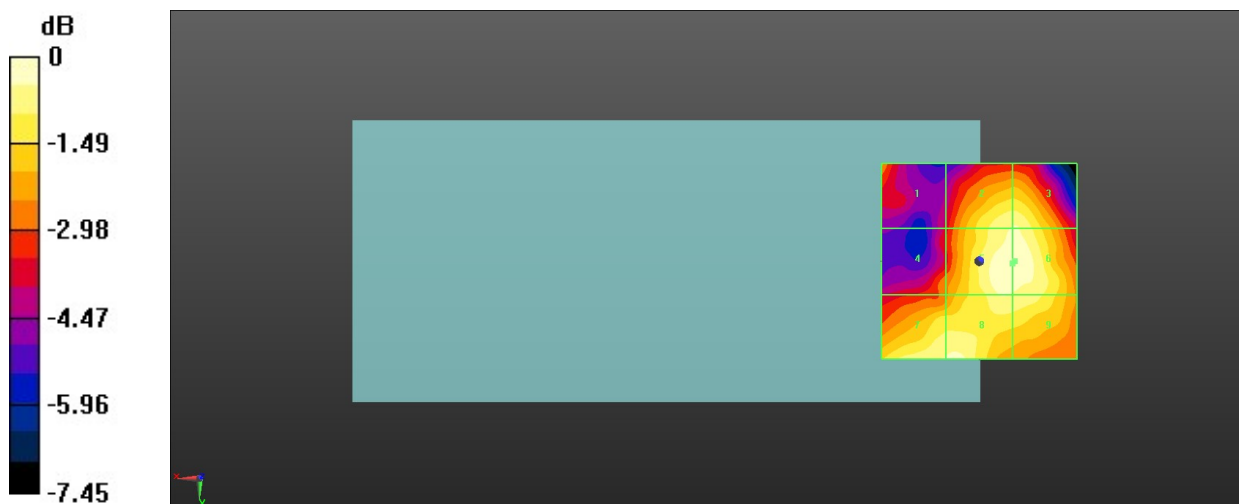

0 dB = 7.986 V/m = 18.05 dBV/m

20_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch40185

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.12 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.01 dBV/m


MIF scaled E-field

Grid 1 M4 16.43 dBV/m	Grid 2 M4 19.92 dBV/m	Grid 3 M4 19.63 dBV/m
Grid 4 M4 17.94 dBV/m	Grid 5 M4 19.98 dBV/m	Grid 6 M4 19.78 dBV/m
Grid 7 M4 20 dBV/m	Grid 8 M4 20.01 dBV/m	Grid 9 M4 19.12 dBV/m

Total = 20.01 dBV/m

E Category: M4

Location: 7.5, 25, 8.7 mm

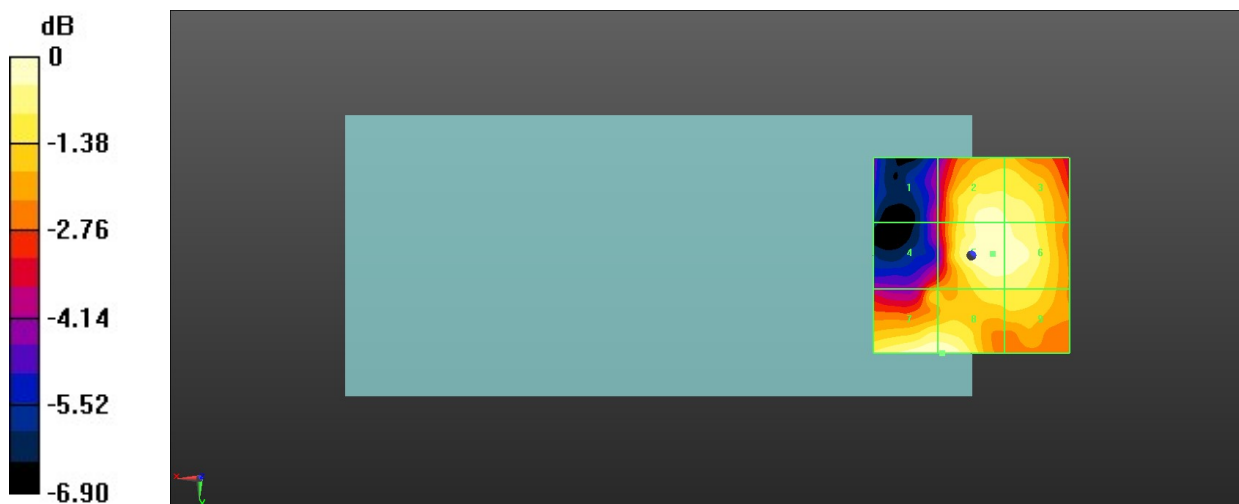

0 dB = 10.02 V/m = 20.02 dBV/m

21_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch40620

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.53 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 23.01 dBV/m


MIF scaled E-field

Grid 1 M4 17.17 dBV/m	Grid 2 M4 20.79 dBV/m	Grid 3 M4 20.52 dBV/m
Grid 4 M4 19.21 dBV/m	Grid 5 M4 21.36 dBV/m	Grid 6 M4 21.37 dBV/m
Grid 7 M4 22.42 dBV/m	Grid 8 M4 23.01 dBV/m	Grid 9 M4 21.34 dBV/m

Total = 23.01 dBV/m

E Category: M4

Location: 3.5, 25, 8.7 mm

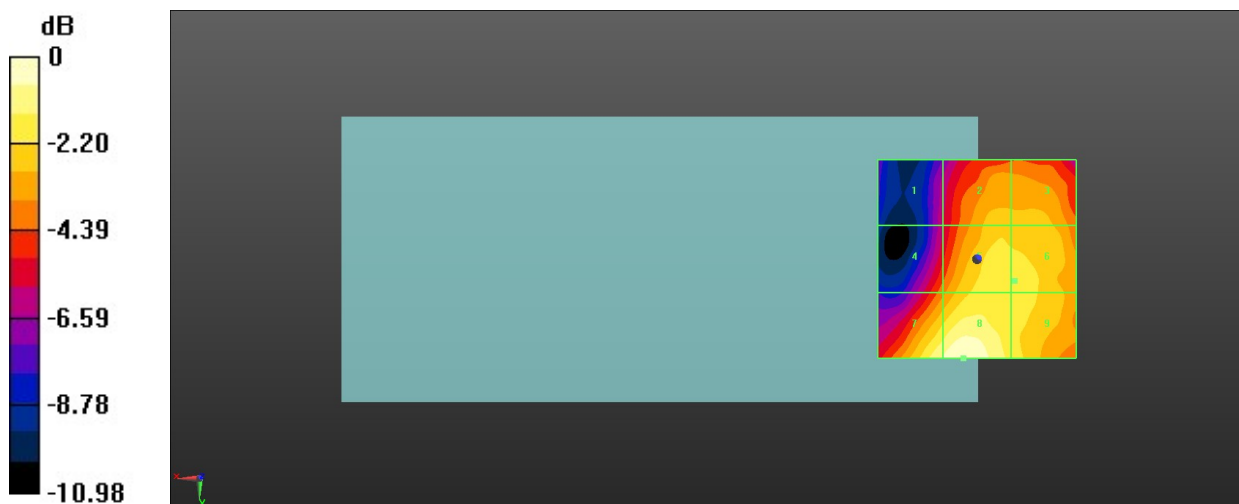

0 dB = 14.13 V/m = 23.00 dBV/m

22_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch41055

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.65 V/m; Power Drift = 0.13 dB

Applied MIF = -1.44 dB

RF audio interference level = 22.30 dBV/m


MIF scaled E-field

Grid 1 M4 16.03 dBV/m	Grid 2 M4 20.48 dBV/m	Grid 3 M4 20.58 dBV/m
Grid 4 M4 18.23 dBV/m	Grid 5 M4 20.63 dBV/m	Grid 6 M4 20.67 dBV/m
Grid 7 M4 22.29 dBV/m	Grid 8 M4 22.3 dBV/m	Grid 9 M4 20.32 dBV/m

Total = 22.30 dBV/m

E Category: M4

Location: 7.5, 25, 8.7 mm

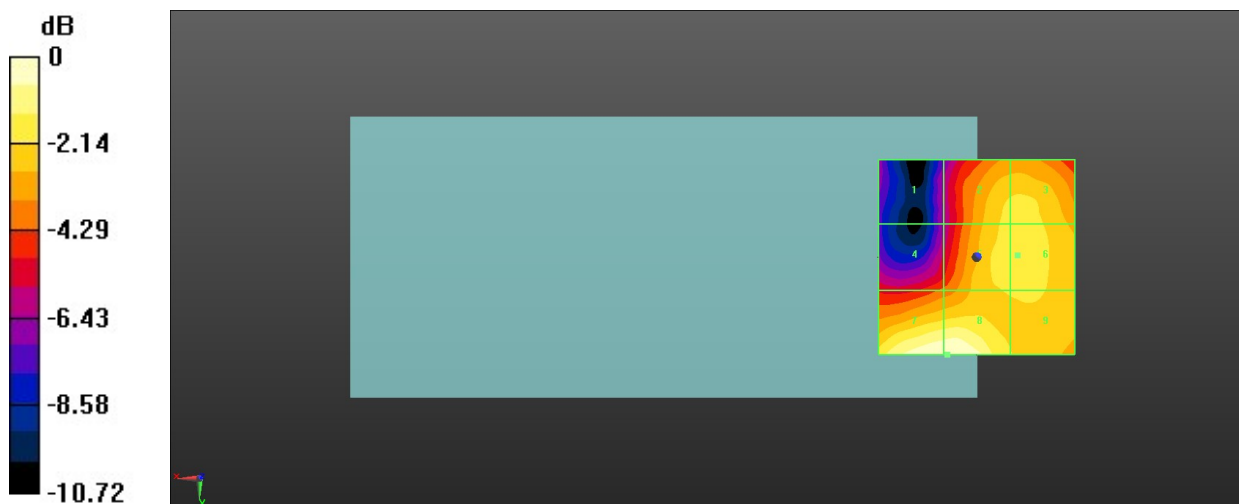

0 dB = 13.03 V/m = 22.30 dBV/m

23_HAC RF LTE B41_20M_ANT 0_QPSK_1RB_0Offset_Ch41490

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.38 V/m; Power Drift = -0.17 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.38 dBV/m


MIF scaled E-field

Grid 1 M4 16.73 dBV/m	Grid 2 M4 18.77 dBV/m	Grid 3 M4 19.02 dBV/m
Grid 4 M4 16.81 dBV/m	Grid 5 M4 19.77 dBV/m	Grid 6 M4 20.24 dBV/m
Grid 7 M4 20.38 dBV/m	Grid 8 M4 20.02 dBV/m	Grid 9 M4 20.3 dBV/m

Total = 20.38 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

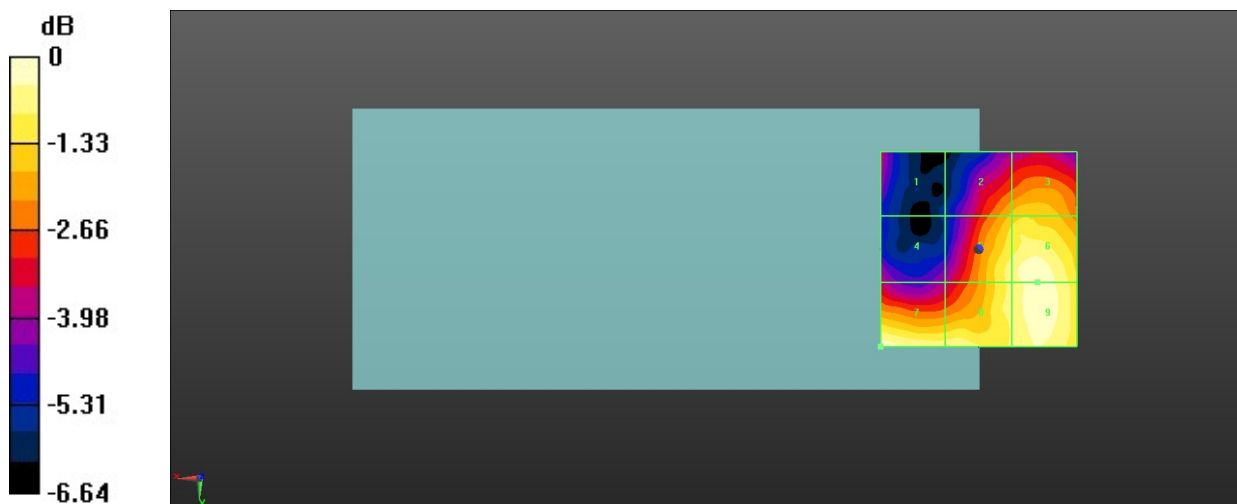

0 dB = 10.45 V/m = 20.38 dBV/m

24_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch39750

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.889 V/m; Power Drift = -0.06 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.27 dBV/m


MIF scaled E-field

Grid 1 M4 17.36 dBV/m	Grid 2 M4 18.27 dBV/m	Grid 3 M4 17.95 dBV/m
Grid 4 M4 14.97 dBV/m	Grid 5 M4 17.38 dBV/m	Grid 6 M4 17.39 dBV/m
Grid 7 M4 14.87 dBV/m	Grid 8 M4 14.95 dBV/m	Grid 9 M4 15.07 dBV/m

Total = 18.27 dBV/m

E Category: M4

Location: -1, -25, 8.7 mm

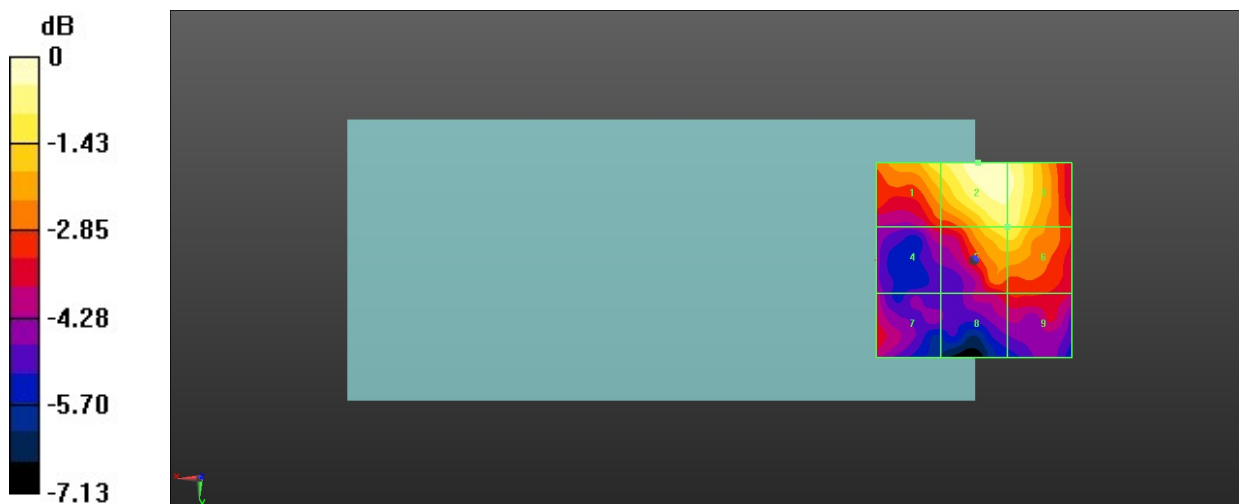

0 dB = 8.193 V/m = 18.27 dBV/m

25_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch40185

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.93 V/m; Power Drift = 0.12 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.94 dBV/m


MIF scaled E-field

Grid 1 M4 18.26 dBV/m	Grid 2 M4 20.94 dBV/m	Grid 3 M4 20.81 dBV/m
Grid 4 M4 16.76 dBV/m	Grid 5 M4 20.48 dBV/m	Grid 6 M4 20.43 dBV/m
Grid 7 M4 17.26 dBV/m	Grid 8 M4 18.17 dBV/m	Grid 9 M4 18.46 dBV/m

Total = 20.94 dBV/m

E Category: M4

Location: -6, -20, 8.7 mm

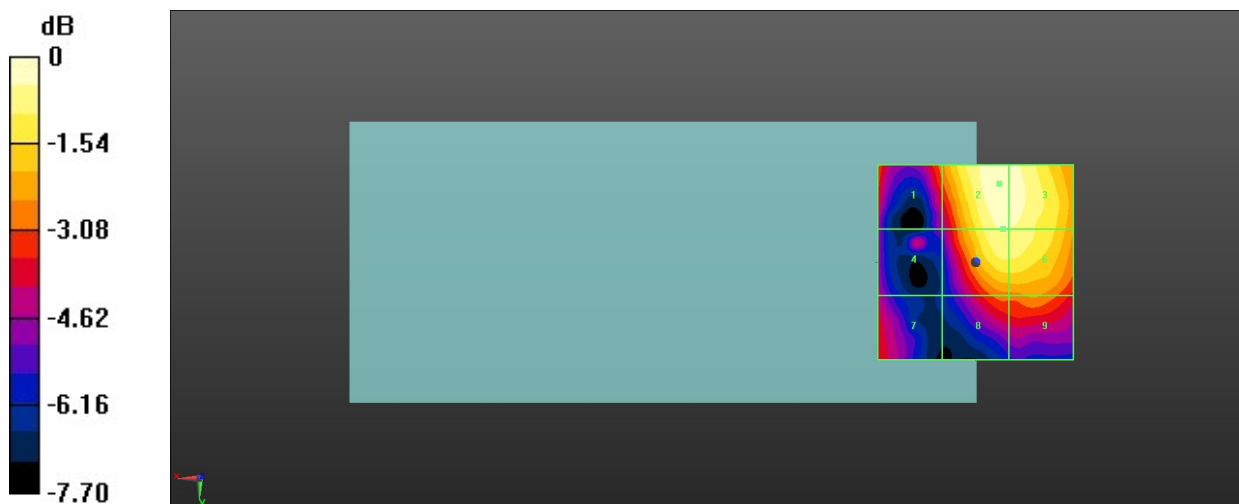

0 dB = 11.14 V/m = 20.94 dBV/m

26_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch40620

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.25 V/m; Power Drift = -0.12 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.72 dBV/m


MIF scaled E-field

Grid 1 M4 19.31 dBV/m	Grid 2 M4 19.72 dBV/m	Grid 3 M4 19.72 dBV/m
Grid 4 M4 17.18 dBV/m	Grid 5 M4 19.68 dBV/m	Grid 6 M4 19.68 dBV/m
Grid 7 M4 16.32 dBV/m	Grid 8 M4 18.6 dBV/m	Grid 9 M4 18.64 dBV/m

Total = 19.72 dBV/m

E Category: M4

Location: -9, -11, 8.7 mm

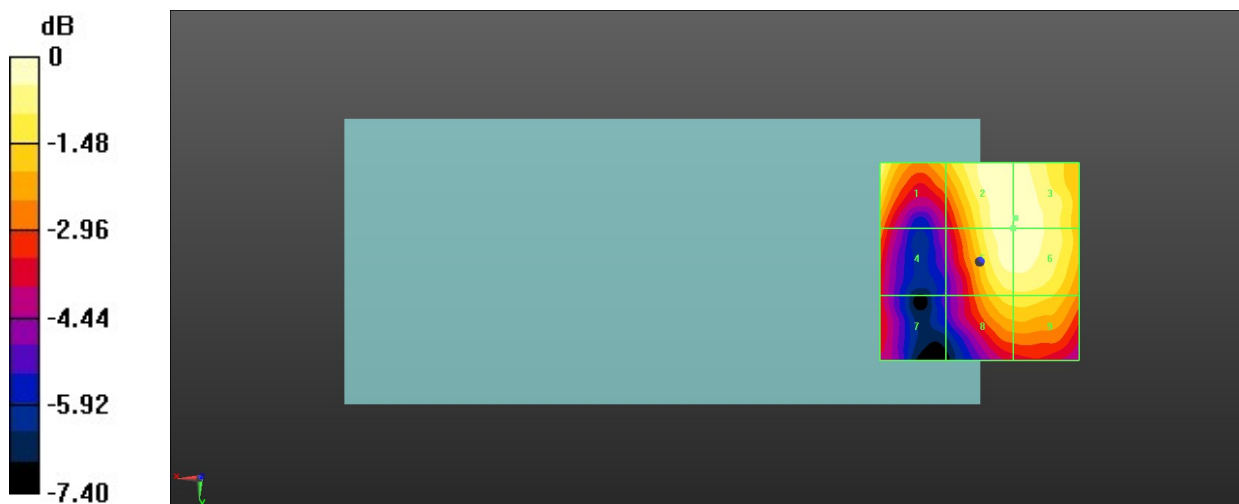

0 dB = 9.687 V/m = 19.72 dBV/m

27_HAC RF LTE B41_20M_ANT 1_QPSK_1RB_0Offset_Ch41055

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2022/1/31
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.71 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.00 dBV/m


MIF scaled E-field

Grid 1 M4 20 dBV/m	Grid 2 M4 19.49 dBV/m	Grid 3 M4 19.22 dBV/m
Grid 4 M4 17.88 dBV/m	Grid 5 M4 19.19 dBV/m	Grid 6 M4 19.27 dBV/m
Grid 7 M4 17.82 dBV/m	Grid 8 M4 18.67 dBV/m	Grid 9 M4 18.94 dBV/m

Total = 20.00 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

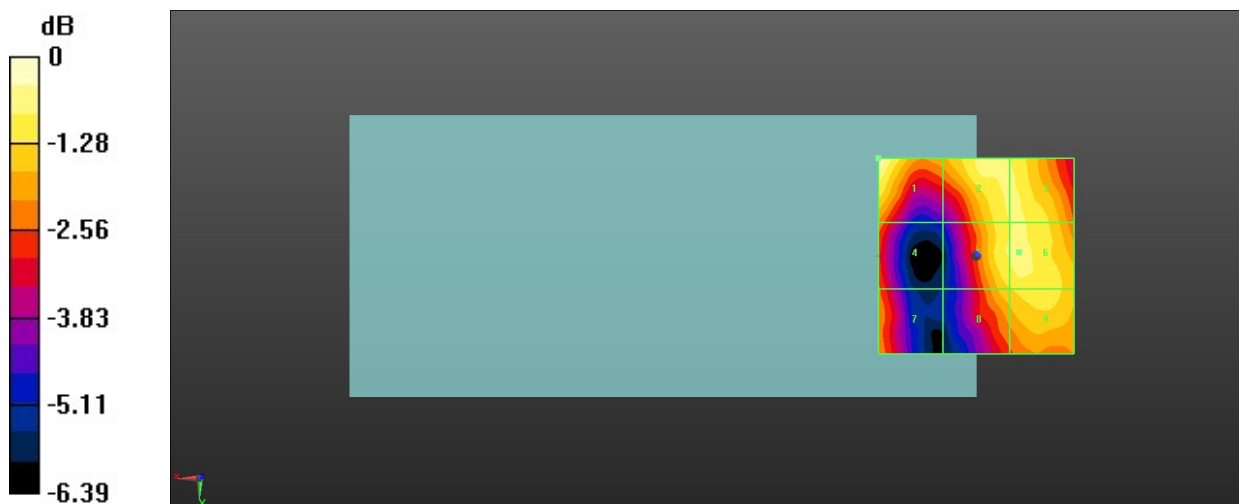

0 dB = 9.997 V/m = 20.00 dBV/m