



		25																																																																																			
Mode	Band Edge																																																																																				
	2400-2483.5_802.11n_HT20_CH01_2412MHz& Part 27Q Band42																																																																																				
ANT	8																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>60.61</td> <td>74.00</td> <td>-13.39</td> <td>48.33</td> <td>31.97</td> <td>7.16</td> <td>32.85</td> <td>6.00</td> <td>155</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	60.61	74.00	-13.39	48.33	31.97	7.16	32.85	6.00	155	302	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.36</td> <td>74.00</td> <td>37.36</td> <td>98.33</td> <td>32.30</td> <td>7.51</td> <td>32.78</td> <td>6.00</td> <td>155</td> <td>302</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	111.36	74.00	37.36	98.33	32.30	7.51	32.78	6.00	155	302	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2389.17	60.61	74.00	-13.39	48.33	31.97	7.16	32.85	6.00	155	302	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																													
1	2412.00	111.36	74.00	37.36	98.33	32.30	7.51	32.78	6.00	155	302	PEAK																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>50.95</td> <td>54.00</td> <td>-3.05</td> <td>38.67</td> <td>31.97</td> <td>7.16</td> <td>32.85</td> <td>6.00</td> <td>155</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	50.95	54.00	-3.05	38.67	31.97	7.16	32.85	6.00	155	302	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.34</td> <td>54.00</td> <td>49.34</td> <td>90.97</td> <td>32.01</td> <td>7.20</td> <td>32.84</td> <td>6.00</td> <td>155</td> <td>302</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	103.34	54.00	49.34	90.97	32.01	7.20	32.84	6.00	155	302	Average			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																													
1	2389.95	50.95	54.00	-3.05	38.67	31.97	7.16	32.85	6.00	155	302	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																													
1	2412.00	103.34	54.00	49.34	90.97	32.01	7.20	32.84	6.00	155	302	Average																																																																									



Mode	25																																																																																			
	Harmonic																																																																																			
	2400-2483.5_802.11n HT20_CH01_2412MHz& Part 27Q Band42																																																																																			
ANT	8																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>39.98</td> <td>74.00</td> <td>-34.02</td> <td>60.86</td> <td>34.09</td> <td>10.29</td> <td>65.26</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.98	74.00	-34.02	60.86	34.09	10.29	65.26	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.41</td> <td>74.00</td> <td>-33.59</td> <td>61.29</td> <td>34.09</td> <td>10.29</td> <td>65.26</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.41	74.00	-33.59	61.29	34.09	10.29	65.26	0.00	300	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4824.00	39.98	74.00	-34.02	60.86	34.09	10.29	65.26	0.00	100	360	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4824.00	40.41	74.00	-33.59	61.29	34.09	10.29	65.26	0.00	300	360	PEAK																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>39.98</td> <td>74.00</td> <td>-34.02</td> <td>60.86</td> <td>34.09</td> <td>10.29</td> <td>65.26</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.98	74.00	-34.02	60.86	34.09	10.29	65.26	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.41</td> <td>74.00</td> <td>-33.59</td> <td>61.29</td> <td>34.09</td> <td>10.29</td> <td>65.26</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.41	74.00	-33.59	61.29	34.09	10.29	65.26	0.00	300	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4824.00	39.98	74.00	-34.02	60.86	34.09	10.29	65.26	0.00	100	360	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4824.00	40.41	74.00	-33.59	61.29	34.09	10.29	65.26	0.00	300	360	PEAK																																																																								




Mode	25																																																																																																																																													
	Emission below 1GHz																																																																																																																																													
	2400-2483.5_802.11n_HT20_CH01_2412MHz& Part 27Q Band42																																																																																																																																													
ANT	8																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Preamp Loss Factor (dB/m)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>24.07</td><td>40.00</td><td>-15.93</td><td>30.62</td><td>25.09</td><td>0.76</td><td>32.40</td><td>Peak</td></tr> <tr><td>2</td><td>67.83</td><td>18.87</td><td>40.00</td><td>-21.13</td><td>35.21</td><td>14.90</td><td>1.16</td><td>32.40</td><td>Peak</td></tr> <tr><td>3</td><td>176.47</td><td>23.73</td><td>43.50</td><td>-19.77</td><td>38.83</td><td>15.36</td><td>1.94</td><td>32.40</td><td>Peak</td></tr> <tr><td>4</td><td>189.08</td><td>24.89</td><td>43.50</td><td>-18.61</td><td>40.22</td><td>15.05</td><td>2.02</td><td>32.40</td><td>Peak</td></tr> <tr><td>5</td><td>255.04</td><td>24.10</td><td>46.00</td><td>-21.90</td><td>35.25</td><td>19.11</td><td>2.14</td><td>32.40</td><td>Peak</td></tr> <tr><td>6</td><td>350.10</td><td>23.57</td><td>46.00</td><td>-22.43</td><td>32.60</td><td>20.61</td><td>2.76</td><td>32.40</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Preamp Loss Factor (dB/m)	A/Pos (dB)	T/Pos (deg)	Remark	1	30.97	24.07	40.00	-15.93	30.62	25.09	0.76	32.40	Peak	2	67.83	18.87	40.00	-21.13	35.21	14.90	1.16	32.40	Peak	3	176.47	23.73	43.50	-19.77	38.83	15.36	1.94	32.40	Peak	4	189.08	24.89	43.50	-18.61	40.22	15.05	2.02	32.40	Peak	5	255.04	24.10	46.00	-21.90	35.25	19.11	2.14	32.40	Peak	6	350.10	23.57	46.00	-22.43	32.60	20.61	2.76	32.40	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Preamp Loss Factor (dB/m)</th> <th>A/Pos (dB)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>25.44</td><td>40.00</td><td>-14.56</td><td>31.34</td><td>25.74</td><td>0.76</td><td>32.40</td><td>Peak</td></tr> <tr><td>2</td><td>98.87</td><td>23.73</td><td>43.50</td><td>-19.77</td><td>38.76</td><td>15.92</td><td>1.45</td><td>32.40</td><td>Peak</td></tr> <tr><td>3</td><td>171.62</td><td>24.19</td><td>43.50</td><td>-19.31</td><td>38.98</td><td>15.70</td><td>1.91</td><td>32.40</td><td>Peak</td></tr> <tr><td>4</td><td>250.19</td><td>24.01</td><td>46.00</td><td>-21.99</td><td>35.75</td><td>18.56</td><td>2.10</td><td>32.40</td><td>Peak</td></tr> <tr><td>5</td><td>348.16</td><td>25.29</td><td>46.00</td><td>-20.71</td><td>34.38</td><td>20.56</td><td>2.75</td><td>32.40</td><td>Peak</td></tr> <tr><td>6</td><td>765.26</td><td>30.39</td><td>46.00</td><td>-15.61</td><td>30.83</td><td>27.68</td><td>4.12</td><td>32.24</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Preamp Loss Factor (dB/m)	A/Pos (dB)	T/Pos (deg)	Remark	1	30.00	25.44	40.00	-14.56	31.34	25.74	0.76	32.40	Peak	2	98.87	23.73	43.50	-19.77	38.76	15.92	1.45	32.40	Peak	3	171.62	24.19	43.50	-19.31	38.98	15.70	1.91	32.40	Peak	4	250.19	24.01	46.00	-21.99	35.75	18.56	2.10	32.40	Peak	5	348.16	25.29	46.00	-20.71	34.38	20.56	2.75	32.40	Peak	6	765.26	30.39	46.00	-15.61	30.83	27.68	4.12	32.24	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Preamp Loss Factor (dB/m)	A/Pos (dB)	T/Pos (deg)	Remark																																																																																																																																					
1	30.97	24.07	40.00	-15.93	30.62	25.09	0.76	32.40	Peak																																																																																																																																					
2	67.83	18.87	40.00	-21.13	35.21	14.90	1.16	32.40	Peak																																																																																																																																					
3	176.47	23.73	43.50	-19.77	38.83	15.36	1.94	32.40	Peak																																																																																																																																					
4	189.08	24.89	43.50	-18.61	40.22	15.05	2.02	32.40	Peak																																																																																																																																					
5	255.04	24.10	46.00	-21.90	35.25	19.11	2.14	32.40	Peak																																																																																																																																					
6	350.10	23.57	46.00	-22.43	32.60	20.61	2.76	32.40	Peak																																																																																																																																					
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Preamp Loss Factor (dB/m)	A/Pos (dB)	T/Pos (deg)	Remark																																																																																																																																					
1	30.00	25.44	40.00	-14.56	31.34	25.74	0.76	32.40	Peak																																																																																																																																					
2	98.87	23.73	43.50	-19.77	38.76	15.92	1.45	32.40	Peak																																																																																																																																					
3	171.62	24.19	43.50	-19.31	38.98	15.70	1.91	32.40	Peak																																																																																																																																					
4	250.19	24.01	46.00	-21.99	35.75	18.56	2.10	32.40	Peak																																																																																																																																					
5	348.16	25.29	46.00	-20.71	34.38	20.56	2.75	32.40	Peak																																																																																																																																					
6	765.26	30.39	46.00	-15.61	30.83	27.68	4.12	32.24	Peak																																																																																																																																					

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.28	2.065	0.484	10Hz
802.11n HT20	98.16	1.928	0.519	10Hz
802.11n HT40	94.93	0.949	1.053	1.1KHz

802.11b

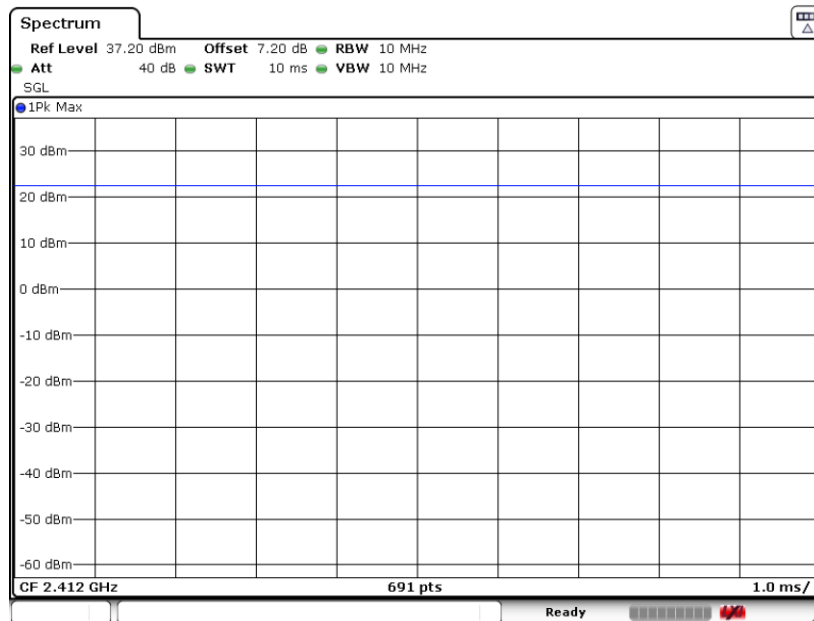




802.11g

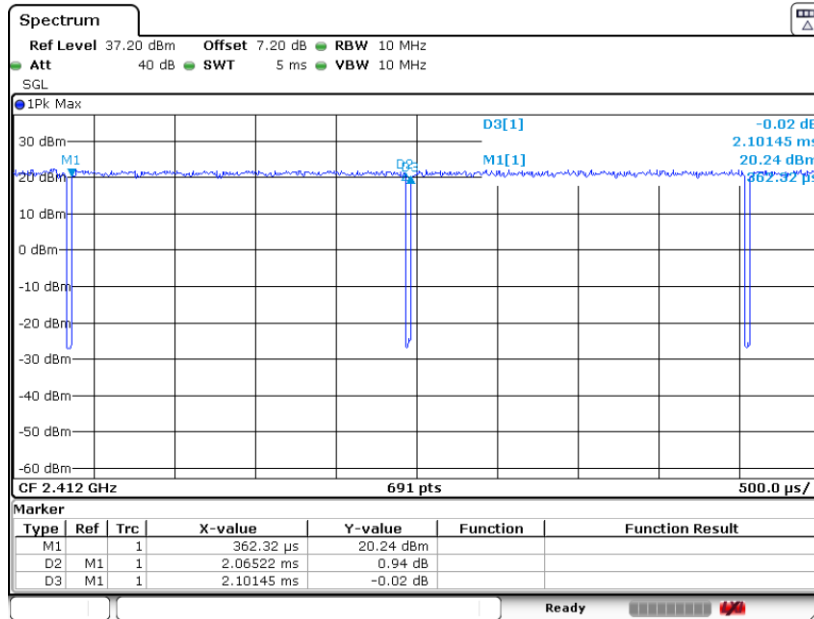

802.11n HT20

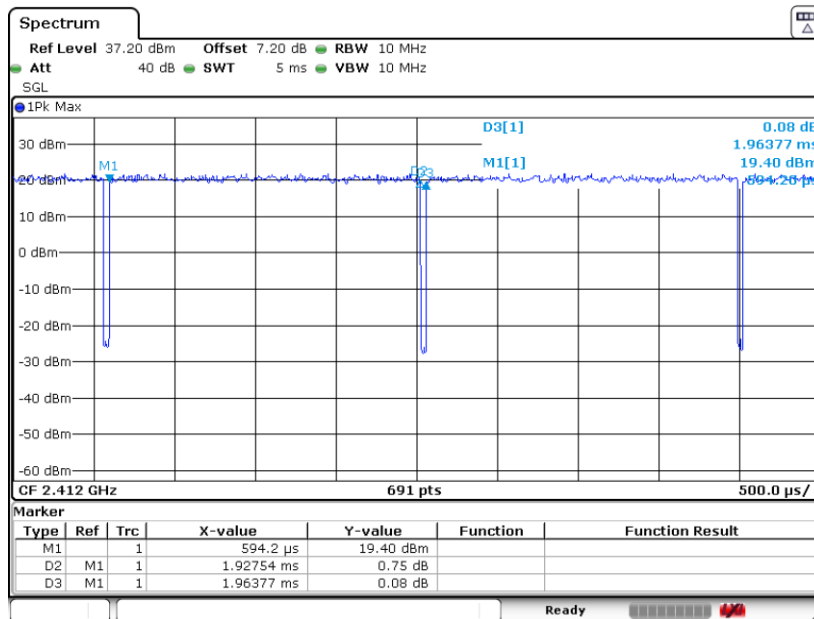



802.11n HT40

