



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2313-3, XT2313-4, XT2313-6  
**FCC ID** : IHDT56AJ8  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Nov. 28, 2022 ~ Dec. 20, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

    1.1 Applicant .....5

    1.2 Manufacturer.....5

    1.3 Product Feature of Equipment Under Test.....5

    1.4 Product Specification of Equipment Under Test.....6

    1.5 Modification of EUT .....6

    1.6 Specification of Accessory.....6

    1.7 Testing Location .....7

    1.8 Test Software.....7

    1.9 Applicable Standards.....7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....8**

    2.1 Carrier Frequency and Channel .....8

    2.2 Test Mode.....9

    2.3 Connection Diagram of Test System.....10

    2.4 Support Unit used in test configuration and system .....11

    2.5 EUT Operation Test Setup .....11

    2.6 Measurement Results Explanation Example.....11

**3 TEST RESULT.....12**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement .....12

    3.2 Maximum Conducted Output Power Measurement .....17

    3.3 Power Spectral Density Measurement .....18

    3.4 Unwanted Emissions Measurement.....20

    3.5 AC Conducted Emission Measurement.....24

    3.6 Antenna Requirements.....26

**4 LIST OF MEASURING EQUIPMENT .....27**

**5 UNCERTAINTY OF EVALUATION.....28**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 8.10 dB at 5936.35 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.80 dB at 0.604 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2313-3, XT2313-4, XT2313-6
FCC ID	IHDT56AJ8
IMEI Code	Conducted: 353054820021491 Conduction: 353054820017267 Radiation: 353054820017200
HW Version	DVT2
SW Version	T1TPN33.13
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The three model name XT2313-3, XT2313-4, XT2313-6 are the same product except model name different for market segment.
3. WLAN 5G Ant. 1 corresponding to EUT Photo Ant. 6



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	<b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11a : 19.83 dBm / 0.0962 W 802.11n HT20 : 19.65 dBm / 0.0923 W 802.11n HT40 : 19.81 dBm / 0.0957 W 802.11ac VHT20: 19.72 dBm / 0.0938 W 802.11ac VHT40: 19.89 dBm / 0.0975 W 802.11ac VHT80: 18.21 dBm / 0.0662 W
<b>99% Occupied Bandwidth</b>	802.11a : 16.88 MHz 802.11ac VHT20 : 17.98 MHz 802.11ac VHT40 : 36.66 MHz 802.11ac VHT80 : 75.76 MHz
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
<b>Antenna Type / Gain</b>	FPC Antenna with gain -3.95 dBi

**Note:** For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/VHT40 by referring to the higher output power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory				
<b>Battery 1</b>	<b>Brand Name</b>	Motorola (ATL)	<b>Model Name</b>	NH50
<b>Battery 2</b>	<b>Brand Name</b>	Motorola (Sunwoda)	<b>Model Name</b>	NH50
<b>USB Cable 1</b>	<b>Brand Name</b>	Motorola (Saibao)	<b>Model Name</b>	SLQ-A212A
<b>USB Cable 2</b>	<b>Brand Name</b>	Motorola (NAIYI)	<b>Model Name</b>	1.1.0196



### 1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01- KS 03CH08-KS TH01-KS	CN1257	314309

### 1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

- 1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#" were 802.11ac VHT80.





## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 1(Charging from Adapter) + Earphone
<b>Remark:</b> Radiated Test Cases were performance with Adapter, Earphone and USB Cable 1.	


Ch. #		U-NII-3 : 5745-5825 MHz			
		802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

## 2.3 Connection Diagram of Test System

For Conducted Emission

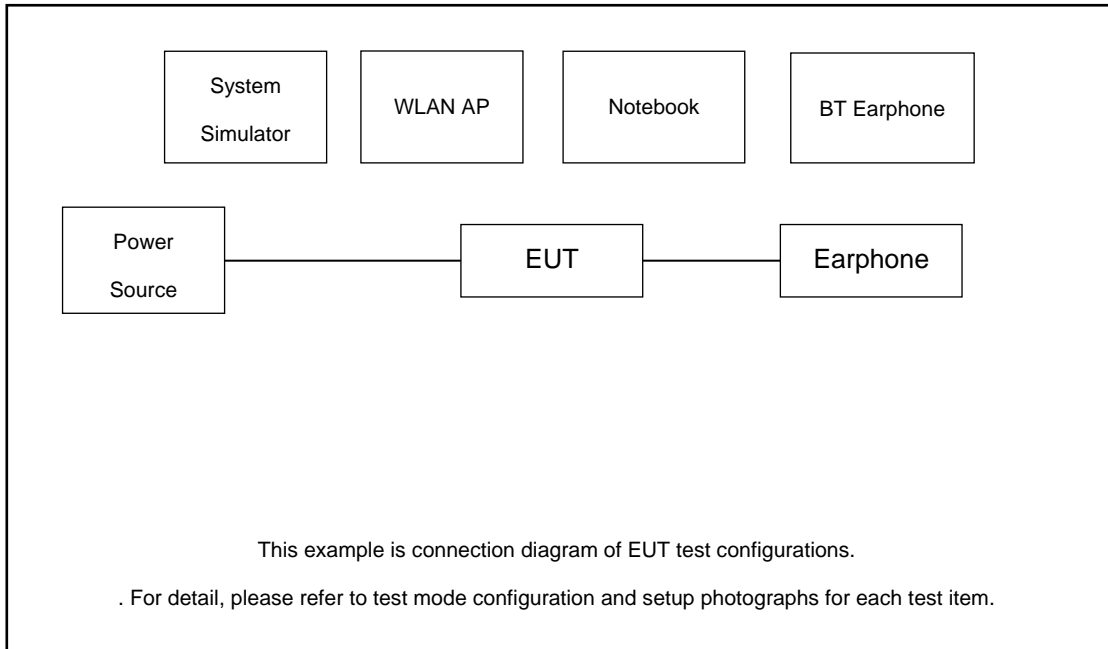

For Radiated Emission

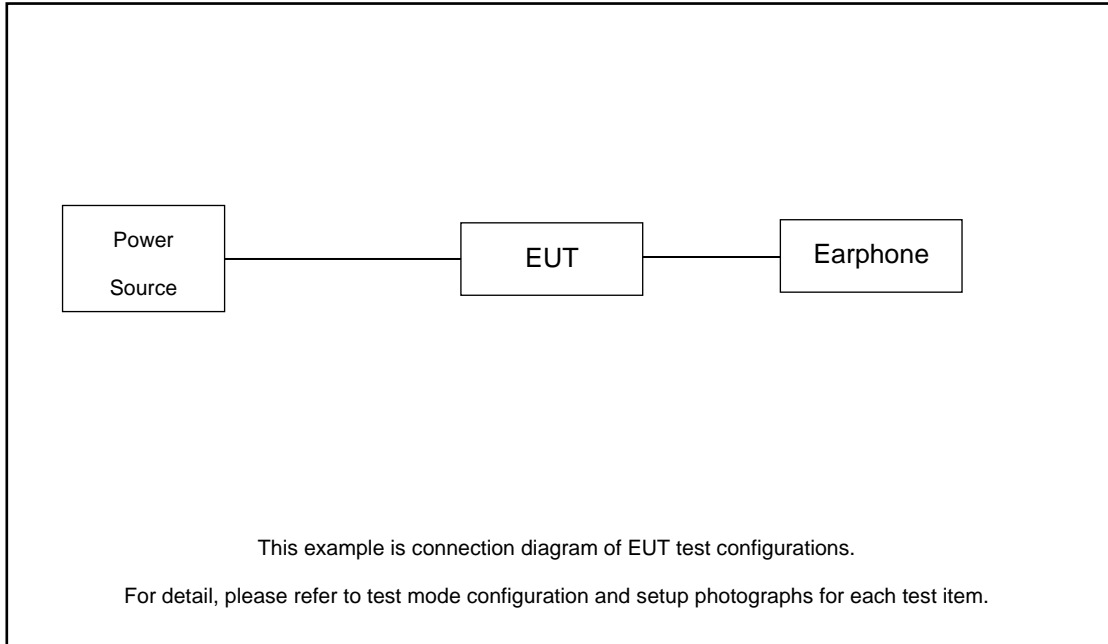



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m ; Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	AC Adapter	Moto	MC-101	N/A	N/A	N/A
6.	Earphone	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 7.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.  
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.  
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.  
For 6dB BW & 99% OBW, Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



##### 3.1.4 Test Setup






##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

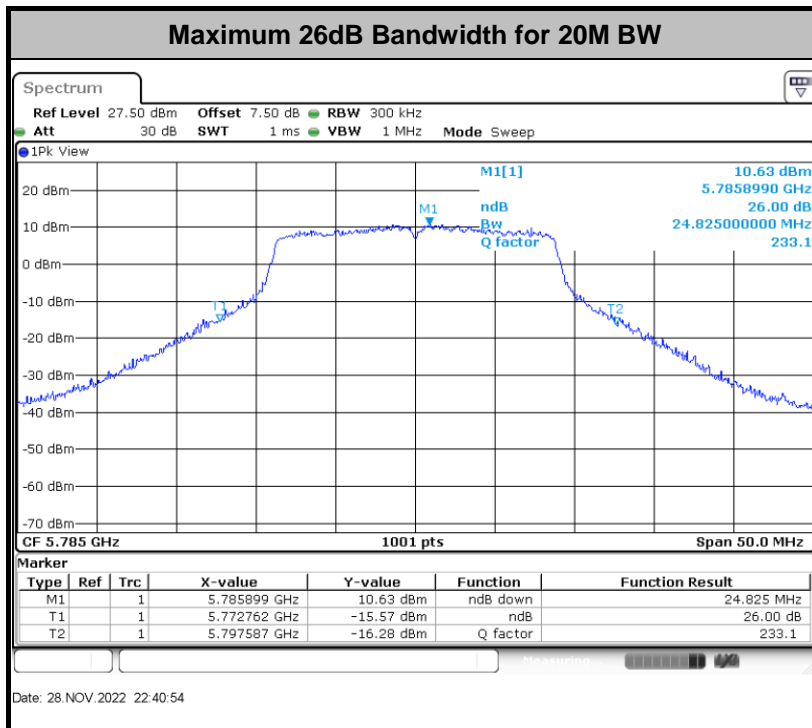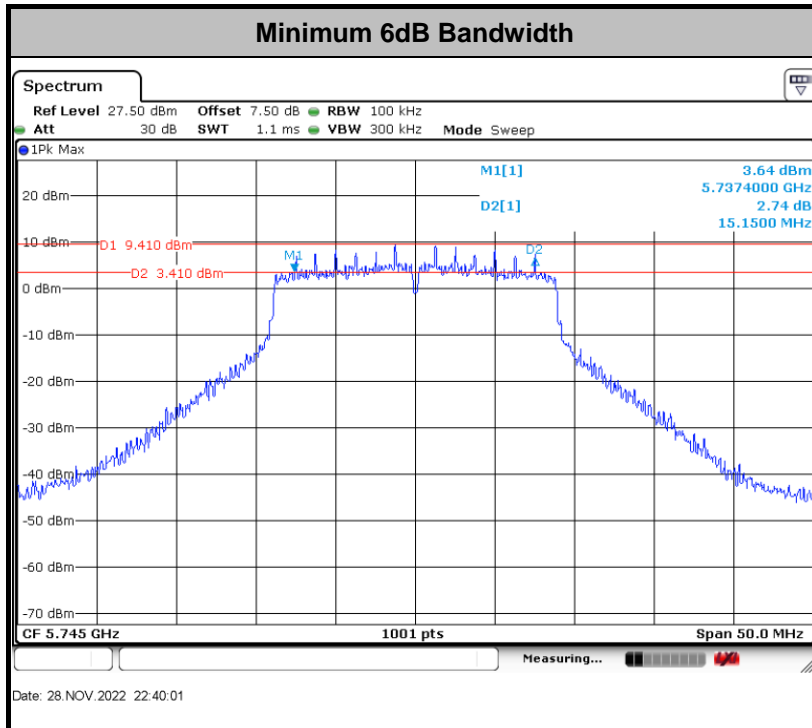

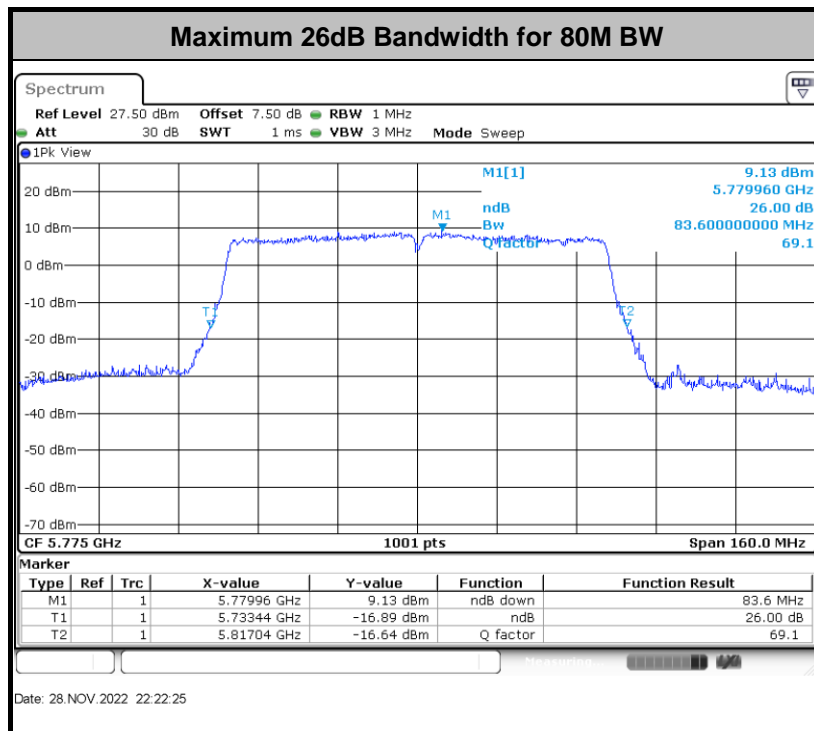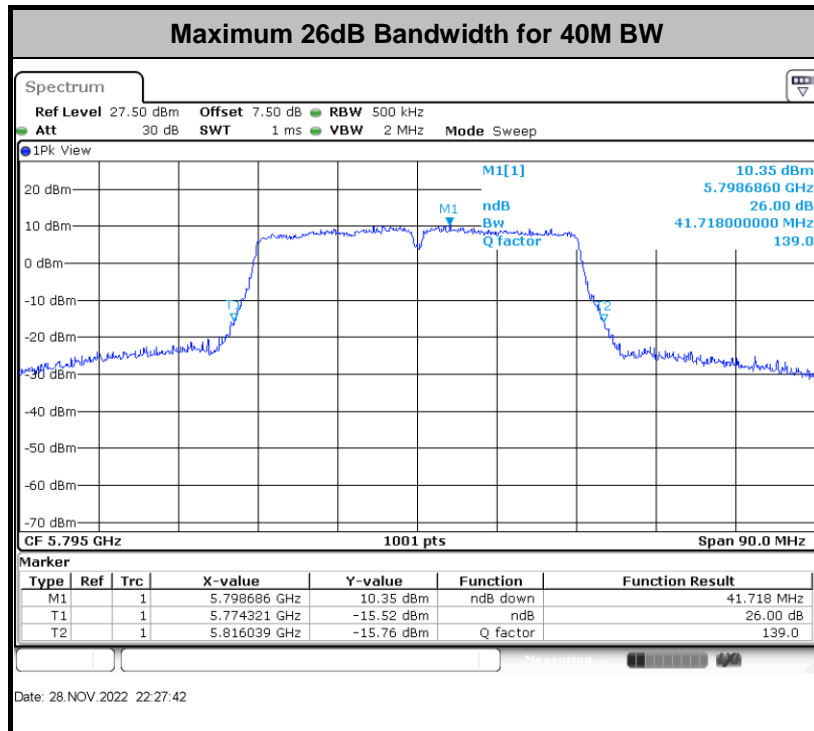

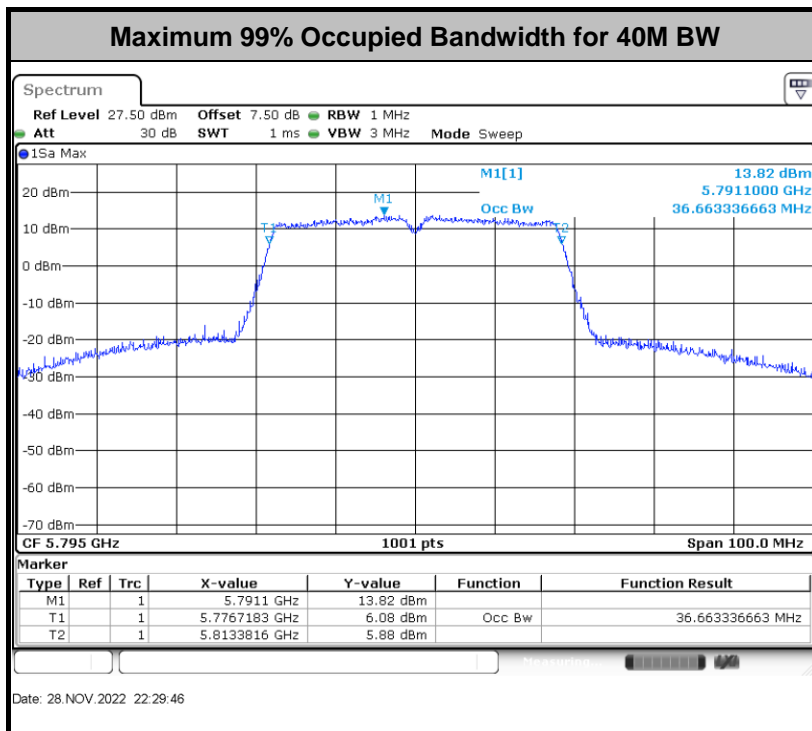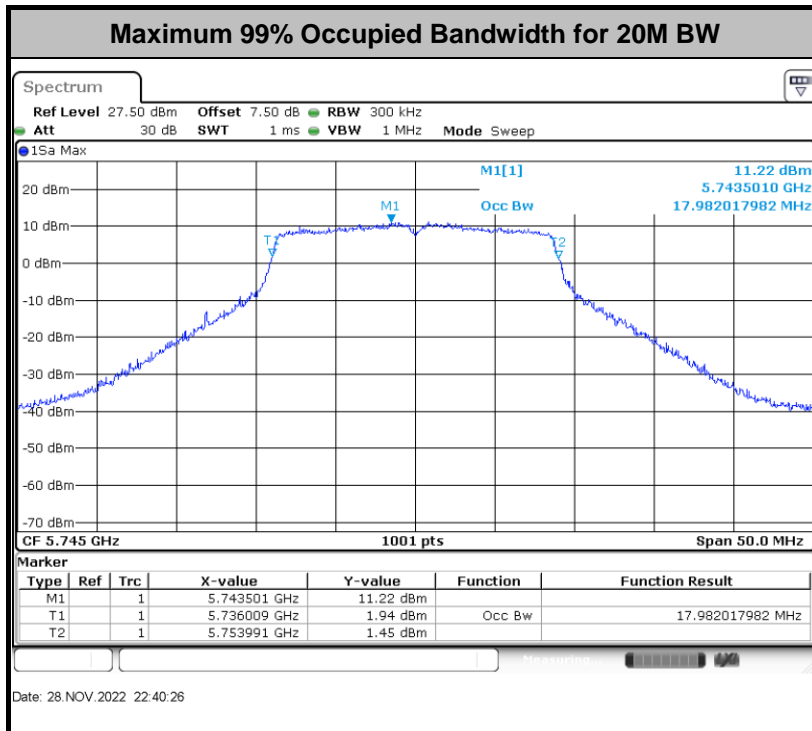

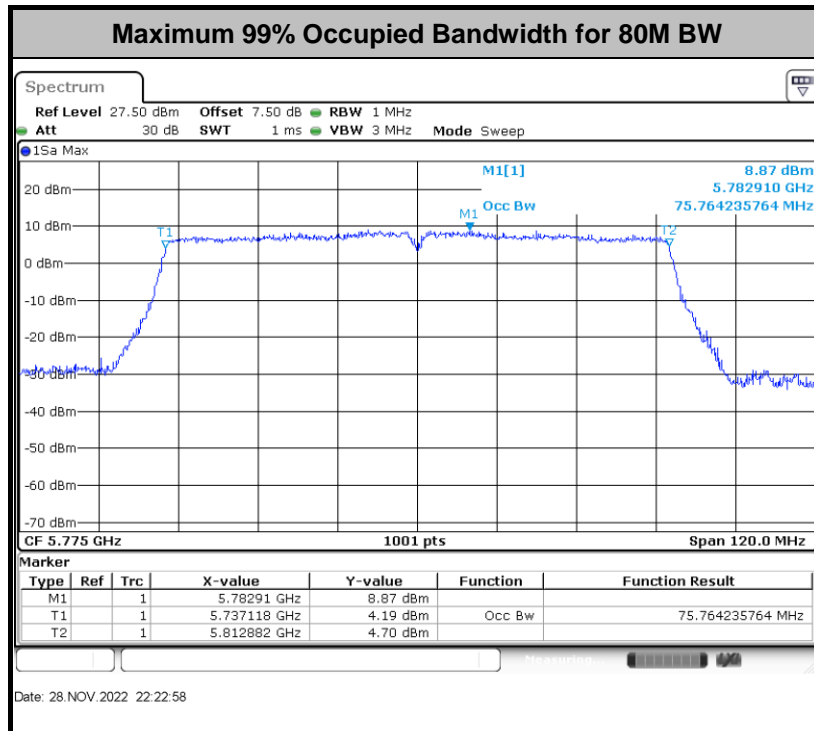

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

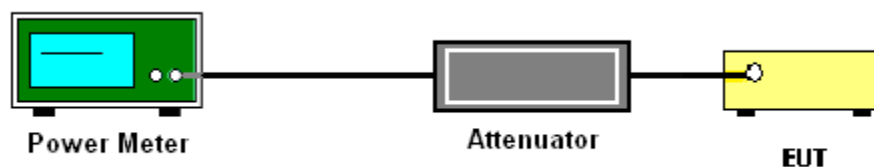

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - If the SA can't set RBW=500KHz, then add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

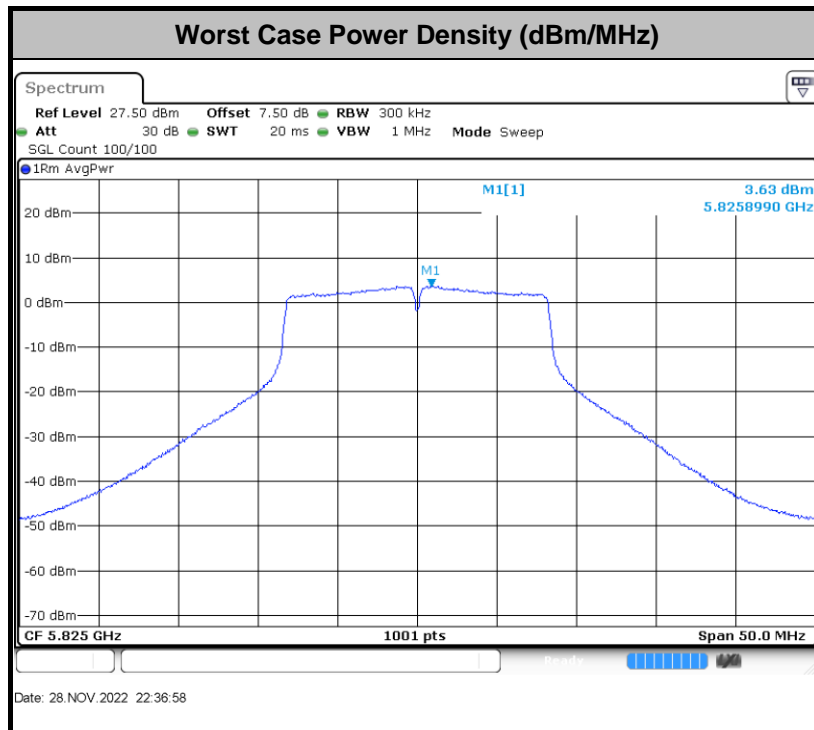

**Note:**

Average Power Density (5.85dBm/500KHz) = Measured value (3.63dBm/300KHz) + RBW Factor (2.22dB).



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

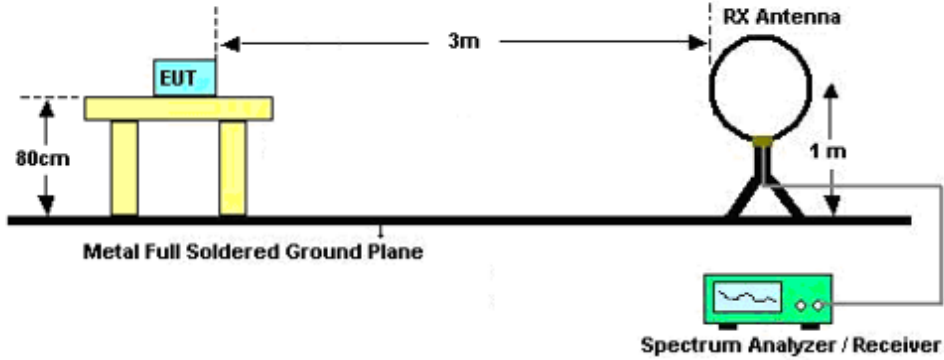

For radiated emissions from 30MHz to 1GHz

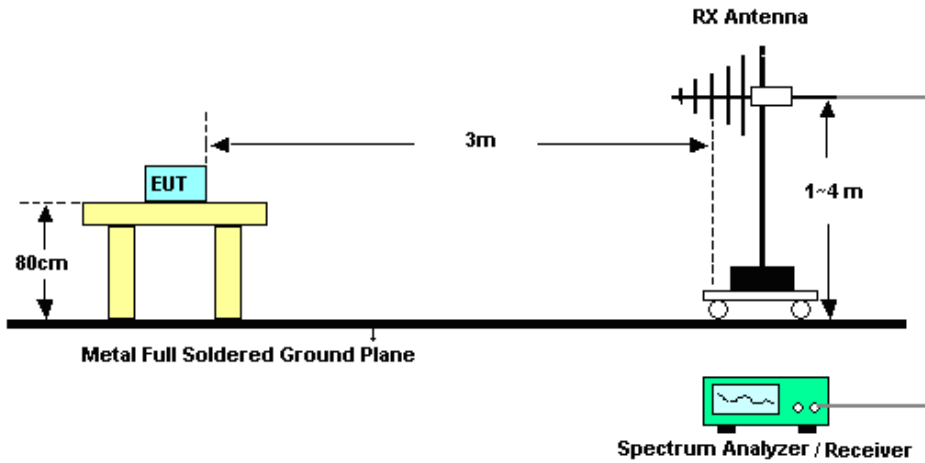

For radiated emissions above 1GHz

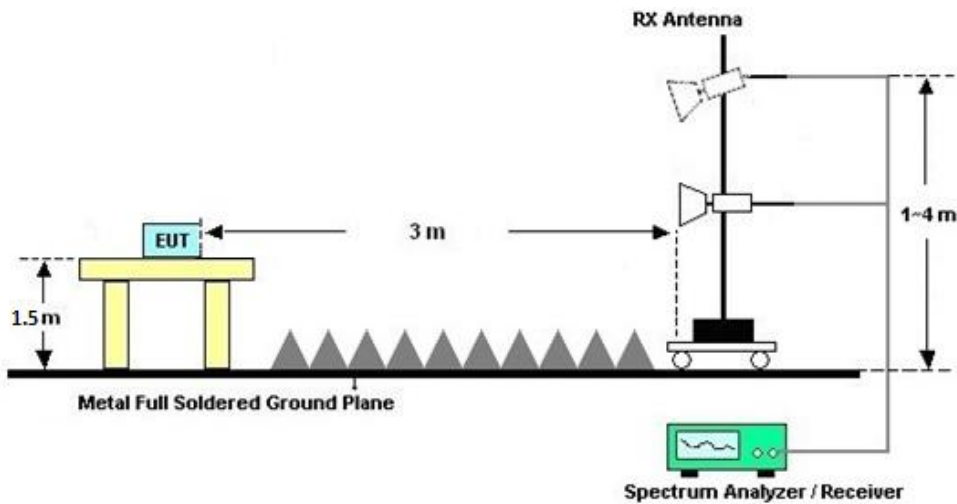



### **3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



### 3.5.4 Test Setup

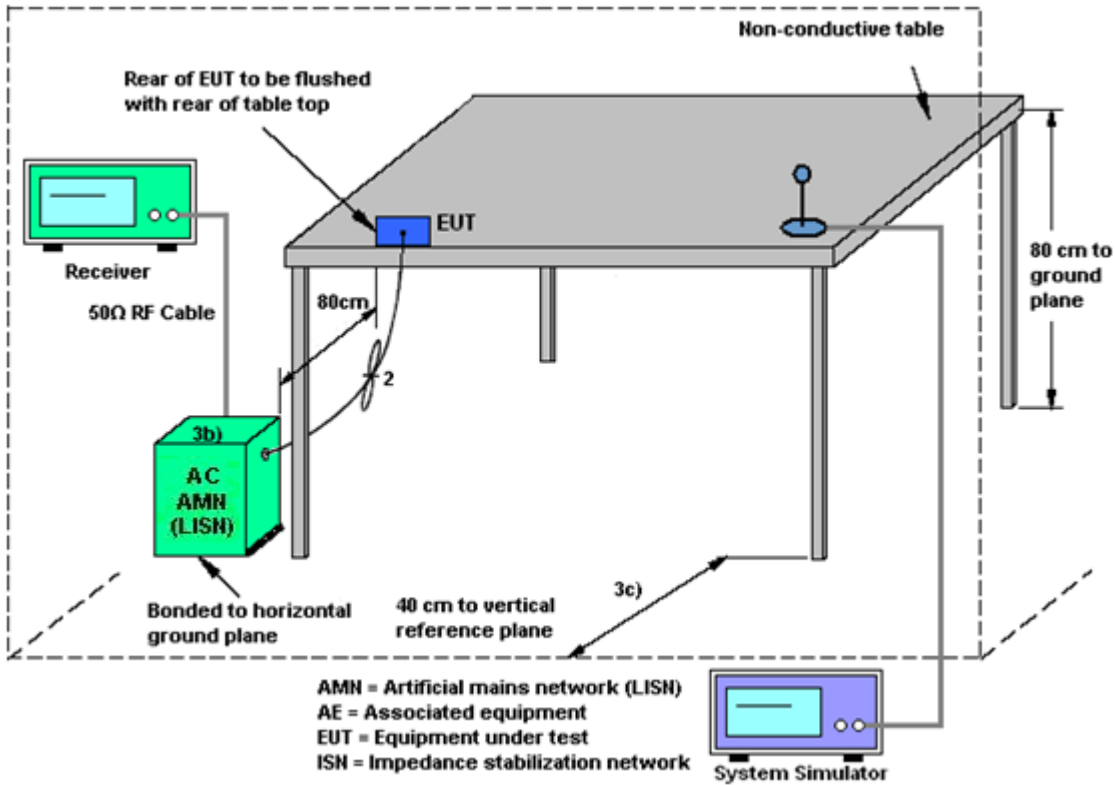

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 11, 2022	Dec. 20, 2022	Jul. 10, 2023	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz; Max 30dBm	Oct. 12, 2022	Dec. 20, 2022	Oct. 11, 2023	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 20, 2022	Oct. 15, 2023	Radiation (03CH08-KS)
Bilog Antenna	TESEQ & VGT	CBL 61110	59915	30MHz~1GHz	Aug. 26, 2022	Dec. 20, 2022	Aug. 25, 2023	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 08, 2022	Dec. 20, 2022	Jul. 07, 2023	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2022	Dec. 20, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Dec. 20, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2022	Dec. 20, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Jan. 05, 2022	Dec. 20, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Dec. 20, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 20, 2022	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 20, 2022	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 20, 2022	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Dec. 17, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Dec. 17, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Dec. 17, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Dec. 17, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**

**A1. Conducted Test Results**

Test Engineer:	kib shi	Temperature:	21~25	°C
Test Date:	2022/11/28	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.83	-	23.78	-	15.95	-	0.5	Pass
11a	6Mbps	1	157	5785	16.88	-	23.68	-	16.25	-	0.5	Pass
11a	6Mbps	1	165	5825	16.88	-	23.88	-	15.30	-	0.5	Pass
VHT20	MCS0	1	149	5745	17.98	-	24.13	-	15.15	-	0.5	Pass
VHT20	MCS0	1	157	5785	17.98	-	24.83	-	16.30	-	0.5	Pass
VHT20	MCS0	1	165	5825	17.98	-	24.13	-	15.30	-	0.5	Pass
VHT40	MCS0	1	151	5755	36.56	-	41.54	-	36.27	-	0.5	Pass
VHT40	MCS0	1	159	5795	36.66	-	41.72	-	35.73	-	0.5	Pass
VHT80	MCS0	1	155	5775	75.76	-	83.60	-	75.20	-	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	19.83	-		30.00	-	-3.95	-	Pass
11a	6Mbps	1	157	5785	19.76	-		30.00	-	-3.95	-	Pass
11a	6Mbps	1	165	5825	19.80	-		30.00	-	-3.95	-	Pass
HT20	MCS0	1	149	5745	19.65	-		30.00	-	-3.95	-	Pass
HT20	MCS0	1	157	5785	19.59	-		30.00	-	-3.95	-	Pass
HT20	MCS0	1	165	5825	19.64	-		30.00	-	-3.95	-	Pass
HT40	MCS0	1	151	5755	19.34	-		30.00	-	-3.95	-	Pass
HT40	MCS0	1	159	5795	19.81	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	149	5745	19.72	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	157	5785	19.62	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	165	5825	19.69	-		30.00	-	-3.95	-	Pass
VHT40	MCS0	1	151	5755	19.39	-		30.00	-	-3.95	-	Pass
VHT40	MCS0	1	159	5795	19.89	-		30.00	-	-3.95	-	Pass
VHT80	MCS0	1	155	5775	18.21	-		30.00	-	-3.95	-	Pass




**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	5.66	-		30.00	-	-3.95	-	Pass
11a	6Mbps	1	157	5785	2.22	-	5.45	-		30.00	-	-3.95	-	Pass
11a	6Mbps	1	165	5825	2.22	-	5.85	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	149	5745	2.22	-	5.12	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	157	5785	2.22	-	5.25	-		30.00	-	-3.95	-	Pass
VHT20	MCS0	1	165	5825	2.22	-	5.44	-		30.00	-	-3.95	-	Pass
VHT40	MCS0	1	151	5755	2.22	-	1.61	-		30.00	-	-3.95	-	Pass
VHT40	MCS0	1	159	5795	2.22	-	1.95	-		30.00	-	-3.95	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-2.93	-		30.00	-	-3.95	-	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

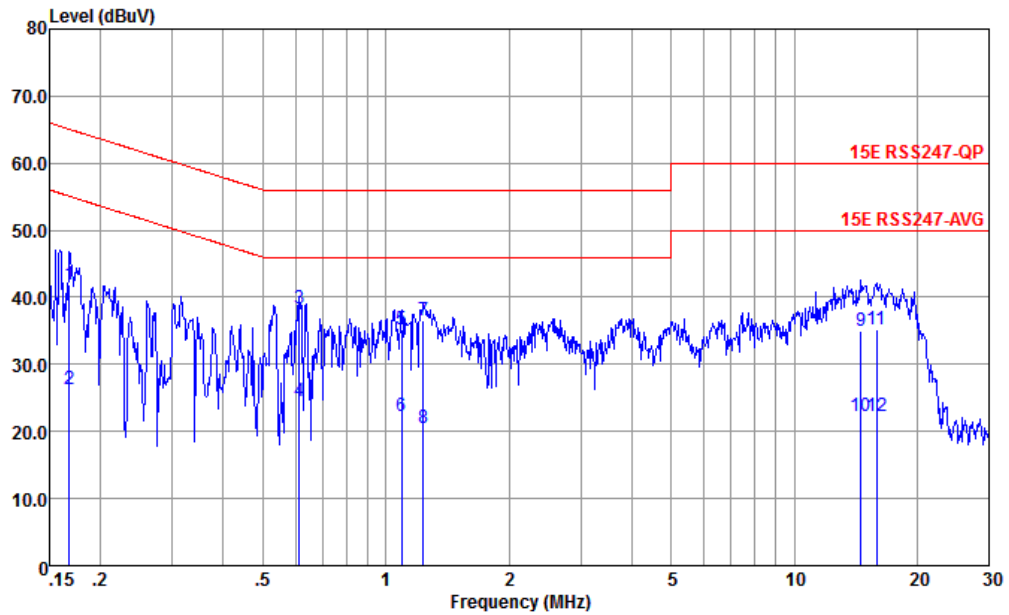


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.168	41.98	-23.10	65.08	31.50	0.05	10.43	QP
2	0.168	26.38	-28.70	55.08	15.90	0.05	10.43	Average
3 *	0.614	38.31	-17.69	56.00	28.20	-0.07	10.18	QP
4	0.614	24.41	-21.59	46.00	14.30	-0.07	10.18	Average
5	1.094	35.20	-20.80	56.00	25.20	-0.10	10.10	QP
6	1.094	22.30	-23.70	46.00	12.30	-0.10	10.10	Average
7	1.236	36.59	-19.41	56.00	26.61	-0.11	10.09	QP
8	1.236	20.49	-25.51	46.00	10.51	-0.11	10.09	Average
9	14.594	34.90	-25.10	60.00	23.91	-0.21	11.20	QP
10	14.594	22.20	-27.80	50.00	11.21	-0.21	11.20	Average
11	15.885	35.22	-24.78	60.00	24.20	-0.23	11.25	QP
12	15.885	22.22	-27.78	50.00	11.20	-0.23	11.25	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

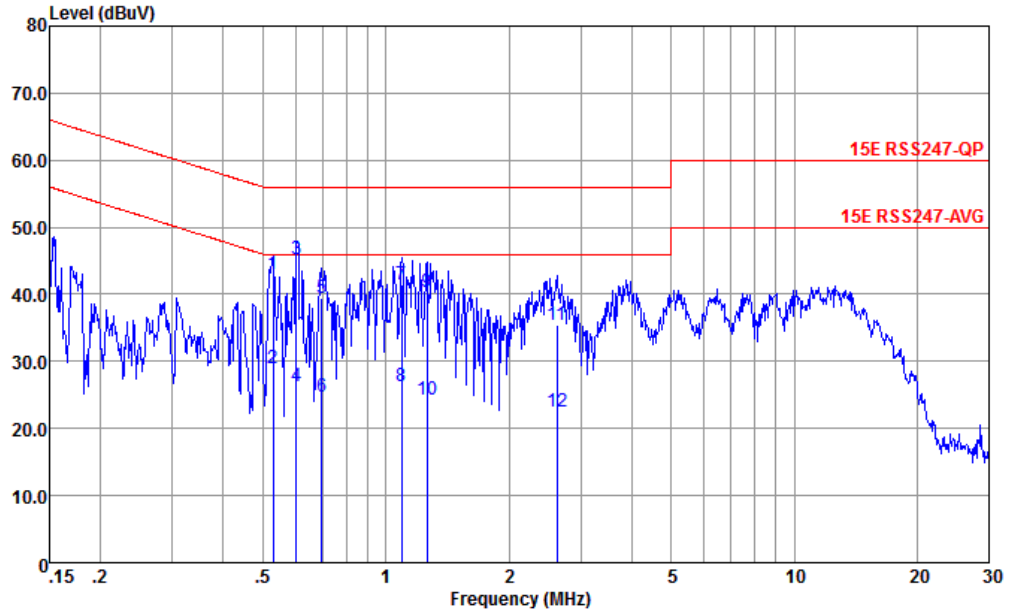

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.529	43.02	-12.98	56.00	32.90	-0.08	10.20	QP
2	0.529	29.02	-16.98	46.00	18.90	-0.08	10.20	Average
3 *	0.604	45.20	-10.80	56.00	35.11	-0.09	10.18	QP
4	0.604	26.30	-19.70	46.00	16.21	-0.09	10.18	Average
5	0.697	39.37	-16.63	56.00	29.30	-0.09	10.16	QP
6	0.697	24.67	-21.33	46.00	14.60	-0.09	10.16	Average
7	1.094	41.49	-14.51	56.00	31.50	-0.11	10.10	QP
8	1.094	26.29	-19.71	46.00	16.30	-0.11	10.10	Average
9	1.262	40.28	-15.72	56.00	30.30	-0.11	10.09	QP
10	1.262	24.18	-21.82	46.00	14.20	-0.11	10.09	Average
11	2.622	35.53	-20.47	56.00	25.60	-0.13	10.06	QP
12	2.622	22.53	-23.47	46.00	12.60	-0.13	10.06	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-3	5.725-5.85	802.11a	149	5745	6Mbps	-
Mode 2	U-NII-3	5.725-5.85	802.11a	157	5785	6Mbps	-
Mode 3	U-NII-3	5.725-5.85	802.11a	165	5825	6Mbps	-
Mode 4	U-NII-3	5.725-5.85	802.11ac VHT20	149	5745	MCS0	-
Mode 5	U-NII-3	5.725-5.85	802.11ac VHT20	157	5785	MCS0	-
Mode 6	U-NII-3	5.725-5.85	802.11ac VHT20	165	5825	MCS0	-
Mode 7	U-NII-3	5.725-5.85	802.11ac VHT40	151	5755	MCS0	-
Mode 8	U-NII-3	5.725-5.85	802.11ac VHT40	159	5795	MCS0	-
Mode 9	U-NII-3	5.725-5.85	802.11ac VHT80	155	5775	MCS0	-
Mode 10	U-NII-3	5.725-5.85	802.11ac VHT40	151	5755	MCS0	LF



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	149	5619.58	59.05	68.30	-9.25	H	PEAK	Pass	Band Edge
1	802.11a	149	11490.00	45.19	74.00	-28.81	H	PEAK	Pass	Harmonic
2	802.11a	157	5610.55	59.07	68.30	-9.23	H	PEAK	Pass	Band Edge
2	802.11a	157	11570.13	44.64	74.00	-29.36	H	Peak	Pass	Harmonic
3	802.11a	165	5946.88	59.50	68.30	-8.80	H	PEAK	Pass	Band Edge
3	802.11a	165	11650.00	46.19	74.00	-27.81	H	PEAK	Pass	Harmonic
4	802.11ac VHT20	149	5642.05	59.10	68.30	-9.20	V	PEAK	Pass	Band Edge
4	802.11ac VHT20	149	11490.00	46.58	74.00	-27.42	H	PEAK	Pass	Harmonic
5	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
5	802.11ac VHT20	157	11570.00	45.84	74.00	-28.16	H	PEAK	Pass	Harmonic
6	802.11ac VHT20	165	5933.38	59.58	68.30	-8.72	H	PEAK	Pass	Band Edge
6	802.11ac VHT20	165	11650.00	45.77	74.00	-28.23	H	PEAK	Pass	Harmonic
7	802.11ac VHT40	151	5936.35	60.20	68.30	-8.10	H	PEAK	Pass	Band Edge
7	802.11ac VHT40	151	11510.00	45.92	74.00	-28.08	H	PEAK	Pass	Harmonic
8	802.11ac VHT40	159	5934.19	59.59	68.30	-8.71	H	PEAK	Pass	Band Edge
8	802.11ac VHT40	159	11590.00	45.74	74.00	-28.26	H	PEAK	Pass	Harmonic
9	802.11ac VHT80	155	5605.43	59.40	68.30	-8.90	H	PEAK	Pass	Band Edge
9	802.11ac VHT80	155	11550.00	45.56	74.00	-28.44	H	PEAK	Pass	Harmonic
10	802.11ac VHT40	151	480.08	32.50	46	-13.50	V	PEAK	Pass	LF



Mode	1																																																																																																												
	Band Edge																																																																																																												
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																											
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5619.58</td> <td>59.05</td> <td>68.30</td> <td>-9.25</td> <td>40.97</td> <td>34.64</td> <td>13.21</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.83</td> <td>56.12</td> <td>68.32</td> <td>-12.20</td> <td>37.89</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.26</td> <td>58.07</td> <td>106.49</td> <td>-48.42</td> <td>39.56</td> <td>34.79</td> <td>13.52</td> <td>29.00</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.38</td> <td>62.41</td> <td>116.33</td> <td>-53.92</td> <td>43.69</td> <td>34.83</td> <td>13.68</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5619.58	59.05	68.30	-9.25	40.97	34.64	13.21	29.77	0.00	100	113	PEAK	2	5650.83	56.12	68.32	-12.20	37.89	34.69	13.32	29.78	0.00	100	113	PEAK	3	5704.26	58.07	106.49	-48.42	39.56	34.79	13.52	29.00	0.00	100	113	PEAK	4	5722.38	62.41	116.33	-53.92	43.69	34.83	13.68	29.79	0.00	100	113	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.60</td> <td>122.30</td> <td>-12.70</td> <td>90.62</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5745.00	109.60	122.30	-12.70	90.62	34.88	13.89	29.79	0.00	100	113	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5619.58	59.05	68.30	-9.25	40.97	34.64	13.21	29.77	0.00	100	113	PEAK																																																																																																	
2	5650.83	56.12	68.32	-12.20	37.89	34.69	13.32	29.78	0.00	100	113	PEAK																																																																																																	
3	5704.26	58.07	106.49	-48.42	39.56	34.79	13.52	29.00	0.00	100	113	PEAK																																																																																																	
4	5722.38	62.41	116.33	-53.92	43.69	34.83	13.68	29.79	0.00	100	113	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5745.00	109.60	122.30	-12.70	90.62	34.88	13.89	29.79	0.00	100	113	PEAK																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.03</td> <td>122.30</td> <td>-22.27</td> <td>81.05</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5745.00	100.03	122.30	-22.27	81.05	34.88	13.89	29.79	0.00	100	113	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5745.00	100.03	122.30	-22.27	81.05	34.88	13.89	29.79	0.00	100	113	AVERAGE																																																																																																	



Mode	1																																																																																																																		
	Band Edge																																																																																																																		
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.59</td> <td>58.13</td> <td>68.30</td> <td>-10.17</td> <td>40.09</td> <td>34.62</td> <td>13.18</td> <td>29.76</td> <td>0.00</td> <td>330</td> <td>83</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.91</td> <td>57.48</td> <td>69.72</td> <td>-12.24</td> <td>39.25</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>330</td> <td>83</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.65</td> <td>56.96</td> <td>105.76</td> <td>-48.00</td> <td>38.49</td> <td>34.78</td> <td>13.49</td> <td>29.00</td> <td>0.00</td> <td>330</td> <td>83</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.21</td> <td>58.61</td> <td>111.37</td> <td>-52.76</td> <td>39.92</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>330</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.59	58.13	68.30	-10.17	40.09	34.62	13.18	29.76	0.00	330	83	PEAK	2	5651.91	57.48	69.72	-12.24	39.25	34.69	13.32	29.78	0.00	330	83	PEAK	3	5701.65	56.96	105.76	-48.00	38.49	34.78	13.49	29.00	0.00	330	83	PEAK	4	5728.21	58.61	111.37	-52.76	39.92	34.82	13.66	29.79	0.00	330	83	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.89</td> <td>122.30</td> <td>-14.41</td> <td>88.91</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>330</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	107.89	122.30	-14.41	88.91	34.88	13.89	29.79	0.00	330	83	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5610.59	58.13	68.30	-10.17	40.09	34.62	13.18	29.76	0.00	330	83	PEAK																																																																																																							
2	5651.91	57.48	69.72	-12.24	39.25	34.69	13.32	29.78	0.00	330	83	PEAK																																																																																																							
3	5701.65	56.96	105.76	-48.00	38.49	34.78	13.49	29.00	0.00	330	83	PEAK																																																																																																							
4	5728.21	58.61	111.37	-52.76	39.92	34.82	13.66	29.79	0.00	330	83	PEAK																																																																																																							
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5745.00	107.89	122.30	-14.41	88.91	34.88	13.89	29.79	0.00	330	83	PEAK																																																																																																							
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.54</td> <td>122.30</td> <td>-23.76</td> <td>79.56</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>330</td> <td>83</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5745.00	98.54	122.30	-23.76	79.56	34.88	13.89	29.79	0.00	330	83	AVERAGE																																																																												
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5745.00	98.54	122.30	-23.76	79.56	34.88	13.89	29.79	0.00	330	83	AVERAGE																																																																																																							



Mode	1																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>53.80</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	45.19	74.00	-28.81	53.80	38.39	18.46	65.46							0.00	300								0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>44.40</td> <td>74.00</td> <td>-29.60</td> <td>53.01</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	44.40	74.00	-29.60	53.01	38.39	18.46	65.46							0.00	100								0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 11490.00	45.19	74.00	-28.81	53.80	38.39	18.46	65.46																																																																																											
						0.00	300																																																																																											
							0 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 11490.00	44.40	74.00	-29.60	53.01	38.39	18.46	65.46																																																																																											
						0.00	100																																																																																											
							0 PEAK																																																																																											








2																																																																																						
Band Edge - L																																																																																						
U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																						
Pol.	Horizontal																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.55</td> <td>59.07</td> <td>68.30</td> <td>-9.23</td> <td>41.03</td> <td>34.62</td> <td>13.18</td> <td>29.76</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.36</td> <td>58.06</td> <td>70.05</td> <td>-11.99</td> <td>39.83</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.34</td> <td>58.17</td> <td>106.52</td> <td>-48.35</td> <td>39.66</td> <td>34.79</td> <td>13.52</td> <td>29.00</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.07</td> <td>56.88</td> <td>111.05</td> <td>-54.17</td> <td>38.19</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.55	59.07	68.30	-9.23	41.03	34.62	13.18	29.76	0.00	106	116	PEAK	2	5652.36	58.06	70.05	-11.99	39.83	34.69	13.32	29.78	0.00	106	116	PEAK	3	5704.34	58.17	106.52	-48.35	39.66	34.79	13.52	29.00	0.00	106	116	PEAK	4	5728.07	56.88	111.05	-54.17	38.19	34.82	13.66	29.79	0.00	106	116	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5610.55	59.07	68.30	-9.23	41.03	34.62	13.18	29.76	0.00	106	116	PEAK																																																																										
2	5652.36	58.06	70.05	-11.99	39.83	34.69	13.32	29.78	0.00	106	116	PEAK																																																																										
3	5704.34	58.17	106.52	-48.35	39.66	34.79	13.52	29.00	0.00	106	116	PEAK																																																																										
4	5728.07	56.88	111.05	-54.17	38.19	34.82	13.66	29.79	0.00	106	116	PEAK																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>110.04</td> <td>122.30</td> <td>-12.26</td> <td>90.58</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	110.04	122.30	-12.26	90.58	34.97	14.26	29.77	0.00	106	116	PEAK																																							
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5785.00	110.04	122.30	-12.26	90.58	34.97	14.26	29.77	0.00	106	116	PEAK																																																																										
Avg	Blank																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>101.99</td> <td>122.30</td> <td>-20.31</td> <td>82.60</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>106</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	101.99	122.30	-20.31	82.60	34.96	14.21	29.78	0.00	106	116	AVERAGE																																							
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5785.00	101.99	122.30	-20.31	82.60	34.96	14.21	29.78	0.00	106	116	AVERAGE																																																																										



Mode	2																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.14</td> <td>59.83</td> <td>112.87</td> <td>-53.04</td> <td>40.51</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.77</td> <td>57.96</td> <td>105.64</td> <td>-47.68</td> <td>38.73</td> <td>35.11</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.59</td> <td>57.67</td> <td>68.60</td> <td>-10.93</td> <td>38.61</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.25</td> <td>58.70</td> <td>68.30</td> <td>-9.60</td> <td>39.67</td> <td>35.21</td> <td>13.66</td> <td>29.84</td> <td>0.00</td> <td>106</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.14	59.83	112.87	-53.04	40.51	35.08	14.03	29.79	0.00	106	116	PEAK	2	5873.77	57.96	105.64	-47.68	38.73	35.11	13.91	29.79	0.00	106	116	PEAK	3	5924.59	57.67	68.60	-10.93	38.61	35.19	13.69	29.82	0.00	106	116	PEAK	4	5942.25	58.70	68.30	-9.60	39.67	35.21	13.66	29.84	0.00	106	116	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.14	59.83	112.87	-53.04	40.51	35.08	14.03	29.79	0.00	106	116	PEAK																																																														
2	5873.77	57.96	105.64	-47.68	38.73	35.11	13.91	29.79	0.00	106	116	PEAK																																																														
3	5924.59	57.67	68.60	-10.93	38.61	35.19	13.69	29.82	0.00	106	116	PEAK																																																														
4	5942.25	58.70	68.30	-9.60	39.67	35.21	13.66	29.84	0.00	106	116	PEAK																																																														

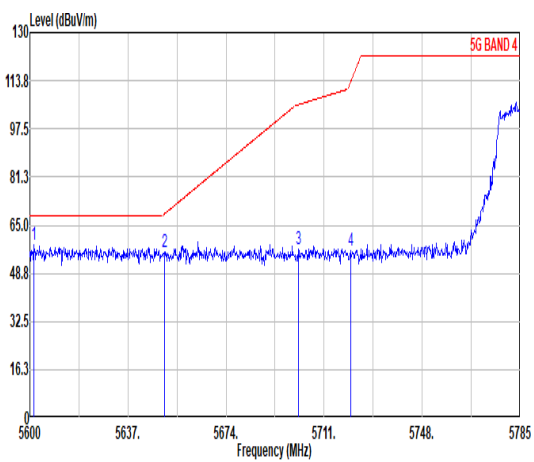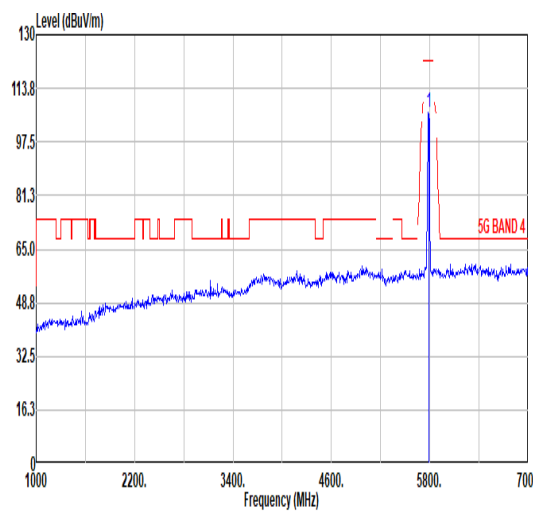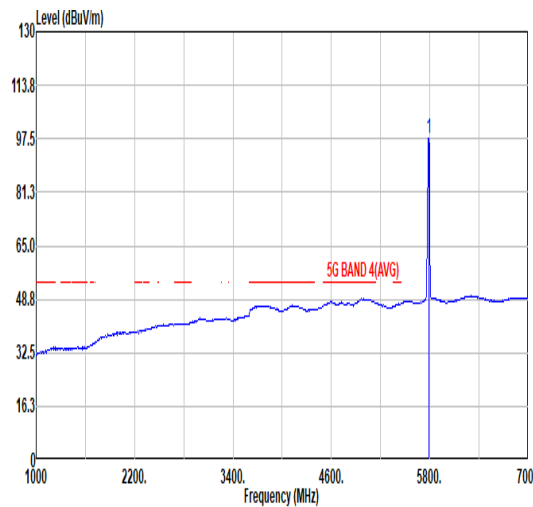

		2																																																																																																											
Mode		Band Edge - L																																																																																																											
		U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																											
Pol.		Vertical					Fundamental																																																																																																						
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Shows a rising red line for 5G BAND 4 and a blue line for the actual signal. Peaks are marked at 5601.48, 5650.88, 5701.20, and 5728.99 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5601.48</td> <td>58.41</td> <td>68.30</td> <td>-9.89</td> <td>40.42</td> <td>34.60</td> <td>13.15</td> <td>29.76</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.88</td> <td>56.10</td> <td>66.95</td> <td>-12.85</td> <td>37.87</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.20</td> <td>56.66</td> <td>105.64</td> <td>-48.98</td> <td>38.19</td> <td>34.78</td> <td>13.49</td> <td>29.00</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.99</td> <td>56.44</td> <td>113.16</td> <td>-56.72</td> <td>37.73</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5601.48	58.41	68.30	-9.89	40.42	34.60	13.15	29.76	0.00	344	82	PEAK	2	5650.88	56.10	66.95	-12.85	37.87	34.69	13.32	29.78	0.00	344	82	PEAK	3	5701.20	56.66	105.64	-48.98	38.19	34.78	13.49	29.00	0.00	344	82	PEAK	4	5728.99	56.44	113.16	-56.72	37.73	34.83	13.67	29.79	0.00	344	82	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Shows a red line for 5G BAND 4 and a blue line for the actual signal. A sharp peak is visible at 5785.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>106.52</td> <td>122.30</td> <td>-15.78</td> <td>87.13</td> <td>34.96</td> <td>14.21</td> <td>29.78</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5785.00	106.52	122.30	-15.78	87.13	34.96	14.21	29.78	0.00	344	82	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5601.48	58.41	68.30	-9.89	40.42	34.60	13.15	29.76	0.00	344	82	PEAK																																																																																																	
2	5650.88	56.10	66.95	-12.85	37.87	34.69	13.32	29.78	0.00	344	82	PEAK																																																																																																	
3	5701.20	56.66	105.64	-48.98	38.19	34.78	13.49	29.00	0.00	344	82	PEAK																																																																																																	
4	5728.99	56.44	113.16	-56.72	37.73	34.83	13.67	29.79	0.00	344	82	PEAK																																																																																																	
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5785.00	106.52	122.30	-15.78	87.13	34.96	14.21	29.78	0.00	344	82	PEAK																																																																																																	
Avg	<p>Blank</p>  <p>Level (dBuV/m) vs Frequency (MHz) for Average. Shows a red dashed line for 5G BAND 4(AVG) and a blue line for the average signal. A peak is visible at 5785.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>97.69</td> <td>122.30</td> <td>-24.61</td> <td>78.23</td> <td>34.97</td> <td>14.26</td> <td>29.77</td> <td>0.00</td> <td>344</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5785.00	97.69	122.30	-24.61	78.23	34.97	14.26	29.77	0.00	344	82	AVERAGE																																																																										
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																		
1	5785.00	97.69	122.30	-24.61	78.23	34.97	14.26	29.77	0.00	344	82	AVERAGE																																																																																																	



Mode	2																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>57.16</td> <td>111.37</td> <td>-54.21</td> <td>37.85</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.77</td> <td>57.71</td> <td>105.64</td> <td>-47.93</td> <td>38.48</td> <td>35.11</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.94</td> <td>58.68</td> <td>69.82</td> <td>-11.14</td> <td>39.62</td> <td>35.18</td> <td>13.70</td> <td>29.82</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.62</td> <td>58.78</td> <td>68.30</td> <td>-9.52</td> <td>39.73</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>344</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.80	57.16	111.37	-54.21	37.85	35.08	14.02	29.79	0.00	344	82	PEAK	2	5873.77	57.71	105.64	-47.93	38.48	35.11	13.91	29.79	0.00	344	82	PEAK	3	5922.94	58.68	69.82	-11.14	39.62	35.18	13.70	29.82	0.00	344	82	PEAK	4	5938.62	58.78	68.30	-9.52	39.73	35.21	13.67	29.83	0.00	344	82	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.80	57.16	111.37	-54.21	37.85	35.08	14.02	29.79	0.00	344	82	PEAK																																																														
2	5873.77	57.71	105.64	-47.93	38.48	35.11	13.91	29.79	0.00	344	82	PEAK																																																														
3	5922.94	58.68	69.82	-11.14	39.62	35.18	13.70	29.82	0.00	344	82	PEAK																																																														
4	5938.62	58.78	68.30	-9.52	39.73	35.21	13.67	29.83	0.00	344	82	PEAK																																																														



Mode	2																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.13</td> <td>44.64</td> <td>74.00</td> <td>-29.36</td> <td>53.09</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 278 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.13	44.64	74.00	-29.36	53.09	38.44	18.52	65.41	0.00									100 278 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.13</td> <td>43.31</td> <td>74.00</td> <td>-30.69</td> <td>51.76</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 337 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.13	43.31	74.00	-30.69	51.76	38.44	18.52	65.41	0.00									100 337 Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11570.13	44.64	74.00	-29.36	53.09	38.44	18.52	65.41	0.00																																																																																				
								100 278 Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11570.13	43.31	74.00	-30.69	51.76	38.44	18.52	65.41	0.00																																																																																				
								100 337 Peak																																																																																				



Mode		2																																																																																																																																						
		Band Edge																																																																																																																																						
		U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																																																		
Peak																																																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>58.73</td> <td>111.75</td> <td>-53.02</td> <td>39.41</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>115</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.50</td> <td>60.81</td> <td>106.28</td> <td>-45.47</td> <td>41.57</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>115</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>58.13</td> <td>68.50</td> <td>-10.45</td> <td>39.07</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>115</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5946.88</td> <td>59.50</td> <td>68.30</td> <td>-8.80</td> <td>40.47</td> <td>35.22</td> <td>13.65</td> <td>29.84</td> <td>0.00</td> <td>115</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.63	58.73	111.75	-53.02	39.41	35.08	14.03	29.79	0.00	115	110	PEAK	2	5871.50	60.81	106.28	-45.47	41.57	35.11	13.92	29.79	0.00	115	110	PEAK	3	5924.63	58.13	68.50	-10.45	39.07	35.19	13.69	29.82	0.00	115	110	PEAK	4	5946.88	59.50	68.30	-8.80	40.47	35.22	13.65	29.84	0.00	115	110	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.22</td> <td>122.30</td> <td>-12.08</td> <td>90.74</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>115</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	110.22	122.30	-12.08	90.74	35.04	14.22	29.78	0.00	115	110
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5854.63	58.73	111.75	-53.02	39.41	35.08	14.03	29.79	0.00	115	110	PEAK																																																																																																																												
2	5871.50	60.81	106.28	-45.47	41.57	35.11	13.92	29.79	0.00	115	110	PEAK																																																																																																																												
3	5924.63	58.13	68.50	-10.45	39.07	35.19	13.69	29.82	0.00	115	110	PEAK																																																																																																																												
4	5946.88	59.50	68.30	-8.80	40.47	35.22	13.65	29.84	0.00	115	110	PEAK																																																																																																																												
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5825.00	110.22	122.30	-12.08	90.74	35.04	14.22	29.78	0.00	115	110	PEAK																																																																																																																												
Avg	Blank																																																																																																																																							
						<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.87</td> <td>122.30</td> <td>-22.43</td> <td>80.39</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>115</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.87	122.30	-22.43	80.39	35.04	14.22	29.78	0.00	115	110	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	5825.00	99.87	122.30	-22.43	80.39	35.04	14.22	29.78	0.00	115	110	AVERAGE																																																																																																																												



Mode		2																																																																																																																							
		Band Edge																																																																																																																							
		U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																							
Pol.	Vertical	Fundamental																																																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>57.44</td> <td>111.18</td> <td>-53.74</td> <td>38.13</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>304</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.63</td> <td>57.88</td> <td>105.40</td> <td>-47.52</td> <td>38.66</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>304</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>57.77</td> <td>68.30</td> <td>-10.53</td> <td>38.71</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>304</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5937.63</td> <td>59.05</td> <td>68.30</td> <td>-9.25</td> <td>40.00</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>304</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5854.88	57.44	111.18	-53.74	38.13	35.08	14.02	29.79	0.00	304	72	PEAK	2	5874.63	57.88	105.40	-47.52	38.66	35.11	13.90	29.79	0.00	304	72	PEAK	3	5925.00	57.77	68.30	-10.53	38.71	35.19	13.69	29.82	0.00	304	72	PEAK	4	5937.63	59.05	68.30	-9.25	40.00	35.21	13.67	29.83	0.00	304	72	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.13</td> <td>122.30</td> <td>-15.17</td> <td>87.69</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>304</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5825.00	107.13	122.30	-15.17	87.69	35.04	14.18	29.78	0.00	304	72	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5854.88	57.44	111.18	-53.74	38.13	35.08	14.02	29.79	0.00	304	72	PEAK																																																																																																													
2	5874.63	57.88	105.40	-47.52	38.66	35.11	13.90	29.79	0.00	304	72	PEAK																																																																																																													
3	5925.00	57.77	68.30	-10.53	38.71	35.19	13.69	29.82	0.00	304	72	PEAK																																																																																																													
4	5937.63	59.05	68.30	-9.25	40.00	35.21	13.67	29.83	0.00	304	72	PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5825.00	107.13	122.30	-15.17	87.69	35.04	14.18	29.78	0.00	304	72	PEAK																																																																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.31</td> <td>122.30</td> <td>-24.99</td> <td>77.83</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>304</td> <td>72</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5825.00	97.31	122.30	-24.99	77.83	35.04	14.22	29.78	0.00	304	72	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	5825.00	97.31	122.30	-24.99	77.83	35.04	14.22	29.78	0.00	304	72	AVERAGE																																																																																																													



Mode	3																																																																																	
	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.19</td> <td>74.00</td> <td>-27.81</td> <td>54.49</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	46.19	74.00	-27.81	54.49	38.49	18.58	65.37	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.18</td> <td>74.00</td> <td>-27.82</td> <td>54.48</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	46.18	74.00	-27.82	54.48	38.49	18.58	65.37	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11650.00	46.19	74.00	-27.81	54.49	38.49	18.58	65.37	0.00	100	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11650.00	46.18	74.00	-27.82	54.48	38.49	18.58	65.37	0.00	100	0	PEAK																																																																						





Mode	4																																																																																																																																				
	Band Edge																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																																			
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a rising signal level from approximately 48.8 dBuV/m at 5600 MHz to 113.8 dBuV/m at 5745 MHz. A red line indicates the 5G BAND 4 limit. Four measurement points are marked with blue vertical lines and numbered 1 to 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.97</td> <td>58.48</td> <td>68.30</td> <td>-9.82</td> <td>40.36</td> <td>34.65</td> <td>13.24</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>56.89</td> <td>68.43</td> <td>-11.54</td> <td>38.66</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.07</td> <td>57.27</td> <td>105.60</td> <td>-48.33</td> <td>38.00</td> <td>34.78</td> <td>13.49</td> <td>29.00</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.06</td> <td>59.05</td> <td>111.04</td> <td>-51.99</td> <td>40.36</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5626.97	58.48	68.30	-9.82	40.36	34.65	13.24	29.77	0.00	100	110	PEAK	2	5650.17	56.89	68.43	-11.54	38.66	34.69	13.32	29.78	0.00	100	110	PEAK	3	5701.07	57.27	105.60	-48.33	38.00	34.78	13.49	29.00	0.00	100	110	PEAK	4	5728.06	59.05	111.04	-51.99	40.36	34.82	13.66	29.79	0.00	100	110	PEAK	<p>Peak Fundamental Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5745 MHz reaching 113.8 dBuV/m. A red line indicates the 5G BAND 4 limit. A single measurement point is marked with a blue vertical line and numbered 1.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.92</td> <td>122.30</td> <td>-13.38</td> <td>89.87</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5745.00	108.92	122.30	-13.38	89.87	34.89	13.94	29.78	0.00	100	110	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																																																									
1	5626.97	58.48	68.30	-9.82	40.36	34.65	13.24	29.77	0.00	100	110	PEAK																																																																																																																									
2	5650.17	56.89	68.43	-11.54	38.66	34.69	13.32	29.78	0.00	100	110	PEAK																																																																																																																									
3	5701.07	57.27	105.60	-48.33	38.00	34.78	13.49	29.00	0.00	100	110	PEAK																																																																																																																									
4	5728.06	59.05	111.04	-51.99	40.36	34.82	13.66	29.79	0.00	100	110	PEAK																																																																																																																									
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																																																									
1	5745.00	108.92	122.30	-13.38	89.87	34.89	13.94	29.78	0.00	100	110	PEAK																																																																																																																									
Avg	Blank	<p>Average Fundamental Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5745 MHz reaching 113.8 dBuV/m. A red dashed line indicates the 5G BAND 4(AVG) limit. A single measurement point is marked with a blue vertical line and numbered 1.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.00</td> <td>122.30</td> <td>-21.50</td> <td>81.82</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5745.00	100.00	122.30	-21.50	81.82	34.88	13.89	29.79	0.00	100	110	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																																																									
1	5745.00	100.00	122.30	-21.50	81.82	34.88	13.89	29.79	0.00	100	110	AVERAGE																																																																																																																									



Mode	4																																																																																																										
	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.05</td> <td>59.10</td> <td>68.30</td> <td>-9.20</td> <td>40.91</td> <td>34.68</td> <td>13.29</td> <td>29.78</td> <td>0.00</td> <td>328</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.75</td> <td>57.73</td> <td>68.86</td> <td>-11.13</td> <td>39.50</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>328</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.58</td> <td>58.42</td> <td>107.14</td> <td>-48.72</td> <td>39.89</td> <td>34.79</td> <td>13.54</td> <td>29.00</td> <td>0.00</td> <td>328</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.08</td> <td>58.34</td> <td>113.35</td> <td>-55.01</td> <td>39.63</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>328</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5642.05	59.10	68.30	-9.20	40.91	34.68	13.29	29.78	0.00	328	80	PEAK	2	5650.75	57.73	68.86	-11.13	39.50	34.69	13.32	29.78	0.00	328	80	PEAK	3	5706.58	58.42	107.14	-48.72	39.89	34.79	13.54	29.00	0.00	328	80	PEAK	4	5721.08	58.34	113.35	-55.01	39.63	34.83	13.67	29.79	0.00	328	80	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.77</td> <td>122.30</td> <td>-16.53</td> <td>86.72</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>328</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5745.00	105.77	122.30	-16.53	86.72	34.89	13.94	29.78	0.00	328	80	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																
1	5642.05	59.10	68.30	-9.20	40.91	34.68	13.29	29.78	0.00	328	80	PEAK																																																																																															
2	5650.75	57.73	68.86	-11.13	39.50	34.69	13.32	29.78	0.00	328	80	PEAK																																																																																															
3	5706.58	58.42	107.14	-48.72	39.89	34.79	13.54	29.00	0.00	328	80	PEAK																																																																																															
4	5721.08	58.34	113.35	-55.01	39.63	34.83	13.67	29.79	0.00	328	80	PEAK																																																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																
1	5745.00	105.77	122.30	-16.53	86.72	34.89	13.94	29.78	0.00	328	80	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>97.92</td> <td>122.30</td> <td>-24.38</td> <td>78.94</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>328</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5745.00	97.92	122.30	-24.38	78.94	34.88	13.89	29.79	0.00	328	80	AVERAGE																																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																
1	5745.00	97.92	122.30	-24.38	78.94	34.88	13.89	29.79	0.00	328	80	AVERAGE																																																																																															



Mode	4																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>46.58</td> <td>74.00</td> <td>-27.42</td> <td>55.19</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>360</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	46.58	74.00	-27.42	55.19	38.39	18.46	65.46							0.00	100								360								PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>45.59</td> <td>74.00</td> <td>-28.41</td> <td>54.20</td> <td>38.39</td> <td>18.46</td> <td>65.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11490.00	45.59	74.00	-28.41	54.20	38.39	18.46	65.46							0.00	100								0								PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1 11490.00	46.58	74.00	-27.42	55.19	38.39	18.46	65.46																																																																																																											
						0.00	100																																																																																																											
							360																																																																																																											
							PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1 11490.00	45.59	74.00	-28.41	54.20	38.39	18.46	65.46																																																																																																											
						0.00	100																																																																																																											
							0																																																																																																											
							PEAK																																																																																																											



Mode	5																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>45.84</td> <td>74.00</td> <td>-28.16</td> <td>54.29</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	45.84	74.00	-28.16	54.29	38.44	18.52	65.41	0.00									100 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>45.35</td> <td>74.00</td> <td>-28.65</td> <td>53.80</td> <td>38.44</td> <td>18.52</td> <td>65.41</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11570.00	45.35	74.00	-28.65	53.80	38.44	18.52	65.41	0.00									100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11570.00	45.84	74.00	-28.16	54.29	38.44	18.52	65.41	0.00																																																																																				
								100 360 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11570.00	45.35	74.00	-28.65	53.80	38.44	18.52	65.41	0.00																																																																																				
								100 0 PEAK																																																																																				



Mode	6																																																																																																																										
	Band Edge																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.88</td> <td>59.22</td> <td>113.46</td> <td>-54.24</td> <td>39.90</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.38</td> <td>59.39</td> <td>105.47</td> <td>-46.08</td> <td>40.17</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.38</td> <td>58.83</td> <td>68.76</td> <td>-9.93</td> <td>39.77</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.38</td> <td>59.58</td> <td>68.30</td> <td>-8.72</td> <td>40.53</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.88	59.22	113.46	-54.24	39.90	35.08	14.03	29.79	0.00	100	113	PEAK	2	5874.38	59.39	105.47	-46.08	40.17	35.11	13.90	29.79	0.00	100	113	PEAK	3	5924.38	58.83	68.76	-9.93	39.77	35.19	13.69	29.82	0.00	100	113	PEAK	4	5933.38	59.58	68.30	-8.72	40.53	35.20	13.68	29.83	0.00	100	113	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.57</td> <td>122.30</td> <td>-13.73</td> <td>89.09</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	108.57	122.30	-13.73	89.09	35.04	14.22	29.78	0.00	100	113	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5853.88	59.22	113.46	-54.24	39.90	35.08	14.03	29.79	0.00	100	113	PEAK																																																																																																															
2	5874.38	59.39	105.47	-46.08	40.17	35.11	13.90	29.79	0.00	100	113	PEAK																																																																																																															
3	5924.38	58.83	68.76	-9.93	39.77	35.19	13.69	29.82	0.00	100	113	PEAK																																																																																																															
4	5933.38	59.58	68.30	-8.72	40.53	35.20	13.68	29.83	0.00	100	113	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	108.57	122.30	-13.73	89.09	35.04	14.22	29.78	0.00	100	113	PEAK																																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.19</td> <td>122.30</td> <td>-22.11</td> <td>80.71</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.19	122.30	-22.11	80.71	35.04	14.22	29.78	0.00	100	113	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	100.19	122.30	-22.11	80.71	35.04	14.22	29.78	0.00	100	113	AVERAGE																																																																																																															



Mode		6																																																																																																												
		Band Edge																																																																																																												
		U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																												
Pol.	Vertical					Fundamental																																																																																																								
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. Shows a red limit line and a blue signal line. Four peaks are marked with vertical lines and numbered 1-4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>56.69</td> <td>110.90</td> <td>-54.21</td> <td>37.38</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>307</td> <td>70 PEAK</td> </tr> <tr> <td>2</td> <td>5869.38</td> <td>59.30</td> <td>106.87</td> <td>-47.57</td> <td>40.06</td> <td>35.10</td> <td>13.93</td> <td>29.79</td> <td>0.00</td> <td>307</td> <td>70 PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>56.86</td> <td>68.58</td> <td>-11.72</td> <td>37.00</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>307</td> <td>70 PEAK</td> </tr> <tr> <td>4</td> <td>5937.00</td> <td>59.26</td> <td>68.30</td> <td>-9.04</td> <td>40.21</td> <td>35.21</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>307</td> <td>70 PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5855.00	56.69	110.90	-54.21	37.38	35.08	14.02	29.79	0.00	307	70 PEAK	2	5869.38	59.30	106.87	-47.57	40.06	35.10	13.93	29.79	0.00	307	70 PEAK	3	5924.63	56.86	68.58	-11.72	37.00	35.19	13.69	29.82	0.00	307	70 PEAK	4	5937.00	59.26	68.30	-9.04	40.21	35.21	13.67	29.83	0.00	307	70 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. Shows a red limit line and a blue signal line. A prominent peak is visible at 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>105.82</td> <td>122.30</td> <td>-16.48</td> <td>86.38</td> <td>35.04</td> <td>14.18</td> <td>29.78</td> <td>0.00</td> <td>307</td> <td>70 PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	105.82	122.30	-16.48	86.38	35.04	14.18	29.78	0.00	307	70 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1	5855.00	56.69	110.90	-54.21	37.38	35.08	14.02	29.79	0.00	307	70 PEAK																																																																																																			
2	5869.38	59.30	106.87	-47.57	40.06	35.10	13.93	29.79	0.00	307	70 PEAK																																																																																																			
3	5924.63	56.86	68.58	-11.72	37.00	35.19	13.69	29.82	0.00	307	70 PEAK																																																																																																			
4	5937.00	59.26	68.30	-9.04	40.21	35.21	13.67	29.83	0.00	307	70 PEAK																																																																																																			
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1	5825.00	105.82	122.30	-16.48	86.38	35.04	14.18	29.78	0.00	307	70 PEAK																																																																																																			
Avg	Blank					<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. Shows a red limit line and a blue signal line. A peak is visible at 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.37</td> <td>122.30</td> <td>-24.93</td> <td>77.89</td> <td>35.04</td> <td>14.22</td> <td>29.78</td> <td>0.00</td> <td>307</td> <td>70 AVERAGE</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	97.37	122.30	-24.93	77.89	35.04	14.22	29.78	0.00	307	70 AVERAGE																																																																				
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1	5825.00	97.37	122.30	-24.93	77.89	35.04	14.22	29.78	0.00	307	70 AVERAGE																																																																																																			



Mode	6																																																																																	
	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>54.07</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	45.77	74.00	-28.23	54.07	38.49	18.58	65.37	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>45.64</td> <td>74.00</td> <td>-28.36</td> <td>53.94</td> <td>38.49</td> <td>18.58</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	45.64	74.00	-28.36	53.94	38.49	18.58	65.37	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11650.00	45.77	74.00	-28.23	54.07	38.49	18.58	65.37	0.00	100	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11650.00	45.64	74.00	-28.36	53.94	38.49	18.58	65.37	0.00	100	0	PEAK																																																																						



7																																																																								
Band Edge - L																																																																								
U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																								
Pol.	Horizontal																																																																							
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a rising signal level from 5600 MHz to 5755 MHz, with a red line indicating the 5G BAND 4 limit. Four peaks are marked with vertical lines and numbered 1 through 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.51</td> <td>58.70</td> <td>68.30</td> <td>-9.60</td> <td>40.58</td> <td>34.65</td> <td>13.24</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.07</td> <td>56.55</td> <td>68.35</td> <td>-11.80</td> <td>38.32</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.69</td> <td>62.00</td> <td>108.85</td> <td>-46.85</td> <td>43.40</td> <td>34.81</td> <td>13.59</td> <td>29.80</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.44</td> <td>61.76</td> <td>111.89</td> <td>-50.13</td> <td>43.07</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5626.51	58.70	68.30	-9.60	40.58	34.65	13.24	29.77	0.00	100	111	PEAK	2	5650.07	56.55	68.35	-11.80	38.32	34.69	13.32	29.78	0.00	100	111	PEAK	3	5712.69	62.00	108.85	-46.85	43.40	34.81	13.59	29.80	0.00	100	111	PEAK	4	5728.44	61.76	111.89	-50.13	43.07	34.82	13.66	29.79	0.00	100	111	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	5626.51	58.70	68.30	-9.60	40.58	34.65	13.24	29.77	0.00	100	111	PEAK																																																												
2	5650.07	56.55	68.35	-11.80	38.32	34.69	13.32	29.78	0.00	100	111	PEAK																																																												
3	5712.69	62.00	108.85	-46.85	43.40	34.81	13.59	29.80	0.00	100	111	PEAK																																																												
4	5728.44	61.76	111.89	-50.13	43.07	34.82	13.66	29.79	0.00	100	111	PEAK																																																												
	<p>Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). A sharp peak is visible at 5800 MHz, labeled as 5G BAND 4. The plot includes a red line for the limit and a blue line for the measured signal.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.81</td> <td>122.30</td> <td>-15.49</td> <td>87.68</td> <td>34.91</td> <td>14.00</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5755.00	106.81	122.30	-15.49	87.68	34.91	14.00	29.78	0.00	100	111	PEAK																																							
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	5755.00	106.81	122.30	-15.49	87.68	34.91	14.00	29.78	0.00	100	111	PEAK																																																												
Avg	Blank																																																																							
	<p>Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a relatively flat signal level around 48.8 dBuV/m, with a red dashed line indicating the 5G BAND 4(AVG) limit. A sharp peak is visible at 5800 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.68</td> <td>122.30</td> <td>-25.62</td> <td>77.63</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5755.00	96.68	122.30	-25.62	77.63	34.89	13.94	29.78	0.00	100	111	AVERAGE																																							
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	5755.00	96.68	122.30	-25.62	77.63	34.89	13.94	29.78	0.00	100	111	AVERAGE																																																												





Mode	7																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>56.15</td> <td>111.26</td> <td>-55.11</td> <td>36.84</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.15</td> <td>59.84</td> <td>107.78</td> <td>-47.94</td> <td>40.58</td> <td>35.10</td> <td>13.95</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>56.38</td> <td>68.41</td> <td>-12.03</td> <td>37.32</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.35</td> <td>60.20</td> <td>68.30</td> <td>-8.10</td> <td>41.16</td> <td>35.20</td> <td>13.67</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5854.84	56.15	111.26	-55.11	36.84	35.08	14.02	29.79	0.00	100	111	PEAK	2	5866.15	59.84	107.78	-47.94	40.58	35.10	13.95	29.79	0.00	100	111	PEAK	3	5924.85	56.38	68.41	-12.03	37.32	35.19	13.69	29.82	0.00	100	111	PEAK	4	5936.35	60.20	68.30	-8.10	41.16	35.20	13.67	29.83	0.00	100	111	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5854.84	56.15	111.26	-55.11	36.84	35.08	14.02	29.79	0.00	100	111	PEAK																																																																								
2	5866.15	59.84	107.78	-47.94	40.58	35.10	13.95	29.79	0.00	100	111	PEAK																																																																								
3	5924.85	56.38	68.41	-12.03	37.32	35.19	13.69	29.82	0.00	100	111	PEAK																																																																								
4	5936.35	60.20	68.30	-8.10	41.16	35.20	13.67	29.83	0.00	100	111	PEAK																																																																								




7																																																																																																																			
Band Edge - L																																																																																																																			
U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																			
Pol.	Vertical																																																																																																																		
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a rising signal level from approximately 50 dBuV/m at 5600 MHz to over 100 dBuV/m at 5755 MHz. A red line indicates the 5G BAND 4 limit. Four measurement points are marked with blue vertical lines and numbered 1 through 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.98</td> <td>58.29</td> <td>68.30</td> <td>-10.01</td> <td>40.12</td> <td>34.67</td> <td>13.28</td> <td>29.78</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.07</td> <td>57.69</td> <td>68.35</td> <td>-10.66</td> <td>39.46</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.54</td> <td>58.81</td> <td>106.29</td> <td>-47.48</td> <td>40.31</td> <td>34.79</td> <td>13.51</td> <td>29.00</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.59</td> <td>60.01</td> <td>112.25</td> <td>-52.24</td> <td>41.31</td> <td>34.83</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5637.98	58.29	68.30	-10.01	40.12	34.67	13.28	29.78	0.00	345	78	PEAK	2	5650.07	57.69	68.35	-10.66	39.46	34.69	13.32	29.78	0.00	345	78	PEAK	3	5703.54	58.81	106.29	-47.48	40.31	34.79	13.51	29.00	0.00	345	78	PEAK	4	5720.59	60.01	112.25	-52.24	41.31	34.83	13.66	29.79	0.00	345	78	PEAK	<p>Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). A sharp peak is visible at approximately 5755 MHz. A red line indicates the 5G BAND 4 limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>103.02</td> <td>122.30</td> <td>-19.28</td> <td>84.04</td> <td>34.88</td> <td>13.89</td> <td>29.79</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	103.02	122.30	-19.28	84.04	34.88	13.89	29.79	0.00	345	78	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																											
Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5637.98	58.29	68.30	-10.01	40.12	34.67	13.28	29.78	0.00	345	78	PEAK																																																																																																							
2	5650.07	57.69	68.35	-10.66	39.46	34.69	13.32	29.78	0.00	345	78	PEAK																																																																																																							
3	5703.54	58.81	106.29	-47.48	40.31	34.79	13.51	29.00	0.00	345	78	PEAK																																																																																																							
4	5720.59	60.01	112.25	-52.24	41.31	34.83	13.66	29.79	0.00	345	78	PEAK																																																																																																							
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																												
Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5755.00	103.02	122.30	-19.28	84.04	34.88	13.89	29.79	0.00	345	78	PEAK																																																																																																							
Avg	Blank	<p>Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a relatively flat signal level around 40-50 dBuV/m across the frequency range. A red dashed line indicates the 5G BAND 4(AVG) limit.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>95.00</td> <td>122.30</td> <td>-27.30</td> <td>75.95</td> <td>34.89</td> <td>13.94</td> <td>29.78</td> <td>0.00</td> <td>345</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	95.00	122.30	-27.30	75.95	34.89	13.94	29.78	0.00	345	78	AVERAGE																																																																												
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																																												
Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	5755.00	95.00	122.30	-27.30	75.95	34.89	13.94	29.78	0.00	345	78	AVERAGE																																																																																																							



Mode	7																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>57.68</td> <td>111.26</td> <td>-53.58</td> <td>38.37</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>58.37</td> <td>105.32</td> <td>-46.95</td> <td>39.15</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.09</td> <td>59.52</td> <td>69.71</td> <td>-10.19</td> <td>40.46</td> <td>35.18</td> <td>13.70</td> <td>29.02</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.09</td> <td>58.12</td> <td>68.30</td> <td>-10.18</td> <td>39.07</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>345</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5854.84	57.68	111.26	-53.58	38.37	35.08	14.02	29.79	0.00	345	78	PEAK	2	5874.93	58.37	105.32	-46.95	39.15	35.11	13.90	29.79	0.00	345	78	PEAK	3	5923.09	59.52	69.71	-10.19	40.46	35.18	13.70	29.02	0.00	345	78	PEAK	4	5931.09	58.12	68.30	-10.18	39.07	35.20	13.68	29.83	0.00	345	78	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																													
1	5854.84	57.68	111.26	-53.58	38.37	35.08	14.02	29.79	0.00	345	78	PEAK																																																																									
2	5874.93	58.37	105.32	-46.95	39.15	35.11	13.90	29.79	0.00	345	78	PEAK																																																																									
3	5923.09	59.52	69.71	-10.19	40.46	35.18	13.70	29.02	0.00	345	78	PEAK																																																																									
4	5931.09	58.12	68.30	-10.18	39.07	35.20	13.68	29.83	0.00	345	78	PEAK																																																																									



Mode	7																																																																																	
	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>45.92</td> <td>74.00</td> <td>-28.08</td> <td>54.48</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11510.00	45.92	74.00	-28.08	54.48	38.41	18.47	65.44	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>44.88</td> <td>74.00</td> <td>-29.12</td> <td>53.44</td> <td>38.41</td> <td>18.47</td> <td>65.44</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11510.00	44.88	74.00	-29.12	53.44	38.41	18.47	65.44	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11510.00	45.92	74.00	-28.08	54.48	38.41	18.47	65.44	0.00	100	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11510.00	44.88	74.00	-29.12	53.44	38.41	18.47	65.44	0.00	100	0	PEAK																																																																						

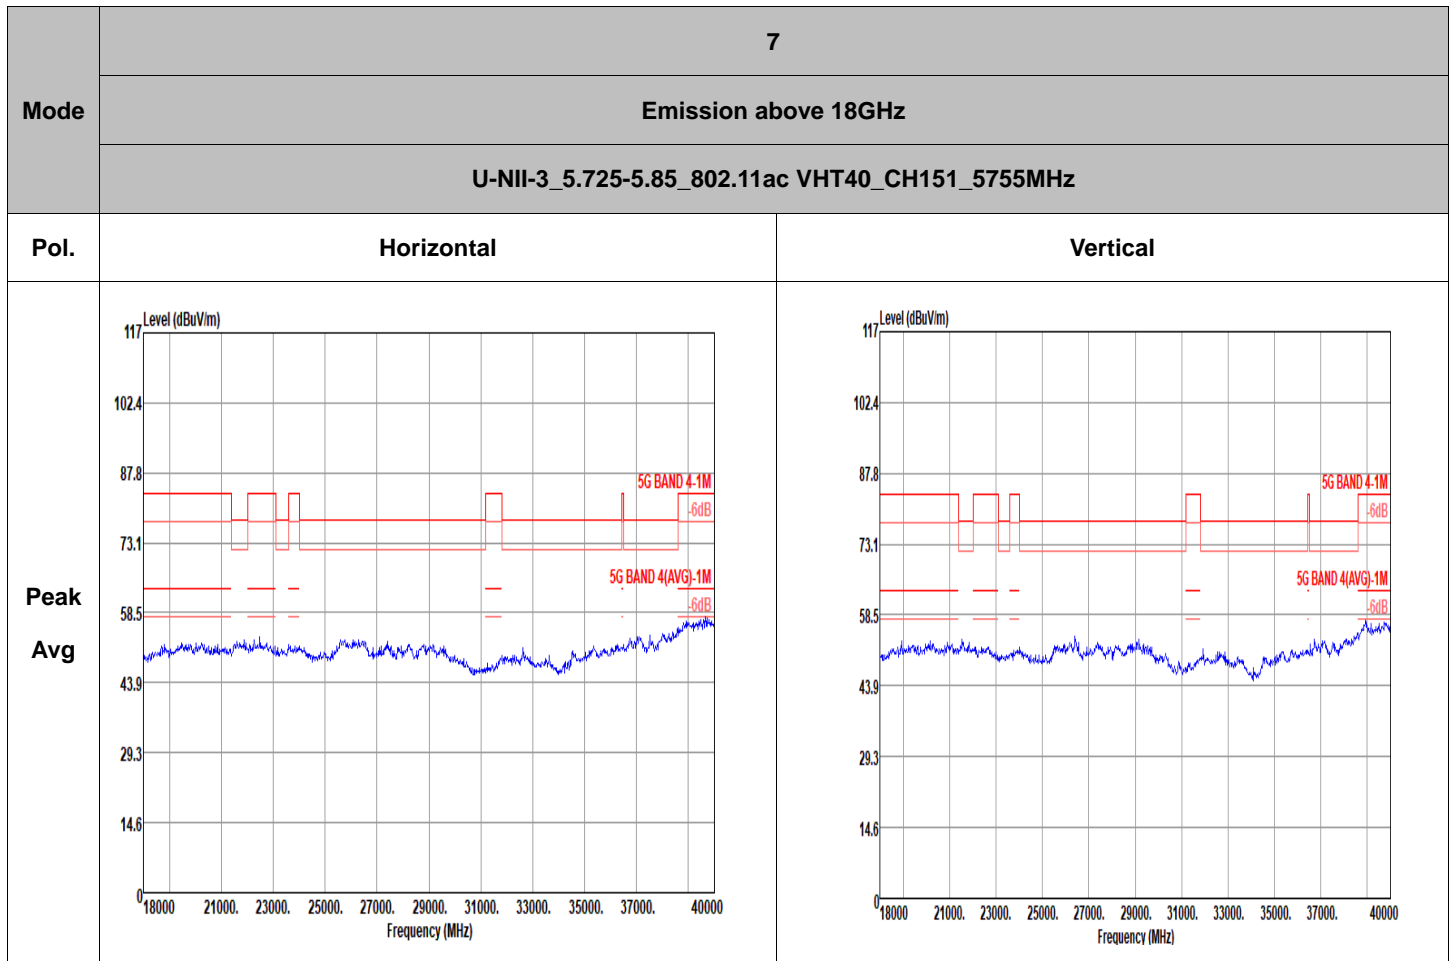






Mode		8																																																																																																																																				
		Band Edge - L																																																																																																																																				
		U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																				
Pol.	Horizontal					Fundamental																																																																																																																																
Peak																																																																																																																																						
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.86</td> <td>58.17</td> <td>68.30</td> <td>-10.13</td> <td>40.04</td> <td>34.65</td> <td>13.25</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.70</td> <td>56.98</td> <td>68.82</td> <td>-11.84</td> <td>38.75</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.21</td> <td>56.78</td> <td>105.64</td> <td>-48.86</td> <td>38.31</td> <td>34.78</td> <td>13.49</td> <td>29.00</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.90</td> <td>56.92</td> <td>112.95</td> <td>-56.03</td> <td>38.21</td> <td>34.83</td> <td>13.67</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5628.86	58.17	68.30	-10.13	40.04	34.65	13.25	29.77	0.00	100	110	PEAK	2	5650.70	56.98	68.82	-11.84	38.75	34.69	13.32	29.78	0.00	100	110	PEAK	3	5701.21	56.78	105.64	-48.86	38.31	34.78	13.49	29.00	0.00	100	110	PEAK	4	5728.90	56.92	112.95	-56.03	38.21	34.83	13.67	29.79	0.00	100	110	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>105.53</td> <td>122.30</td> <td>-16.77</td> <td>85.96</td> <td>35.01</td> <td>14.33</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	105.53	122.30	-16.77	85.96	35.01	14.33	29.77	0.00	100	110
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	5628.86	58.17	68.30	-10.13	40.04	34.65	13.25	29.77	0.00	100	110	PEAK																																																																																																																										
2	5650.70	56.98	68.82	-11.84	38.75	34.69	13.32	29.78	0.00	100	110	PEAK																																																																																																																										
3	5701.21	56.78	105.64	-48.86	38.31	34.78	13.49	29.00	0.00	100	110	PEAK																																																																																																																										
4	5728.90	56.92	112.95	-56.03	38.21	34.83	13.67	29.79	0.00	100	110	PEAK																																																																																																																										
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	5795.00	105.53	122.30	-16.77	85.96	35.01	14.33	29.77	0.00	100	110	PEAK																																																																																																																										
Avg	Blank																																																																																																																																					
					<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>96.23</td> <td>122.30</td> <td>-26.07</td> <td>76.63</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	96.23	122.30	-26.07	76.63	35.00	14.37	29.77	0.00	100	110	AVERAGE																																																																																		
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	5795.00	96.23	122.30	-26.07	76.63	35.00	14.37	29.77	0.00	100	110	AVERAGE																																																																																																																										



Mode	8																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>58.25</td> <td>110.93</td> <td>-52.68</td> <td>38.94</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.98</td> <td>58.08</td> <td>105.31</td> <td>-47.23</td> <td>38.86</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>57.15</td> <td>68.50</td> <td>-11.35</td> <td>38.09</td> <td>35.19</td> <td>13.69</td> <td>29.02</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.19</td> <td>59.59</td> <td>68.30</td> <td>-8.71</td> <td>40.54</td> <td>35.20</td> <td>13.68</td> <td>29.83</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.99	58.25	110.93	-52.68	38.94	35.08	14.02	29.79	0.00	100	110	PEAK	2	5874.98	58.08	105.31	-47.23	38.86	35.11	13.90	29.79	0.00	100	110	PEAK	3	5924.74	57.15	68.50	-11.35	38.09	35.19	13.69	29.02	0.00	100	110	PEAK	4	5934.19	59.59	68.30	-8.71	40.54	35.20	13.68	29.83	0.00	100	110	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.99	58.25	110.93	-52.68	38.94	35.08	14.02	29.79	0.00	100	110	PEAK																																																														
2	5874.98	58.08	105.31	-47.23	38.86	35.11	13.90	29.79	0.00	100	110	PEAK																																																														
3	5924.74	57.15	68.50	-11.35	38.09	35.19	13.69	29.02	0.00	100	110	PEAK																																																														
4	5934.19	59.59	68.30	-8.71	40.54	35.20	13.68	29.83	0.00	100	110	PEAK																																																														

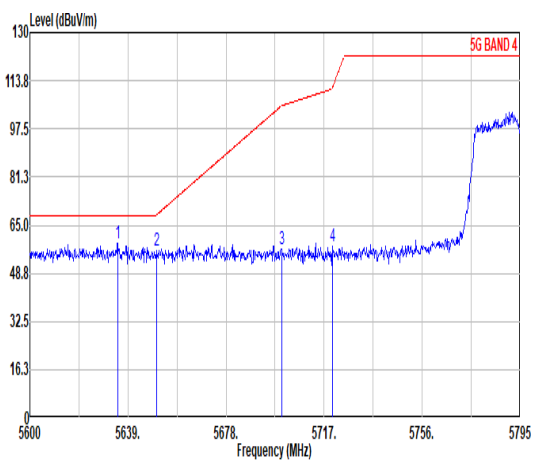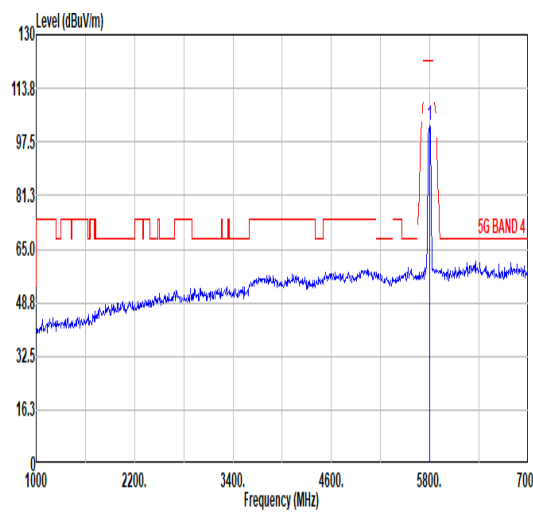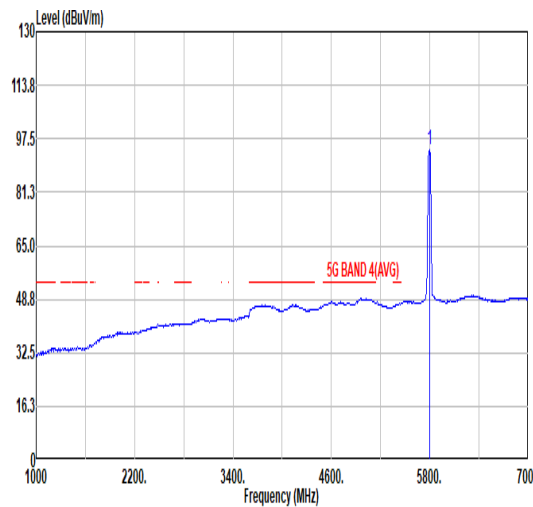

Mode		8																																																																																																						
		Band Edge - L																																																																																																						
		U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																						
Pol.	Vertical					Fundamental																																																																																																		
Peak																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5634.91</td> <td>58.77</td> <td>68.30</td> <td>-9.53</td> <td>40.61</td> <td>34.66</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>306</td> <td>80 PEAK</td> </tr> <tr> <td>2 5650.31</td> <td>56.29</td> <td>68.53</td> <td>-12.24</td> <td>38.06</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>306</td> <td>80 PEAK</td> </tr> <tr> <td>3 5700.04</td> <td>56.71</td> <td>105.31</td> <td>-48.60</td> <td>38.25</td> <td>34.78</td> <td>13.48</td> <td>29.80</td> <td>0.00</td> <td>306</td> <td>80 PEAK</td> </tr> <tr> <td>4 5720.32</td> <td>57.67</td> <td>111.62</td> <td>-53.95</td> <td>38.98</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>306</td> <td>80 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5634.91	58.77	68.30	-9.53	40.61	34.66	13.27	29.77	0.00	306	80 PEAK	2 5650.31	56.29	68.53	-12.24	38.06	34.69	13.32	29.78	0.00	306	80 PEAK	3 5700.04	56.71	105.31	-48.60	38.25	34.78	13.48	29.80	0.00	306	80 PEAK	4 5720.32	57.67	111.62	-53.95	38.98	34.82	13.66	29.79	0.00	306	80 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>102.66</td> <td>122.30</td> <td>-19.64</td> <td>83.06</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>306</td> <td>80 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5795.00	102.66	122.30	-19.64	83.06	35.00	14.37	29.77	0.00	306
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1 5634.91	58.77	68.30	-9.53	40.61	34.66	13.27	29.77	0.00	306	80 PEAK																																																																																														
2 5650.31	56.29	68.53	-12.24	38.06	34.69	13.32	29.78	0.00	306	80 PEAK																																																																																														
3 5700.04	56.71	105.31	-48.60	38.25	34.78	13.48	29.80	0.00	306	80 PEAK																																																																																														
4 5720.32	57.67	111.62	-53.95	38.98	34.82	13.66	29.79	0.00	306	80 PEAK																																																																																														
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1 5795.00	102.66	122.30	-19.64	83.06	35.00	14.37	29.77	0.00	306	80 PEAK																																																																																														
Avg	Blank																																																																																																							
						<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>94.17</td> <td>122.30</td> <td>-28.13</td> <td>74.57</td> <td>35.00</td> <td>14.37</td> <td>29.77</td> <td>0.00</td> <td>306</td> <td>80 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5795.00	94.17	122.30	-28.13	74.57	35.00	14.37	29.77	0.00	306	80 AVERAGE																																																															
	Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1 5795.00	94.17	122.30	-28.13	74.57	35.00	14.37	29.77	0.00	306	80 AVERAGE																																																																																														








Mode	8																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>59.03</td> <td>111.29</td> <td>-52.26</td> <td>39.72</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>306</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.40</td> <td>59.47</td> <td>106.87</td> <td>-47.40</td> <td>40.23</td> <td>35.10</td> <td>13.93</td> <td>29.79</td> <td>0.00</td> <td>306</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.58</td> <td>57.10</td> <td>68.61</td> <td>-11.51</td> <td>38.04</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>306</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.60</td> <td>58.18</td> <td>68.30</td> <td>-10.12</td> <td>39.12</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>306</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.83	59.03	111.29	-52.26	39.72	35.08	14.02	29.79	0.00	306	80	PEAK	2	5869.40	59.47	106.87	-47.40	40.23	35.10	13.93	29.79	0.00	306	80	PEAK	3	5924.58	57.10	68.61	-11.51	38.04	35.19	13.69	29.82	0.00	306	80	PEAK	4	5926.60	58.18	68.30	-10.12	39.12	35.19	13.69	29.82	0.00	306	80	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.83	59.03	111.29	-52.26	39.72	35.08	14.02	29.79	0.00	306	80	PEAK																																																														
2	5869.40	59.47	106.87	-47.40	40.23	35.10	13.93	29.79	0.00	306	80	PEAK																																																														
3	5924.58	57.10	68.61	-11.51	38.04	35.19	13.69	29.82	0.00	306	80	PEAK																																																														
4	5926.60	58.18	68.30	-10.12	39.12	35.19	13.69	29.82	0.00	306	80	PEAK																																																														



Mode	8																																																																																	
	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>54.16</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	45.74	74.00	-28.26	54.16	38.45	18.53	65.40	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>44.79</td> <td>74.00</td> <td>-29.21</td> <td>53.21</td> <td>38.45</td> <td>18.53</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	44.79	74.00	-29.21	53.21	38.45	18.53	65.40	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11590.00	45.74	74.00	-28.26	54.16	38.45	18.53	65.40	0.00	100	360	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11590.00	44.79	74.00	-29.21	53.21	38.45	18.53	65.40	0.00	100	0	PEAK																																																																						

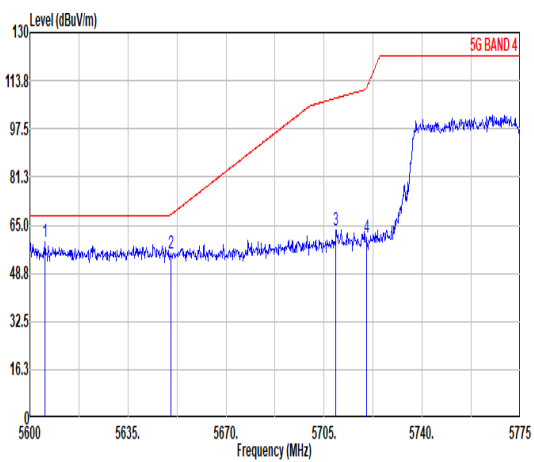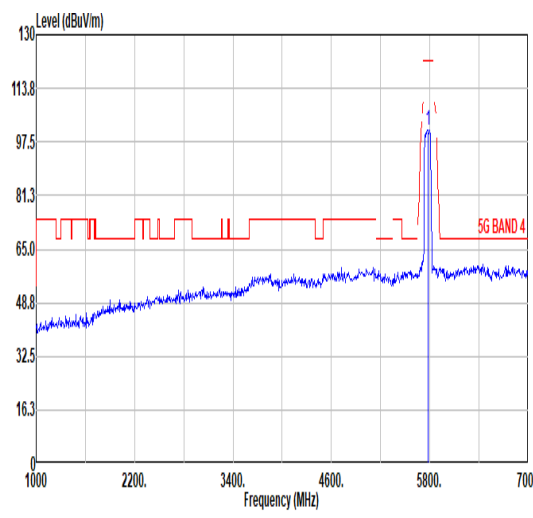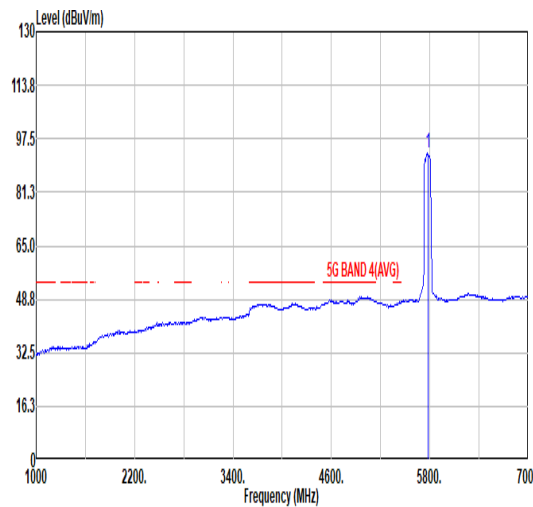

		9																																																																																																																														
Mode		Band Edge - L																																																																																																																														
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																														
Pol.	Horizontal										Fundamental																																																																																																																					
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a rising red line for the 5G BAND 4 limit and a blue line for the measured signal. Four peaks are marked with vertical lines and numbered 1 to 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5605.43</td> <td>59.40</td> <td>68.30</td> <td>-8.90</td> <td>41.38</td> <td>34.61</td> <td>13.17</td> <td>29.76</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>2 5650.40</td> <td>55.46</td> <td>68.60</td> <td>-13.14</td> <td>37.23</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>3 5709.20</td> <td>63.17</td> <td>107.88</td> <td>-44.71</td> <td>44.61</td> <td>34.00</td> <td>13.56</td> <td>29.00</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>4 5728.05</td> <td>60.81</td> <td>111.01</td> <td>-50.20</td> <td>42.12</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5605.43	59.40	68.30	-8.90	41.38	34.61	13.17	29.76	0.00	100	115	PEAK	2 5650.40	55.46	68.60	-13.14	37.23	34.69	13.32	29.78	0.00	100	115	PEAK	3 5709.20	63.17	107.88	-44.71	44.61	34.00	13.56	29.00	0.00	100	115	PEAK	4 5728.05	60.81	111.01	-50.20	42.12	34.82	13.66	29.79	0.00	100	115	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a red line for the 5G BAND 4 limit and a blue line for the measured signal. A single sharp peak is visible at 5775 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>101.05</td> <td>122.30</td> <td>-21.25</td> <td>81.80</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5775.00	101.05	122.30	-21.25	81.80	34.93	14.10	29.78	0.00	100	115	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5605.43	59.40	68.30	-8.90	41.38	34.61	13.17	29.76	0.00	100	115	PEAK																																																																																																																					
2 5650.40	55.46	68.60	-13.14	37.23	34.69	13.32	29.78	0.00	100	115	PEAK																																																																																																																					
3 5709.20	63.17	107.88	-44.71	44.61	34.00	13.56	29.00	0.00	100	115	PEAK																																																																																																																					
4 5728.05	60.81	111.01	-50.20	42.12	34.82	13.66	29.79	0.00	100	115	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5775.00	101.05	122.30	-21.25	81.80	34.93	14.10	29.78	0.00	100	115	PEAK																																																																																																																					
Avg	Blank										 <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a red dashed line for the 5G BAND 4(AVG) limit and a blue line for the measured signal. A single sharp peak is visible at 5775 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5775.00</td> <td>93.13</td> <td>122.30</td> <td>-29.17</td> <td>73.88</td> <td>34.93</td> <td>14.10</td> <td>29.78</td> <td>0.00</td> <td>100</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5775.00	93.13	122.30	-29.17	73.88	34.93	14.10	29.78	0.00	100	115	AVERAGE																																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5775.00	93.13	122.30	-29.17	73.88	34.93	14.10	29.78	0.00	100	115	AVERAGE																																																																																																																					



Mode	9																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>58.89</td> <td>111.36</td> <td>-52.47</td> <td>39.58</td> <td>35.08</td> <td>14.02</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.43</td> <td>58.76</td> <td>106.30</td> <td>-47.54</td> <td>39.52</td> <td>35.11</td> <td>13.92</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.05</td> <td>58.43</td> <td>69.74</td> <td>-11.31</td> <td>39.37</td> <td>35.18</td> <td>13.70</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.03</td> <td>58.70</td> <td>68.30</td> <td>-9.60</td> <td>39.64</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.80	58.89	111.36	-52.47	39.58	35.08	14.02	29.79	0.00	100	115	PEAK	2	5871.43	58.76	106.30	-47.54	39.52	35.11	13.92	29.79	0.00	100	115	PEAK	3	5923.05	58.43	69.74	-11.31	39.37	35.18	13.70	29.82	0.00	100	115	PEAK	4	5926.03	58.70	68.30	-9.60	39.64	35.19	13.69	29.82	0.00	100	115	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.80	58.89	111.36	-52.47	39.58	35.08	14.02	29.79	0.00	100	115	PEAK																																																														
2	5871.43	58.76	106.30	-47.54	39.52	35.11	13.92	29.79	0.00	100	115	PEAK																																																														
3	5923.05	58.43	69.74	-11.31	39.37	35.18	13.70	29.82	0.00	100	115	PEAK																																																														
4	5926.03	58.70	68.30	-9.60	39.64	35.19	13.69	29.82	0.00	100	115	PEAK																																																														



Mode		9																																																																																											
		Band Edge - L																																																																																											
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																											
Pol.	Vertical					Fundamental																																																																																							
Peak																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5635.88</td> <td>59.00</td> <td>68.30</td> <td>-9.30</td> <td>40.84</td> <td>34.66</td> <td>13.27</td> <td>29.77</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>56.53</td> <td>68.73</td> <td>-12.20</td> <td>38.30</td> <td>34.69</td> <td>13.32</td> <td>29.78</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.15</td> <td>57.89</td> <td>105.62</td> <td>-47.73</td> <td>39.42</td> <td>34.78</td> <td>13.49</td> <td>29.80</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.23</td> <td>58.53</td> <td>111.41</td> <td>-52.88</td> <td>39.84</td> <td>34.82</td> <td>13.66</td> <td>29.79</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark			Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5635.88	59.00	68.30	-9.30	40.84	34.66	13.27	29.77	0.00	361	82	PEAK	2	5650.58	56.53	68.73	-12.20	38.30	34.69	13.32	29.78	0.00	361	82	PEAK	3	5701.15	57.89	105.62	-47.73	39.42	34.78	13.49	29.80	0.00	361	82	PEAK	4	5728.23	58.53	111.41	-52.88	39.84	34.82	13.66	29.79	0.00	361	82
Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5635.88	59.00	68.30	-9.30	40.84	34.66	13.27	29.77	0.00	361	82	PEAK																																																																																	
2	5650.58	56.53	68.73	-12.20	38.30	34.69	13.32	29.78	0.00	361	82	PEAK																																																																																	
3	5701.15	57.89	105.62	-47.73	39.42	34.78	13.49	29.80	0.00	361	82	PEAK																																																																																	
4	5728.23	58.53	111.41	-52.88	39.84	34.82	13.66	29.79	0.00	361	82	PEAK																																																																																	
Avg						Blank																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="3">Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>89.39</td> <td>122.30</td> <td>-32.91</td> <td>70.20</td> <td>34.92</td> <td>14.05</td> <td>29.78</td> <td>0.00</td> <td>361</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark			Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	89.39	122.30	-32.91	70.20	34.92	14.05	29.78	0.00	361	82	AVERAGE																																						
Limit	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5775.00	89.39	122.30	-32.91	70.20	34.92	14.05	29.78	0.00	361	82	AVERAGE																																																																																	



Mode	9																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.28</td> <td>57.53</td> <td>112.55</td> <td>-55.02</td> <td>38.21</td> <td>35.08</td> <td>14.03</td> <td>29.79</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.88</td> <td>58.65</td> <td>105.61</td> <td>-46.96</td> <td>39.43</td> <td>35.11</td> <td>13.90</td> <td>29.79</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>56.80</td> <td>68.32</td> <td>-11.52</td> <td>37.74</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.85</td> <td>58.67</td> <td>68.30</td> <td>-9.63</td> <td>39.61</td> <td>35.19</td> <td>13.69</td> <td>29.82</td> <td>0.00</td> <td>361</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.28	57.53	112.55	-55.02	38.21	35.08	14.03	29.79	0.00	361	82	PEAK	2	5873.88	58.65	105.61	-46.96	39.43	35.11	13.90	29.79	0.00	361	82	PEAK	3	5924.98	56.80	68.32	-11.52	37.74	35.19	13.69	29.82	0.00	361	82	PEAK	4	5925.85	58.67	68.30	-9.63	39.61	35.19	13.69	29.82	0.00	361	82	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.28	57.53	112.55	-55.02	38.21	35.08	14.03	29.79	0.00	361	82	PEAK																																																														
2	5873.88	58.65	105.61	-46.96	39.43	35.11	13.90	29.79	0.00	361	82	PEAK																																																														
3	5924.98	56.80	68.32	-11.52	37.74	35.19	13.69	29.82	0.00	361	82	PEAK																																																														
4	5925.85	58.67	68.30	-9.63	39.61	35.19	13.69	29.82	0.00	361	82	PEAK																																																														



Mode	9																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>45.56</td> <td>74.00</td> <td>-28.44</td> <td>54.05</td> <td>38.43</td> <td>18.50</td> <td>65.42</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11550.00	45.56	74.00	-28.44	54.05	38.43	18.50	65.42	0.00									100 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>44.62</td> <td>74.00</td> <td>-29.38</td> <td>53.11</td> <td>38.43</td> <td>18.50</td> <td>65.42</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11550.00	44.62	74.00	-29.38	53.11	38.43	18.50	65.42	0.00									100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11550.00	45.56	74.00	-28.44	54.05	38.43	18.50	65.42	0.00																																																																																				
								100 360 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 11550.00	44.62	74.00	-29.38	53.11	38.43	18.50	65.42	0.00																																																																																				
								100 0 PEAK																																																																																				



Mode	10																																																																																																																																																																									
	Emission below 1GHz																																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>25.56</td><td>40.00</td><td>-14.44</td><td>31.54</td><td>24.91</td><td>0.51</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>43.58</td><td>24.47</td><td>40.00</td><td>-15.53</td><td>37.83</td><td>17.36</td><td>0.68</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>201.69</td><td>22.83</td><td>43.50</td><td>-20.67</td><td>37.34</td><td>14.81</td><td>2.08</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>269.59</td><td>27.03</td><td>46.00</td><td>-18.97</td><td>36.93</td><td>19.11</td><td>2.39</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>299.66</td><td>27.80</td><td>46.00</td><td>-18.20</td><td>37.57</td><td>19.09</td><td>2.54</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>480.08</td><td>29.81</td><td>46.00</td><td>-16.19</td><td>34.80</td><td>23.32</td><td>3.19</td><td>31.50</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Aux Factor	A/Pos (cm)	T/Pos (deg)	Remark	1	30.97	25.56	40.00	-14.44	31.54	24.91	0.51	31.40	0.00	---	Peak	2	43.58	24.47	40.00	-15.53	37.83	17.36	0.68	31.40	0.00	---	Peak	3	201.69	22.83	43.50	-20.67	37.34	14.81	2.08	31.40	0.00	---	Peak	4	269.59	27.03	46.00	-18.97	36.93	19.11	2.39	31.40	0.00	---	Peak	5	299.66	27.80	46.00	-18.20	37.57	19.09	2.54	31.40	0.00	---	Peak	6	480.08	29.81	46.00	-16.19	34.80	23.32	3.19	31.50	0.00	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>24.98</td><td>40.00</td><td>-15.02</td><td>30.19</td><td>25.69</td><td>0.50</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>150.28</td><td>21.15</td><td>43.50</td><td>-22.35</td><td>34.01</td><td>16.77</td><td>1.77</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>200.72</td><td>22.92</td><td>43.50</td><td>-20.58</td><td>37.47</td><td>14.78</td><td>2.07</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>240.49</td><td>26.67</td><td>46.00</td><td>-19.33</td><td>38.59</td><td>17.22</td><td>2.26</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>299.66</td><td>24.37</td><td>46.00</td><td>-21.63</td><td>34.14</td><td>19.09</td><td>2.54</td><td>31.40</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>480.08</td><td>32.50</td><td>46.00</td><td>-13.50</td><td>37.49</td><td>23.32</td><td>3.19</td><td>31.50</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Aux Factor	A/Pos (cm)	T/Pos (deg)	Remark	1	30.00	24.98	40.00	-15.02	30.19	25.69	0.50	31.40	0.00	---	Peak	2	150.28	21.15	43.50	-22.35	34.01	16.77	1.77	31.40	0.00	---	Peak	3	200.72	22.92	43.50	-20.58	37.47	14.78	2.07	31.40	0.00	---	Peak	4	240.49	26.67	46.00	-19.33	38.59	17.22	2.26	31.40	0.00	---	Peak	5	299.66	24.37	46.00	-21.63	34.14	19.09	2.54	31.40	0.00	---	Peak	6	480.08	32.50	46.00	-13.50	37.49	23.32	3.19	31.50	0.00	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Aux Factor	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	30.97	25.56	40.00	-14.44	31.54	24.91	0.51	31.40	0.00	---	Peak																																																																																																																																																															
2	43.58	24.47	40.00	-15.53	37.83	17.36	0.68	31.40	0.00	---	Peak																																																																																																																																																															
3	201.69	22.83	43.50	-20.67	37.34	14.81	2.08	31.40	0.00	---	Peak																																																																																																																																																															
4	269.59	27.03	46.00	-18.97	36.93	19.11	2.39	31.40	0.00	---	Peak																																																																																																																																																															
5	299.66	27.80	46.00	-18.20	37.57	19.09	2.54	31.40	0.00	---	Peak																																																																																																																																																															
6	480.08	29.81	46.00	-16.19	34.80	23.32	3.19	31.50	0.00	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Aux Factor	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	30.00	24.98	40.00	-15.02	30.19	25.69	0.50	31.40	0.00	---	Peak																																																																																																																																																															
2	150.28	21.15	43.50	-22.35	34.01	16.77	1.77	31.40	0.00	---	Peak																																																																																																																																																															
3	200.72	22.92	43.50	-20.58	37.47	14.78	2.07	31.40	0.00	---	Peak																																																																																																																																																															
4	240.49	26.67	46.00	-19.33	38.59	17.22	2.26	31.40	0.00	---	Peak																																																																																																																																																															
5	299.66	24.37	46.00	-21.63	34.14	19.09	2.54	31.40	0.00	---	Peak																																																																																																																																																															
6	480.08	32.50	46.00	-13.50	37.49	23.32	3.19	31.50	0.00	---	Peak																																																																																																																																																															






## Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10HZ
802.11ac VHT20	98.15	-	-	10HZ
802.11ac VHT40	96.46	0.946	1.057	1.1kHz
802.11ac VHT80	92.98	0.461	2.170	2.2kHz

### 802.11a

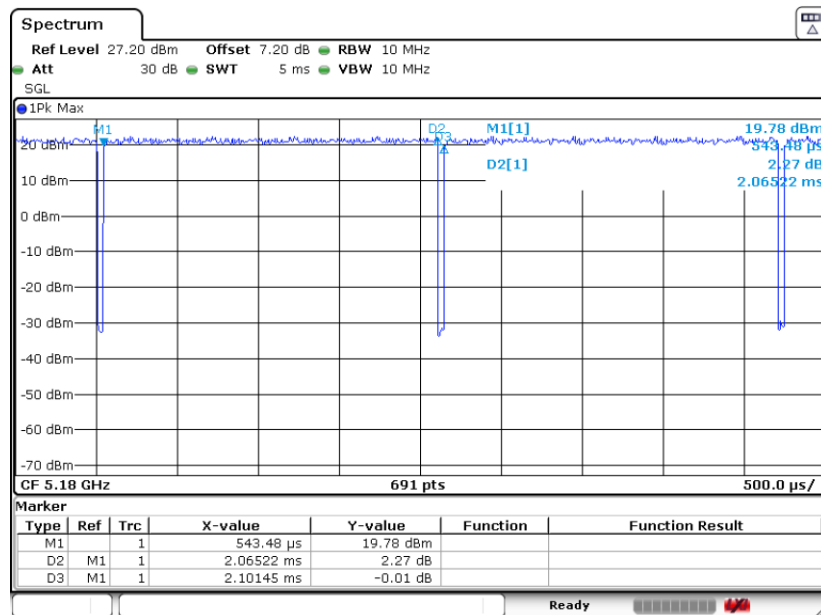




802.11ac VHT20

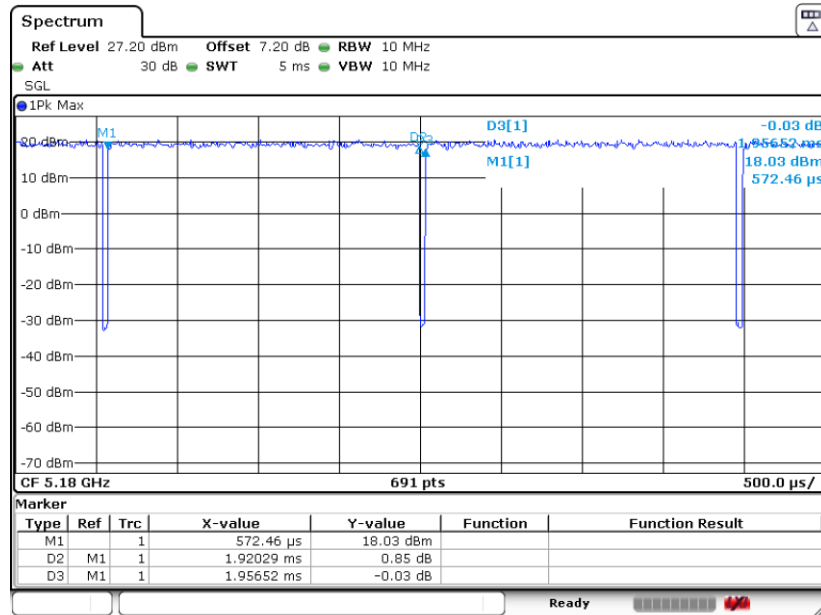

802.11ac VHT40

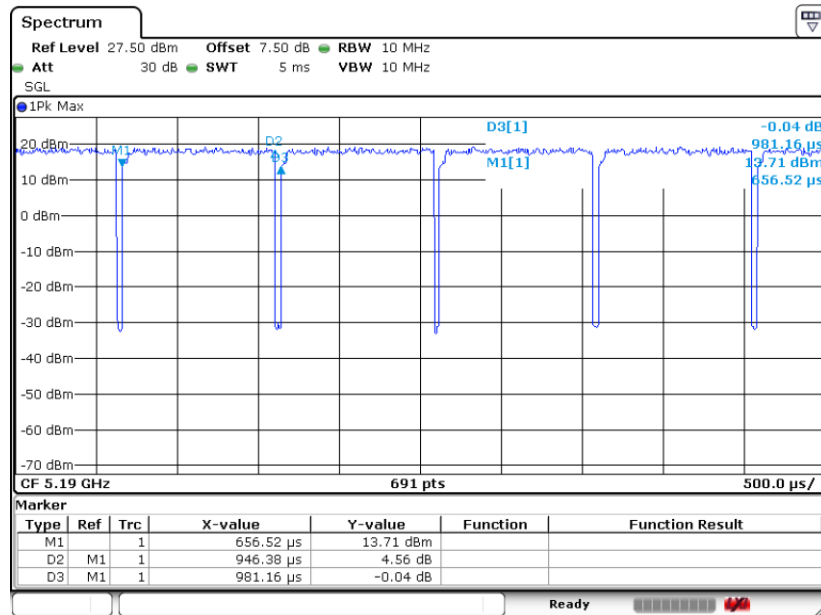



802.11ac VHT80

