



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2345-6  
FCC ID : IHDT56AK5  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Nov. 29, 2022 ~ Dec. 01, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 6

    1.6. Specification of Accessory ..... 7

    1.7. Test Location ..... 8

    1.8. Test Software ..... 8

    1.9. Applicable Standards ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1. Test Mode ..... 9

    2.2. Connection Diagram of Test System ..... 11

    2.3. Support Unit used in test configuration and system ..... 11

    2.4. EUT Operation Test Setup ..... 12

**3. TEST RESULT ..... 13**

    3.1. Test of AC Conducted Emission Measurement ..... 13

    3.2. Test of Radiated Emission Measurement ..... 17

**4. LIST OF MEASURING EQUIPMENT ..... 22**

**5. UNCERTAINTY OF EVALUATION ..... 23**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.40 dB at 0.15 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.83 dB at 159.98 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2345-6
FCC ID	IHDT56AK5
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20 WLAN 5GHz 802.11ac VHT20 Bluetooth BR/EDR/LE GNSS/FM
IMEI Code	Conduction: 353995380002745 for Sample 1 353995380005946 for Sample 2 Radiation: 353995380002521 for Sample 1 353995380005805 for Sample 2
HW Version	DVT2
SW Version	TLA33.89
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the detailed differences could be referred to the XT2345-6\_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to full test and the sample 2 is verified for the difference.
3. Sample 1 & Sample 2 all have Single SIM & Dual SIM config, the Dual SIM and Single SIM are only SIM Slot difference.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824 MHz ~ 849 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Rx Frequency</b>	GSM850: 869 MHz ~ 894 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
<b>Antenna Type</b>	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna FM : External Earphone Antenna
<b>Type of Modulation</b>	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM (Downlink only) DC-HSDPA : 64QAM LTE: QPSK / 16QAM Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(aohai)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(aohai)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(aohai)	Model Name	MC-103
AC Adapter 1(IN)	Brand Name	Motorola(aohai)	Model Name	MC-104
AC Adapter 1(AU)	Brand Name	Motorola(aohai)	Model Name	MC-105
AC Adapter 1(AR)	Brand Name	Motorola(aohai)	Model Name	MC-106
AC Adapter 2(US)	Brand Name	Motorola(chenyang)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(chenyang)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(chenyang)	Model Name	MC-103
AC Adapter 2(IN)	Brand Name	Motorola(chenyang)	Model Name	MC-104
AC Adapter 2(AU)	Brand Name	Motorola(chenyang)	Model Name	MC-105
AC Adapter 2(AR)	Brand Name	Motorola(chenyang)	Model Name	MC-106
AC Adapter 2(BR)	Brand Name	Motorola(chenyang)	Model Name	MC-107
AC Adapter 3(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 3(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-106
AC Adapter 3(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-109
Battery 1	Brand Name	Motorola(ATL)	Model Name	NH50
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	NH50
Earphone 1	Brand Name	Motorola(New leader)	Model Name	NLD-EM313A-20SF
Earphone 2	Brand Name	Motorola(JWELL)	Model Name	JWEP1205-L20H
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SLQ-A214A
USB Cable 2	Brand Name	Motorola(JIEYE)	Model Name	JY-C03-410

### 1.7. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH05-SZ	CN1256	421272

### 1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

### 1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.





## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable1 (Charging from Adapter1 )SIM1 for Sample1
	Mode 2: LTE Band 7 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable2 (Charging from Adapter2 )SIM 2 for Sample1
	Mode 3: WCDMA 850 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 2 + Battery 1 + USB Cable(2 ) (Charging from Adapter 3) SIM 1 for Sample1
	Mode 4: WCDMA 850 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98 ) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB SIM 1 for Sample1
	Mode 5: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) +PC/NB USB Data Link to EUT (eMMC) SIM 1 for Sample1
	Mode 6: LTE Band 5 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB SIM 2 for Sample1
	Mode 7: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) SIM 2 for Sample1
	Mode 8: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable 2(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) SIM 2 for Sample1
	Mode 9: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + Earphone 2 + Battery 2 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) SIM 2 for Sample 2



Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone 1 + Battery 1 + USB Cable1 (Charging from Adapter1 ) SIM 1 for Sample 1</p> <p>Mode 2: LTE Band 7 Rx + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone 2 + Battery 1 + USB Cable2 (Charging from Adapter2 ) SIM 2 for Sample 1</p> <p>Mode 3: WCDMA 850 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone 2 + Battery 1 + USB Cable2 (Charging from Adapter3 ) SIM 1 for Sample 1</p> <p>Mode 4: WCDMA 850 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(108 ) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB SIM 2 for Sample 1</p> <p>Mode 5: LTE Band 5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 5 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(108 ) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB SIM 2 for Sample 1</p> <p>Mode 7: LTE Band 5 Rx(High) + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(108 ) + Earphone 2 + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) SIM 2 for Sample 1</p> <p>Mode 8: WCDMA 850 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + FM Rx(108 ) + Earphone 2 + Battery 1 + USB Cable 2(Data Link with Notebook) SIM 2 for Sample 1</p> <p>Mode 9: WCDMA 850 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) or Camera(Front) + Earphone 2 + Battery 2 + EUT (eMMC) USB Data Link to PC/NB for Sample 2</p>
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. The worst case of AC is mode 7; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 8; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.</li> <li>4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA 850/1900/LTE Band 5 , the worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

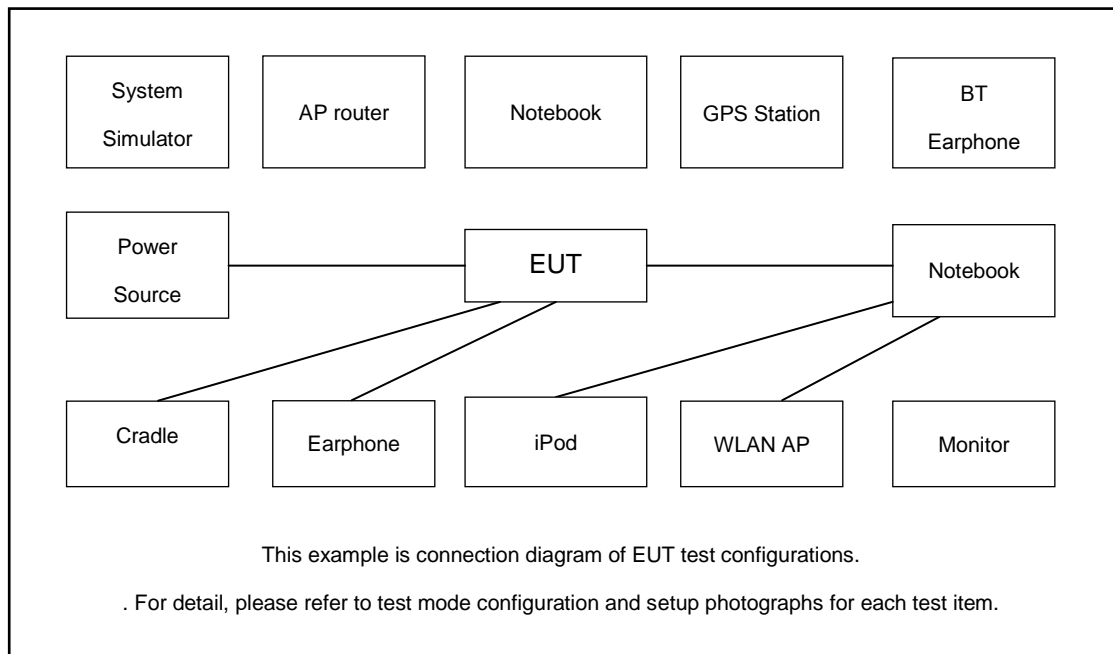

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Notebook	DELL	Inspiron 15-7570	Fcc DoC	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
4.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
5.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
6.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded,1.8m
7.	GPS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded,1.8m
8.	Bluetooth Earphone	Nokia	BH-108	2010DP1340	N/A	N/A
9.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
10.	SD Card	Kingston	3300-10000-078	Fcc DoC	N/A	N/A
11.	Ipod	apple	MC69029/A	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Execute "H Pattern" to show H Pattern via USB Cable on the Notebook.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

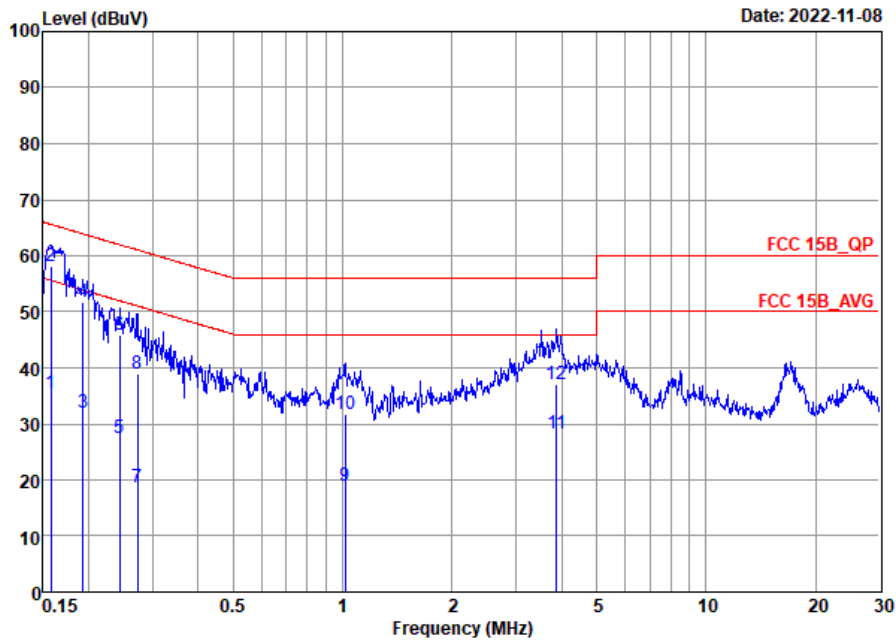


Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_20220811\_ L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	35.53	-20.07	55.60	14.60	10.20	10.73	Average
2 *	0.16	58.23	-7.37	65.60	37.30	10.20	10.73	QP
3	0.19	32.03	-21.86	53.89	11.60	10.20	10.23	Average
4	0.19	51.73	-12.16	63.89	31.30	10.20	10.23	QP
5	0.24	27.60	-24.40	52.00	6.91	10.18	10.51	Average
6	0.24	46.00	-16.00	62.00	25.31	10.18	10.51	QP
7	0.27	18.71	-32.32	51.03	-2.20	10.17	10.74	Average
8	0.27	39.01	-22.02	61.03	18.10	10.17	10.74	QP
9	1.02	18.95	-27.05	46.00	-1.40	10.12	10.23	Average
10	1.02	31.75	-24.25	56.00	11.40	10.12	10.23	QP
11	3.88	28.15	-17.85	46.00	7.90	10.01	10.24	Average
12	3.88	36.95	-19.05	56.00	16.70	10.01	10.24	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

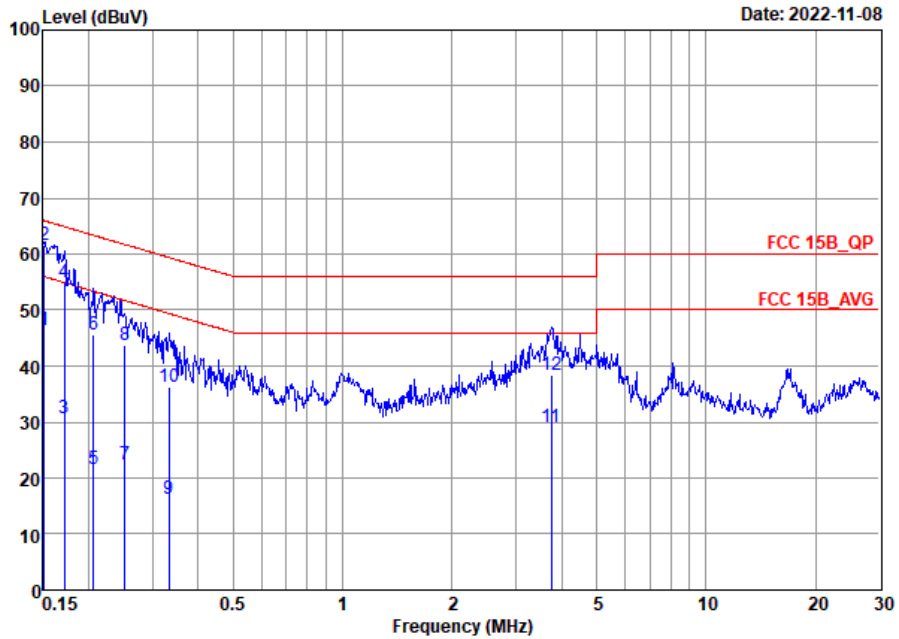

Site : C001-SZ  
 Condition: FCC 15B QP LISN 20220811\_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	46.46	-9.50	55.96	25.30	10.31	10.85	Average
2 *	0.15	61.56	-4.40	65.96	40.40	10.31	10.85	QP
3	0.17	30.74	-24.16	54.90	9.90	10.31	10.53	Average
4	0.17	55.04	-9.86	64.90	34.20	10.31	10.53	QP
5	0.21	21.49	-31.87	53.36	1.00	10.28	10.21	Average
6	0.21	45.49	-17.87	63.36	25.00	10.28	10.21	QP
7	0.25	22.44	-29.25	51.69	1.60	10.25	10.59	Average
8	0.25	43.84	-17.85	61.69	23.00	10.25	10.59	QP
9	0.33	16.29	-33.11	49.40	-4.99	10.18	11.10	Average
10	0.33	36.39	-23.01	59.40	15.11	10.18	11.10	QP
11	3.76	29.09	-16.91	46.00	8.70	10.15	10.24	Average
12	3.76	38.39	-17.61	56.00	18.00	10.15	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

Note:


1. Level(dB $\mu$ V/m) = Read Level(dB $\mu$ V) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

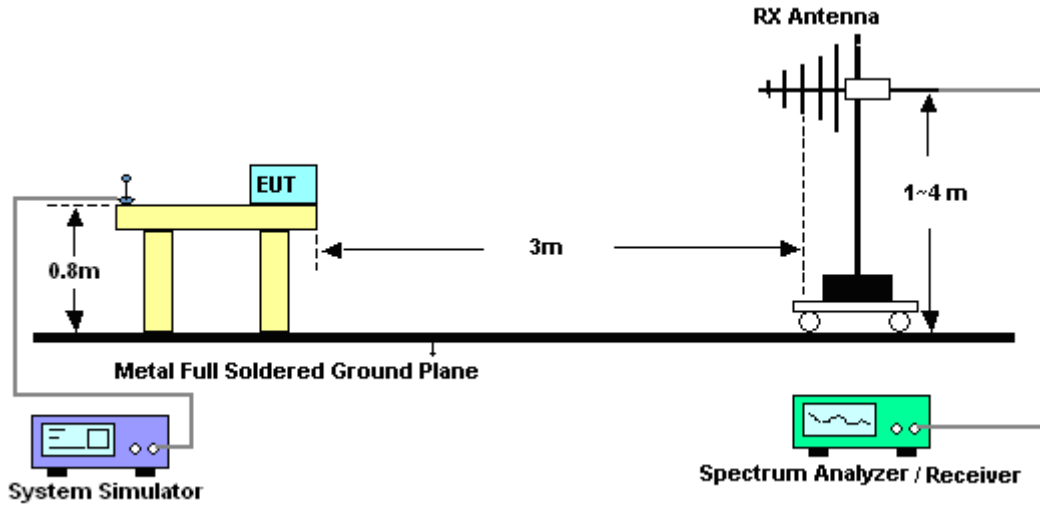


For radiated emissions above 1GHz

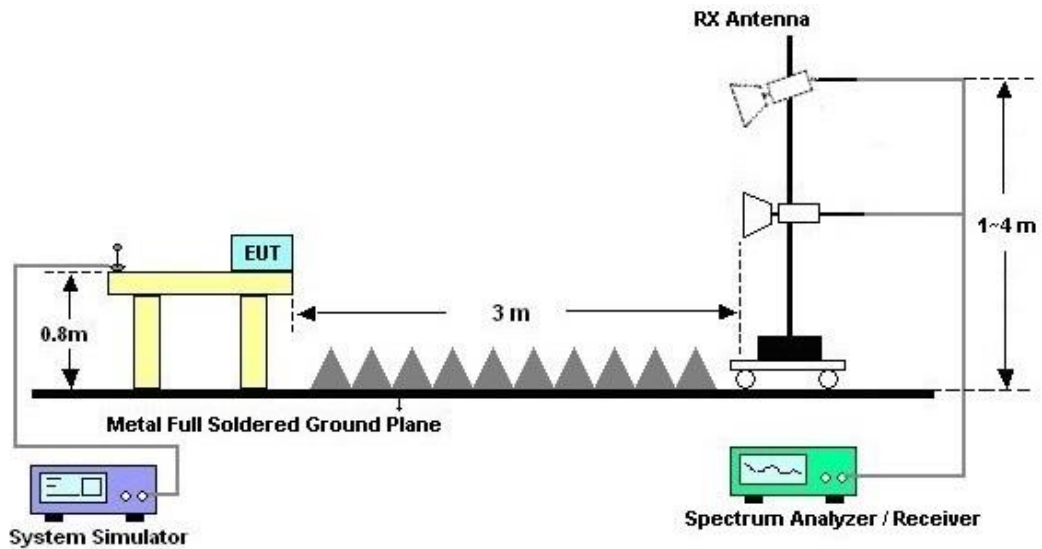



3.2.5. Test Result of Radiated Emission

Test Engineer :	LiuZhanSheng	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#2 is FM RF signal which can be ignored. #8 is system simulator signal which can be ignored. #11 is WLAN 5G RF signal which can be ignored.		

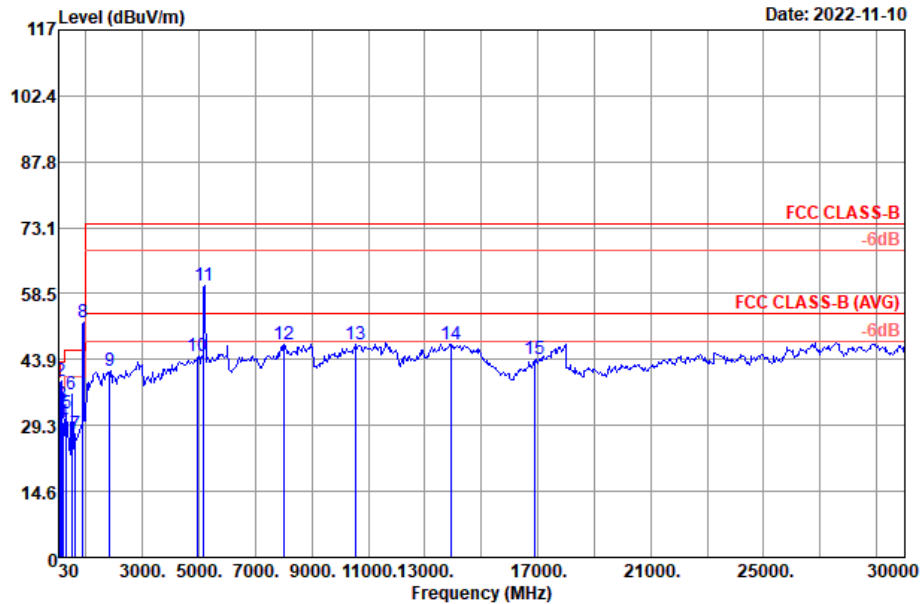


Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01003 HORIZONTAL

Plane : Y

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	44.55	25.74	-14.26	40.00	39.48	19.61	1.60	34.95	---	---	Peak
2	107.60	39.23			56.42	15.53	2.06	34.78	---	---	Peak
3	161.92	33.77	-9.73	43.50	47.80	18.28	2.39	34.70	---	---	Peak
4	201.69	30.03	-13.47	43.50	45.92	16.05	2.76	34.70	---	---	Peak
5	307.42	31.86	-14.14	46.00	43.92	19.29	3.25	34.60	---	---	Peak
6	480.08	36.20	-9.80	46.00	44.17	23.11	3.42	34.50	---	---	Peak
7	622.67	27.41	-18.59	46.00	32.17	26.16	3.63	34.55	---	---	Peak
8 *	891.60	52.11			53.34	28.66	4.41	34.30	---	---	Peak
9	1830.00	41.29	-32.71	74.00	59.33	25.56	6.53	50.13	---	---	Peak
10	4968.00	44.53	-29.47	74.00	53.07	31.50	9.47	49.51	---	---	Peak
11	5180.00	60.43			68.49	31.88	9.45	49.39	---	---	Peak
12	8016.00	47.15	-26.85	74.00	48.15	37.48	11.51	49.99	---	---	Peak
13	10524.00	47.33	-26.67	74.00	42.35	39.93	13.43	48.38	---	---	Peak
14	13920.00	47.40	-26.60	74.00	39.64	40.82	14.53	47.59	---	---	Peak
15	16908.00	44.03	-29.97	74.00	38.83	41.40	15.26	51.46	---	---	Peak



Test Engineer :	LiuZhanSheng	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#2 is FM RF signal which can be ignored. #8 is system simulator signal which can be ignored. #11 is WLAN 5G RF signal which can be ignored.		

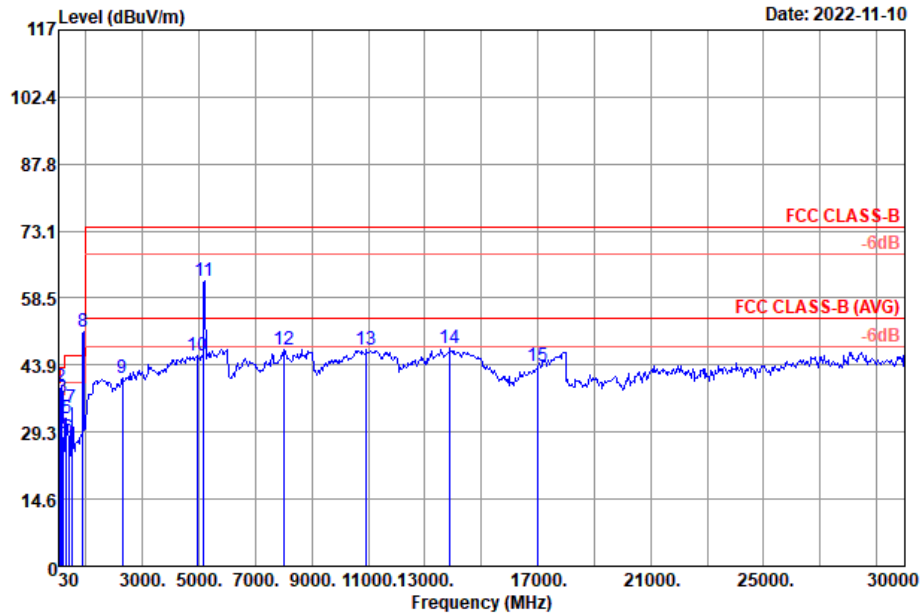

Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01003 VERTICAL

Plane : Y

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	42.61	28.68	-11.32	40.00	42.63	19.48	1.50	34.93	---	Peak
2	107.60	38.96			56.15	15.53	2.06	34.78	---	Peak
3	159.98	36.67	-6.83	43.50	50.60	18.39	2.38	34.70	---	Peak
4	200.72	28.37	-15.13	43.50	44.29	16.02	2.76	34.70	---	Peak
5	306.45	32.23	-13.77	46.00	44.32	19.27	3.24	34.60	---	Peak
6	385.99	27.93	-18.07	46.00	38.03	21.08	3.35	34.53	---	Peak
7	480.08	34.63	-11.37	46.00	42.60	23.11	3.42	34.50	---	Peak
8 *	891.60	51.19			52.42	28.66	4.41	34.30	---	Peak
9	2294.00	41.21	-32.79	74.00	56.64	28.00	6.95	50.38	---	Peak
10	4923.00	45.87	-28.13	74.00	54.54	31.39	9.46	49.52	---	Peak
11	5180.00	62.30			70.36	31.88	9.45	49.39	---	Peak
12	7998.00	47.15	-26.85	74.00	48.10	37.50	11.55	50.00	---	Peak
13	10932.00	47.26	-26.74	74.00	41.47	40.50	13.34	48.05	---	Peak
14	13899.00	47.48	-26.52	74.00	39.73	40.78	14.53	47.56	---	Peak
15	17016.00	43.53	-30.47	74.00	37.88	41.85	15.23	51.43	---	Peak



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Nov. 29 2022	Jul.06 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sept. 15, 2022	Nov. 29 2022	Sept. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Nov. 29 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089 1	100Vac~250Vac	Jul.07, 2022	Nov. 29 2022	Jul. 06, 2023	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	May. 20, 2022	Dec. 01 2022	May. 19, 2023	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 06, 2022	Dec. 01 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	May.24, 2022	Dec. 01 2022	May. 23, 2023	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 10, 2022	Dec. 01 2022	Apr. 09, 2023	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 10. 2022	Dec. 01 2022	Apr. 09, 2023	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz ~3000MHz	Apr. 06, 2022	Dec. 01 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr.06, 2022	Dec. 01 2022	Apr. 05, 2023	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 06, 2022	Dec. 01 2022	Apr. 05, 2023	Radiation (03CH05SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Nov.10.2022	Dec. 01 2022	Nov.09.2023	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Dec. 01 2022	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Dec. 01 2022	NCR	Radiation (03CH05-SZ)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.2 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------