



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2345-6
FCC ID : IHDT56AK5
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 09, 2022 ~ Dec. 02, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Specification of Accessory 6

 1.7 Testing Location 7

 1.8 Test Software..... 8

 1.9 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Output Power Measurement..... 15

 3.3 Power Spectral Density Measurement 16

 3.4 Conducted Band Edges and Spurious Emission Measurement 18

 3.5 Radiated Band Edges and Spurious Emission Measurement 28

 3.6 AC Conducted Emission Measurement..... 32

 3.7 Antenna Requirements 34

4 LIST OF MEASURING EQUIPMENT 35

5 UNCERTAINTY OF EVALUATION 36

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR292305C	Rev. 01	Initial issue of report	Dec. 15, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.19 dB at 4924 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.60 dB at 0.64 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2345-6
FCC ID	IHDT56AK5
IMEI Code	Conducted: 353995380004105 Conduction: 353995380002745 Radiation: 353995380005177
HW Version	DVT2
SW Version	TLA33.89
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.78 dBm (0.1897 W) 802.11g : 24.52 dBm (0.2831 W) 802.11n HT20 : 24.74 dBm (0.2979 W)
99% Occupied Bandwidth	802.11b : 12.19 MHz 802.11g : 19.83 MHz 802.11n HT20 : 21.03 MHz
Antenna Type / Gain	PIFA Antenna type with gain -3.0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(aohai)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(aohai)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(aohai)	Model Name	MC-103
AC Adapter 1(IN)	Brand Name	Motorola(aohai)	Model Name	MC-104
AC Adapter 1(AU)	Brand Name	Motorola(aohai)	Model Name	MC-105
AC Adapter 1(AR)	Brand Name	Motorola(aohai)	Model Name	MC-106
AC Adapter 2(US)	Brand Name	Motorola(chenyang)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(chenyang)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(chenyang)	Model Name	MC-103
AC Adapter 2(IN)	Brand Name	Motorola(chenyang)	Model Name	MC-104
AC Adapter 2(AU)	Brand Name	Motorola(chenyang)	Model Name	MC-105
AC Adapter 2(AR)	Brand Name	Motorola(chenyang)	Model Name	MC-106
AC Adapter 2(BR)	Brand Name	Motorola(chenyang)	Model Name	MC-107
AC Adapter 3(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 3(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-106
AC Adapter 3(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-109
Battery 1	Brand Name	Motorola(ATL)	Model Name	NH50
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	NH50
Earphone 1	Brand Name	Motorola(New leader)	Model Name	NLD-EM313A-20SF
Earphone 2	Brand Name	Motorola(JWELL)	Model Name	JWEP1205-L20H
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SLQ-A214A
USB Cable 2	Brand Name	Motorola(JIEYE)	Model Name	JY-C03-410



1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272



1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter2) + Earphone 2


RSE Simultaneous Transmission
2.4GH WIFI 802.11b CH11 Tx + GSM 850 Link

Remark:


1. RSE tests were performance with Adapter 2, Earphone 2 and USB Cable 2.
2. The Simultaneous transmission mode is assessed from the worst WLAN TX + WWAN Link mode.

2.3 Connection Diagram of Test System

<Radiated Emission >

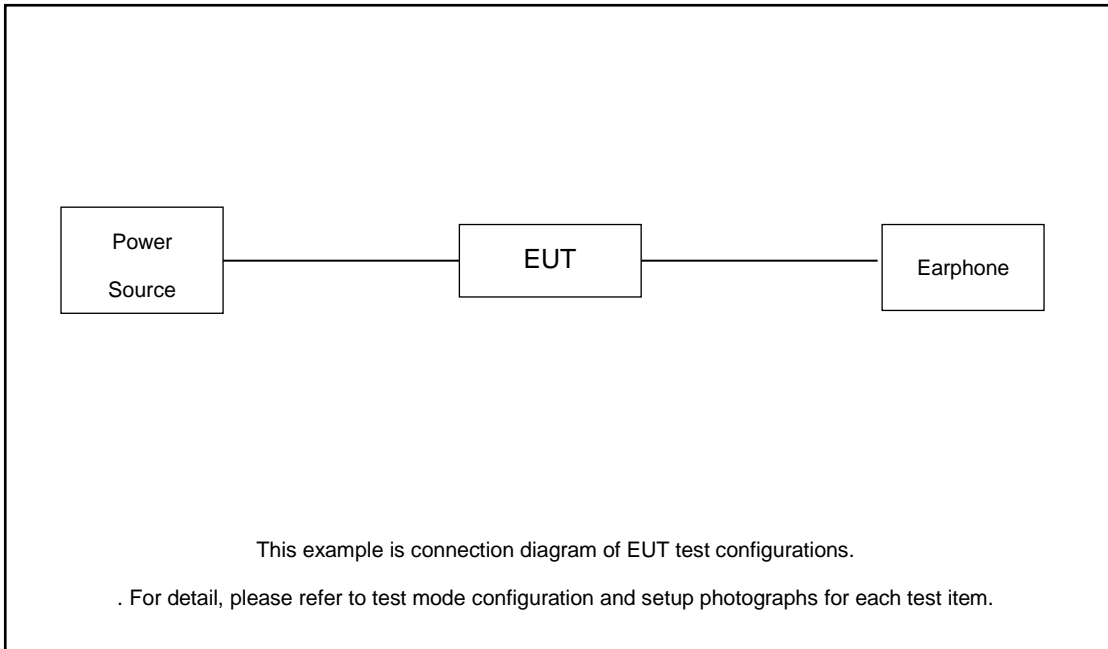

< AC Conducted Emission >

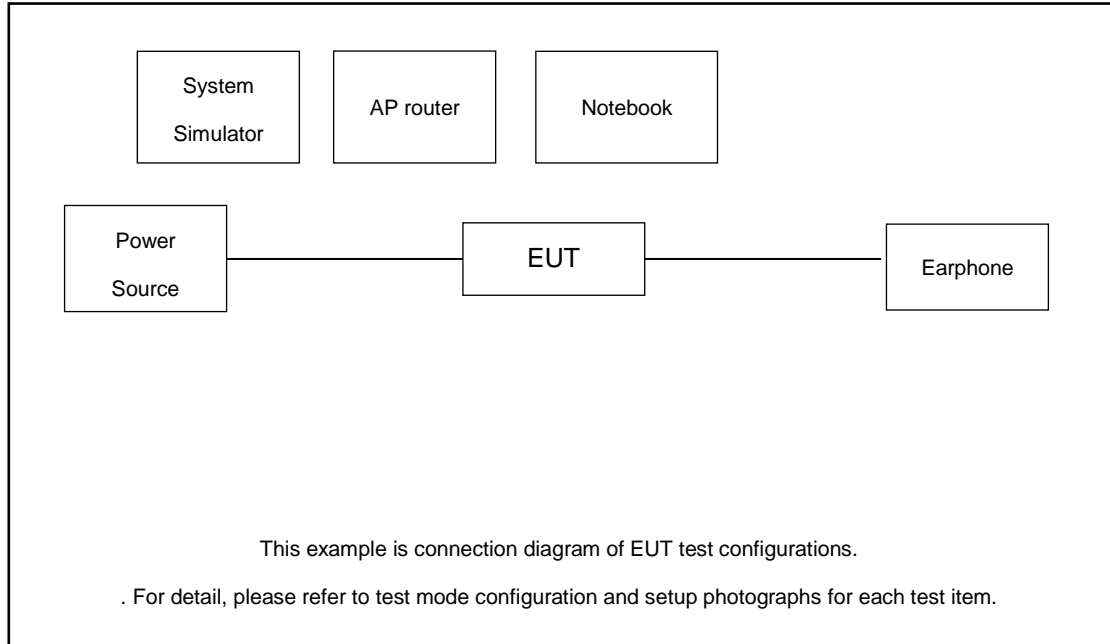



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6 .0dB.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB). \\ &= 6.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.



3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

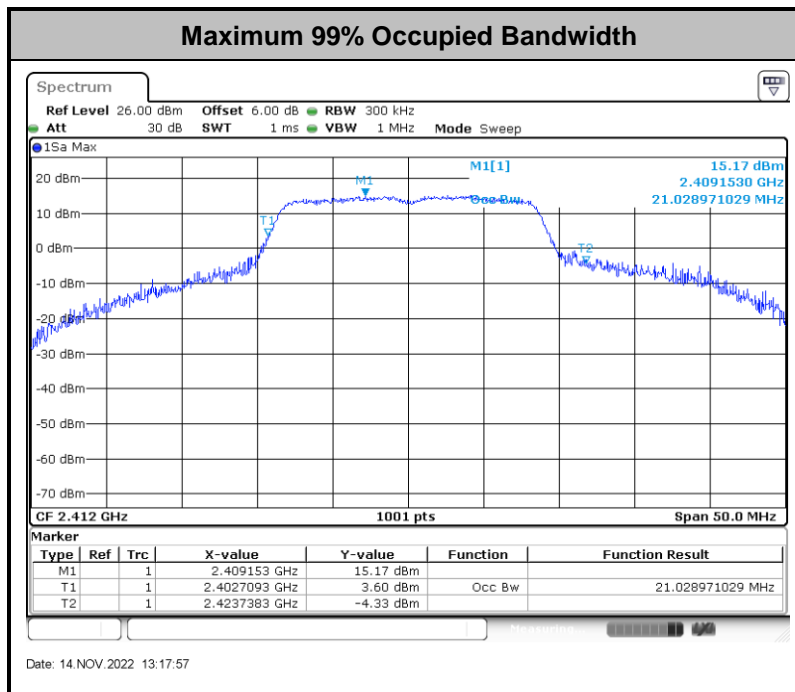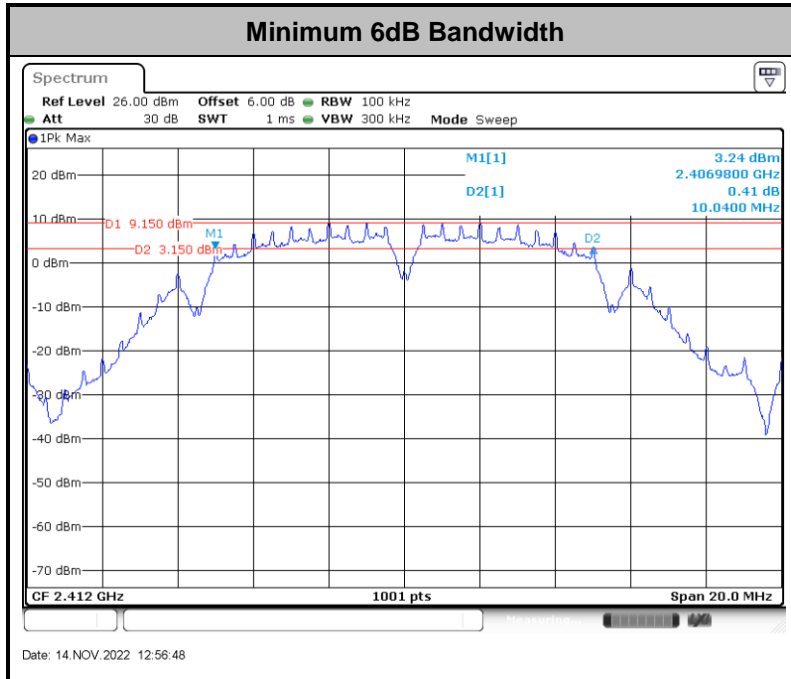

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

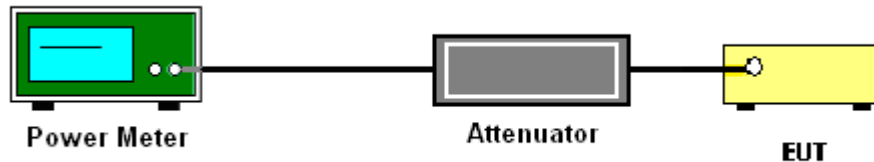

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

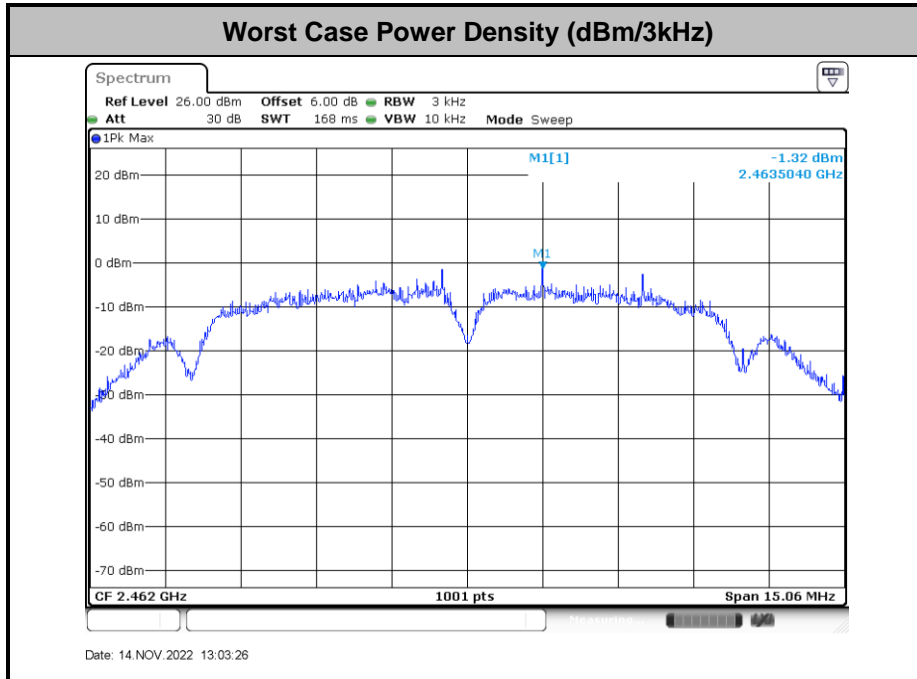

Date: 14.NOV.2022 13:03:26

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

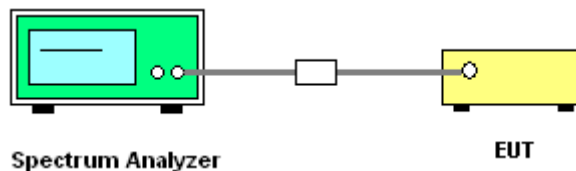




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Jacob Zhang	Temperature : 21~25°C
	Relative Humidity : 51~54%



Number of TX = 1, Ant. 1 (Measured)

Test Mode : 802.11b	Test Channel : 01
---------------------	-------------------

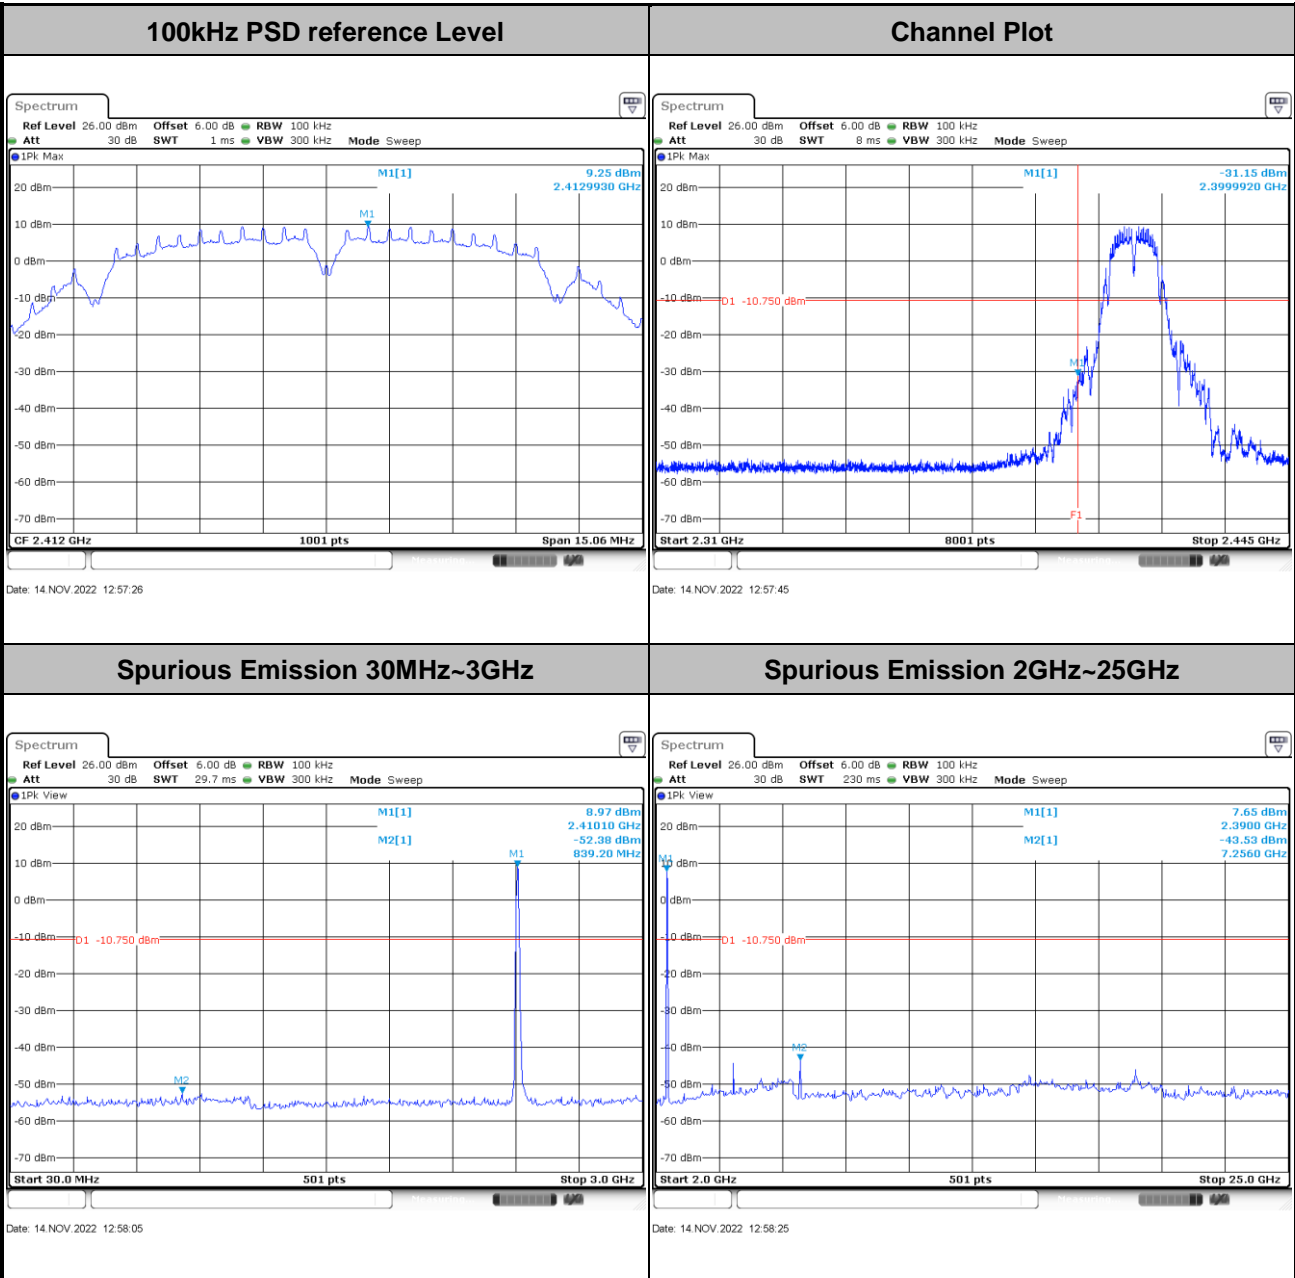





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

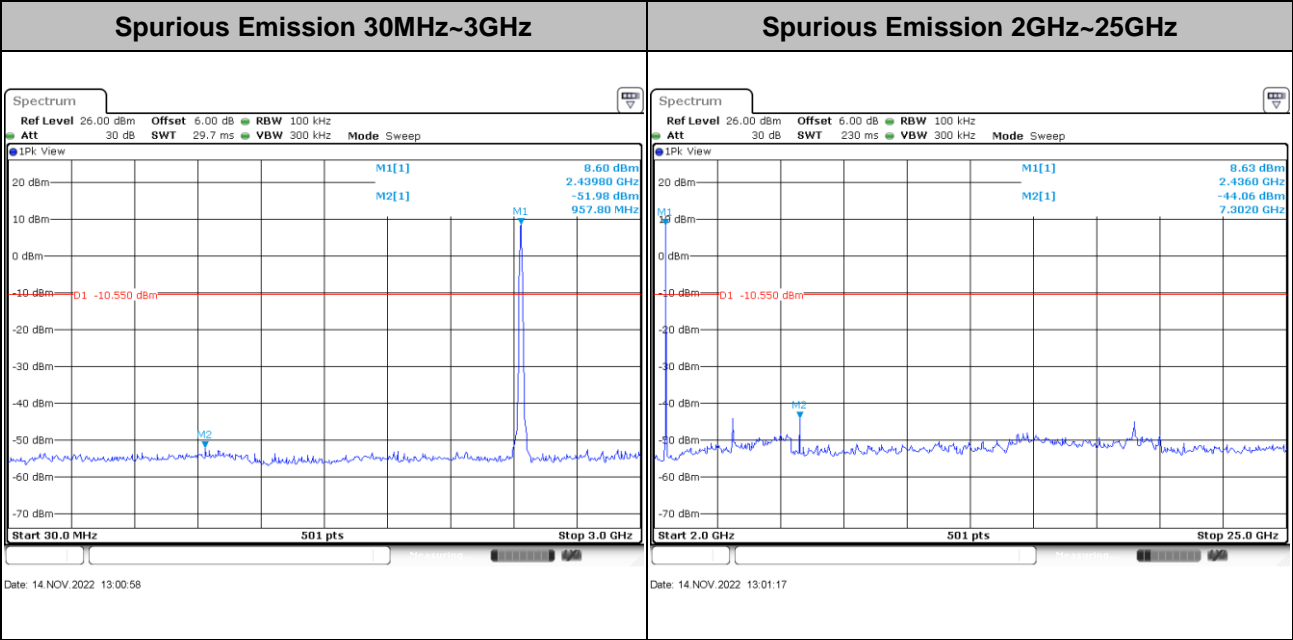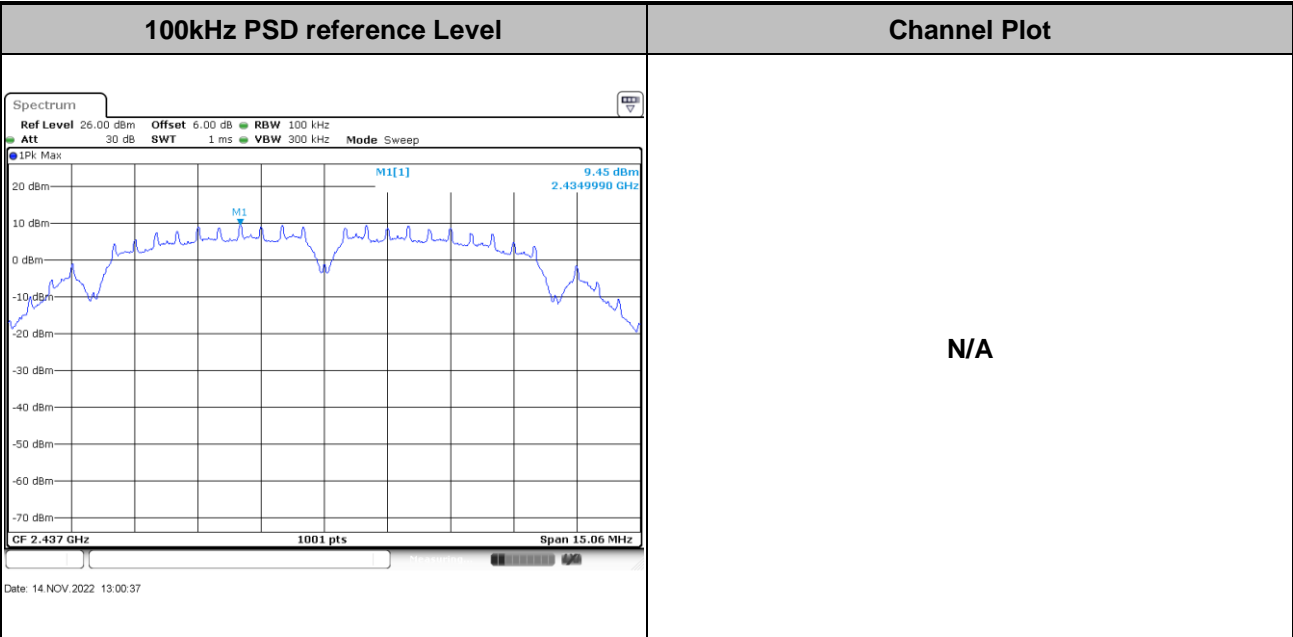





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

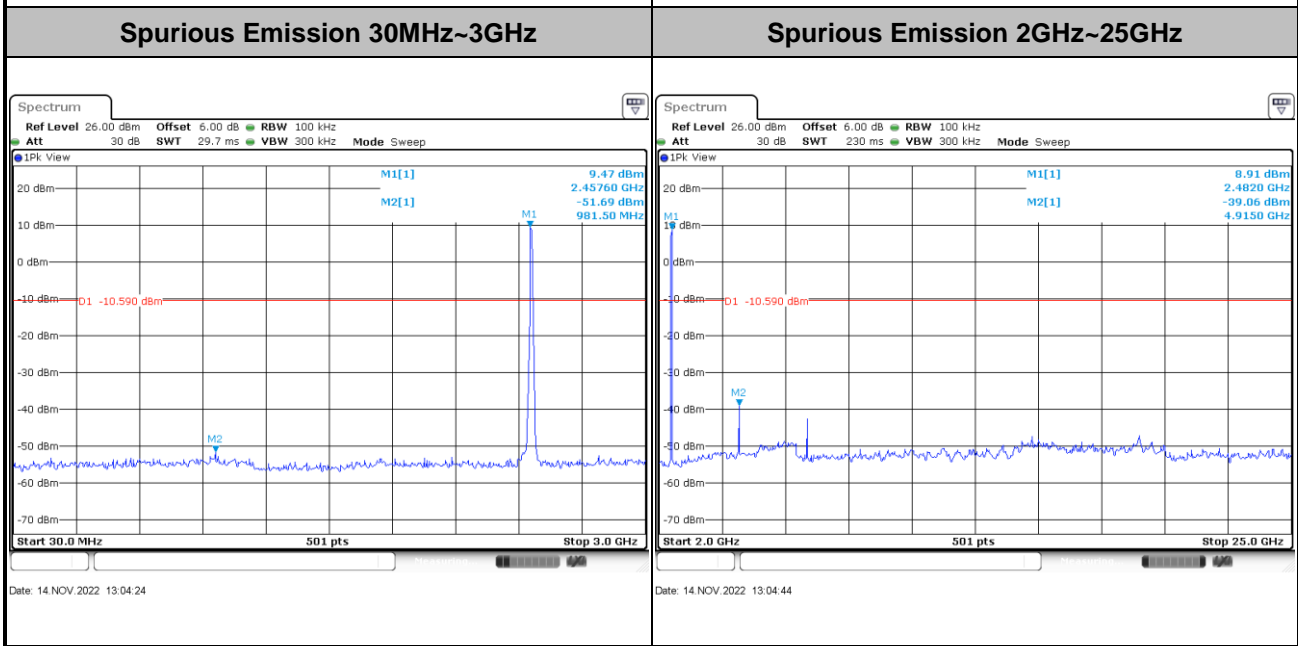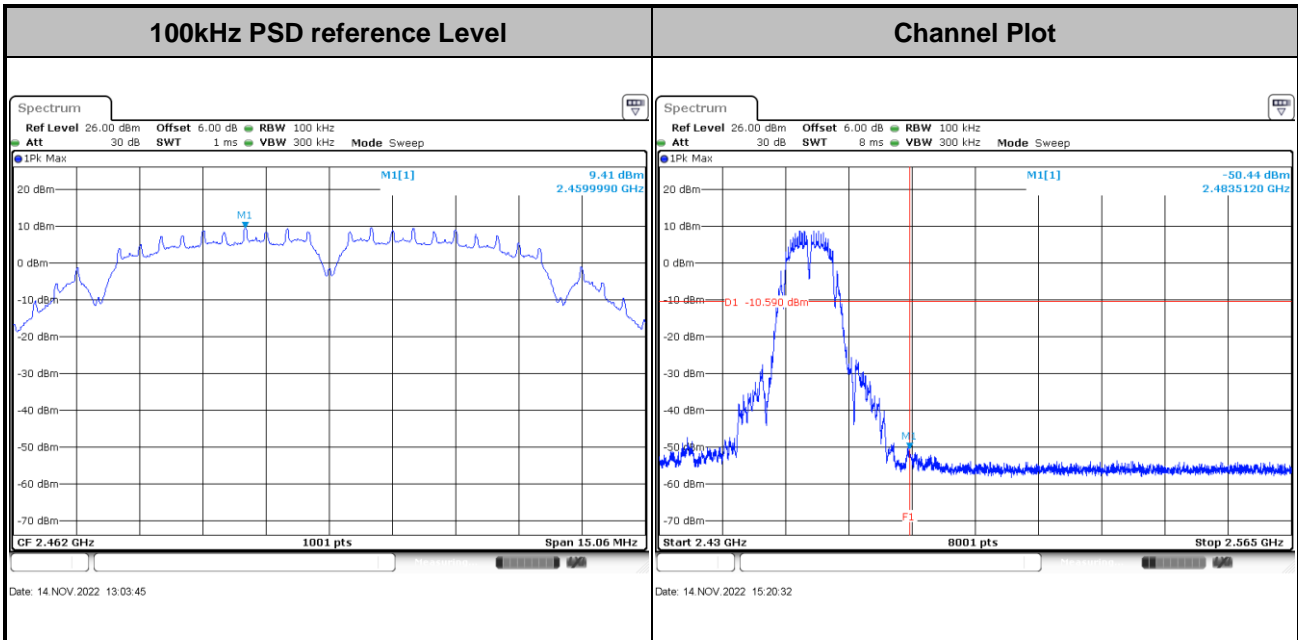





Test Mode : 802.11g Test Channel : 01

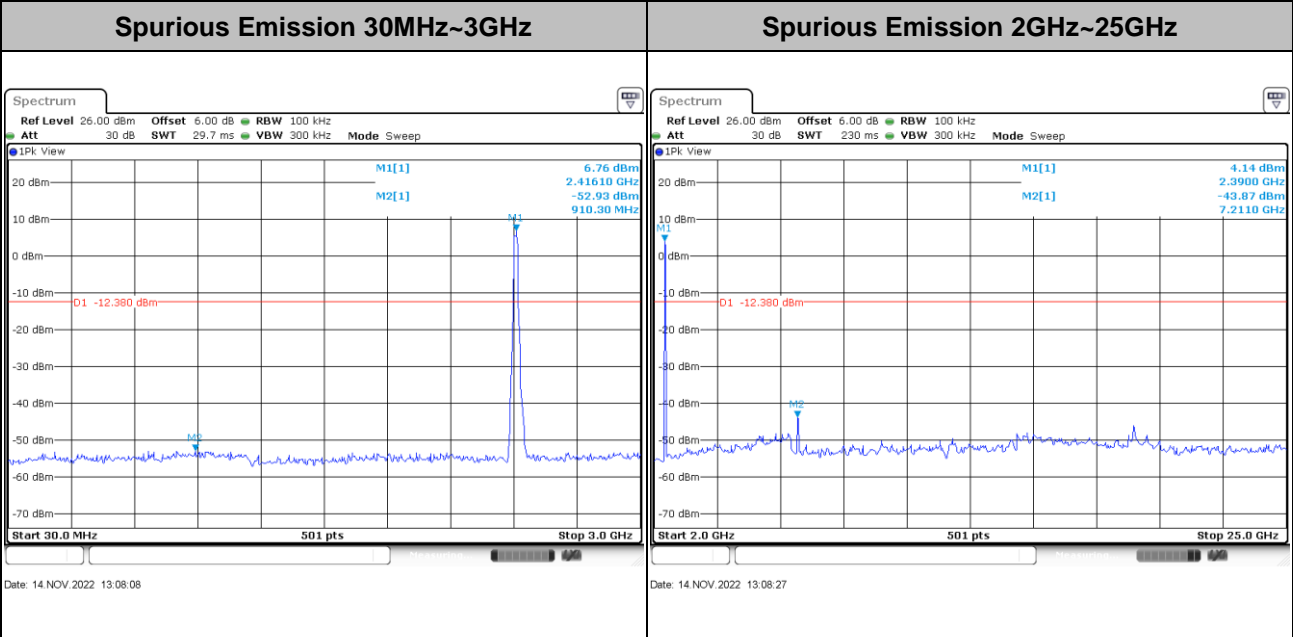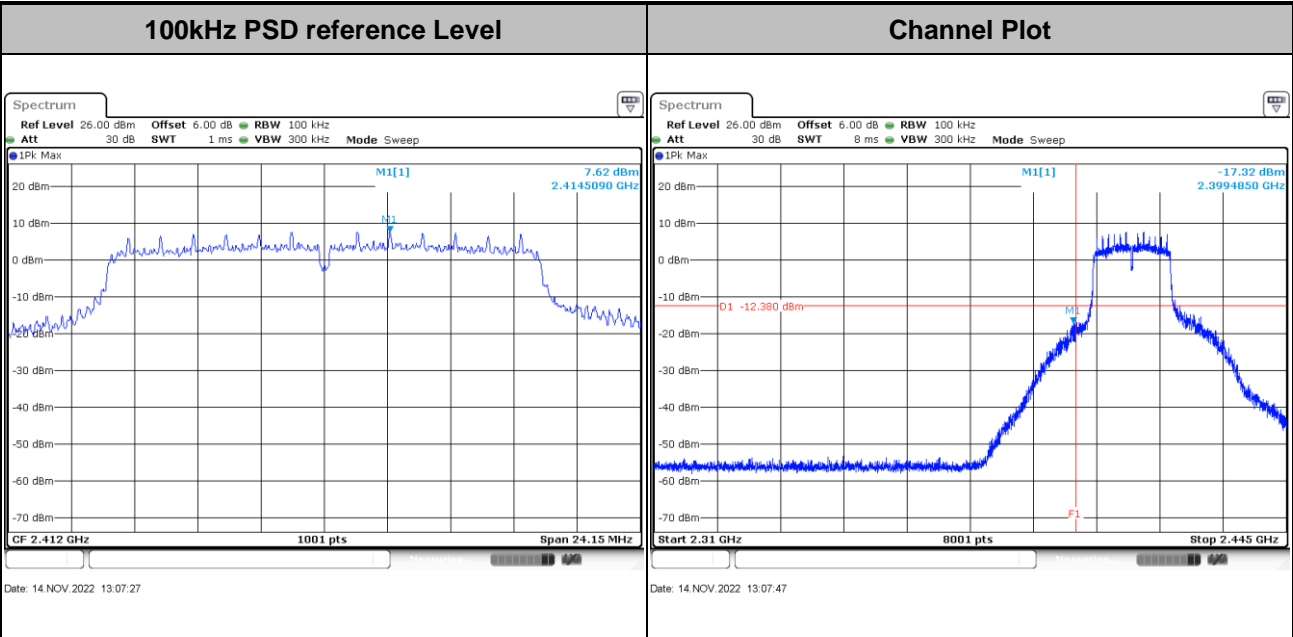





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

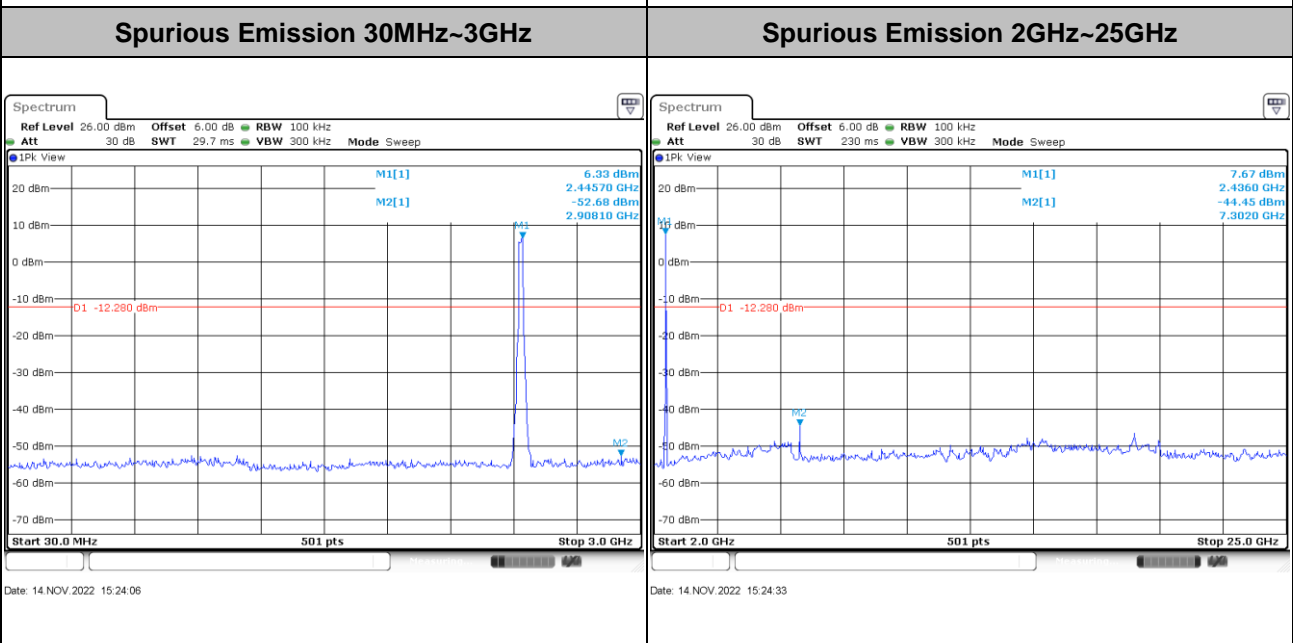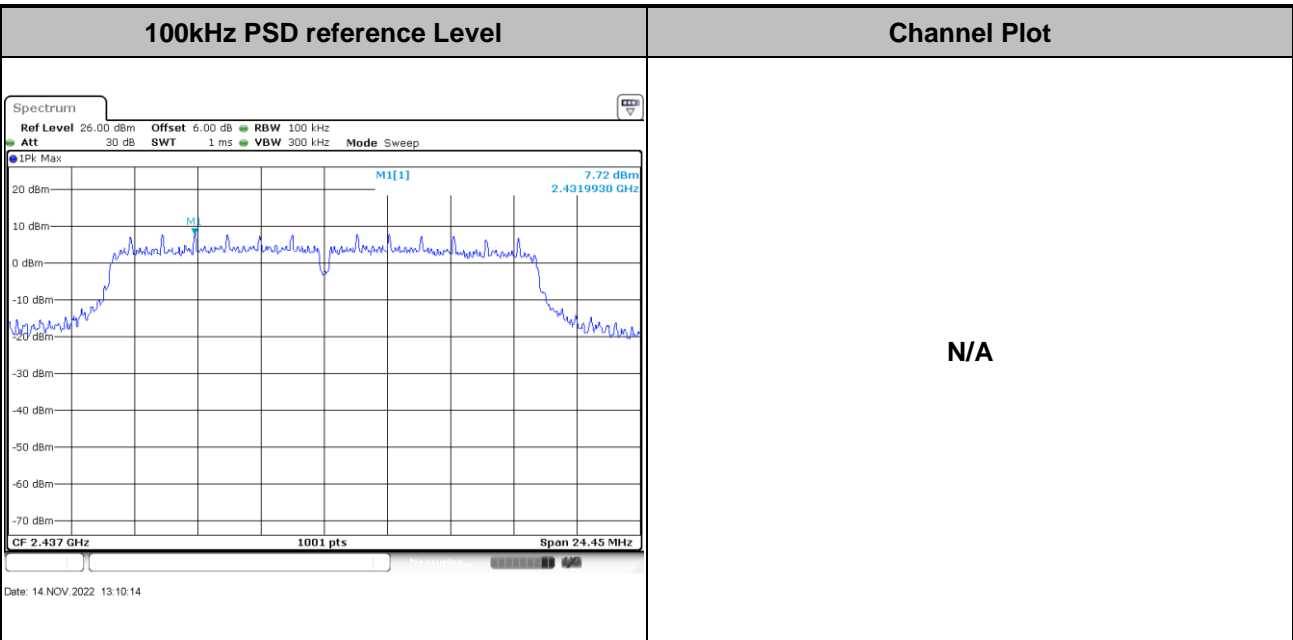





Test Mode : 802.11g Test Channel : 11

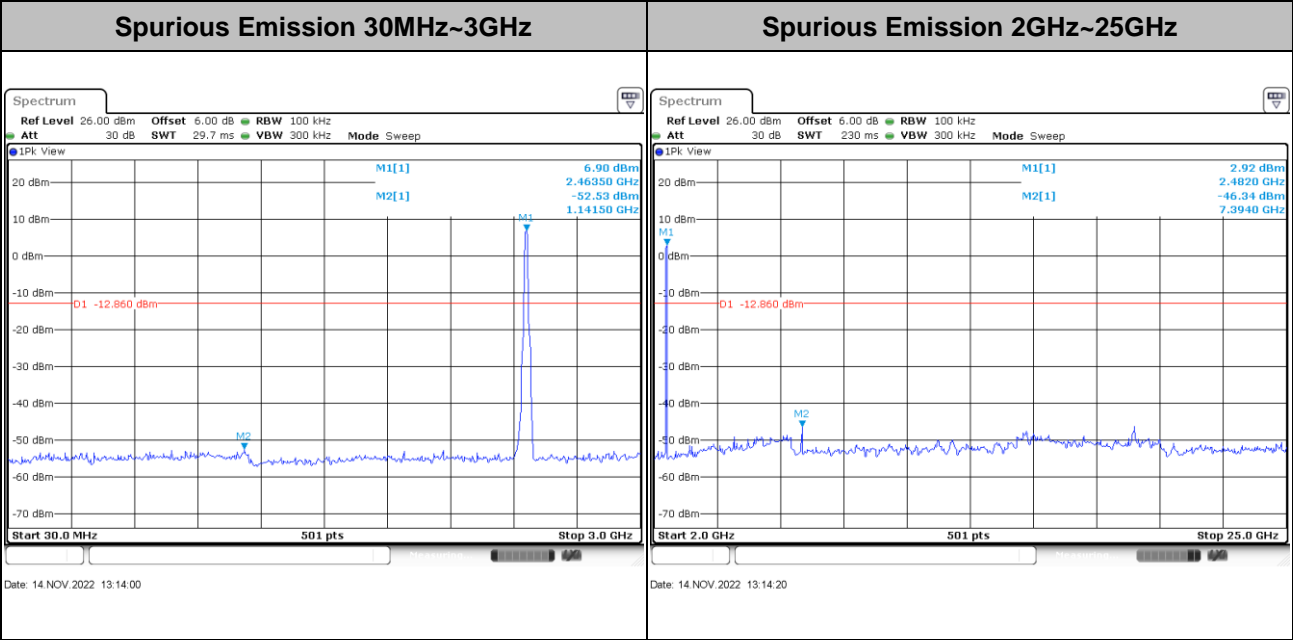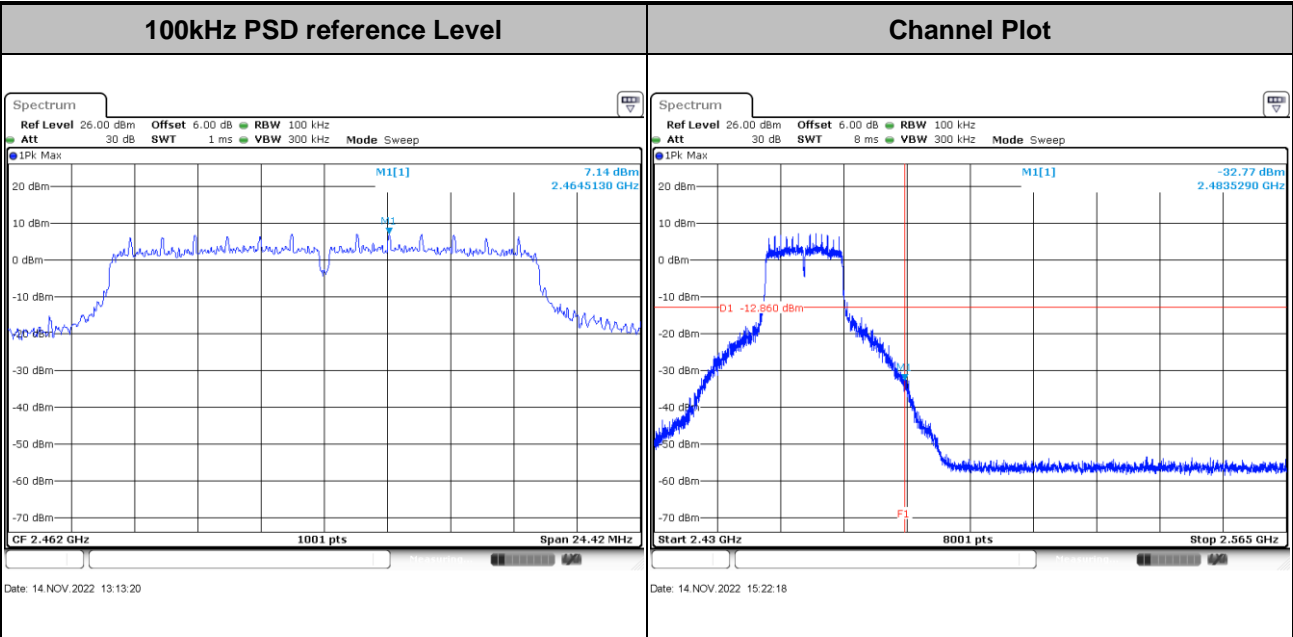





Test Mode : 802.11n HT20 Test Channel : 01

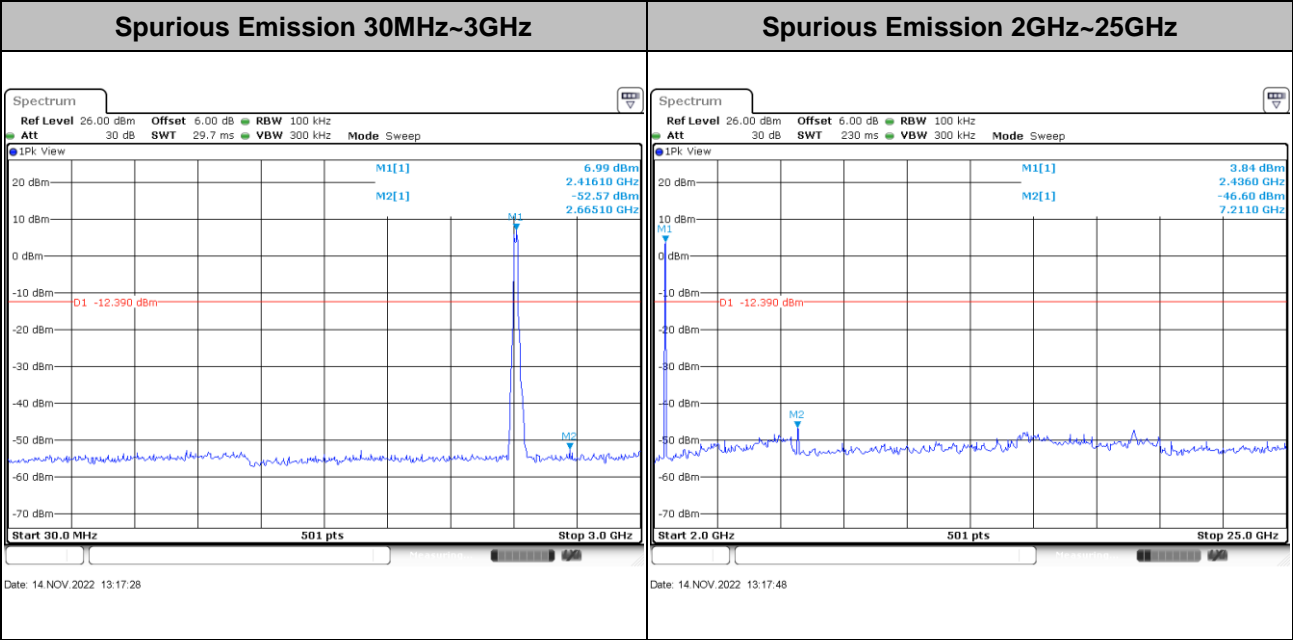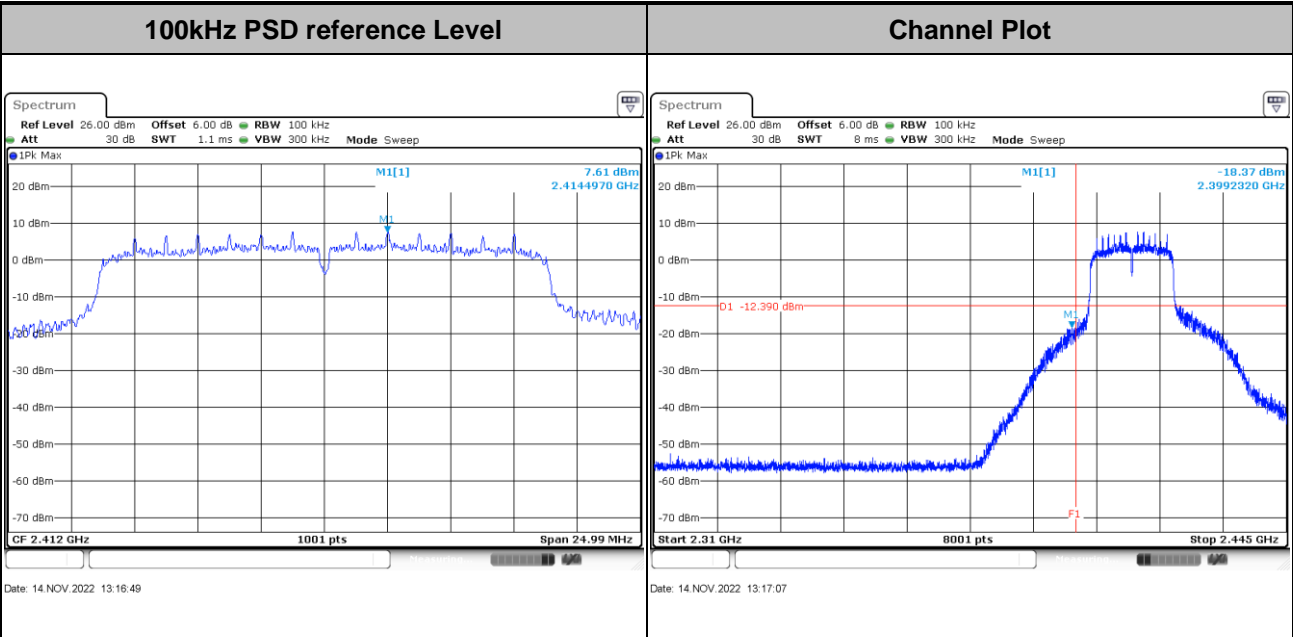





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

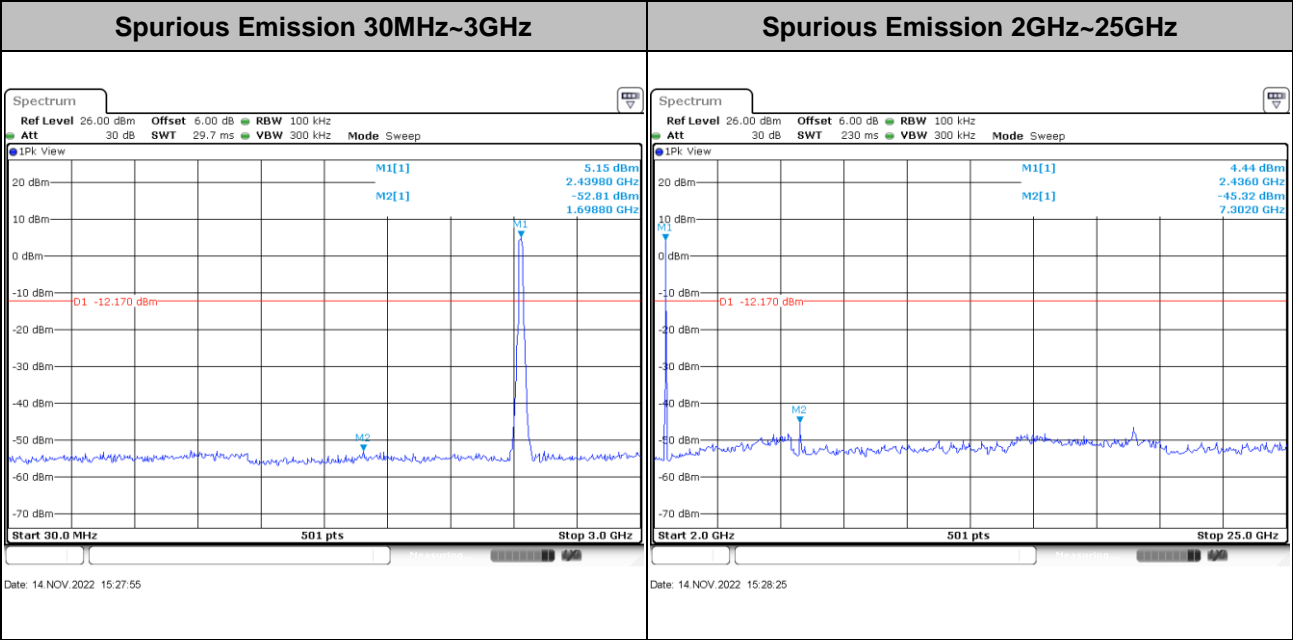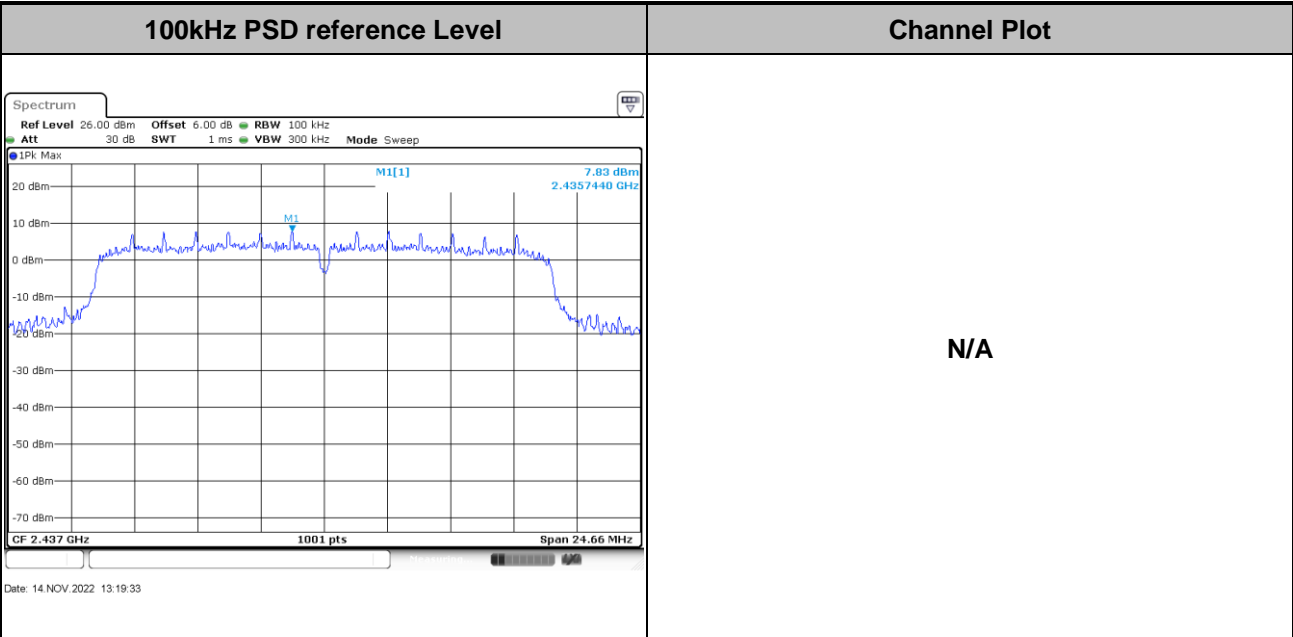



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

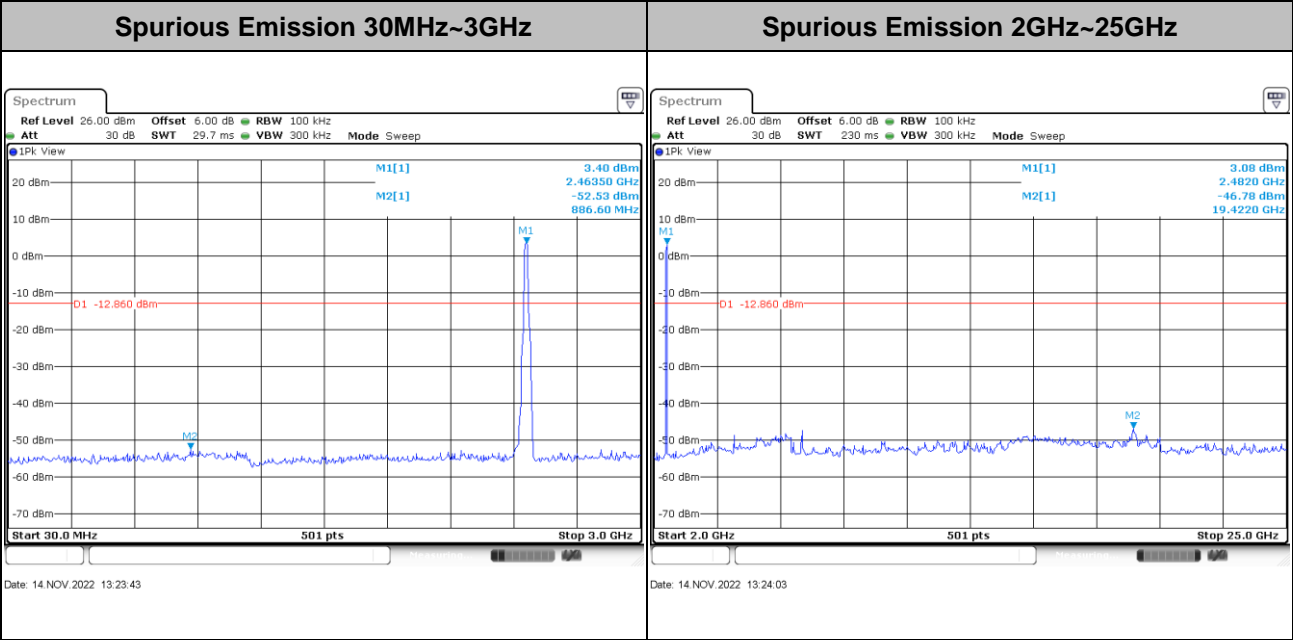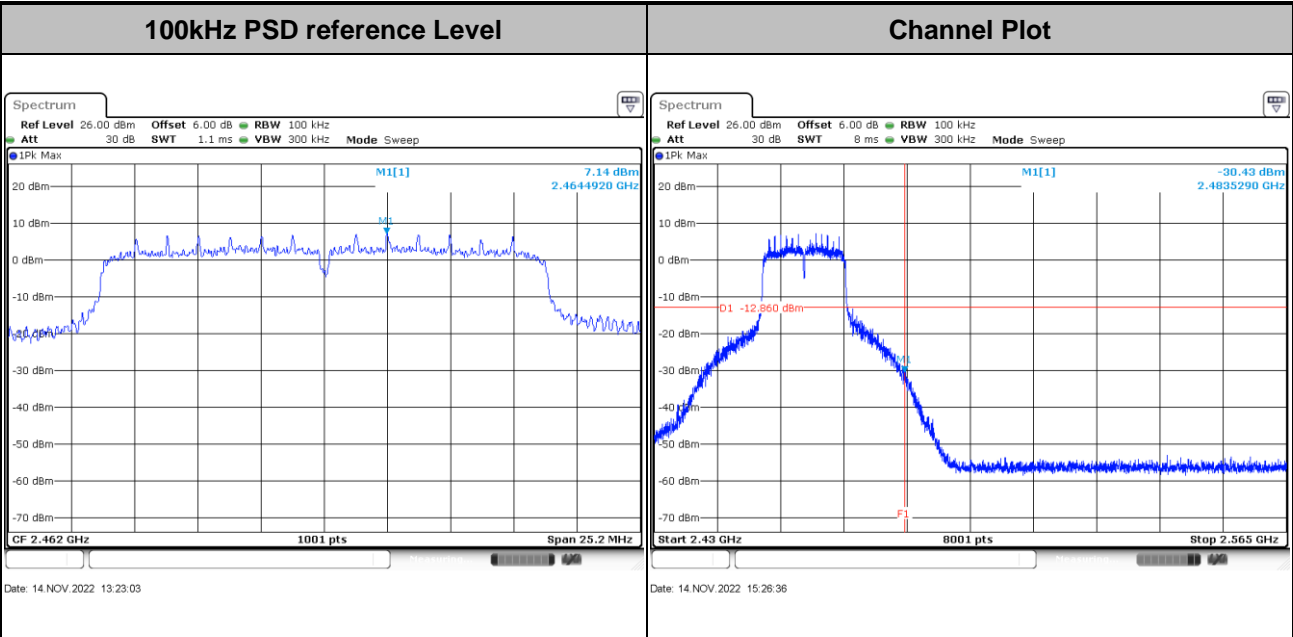



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

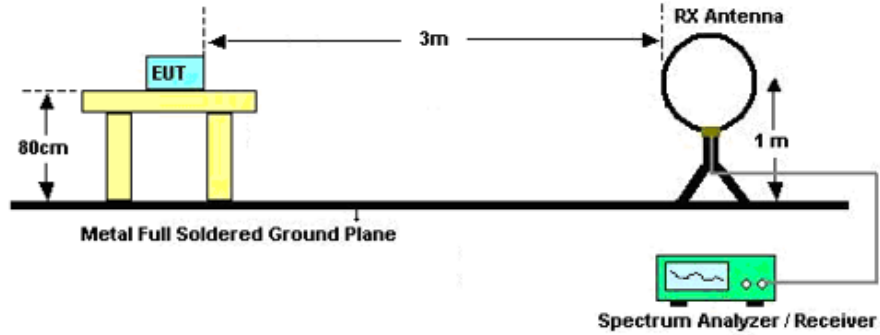

For radiated emissions from 30MHz to 1GHz

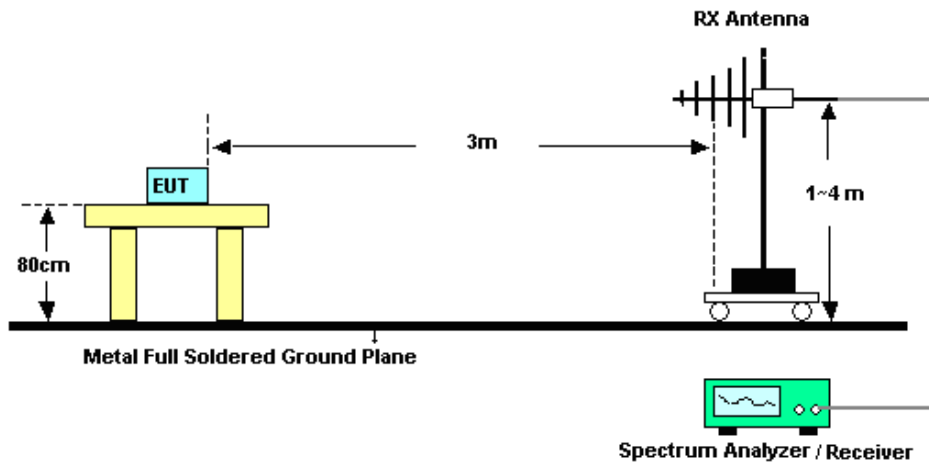

For radiated emissions above 1GHz

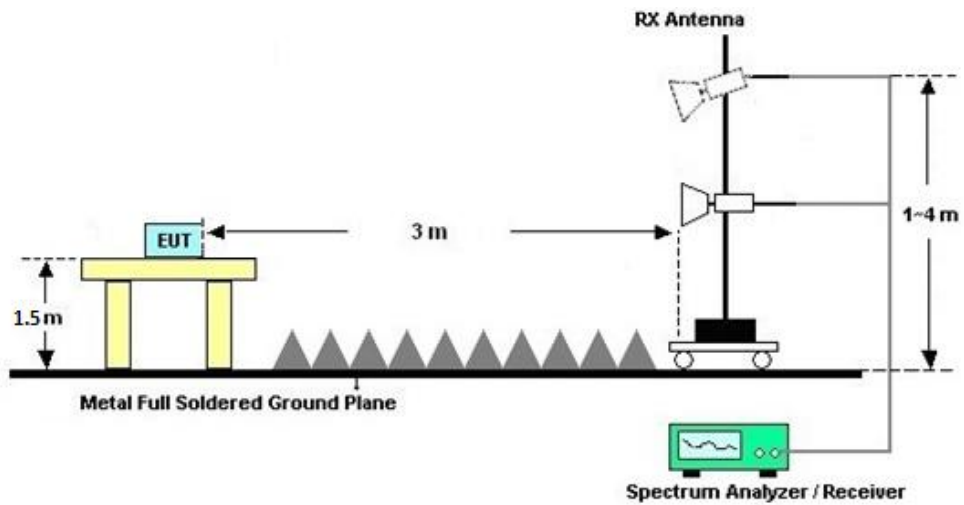



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

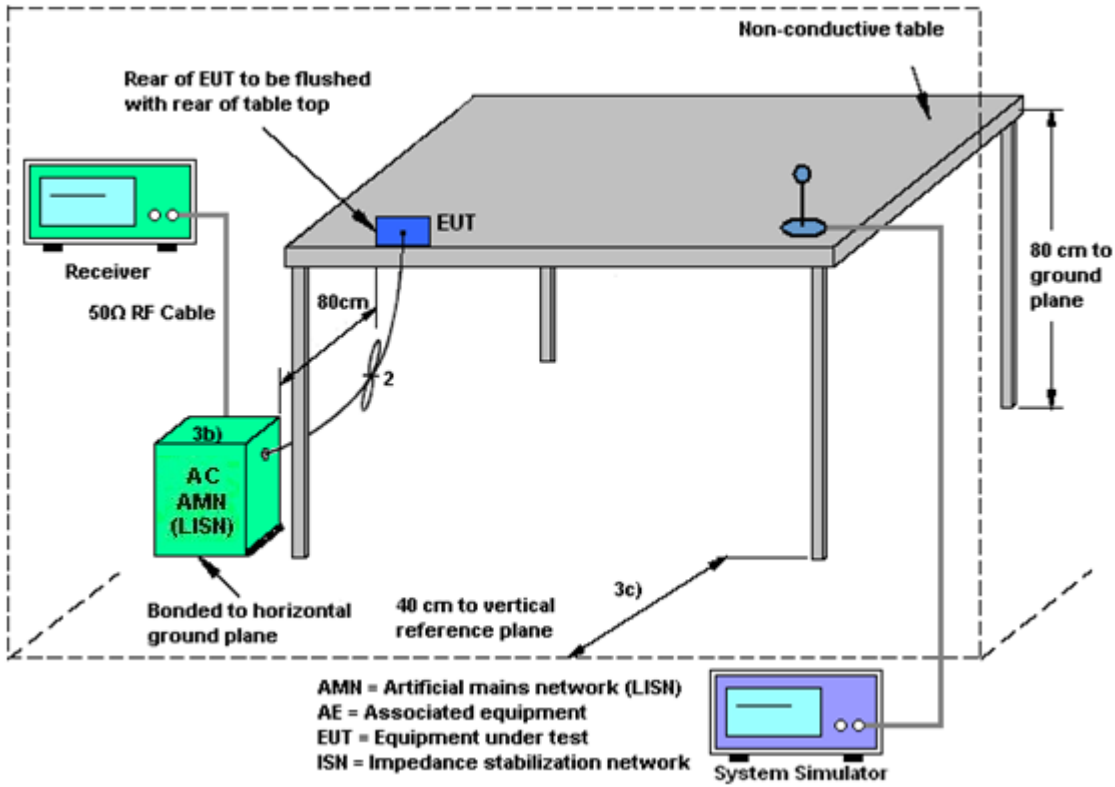

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark	
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov 14, 2022	Oct. 11, 2023	Conducted (TH01-KS)	
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov 14, 2022	Jan. 04, 2023	Conducted (TH01-KS)	
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov 14, 2022	Jan. 04, 2023	Conducted (TH01-KS)	
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Nov 09, 2022	Jul. 06 2023	Conduction (CO01-SZ)	
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Nov 09, 2022	Sep. 14, 2023	Conduction (CO01-SZ)	
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Nov 09, 2022	Oct. 16, 2023	Conduction (CO01-SZ)	
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul.07, 2022	Nov 09, 2022	Jul. 06, 2023	Conduction (CO01-SZ)	
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec.27, 2021	Dec 02, 2022	Dec.26, 2022	Radiation (03CH01-SZ)	
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Dec 02, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)	
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Dec 02, 2022	Jun. 27, 2024	Radiation (03CH01-SZ)	
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2022	Dec 02, 2022	Sep. 27, 2023	Radiation (03CH01-SZ)	
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Dec 02, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)	
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr.10, 2022	Dec 02, 2022	Apr.09 2023	Radiation (03CH01-SZ)	
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Dec 02, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)	
HF Amplifier	MITEQ	AMF-7D-0010	1800-30-10P-R	1943528	1GHz~18GHz	Oct.19,2022	Dec 02, 2022	Oct.18,2023	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct.19,2022	Dec 02, 2022	Oct.18,2023	Radiation (03CH01-SZ)	
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06. 2022	Dec 02, 2022	Jul. 05. 2023	Radiation (03CH01-SZ)	
AC Power Source	Chroma	61601	616010001985	N/A	Nov.10.2022	Dec 02, 2022	Nov.09.2023	Radiation (03CH01-SZ)	
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec 02, 2022	NCR	Radiation (03CH01-SZ)	

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---------------------------------------------------------------------	--------

----- THE END -----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/11/14	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.19	10.04	0.50	Pass
11b	1Mbps	1	6	2437	12.14	10.04	0.50	Pass
11b	1Mbps	1	11	2462	12.19	10.04	0.50	Pass
11g	6Mbps	1	1	2412	19.83	16.10	0.50	Pass
11g	6Mbps	1	6	2437	18.43	16.30	0.50	Pass
11g	6Mbps	1	11	2462	18.38	16.28	0.50	Pass
HT20	MCS0	1	1	2412	21.03	16.66	0.50	Pass
HT20	MCS0	1	6	2437	19.48	16.44	0.50	Pass
HT20	MCS0	1	11	2462	19.33	16.80	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	22.39	30.00	-3.00	19.39	36.00	Pass
11b	1Mbps	1	6	2437	22.78	30.00	-3.00	19.78	36.00	Pass
11b	1Mbps	1	11	2462	22.56	30.00	-3.00	19.56	36.00	Pass
11g	6Mbps	1	1	2412	24.44	30.00	-3.00	21.44	36.00	Pass
11g	6Mbps	1	6	2437	24.52	30.00	-3.00	21.52	36.00	Pass
11g	6Mbps	1	11	2462	24.45	30.00	-3.00	21.45	36.00	Pass
HT20	MCS0	1	1	2412	24.51	30.00	-3.00	21.51	36.00	Pass
HT20	MCS0	1	6	2437	24.74	30.00	-3.00	21.74	36.00	Pass
HT20	MCS0	1	11	2462	24.45	30.00	-3.00	21.45	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.12	19.06
11b	1Mbps	1	6	2437	0.12	19.33
11b	1Mbps	1	11	2462	0.12	19.23
11g	6Mbps	1	1	2412	0.49	19.32
11g	6Mbps	1	6	2437	0.49	19.44
11g	6Mbps	1	11	2462	0.49	19.40
HT20	MCS0	1	1	2412	0.55	19.10
HT20	MCS0	1	6	2437	0.55	19.33
HT20	MCS0	1	11	2462	0.55	19.35


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-1.92	-3.00	8.00	Pass
11b	1Mbps	1	6	2437	-1.33	-3.00	8.00	Pass
11b	1Mbps	1	11	2462	-1.32	-3.00	8.00	Pass
11g	6Mbps	1	1	2412	-6.97	-3.00	8.00	Pass
11g	6Mbps	1	6	2437	-6.59	-3.00	8.00	Pass
11g	6Mbps	1	11	2462	-7.28	-3.00	8.00	Pass
HT20	MCS0	1	1	2412	-6.86	-3.00	8.00	Pass
HT20	MCS0	1	6	2437	-6.24	-3.00	8.00	Pass
HT20	MCS0	1	11	2462	-7.56	-3.00	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

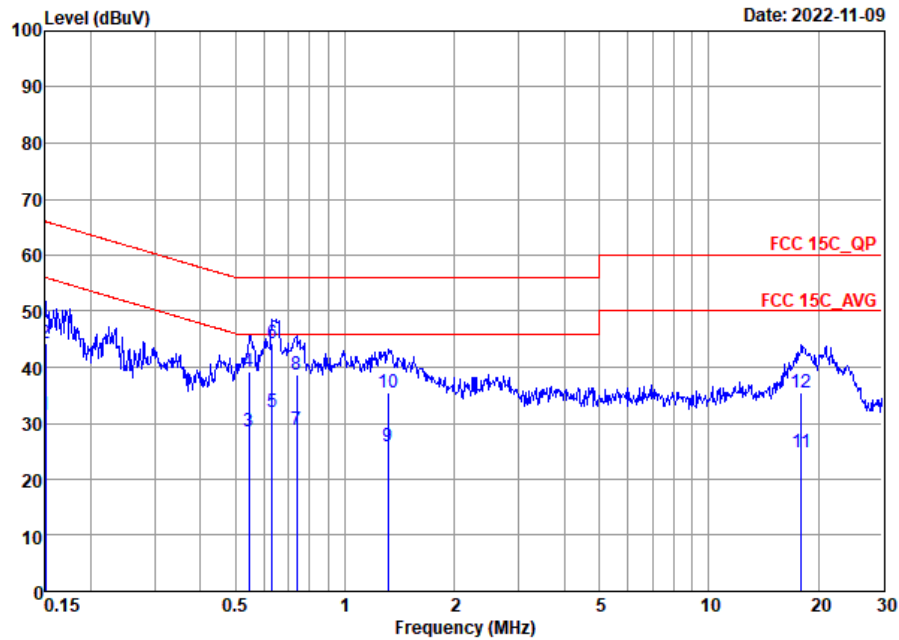


Site : CO01-SZ
 Condition: FCC 15C QP LISN_20220811_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	31.55	-24.45	56.00	10.50	10.20	10.85	Average
2	0.15	44.25	-21.75	66.00	23.20	10.20	10.85	QP
3	0.54	28.66	-17.34	46.00	6.90	10.11	11.65	Average
4	0.54	39.16	-16.84	56.00	17.40	10.11	11.65	QP
5	0.63	31.93	-14.07	46.00	10.50	10.12	11.31	Average
6 *	0.63	44.23	-11.77	56.00	22.80	10.12	11.31	QP
7	0.74	28.80	-17.20	46.00	7.70	10.15	10.95	Average
8	0.74	38.60	-17.40	56.00	17.50	10.15	10.95	QP
9	1.31	25.97	-20.03	46.00	5.60	10.14	10.23	Average
10	1.31	35.47	-20.53	56.00	15.10	10.14	10.23	QP
11	17.94	24.78	-25.22	50.00	4.61	9.82	10.35	Average
12	17.94	35.58	-24.42	60.00	15.41	9.82	10.35	QP



Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

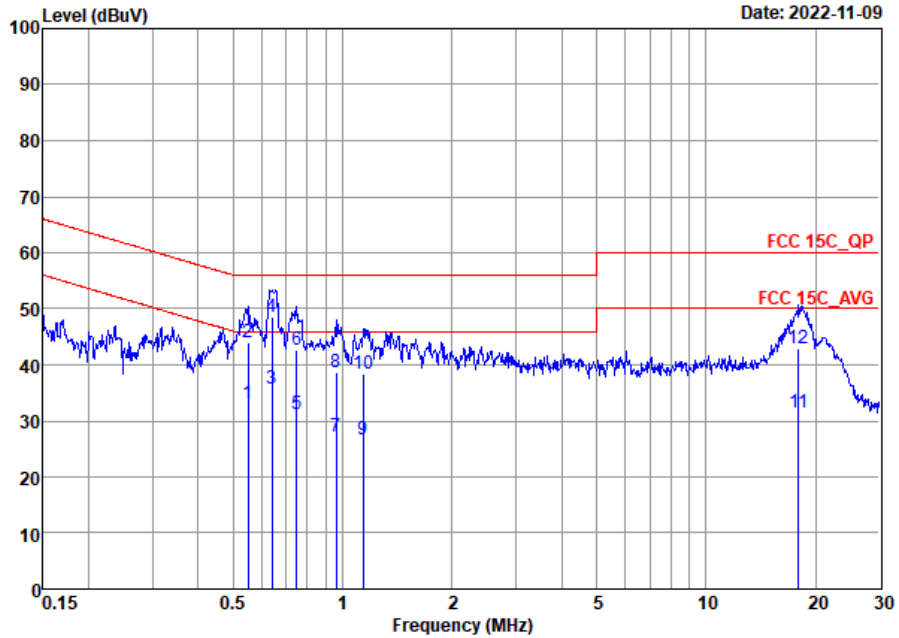

Site : C001-SZ
 Condition: FCC 15C OP LISN_20220811_ N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.55	33.05	-12.95	46.00	11.20	10.22	11.63	Average
2	0.55	44.05	-11.95	56.00	22.20	10.22	11.63	QP
3	0.64	35.70	-10.30	46.00	14.20	10.23	11.27	Average
4 *	0.64	48.40	-7.60	56.00	26.90	10.23	11.27	QP
5	0.75	31.33	-14.67	46.00	10.20	10.22	10.91	Average
6	0.75	42.63	-13.37	56.00	21.50	10.22	10.91	QP
7	0.96	27.32	-18.68	46.00	6.80	10.18	10.34	Average
8	0.96	38.72	-17.28	56.00	18.20	10.18	10.34	QP
9	1.14	26.77	-19.23	46.00	6.30	10.24	10.23	Average
10	1.14	38.27	-17.73	56.00	17.80	10.24	10.23	QP
11	17.94	31.34	-18.66	50.00	11.20	9.79	10.35	Average
12	17.94	42.94	-17.06	60.00	22.80	9.79	10.35	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	50.9	-23.1	74	42.92	32.26	7.8	32.08	100	178	P	H
		2389.59	43.38	-10.62	54	35.39	32.26	7.8	32.07	100	178	A	H
	*	2412	98.85	-	-	90.82	32.31	7.8	32.08	100	178	P	H
	*	2412	96.87	-	-	88.84	32.31	7.8	32.08	100	178	A	H
		2389.905	51.5	-22.5	74	43.52	32.26	7.8	32.08	110	237	P	V
		2389.485	44.28	-9.72	54	36.29	32.26	7.8	32.07	110	237	A	V
	*	2412	100.95	-	-	92.92	32.31	7.8	32.08	110	237	P	V
	*	2412	98.93	-	-	90.9	32.31	7.8	32.08	110	237	P	V
802.11b CH 06 2437MHz		2383.64	47.72	-26.28	74	39.86	32.24	7.69	32.07	100	230	P	H
		2388.4	37.67	-16.33	54	29.69	32.25	7.8	32.07	100	230	A	H
	*	2437	99.83	-	-	91.71	32.36	7.84	32.08	100	230	P	H
	*	2437	97.87	-	-	89.75	32.36	7.84	32.08	100	230	A	H
		2487.33	47.42	-26.58	74	39.16	32.47	7.88	32.09	100	230	P	H
		2483.62	38.27	-15.73	54	30.02	32.46	7.88	32.09	100	230	A	H
		2359.14	48.66	-25.34	74	40.85	32.19	7.69	32.07	100	238	P	V
		2388.4	37.91	-16.09	54	29.93	32.25	7.8	32.07	100	238	A	V
	*	2437	101.12	-	-	93	32.36	7.84	32.08	100	238	P	V
	*	2437	99.18	-	-	91.06	32.36	7.84	32.08	100	238	A	V
		2483.9	47.72	-26.28	74	39.47	32.46	7.88	32.09	100	238	P	V
		2483.69	38.34	-15.66	54	30.09	32.46	7.88	32.09	100	238	A	V



802.11b CH 11 2462MHz	*	2462	101.24	-	-	93.07	32.42	7.84	32.09	100	234	P	H
	*	2462	99.24	-	-	91.07	32.42	7.84	32.09	100	234	A	H
		2487.24	48.67	-25.33	74	40.41	32.47	7.88	32.09	100	234	P	H
		2483.52	39.04	-14.96	54	30.79	32.46	7.88	32.09	100	234	A	H
	*	2462	102.38	-	-	94.21	32.42	7.84	32.09	117	239	P	V
	*	2462	100.63	-	-	92.46	32.42	7.84	32.09	117	239	A	V
		2483.64	48.87	-25.13	74	40.62	32.46	7.88	32.09	117	239	P	V
		2483.52	39.35	-14.65	54	31.1	32.46	7.88	32.09	117	239	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	48.92	-25.08	74	54.58	34.83	11.08	51.57	-	-	P	H
		4824	49.14	-24.86	74	54.8	34.83	11.08	51.57	-	-	P	V
802.11b CH 06 2437MHz		4874	49.62	-24.38	74	55.23	34.85	11.09	51.55	-	-	P	H
		7311	47.62	-26.38	74	49.38	36.32	13.08	51.16	-	-	P	H
		4874	51.16	-22.84	74	56.77	34.85	11.09	51.55	260	327	P	V
		4874	46.8	-7.2	54	52.41	34.85	11.09	51.55	260	327	A	V
802.11b CH 11 2462MHz		4924	50.45	-23.55	74	55.98	34.87	11.13	51.53	-	-	P	H
		7386	48.52	-25.48	74	50.21	36.35	13.14	51.18	-	-	P	H
		4924	51.66	-22.34	74	57.19	34.87	11.13	51.53	100	5	P	V
		4924	47.81	-6.19	54	53.34	34.87	11.13	51.53	100	5	A	V
		7386	47.46	-26.54	74	49.15	36.35	13.14	51.18	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and CH 06 (2437MHz).



802.11g CH 11 2462MHz	*	2462	102.97	-	-	94.8	32.42	7.84	32.09	101	148	P	H
	*	2462	96.12	-	-	87.95	32.42	7.84	32.09	101	148	A	H
		2484.16	52.62	-21.38	74	44.36	32.47	7.88	32.09	101	148	P	H
		2483.8	40.24	-13.76	54	31.99	32.46	7.88	32.09	101	148	A	H
	*	2462	107.26	-	-	99.09	32.42	7.84	32.09	101	94	P	V
	*	2462	100.35	-	-	92.18	32.42	7.84	32.09	101	94	A	V
		2483.84	57.66	-16.34	74	49.41	32.46	7.88	32.09	101	94	P	V
		2483.6	43.93	-10.07	54	35.68	32.46	7.88	32.09	101	94	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.98	-29.02	74	50.64	34.83	11.08	51.57	-	-	P	H
		4824	45.47	-28.53	74	51.13	34.83	11.08	51.57	-	-	P	V
802.11g CH 06 2437MHz		4874	49.41	-24.59	74	55.02	34.85	11.09	51.55	-	-	P	H
		7311	48.73	-25.27	74	50.49	36.32	13.08	51.16	-	-	P	H
		4874	51.28	-22.72	74	56.89	34.85	11.09	51.55	354	64	P	V
		4874	40.18	-13.82	54	45.79	34.85	11.09	51.55	354	64	A	V
802.11g CH 11 2462MHz		4924	46.01	-27.99	74	51.54	34.87	11.13	51.53	-	-	P	H
		7386	48.25	-25.75	74	49.94	36.35	13.14	51.18	-	-	P	H
		4924	48	-26	74	53.53	34.87	11.13	51.53	393	40	P	V
		7386	47.86	-26.14	74	49.55	36.35	13.14	51.18	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 01 (2412MHz) and CH 06 (2437MHz).



802.11n HT20 CH 11 2462MHz	*	2462	101.67	-	-	93.5	32.42	7.84	32.09	100	149	P	H
	*	2462	94.09	-	-	85.92	32.42	7.84	32.09	100	149	A	H
		2483.6	54.43	-19.57	74	46.18	32.46	7.88	32.09	100	149	P	H
		2483.52	42.06	-11.94	54	33.81	32.46	7.88	32.09	100	149	A	H
	*	2462	108.57	-	-	100.4	32.42	7.84	32.09	100	92	P	V
	*	2462	100.45	-	-	92.28	32.42	7.84	32.09	100	92	A	V
		2484.52	61.3	-12.7	74	53.04	32.47	7.88	32.09	100	92	P	V
		2483.6	47.13	-6.87	54	38.88	32.46	7.88	32.09	100	92	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for CH 01 (2412MHz) and CH 06 (2437MHz).



Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

Table with 14 columns: WIFI, Note, Frequency, Level, Margin, Limit, Read, Antenna, Path, Preamp, Ant, Table, Peak, Pol. It contains 12 rows of test data for 2.4GHz WIFI 802.11b LF and a Remark section at the bottom.



<Co-colation>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz + GSM850 Co-colation	*	2462	98.81	-	-	90.64	32.42	7.84	32.09	120	331	P	H
	*	2462	96.93	-	-	88.76	32.42	7.84	32.09	120	331	A	H
		2487	47.87	-26.13	74	39.61	32.47	7.88	32.09	120	331	P	H
		2483.52	37.82	-16.18	54	29.57	32.46	7.88	32.09	120	331	A	H
	*	2462	100.79	-	-	92.62	32.42	7.84	32.09	220	300	P	V
	*	2462	98.94	-	-	90.77	32.42	7.84	32.09	220	300	A	V
		2483.68	48.36	-25.64	74	40.11	32.46	7.88	32.09	220	300	P	V
		2483.52	37.71	-16.29	54	29.46	32.46	7.88	32.09	220	300	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz &GSM850 Co-olation		1672.8	46.41	-27.59	74	42.36	29.96	6.57	32.48	-	-	P	H
		2509.2	48.87	-25.13	74	40.53	32.53	7.91	32.1	-	-	P	H
		3345.6	42.61	-31.39	74	50.87	34.61	9.03	51.9	-	-	P	H
		4924	50.81	-23.19	74	56.34	34.87	11.13	51.53	259	290	P	H
		7386	48.82	-25.18	74	50.51	36.35	13.14	51.18	-	-	P	H
		1672.8	49.1	-24.9	74	45.05	29.96	6.57	32.48	-	-	P	V
		2509.2	50.38	-23.62	74	42.04	32.53	7.91	32.1	-	-	P	V
		3345.6	42.72	-31.28	74	50.98	34.61	9.03	51.9	-	-	P	V
		4924	51.5	-22.5	74	57.03	34.87	11.13	51.53	392	34	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.32	8.406	0.119	300Hz
802.11g	89.35	1.399	0.715	1KHz
802.11n HT20	88.18	1.297	0.771	1KHz

802.11b

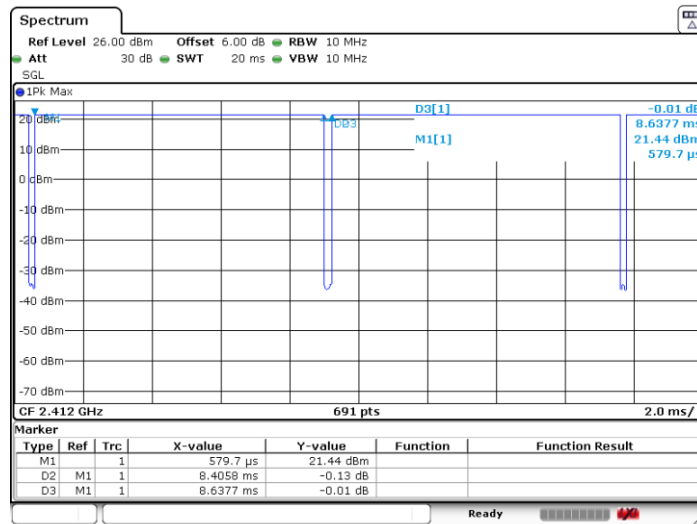

802.11g

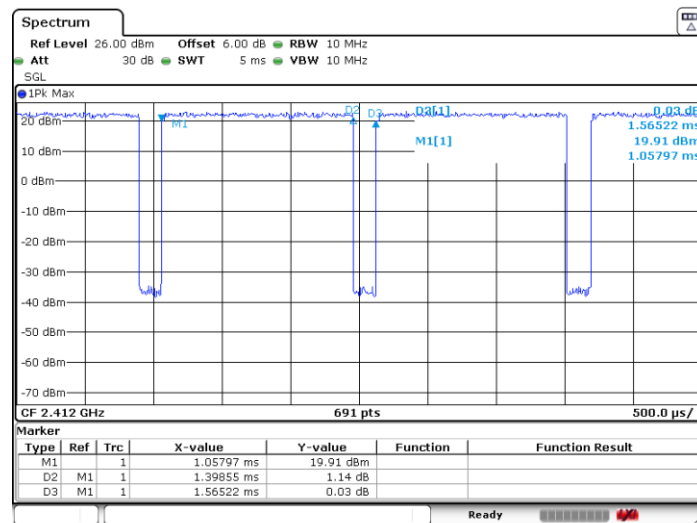



802.11n HT20

