



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2315-1, XT2315-4, XT2315-5
FCC ID : IHDT56AL2
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Dec. 03, 2022 ~ Dec. 25, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Specification of Accessory..... 6

 1.7 Testing Location 6

 1.8 Test Software..... 7

 1.9 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 Carrier Frequency Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 13

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 16

 3.5 Radiated Band Edges and Spurious Emission Measurement 17

 3.6 AC Conducted Emission Measurement..... 21

 3.7 Antenna Requirements 23

4 LIST OF MEASURING EQUIPMENT..... 24

5 UNCERTAINTY OF EVALUATION..... 25

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2N2910B	Rev. 01	Initial issue of report	Jan. 20, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.38 dB at 2483.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.94 dB at 0.62 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2315-1, XT2315-4, XT2315-5
FCC ID	IHDT56AL2
IMEI Code	Conducted: 359709930025070/359709930025534 Conduction: 359709930026250/359709930026268 Radiation: 359709930024958
HW Version	DVT2
SW Version	T1TGN33.33
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The three model name XT2315-1, XT2315-4, XT2315-5 are the same product except model name different for market segment.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE1Mbps: 6.16 dBm (0.0041 W) BLE2Mbps: 6.25 dBm (0.0042 W)
99% Occupied Bandwidth	BLE1Mbps: 1.035 MHz BLE2Mbps: 2.054 MHz
Antenna Type / Gain	ILA Antenna with gain -5.5 dBi
Type of Modulation	Bluetooth LE : GFSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 4	Brand Name	Motorola(Salcomp)	Model Name	MC-101
Battery 1	Brand Name	Motorola(ATL)	Model Name	PG50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	PG50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D22299

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272



1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps & 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps & 2Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + BT Link + Adaptor 1 + USB Cable 1 + Battery 1 + Earphone


Co-location
Bluetooth-LE 2Mbps CH39_2480MHz + LTE Band 30 Link

Remark:


- 1. For Radiated Test Cases, The tests were performance with Adapter 1, Earphone and, USB Cable 1.
- 2. The RSE Co-location mode is assessed from the worst BLE TX + WWAN Link mode.

2.3 Connection Diagram of Test System

AC Conducted Emission:

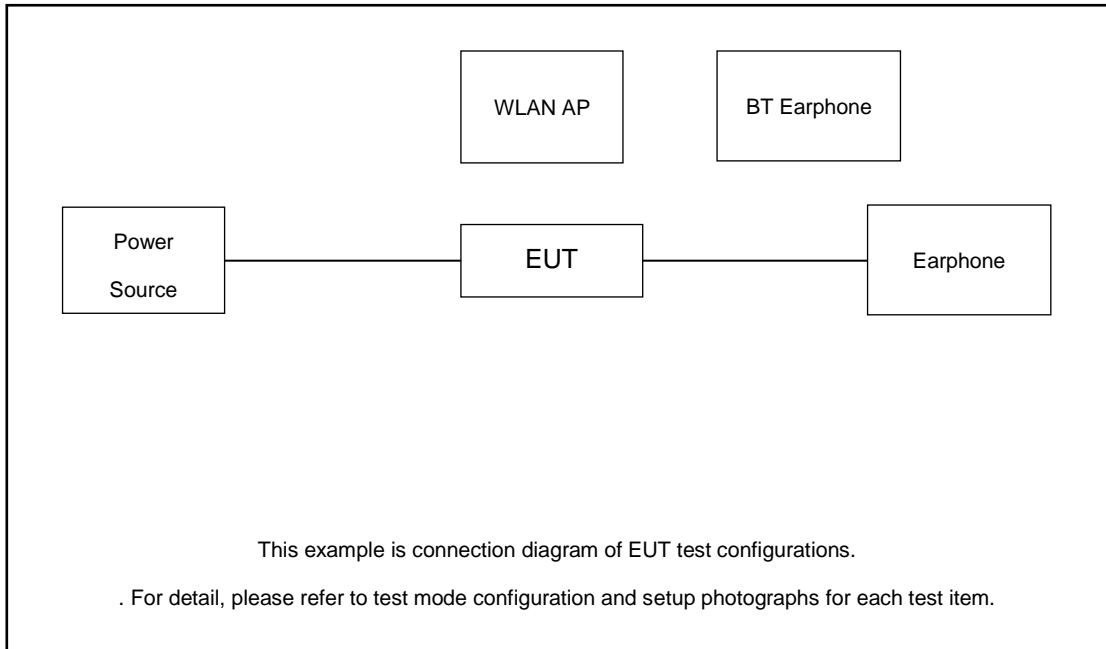

Radiated Emission:

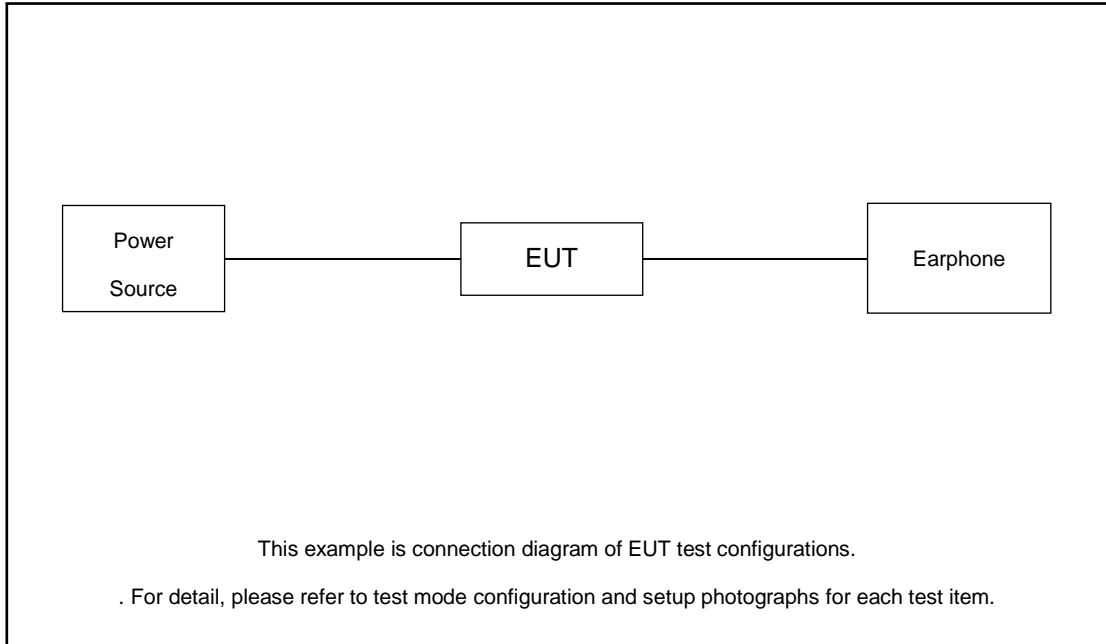

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.50 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.50 + 10 = 11.50 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

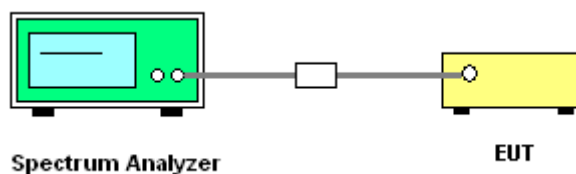

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

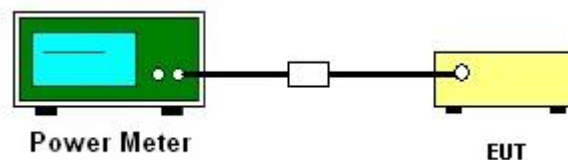



3.2.5 Test Result of Peak Output Power

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.16	30.00	-5.50	0.66	36.00	Pass
BLE	1Mbps	1	19	2440	5.86	30.00	-5.50	0.36	36.00	Pass
BLE	1Mbps	1	39	2480	6.07	30.00	-5.50	0.57	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	6.25	30.00	-5.50	0.75	36.00	Pass
BLE	2Mbps	1	19	2440	6.05	30.00	-5.50	0.55	36.00	Pass
BLE	2Mbps	1	39	2480	6.15	30.00	-5.50	0.65	36.00	Pass

3.2.6 Test Result of Average Output Power (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	6.10
BLE	1Mbps	1	19	2440	2.04	5.80
BLE	1Mbps	1	39	2480	2.04	6.00

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	4.83	6.20
BLE	2Mbps	1	19	2440	4.83	5.90
BLE	2Mbps	1	39	2480	4.83	6.10

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

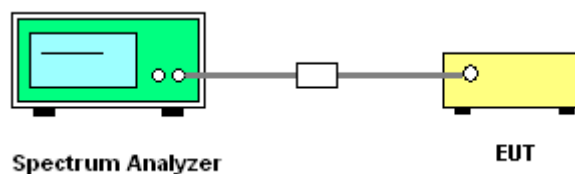

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

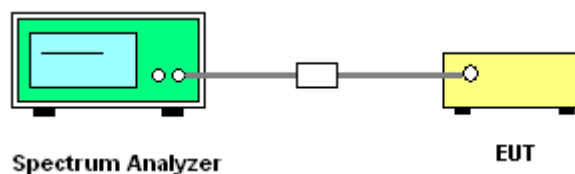

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

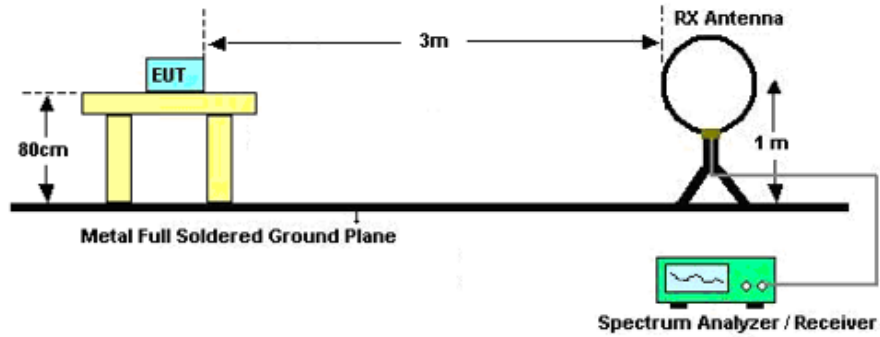

For radiated emissions from 30MHz to 1GHz

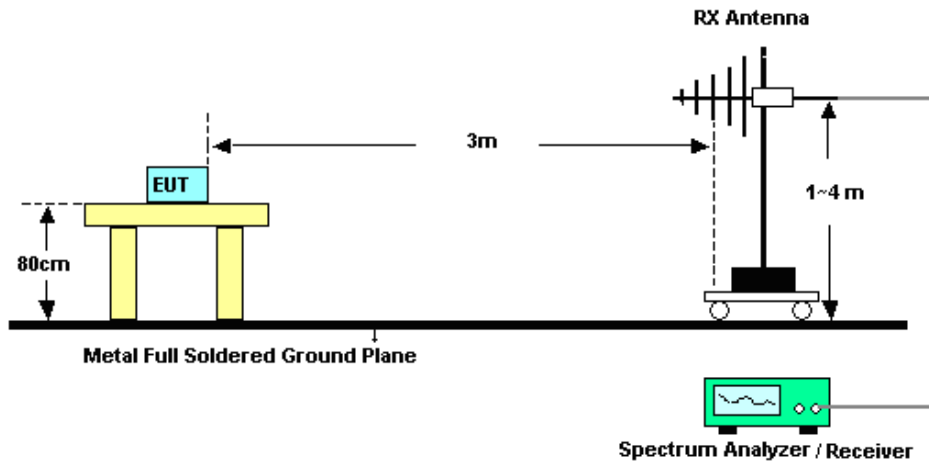

For radiated emissions above 1GHz

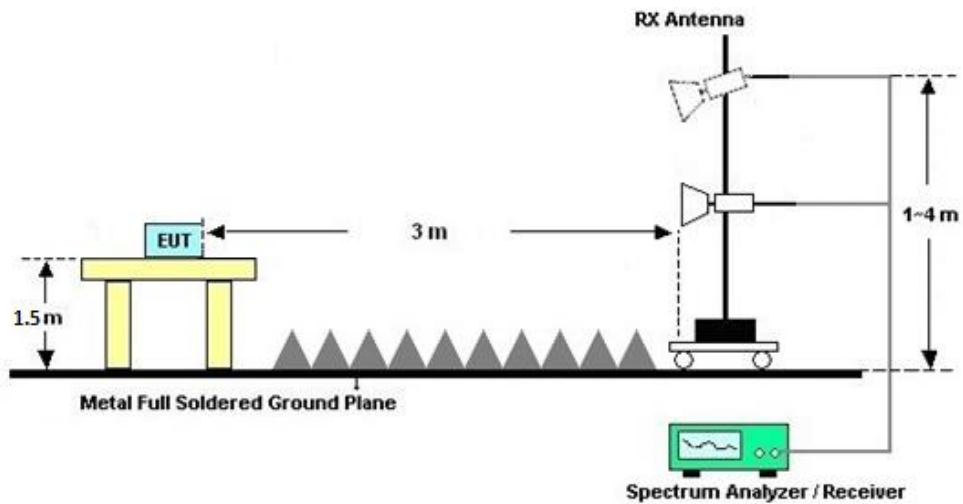



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

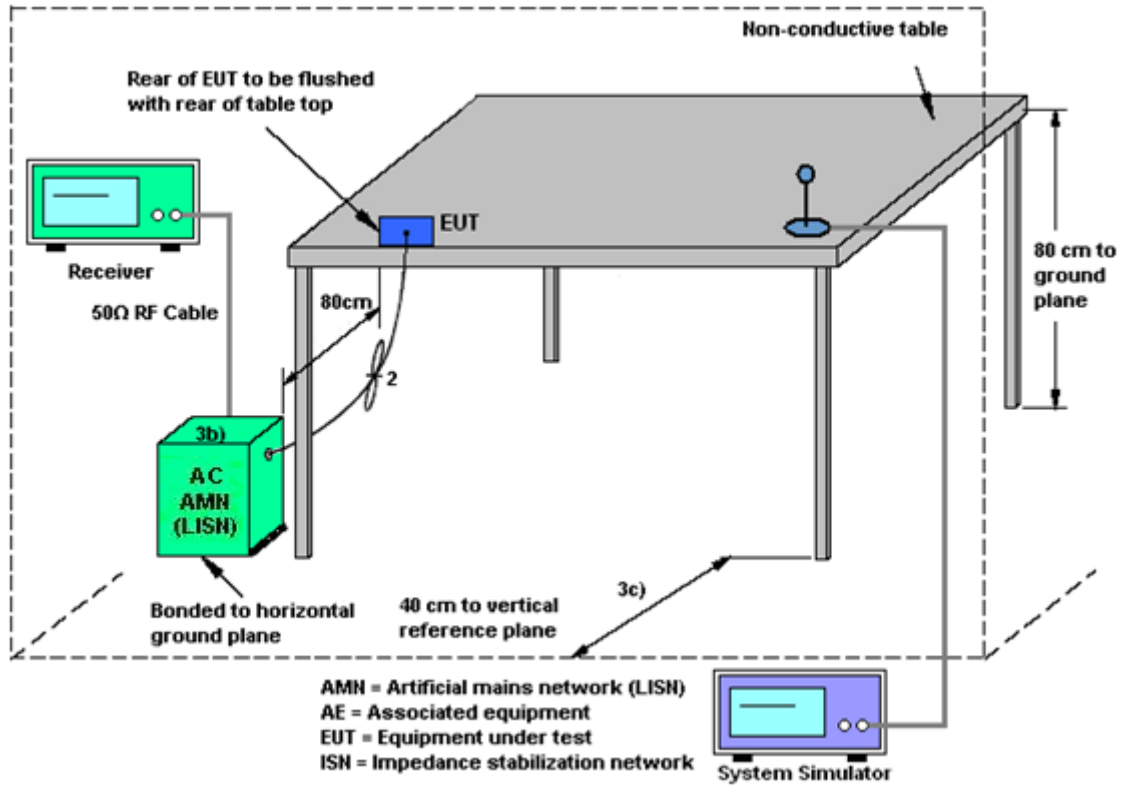

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Dec. 05, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Dec. 05, 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Dec. 05, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 19, 2022	Dec. 03, 2022~Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Dec. 03, 2022~Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Dec. 03, 2022~Dec. 25, 2022	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 27, 2022	Dec. 03, 2022~Dec. 25, 2022	Apr. 27, 2023	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2022	Dec. 03, 2022~Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Dec. 03, 2022~Dec. 25, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Dec. 03, 2022~Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Dec. 03, 2022~Dec. 25, 2022	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	Dec. 03, 2022~Dec. 25, 2022	Jul. 05, 2023	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Sep. 30, 2022	Dec. 03, 2022~Dec. 25, 2022	Sep. 29, 2023	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Nov. 10, 2022	Dec. 03, 2022~Dec. 25, 2022	Nov. 10, 2023	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 03, 2022~Dec. 25, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 03, 2022~Dec. 25, 2022	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Dec. 10, 2022~Dec. 13, 2022	Apr. 08, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Dec. 10, 2022~Dec. 13, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Dec. 10, 2022~Dec. 13, 2022	Dec. 27, 2022	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.012 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---------------------------------------------------------------------	-------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>24~26</u> °C, <u>45~55</u> %RH	
According Standard: ■Part15C	
Test Date: <u>2022/12/10~2022/12/13</u>	Test Engineer: <u>Tang ZhaoYang</u>


DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant3	2402	0.66	2401.67	2402.33	0.5	PASS
		2440	0.66	2439.67	2440.33	0.5	PASS
		2480	0.66	2479.66	2480.33	0.5	PASS
BLE_2M	Ant3	2402	1.13	2401.45	2402.58	0.5	PASS
		2440	1.13	2439.44	2440.58	0.5	PASS
		2480	1.13	2479.44	2480.57	0.5	PASS




Test Graphs

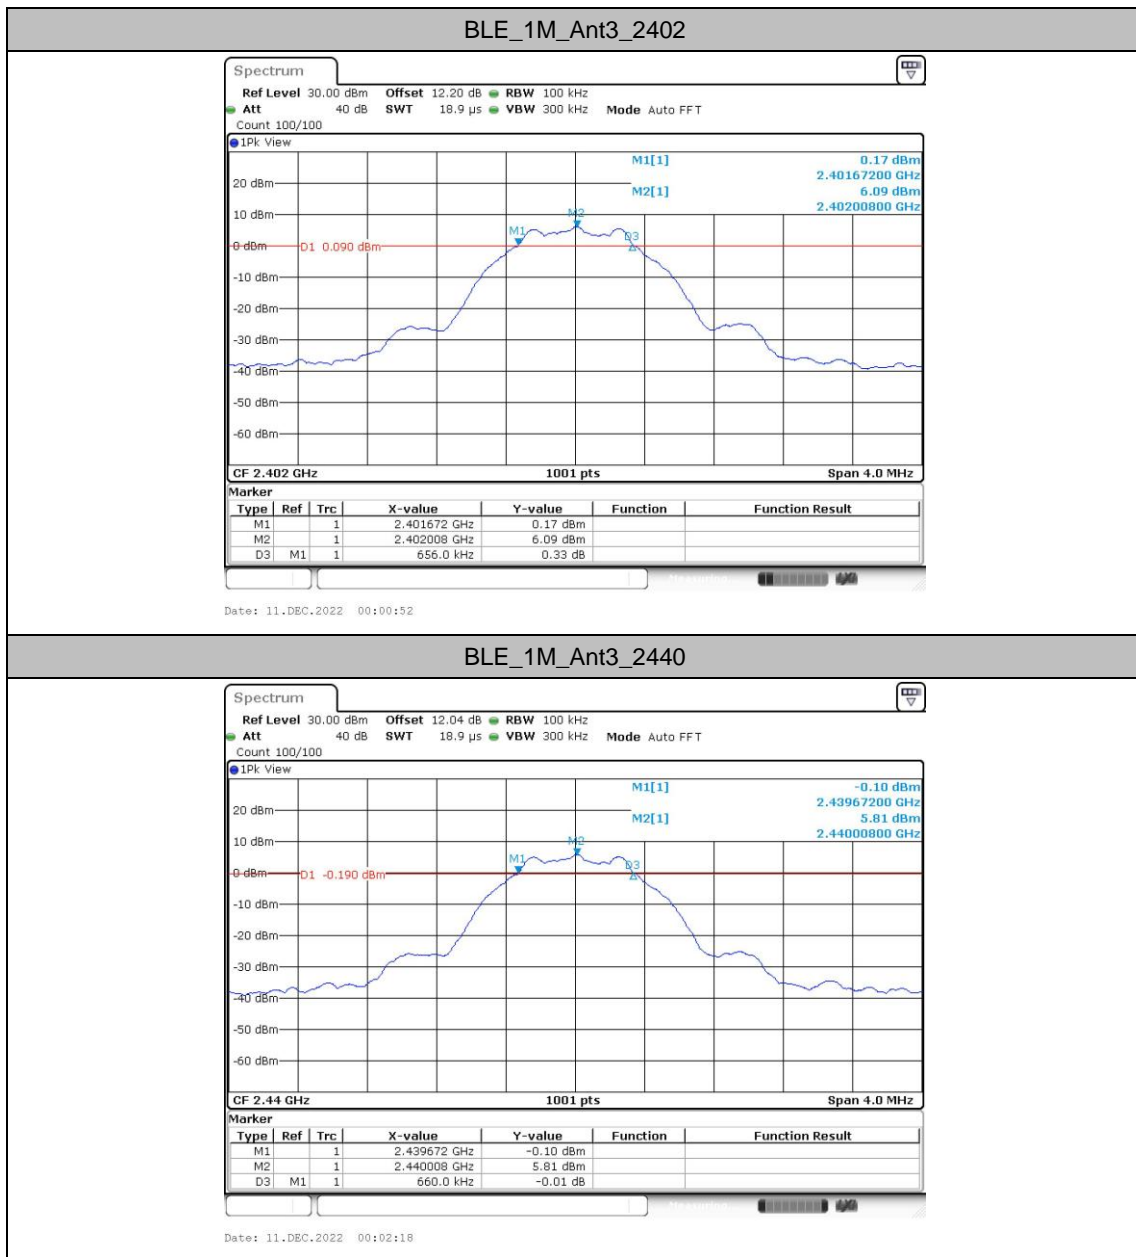

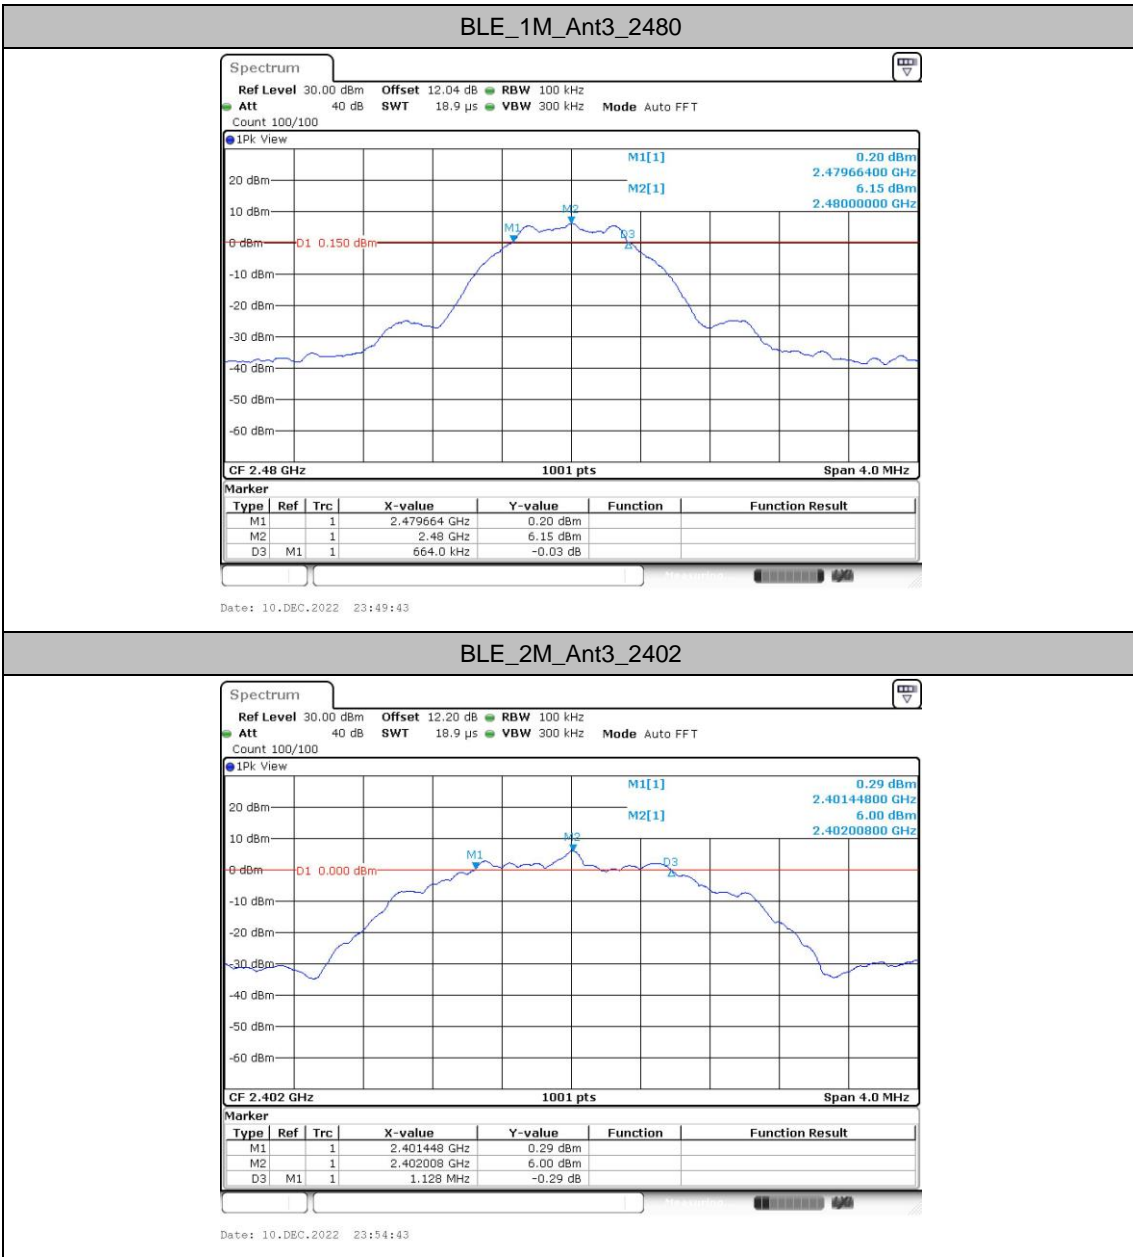




BLE_2M_Ant3_2440

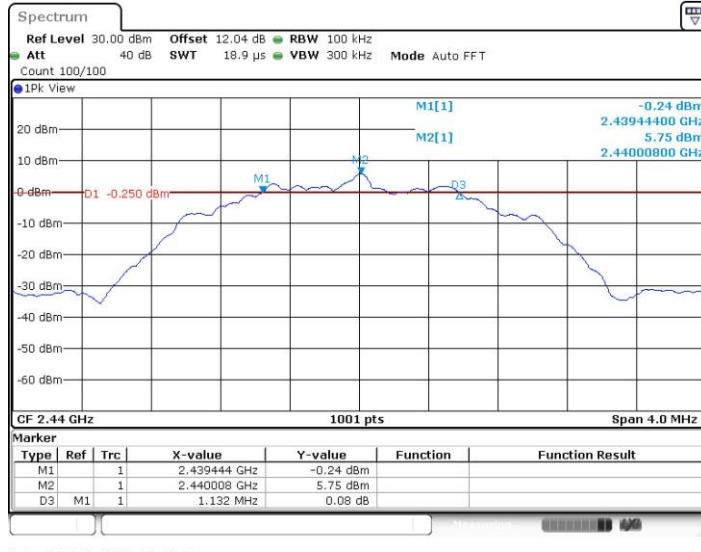

BLE_2M_Ant3_2480

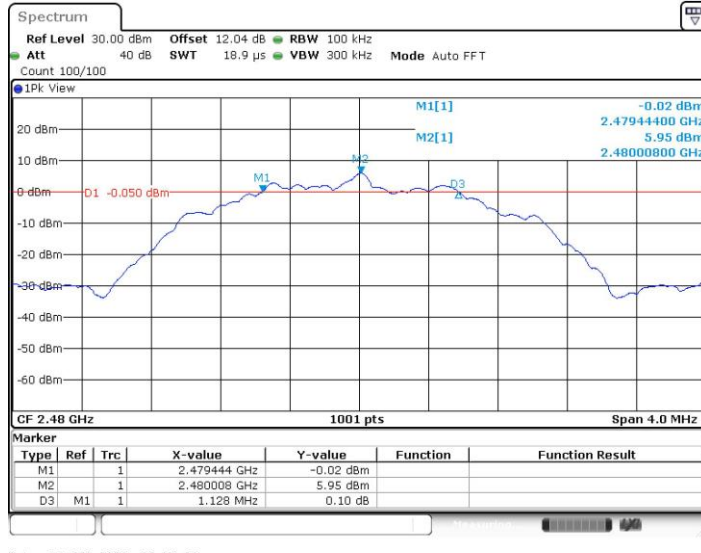




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant3	2402	1.031	2401.4965	2402.5275	---	---
		2440	1.031	2439.4965	2440.5275	---	---
		2480	1.035	2479.4885	2480.5235	---	---
BLE_2M	Ant3	2402	2.050	2400.9970	2403.0470	---	---
		2440	2.050	2438.9970	2441.0470	---	---
		2480	2.054	2478.9930	2481.0470	---	---




Test Graphs

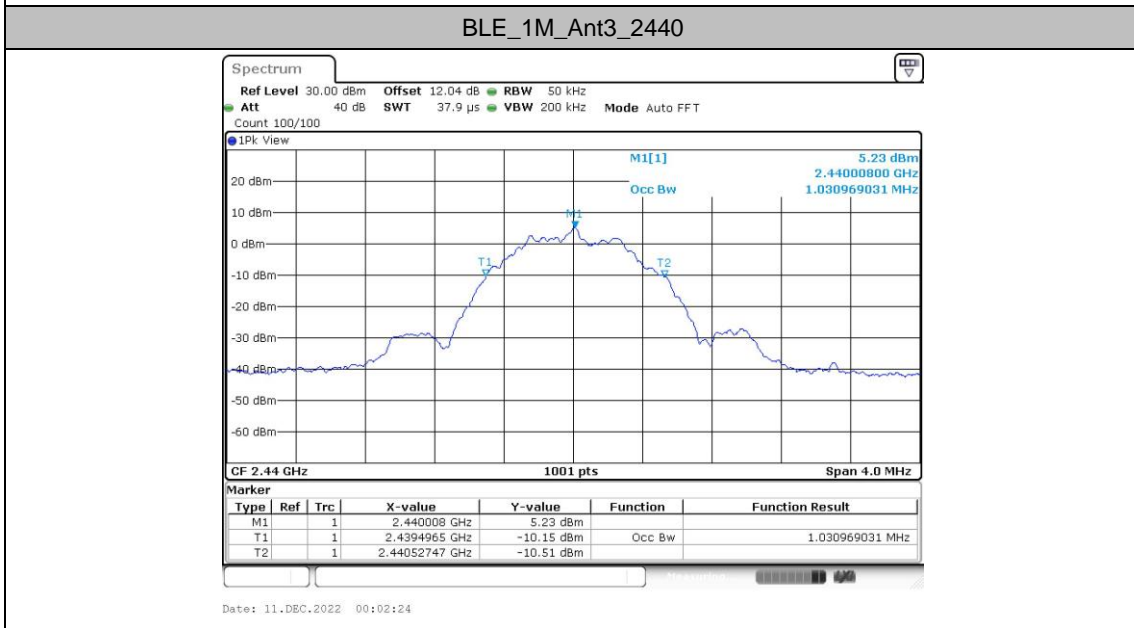




BLE_1M_Ant3_2480

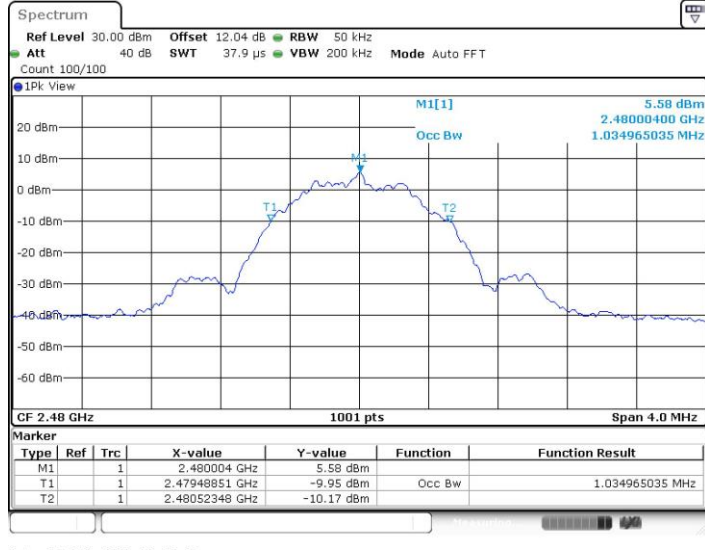


Date: 10.DEC.2022 23:49:49

BLE_2M_Ant3_2402

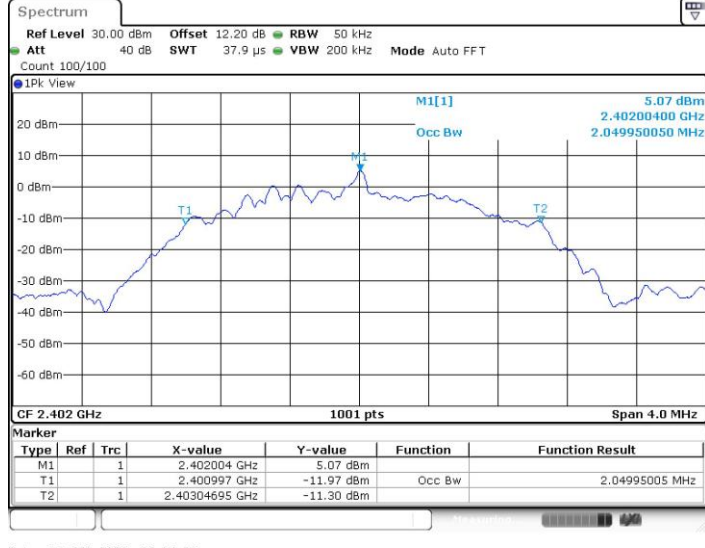

Date: 10.DEC.2022 23:54:50

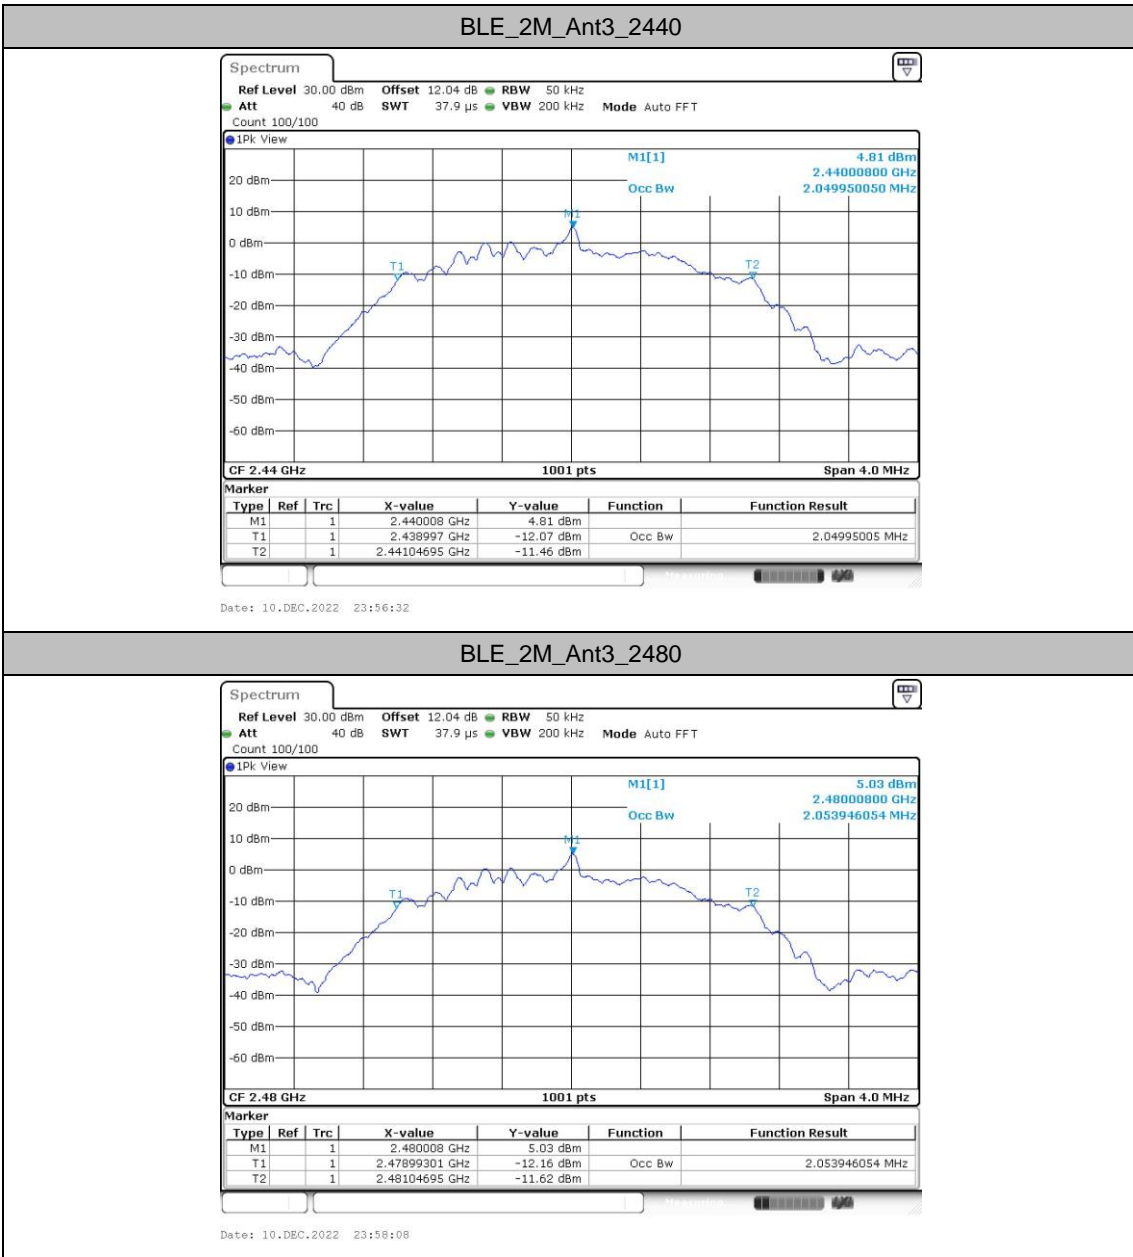





Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant3	2402	-8.68	≤8.00	PASS
		2440	-8.86	≤8.00	PASS
		2480	-8.5	≤8.00	PASS
BLE_2M	Ant3	2402	-12.36	≤8.00	PASS
		2440	-12.49	≤8.00	PASS
		2480	-12.31	≤8.00	PASS



Test Graphs

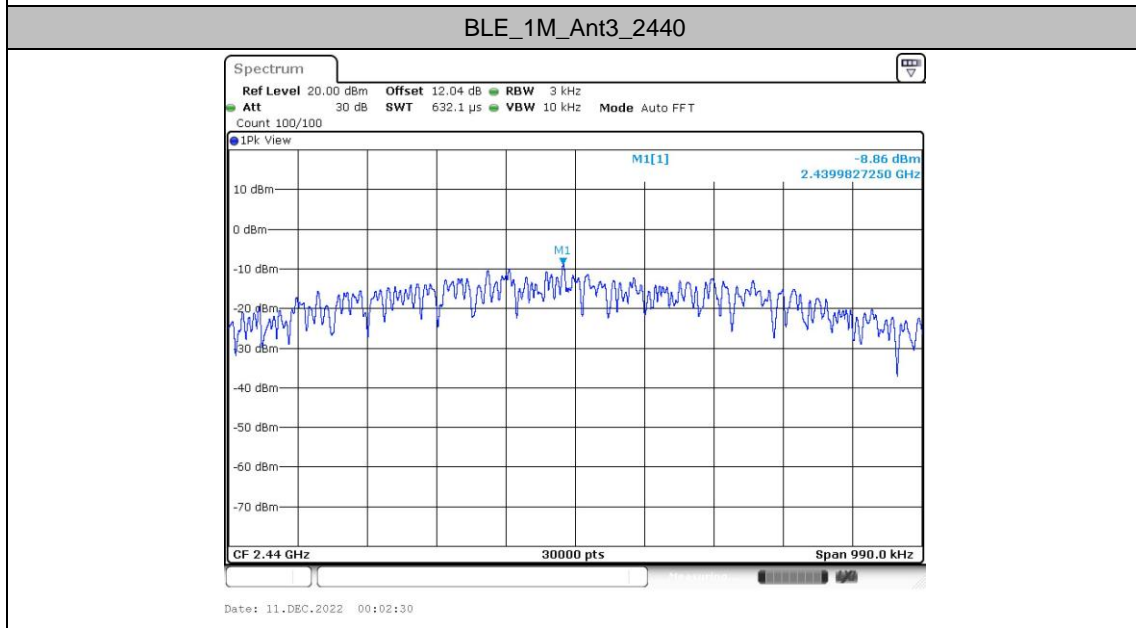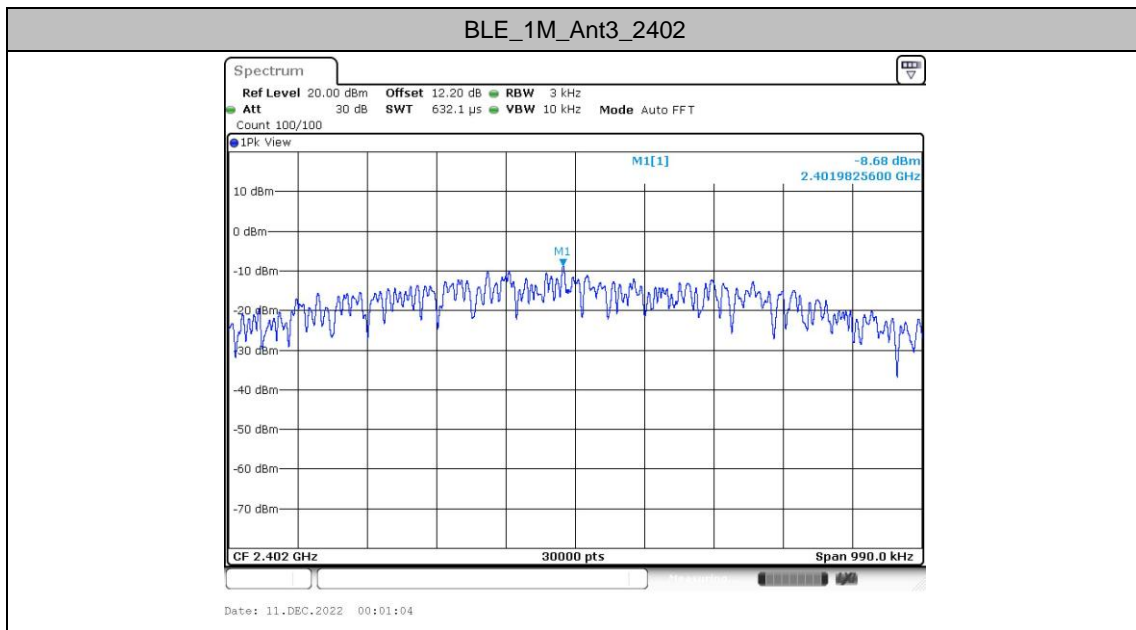

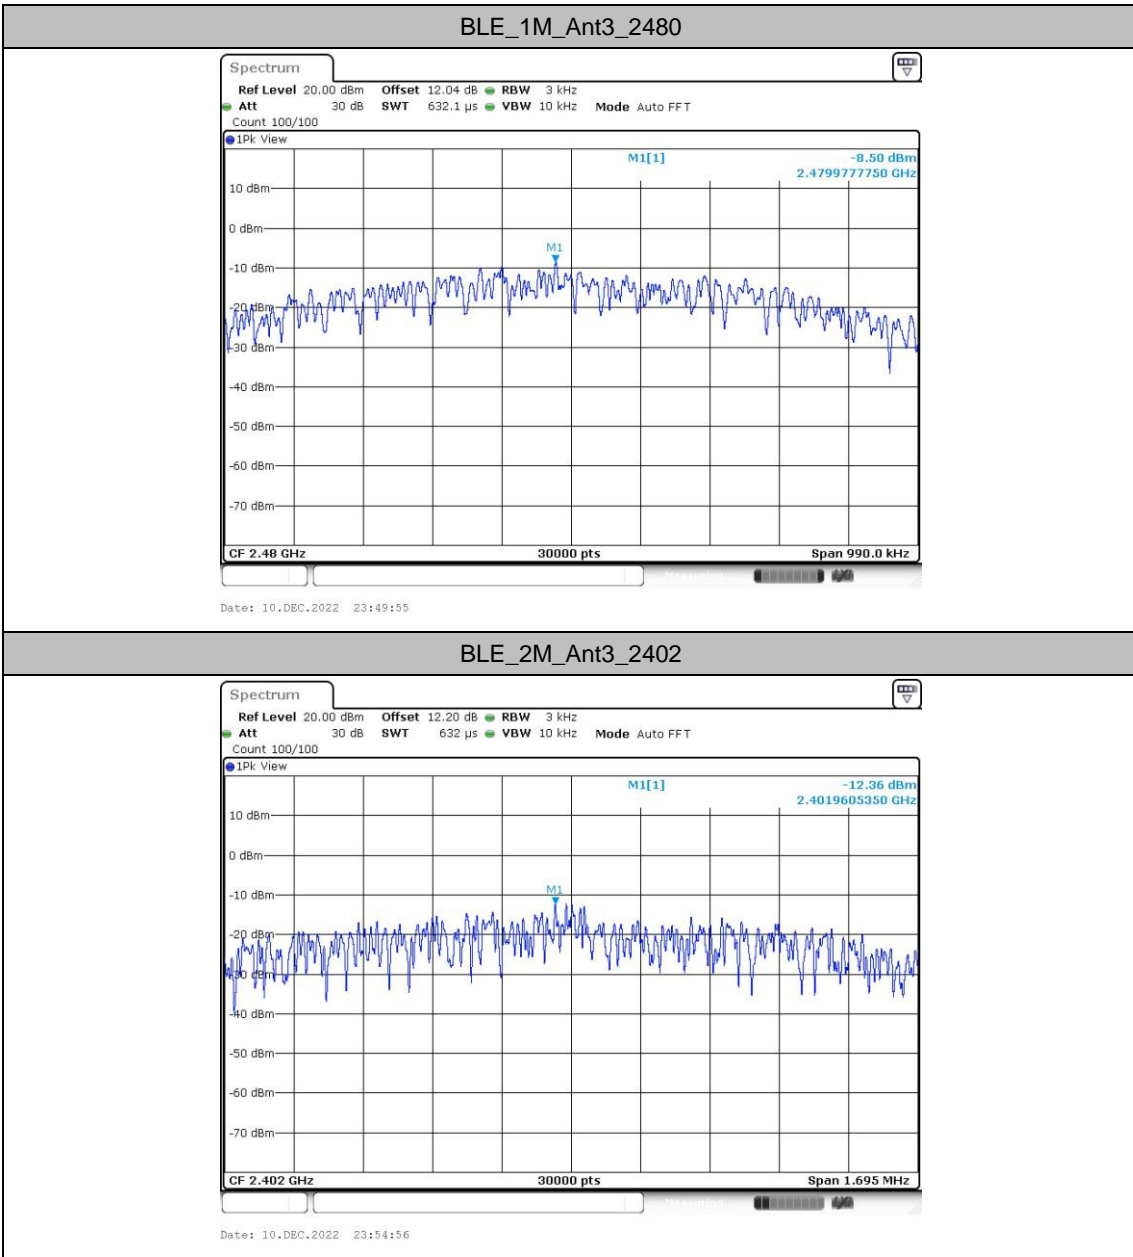

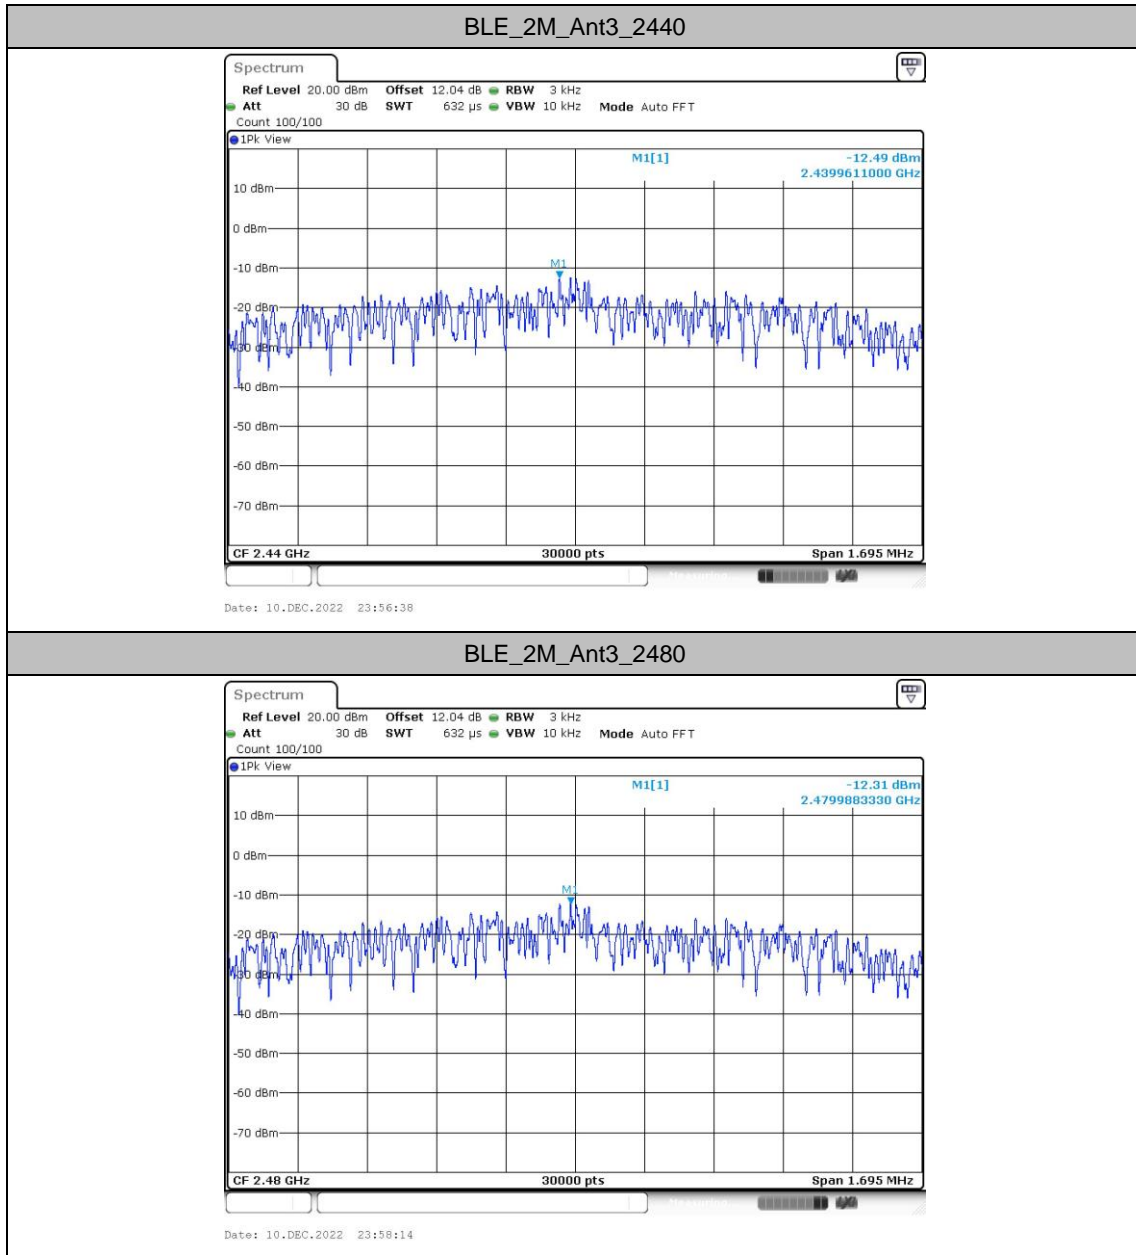




Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant3	2402	2402.01	6.05
		2440	2440.01	5.76
		2480	2480.00	6.18
BLE_2M	Ant3	2402	2402.01	5.99
		2440	2440.01	5.69
		2480	2480.01	5.93




Test Graphs

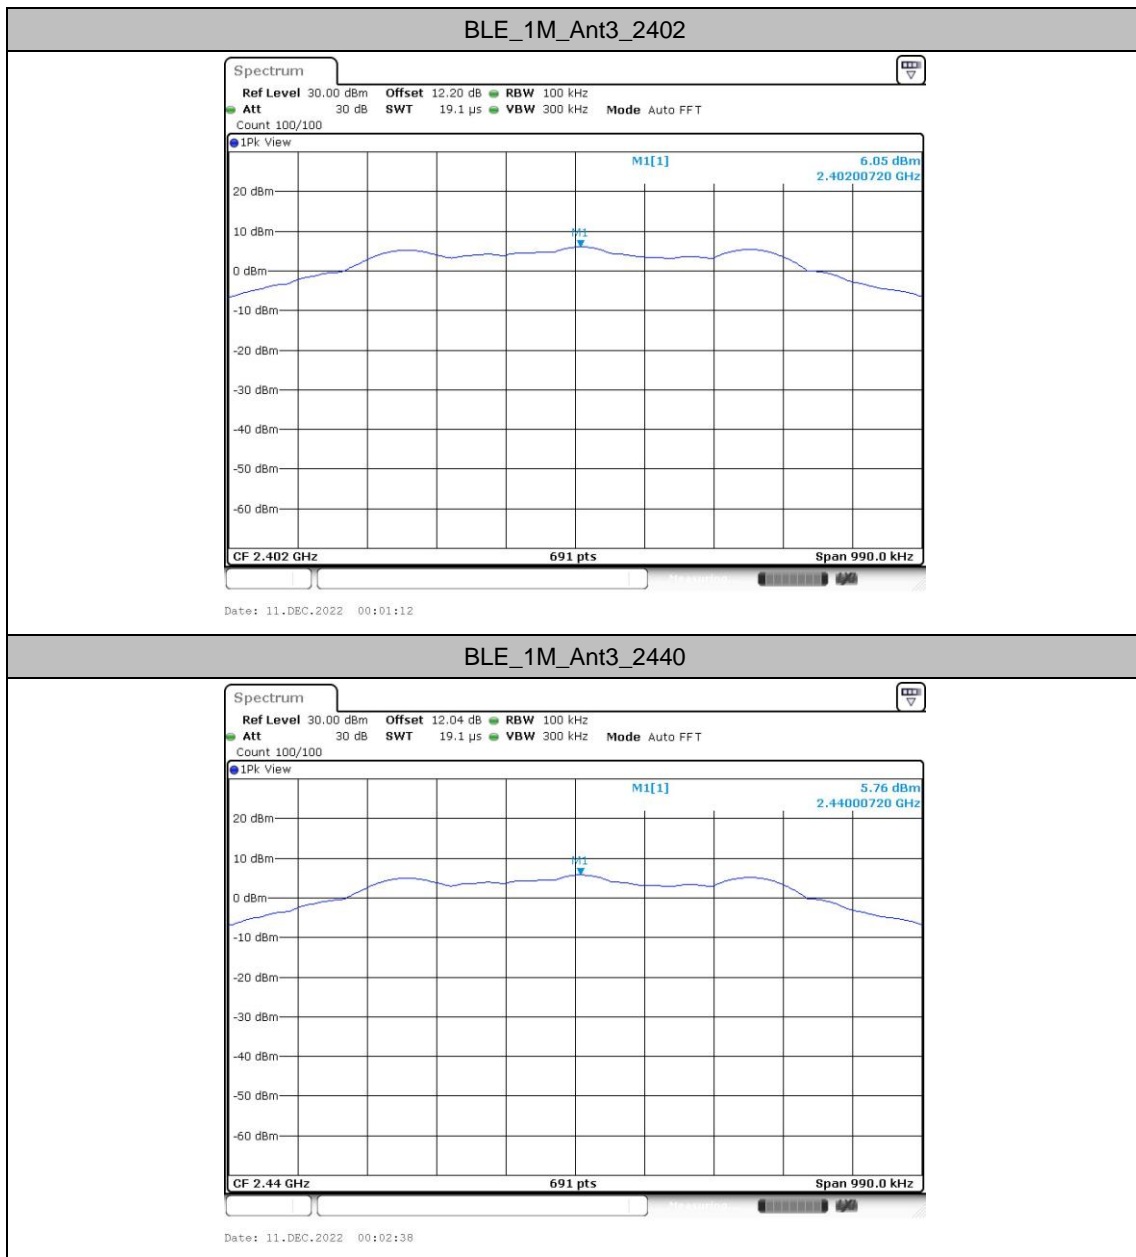






BLE_2M_Ant3_2440

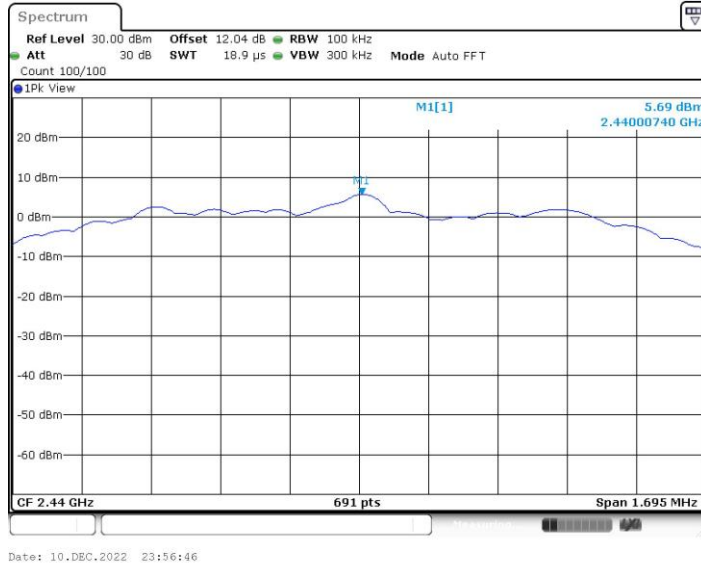

BLE_2M_Ant3_2480

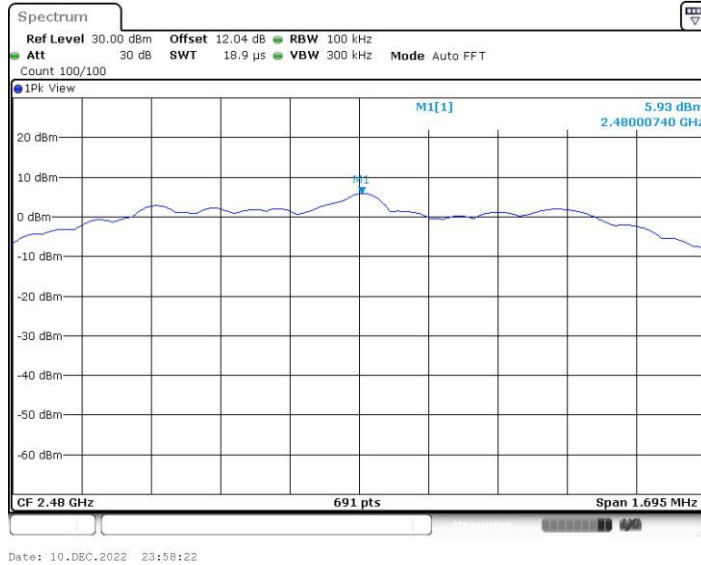





Band edge measurements


Test Result

TestMode	Ant	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant3	Low	2402	6.05	-48.67	≤-13.95	PASS
		High	2480	6.18	-54.95	≤-13.82	PASS
BLE_2M	Ant3	Low	2402	5.99	-31.42	≤-14.01	PASS
		High	2480	5.93	-54.66	≤-14.07	PASS



Test Graphs

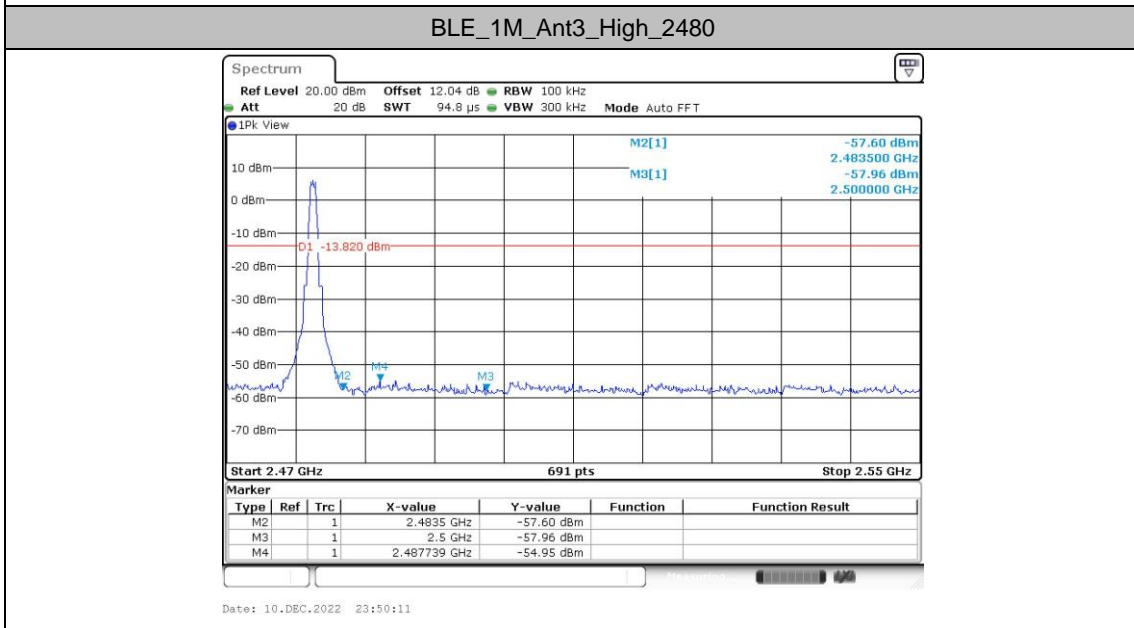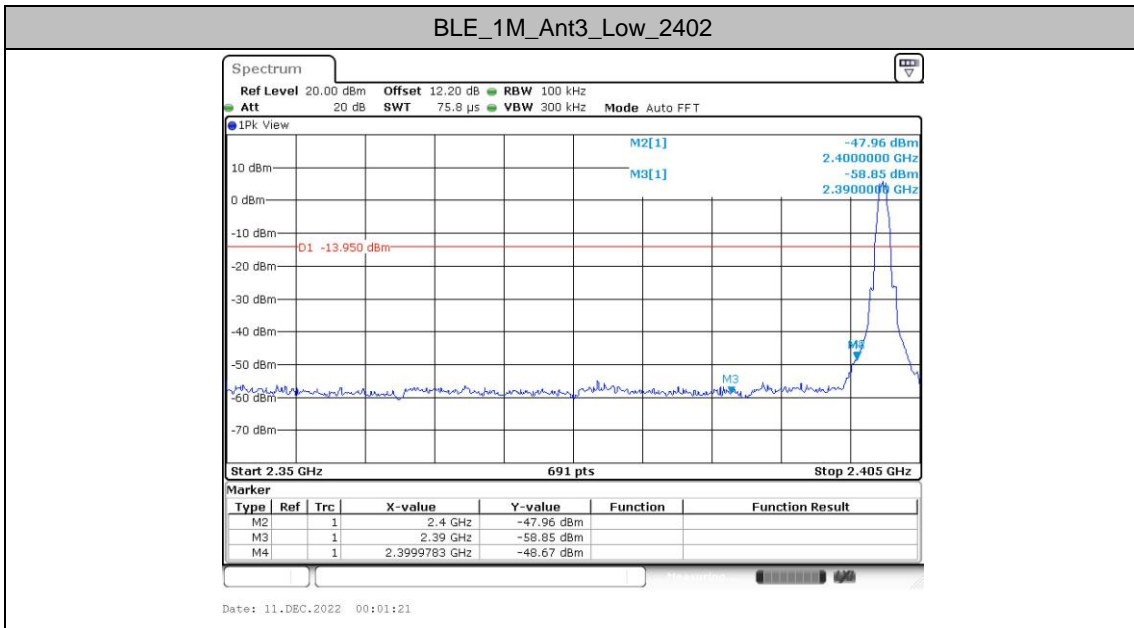

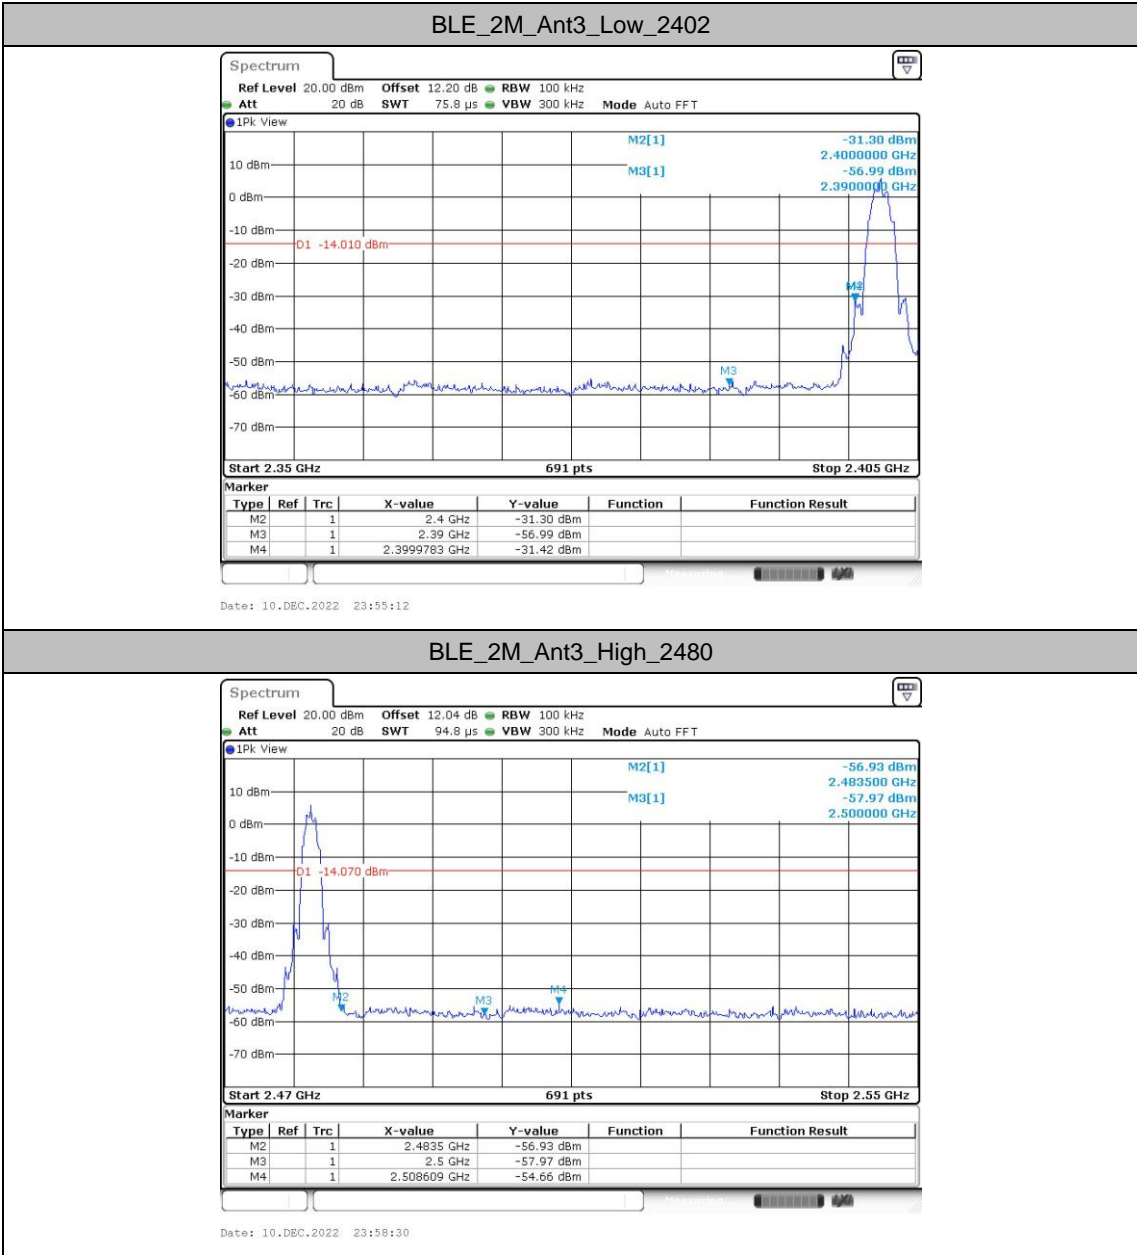





Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant3	2402	30~1000	6.05	-56.64	≤-13.95	PASS
			1000~26500	6.05	-47.01	≤-13.95	PASS
		2440	30~1000	5.76	-56.28	≤-14.24	PASS
			1000~26500	5.76	-47.09	≤-14.24	PASS
		2480	30~1000	6.18	-56.46	≤-13.82	PASS
			1000~26500	6.18	-47.26	≤-13.82	PASS
BLE_2M	Ant3	2402	30~1000	5.99	-56.76	≤-14.01	PASS
			1000~26500	5.99	-47.19	≤-14.01	PASS
		2440	30~1000	5.69	-56.38	≤-14.31	PASS
			1000~26500	5.69	-46.78	≤-14.31	PASS
		2480	30~1000	5.93	-56.93	≤-14.07	PASS
			1000~26500	5.93	-47.44	≤-14.07	PASS




Test Graphs

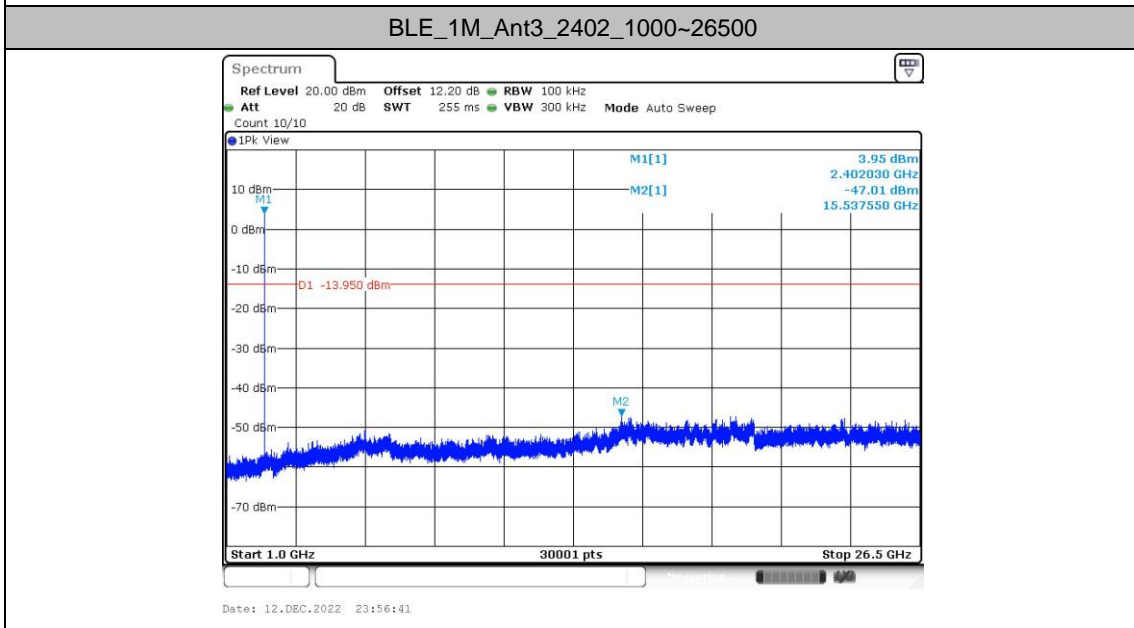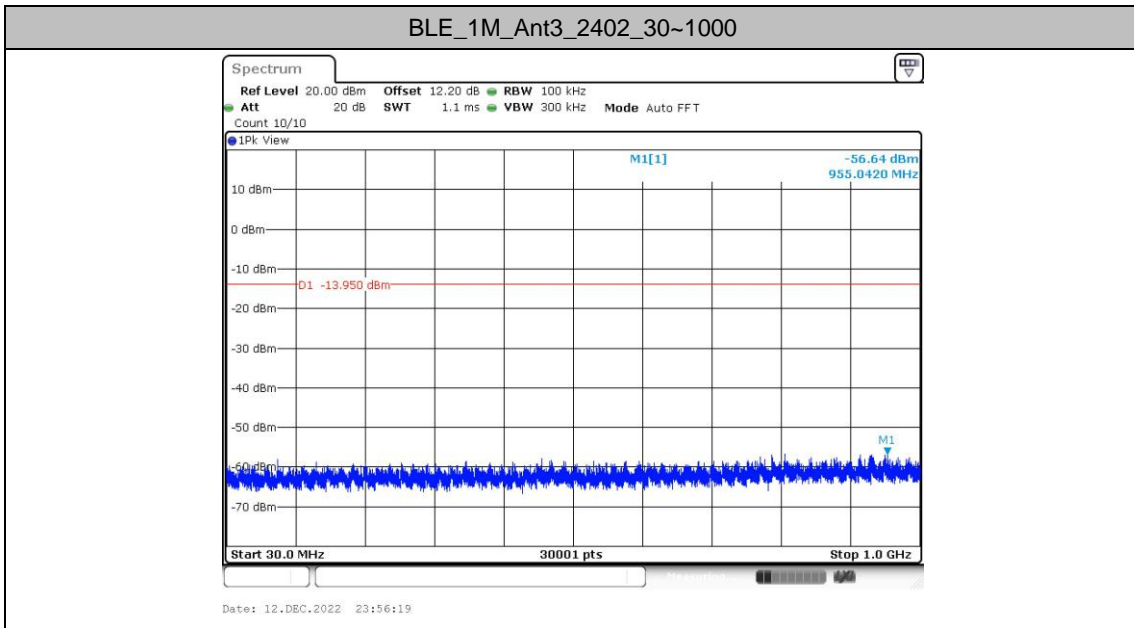






BLE_1M_Ant3_2440_30~1000

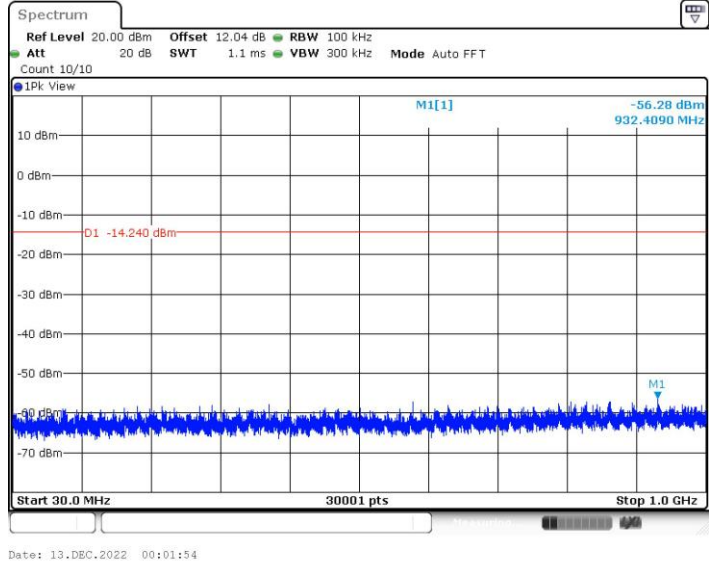

BLE_1M_Ant3_2440_1000~26500

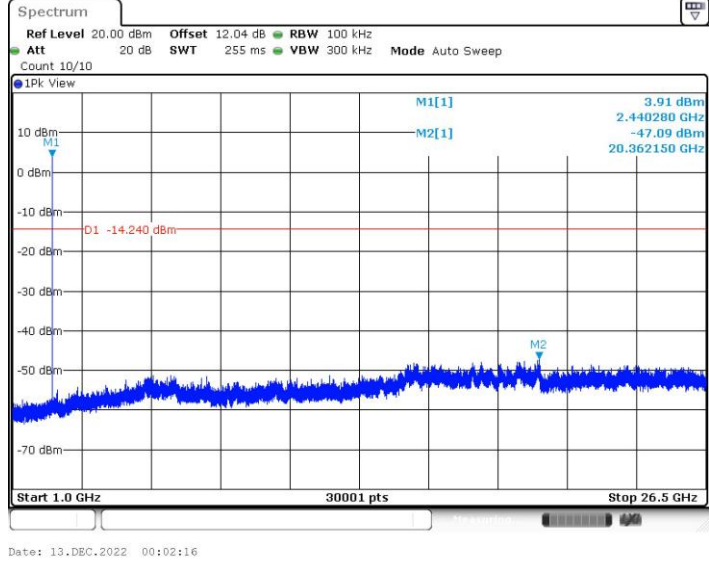


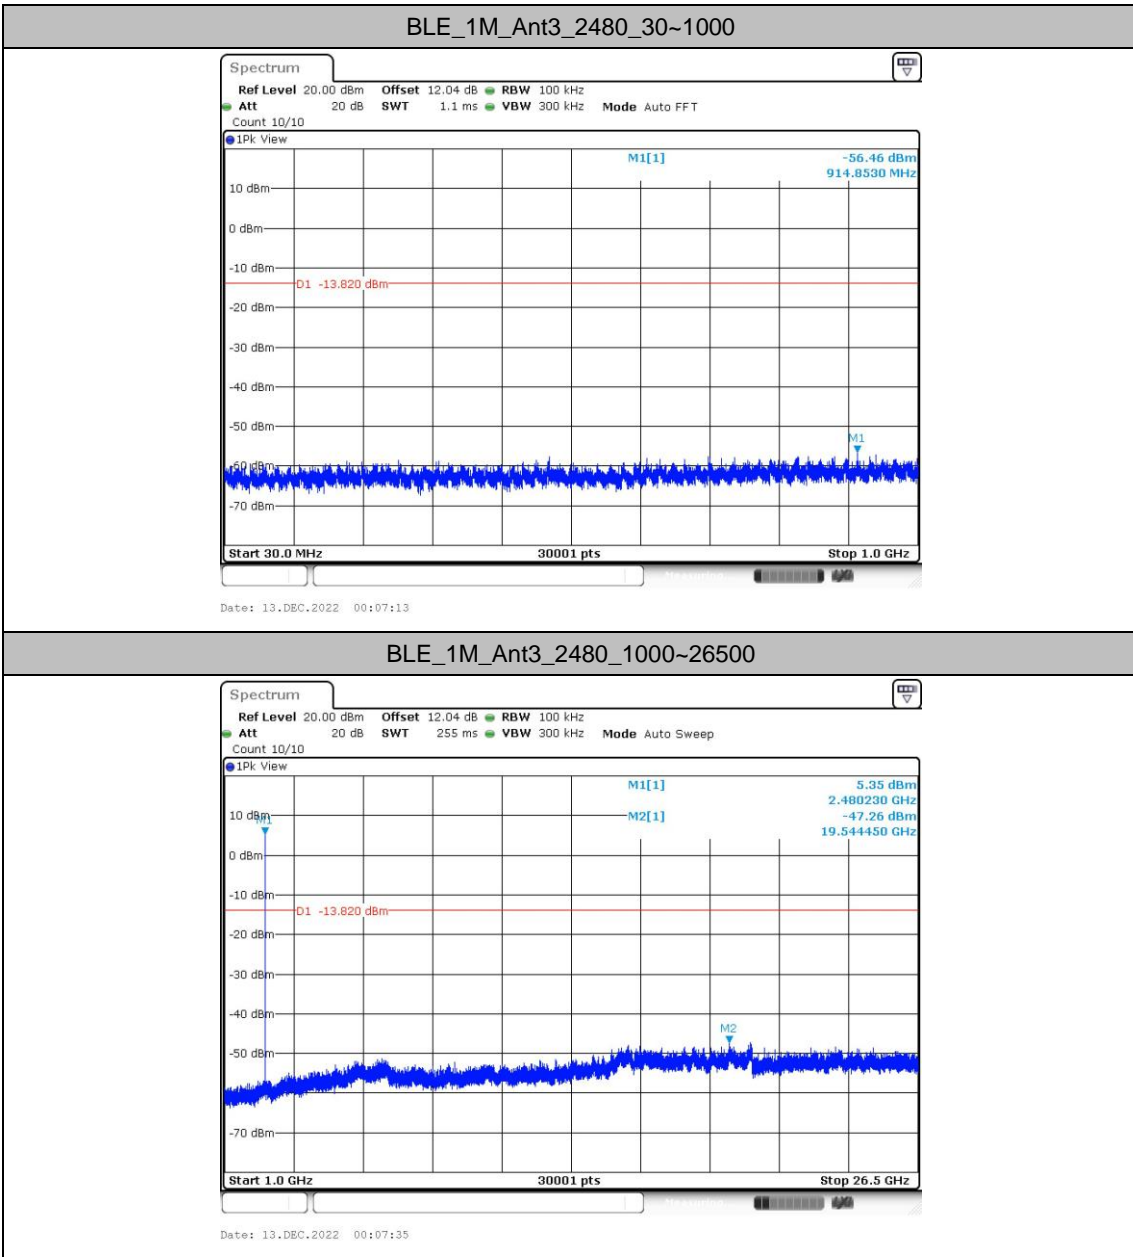

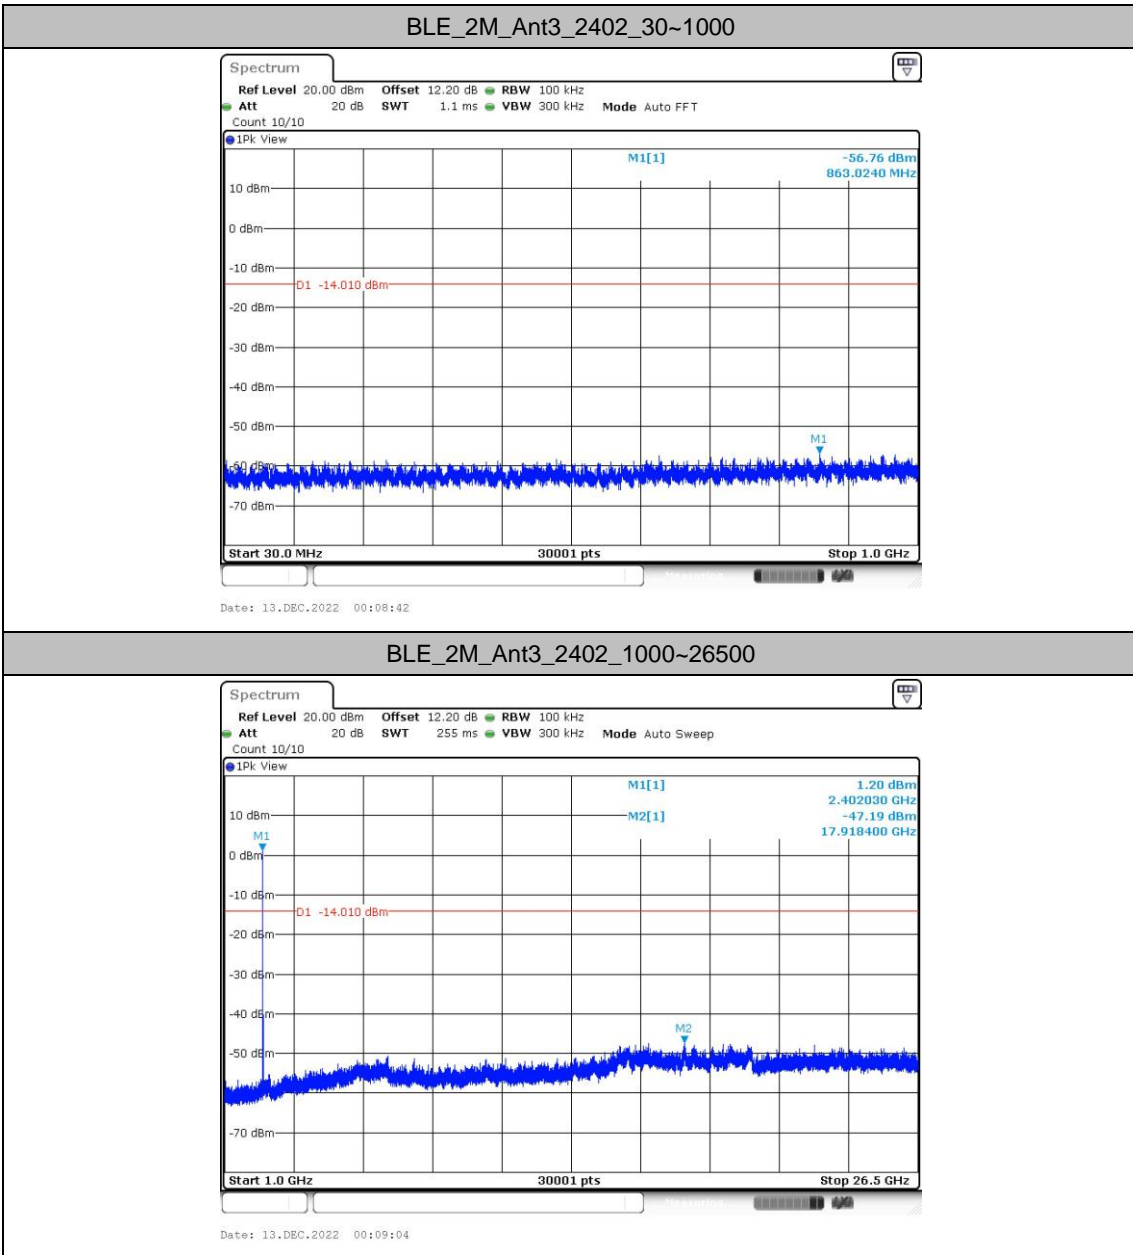





BLE_2M_Ant3_2440_30~1000

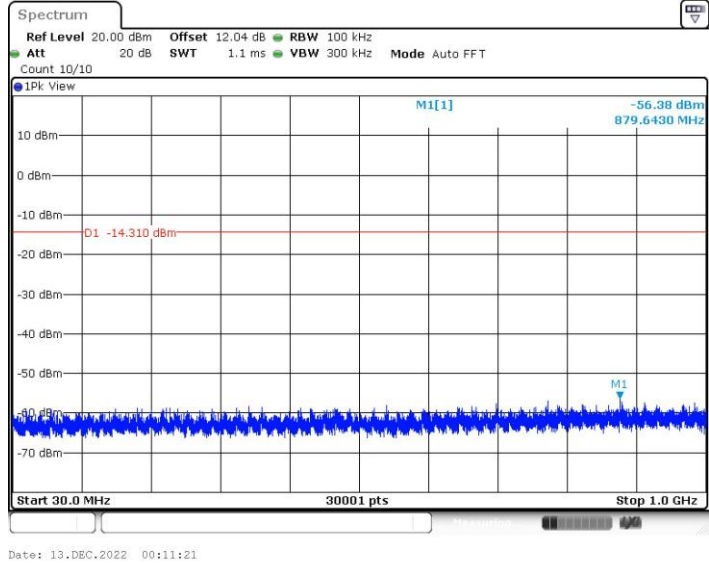

BLE_2M_Ant3_2440_1000~26500

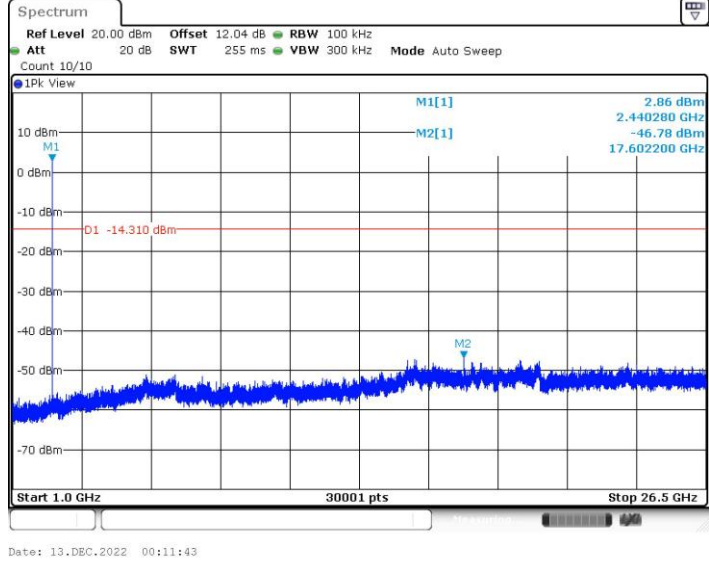


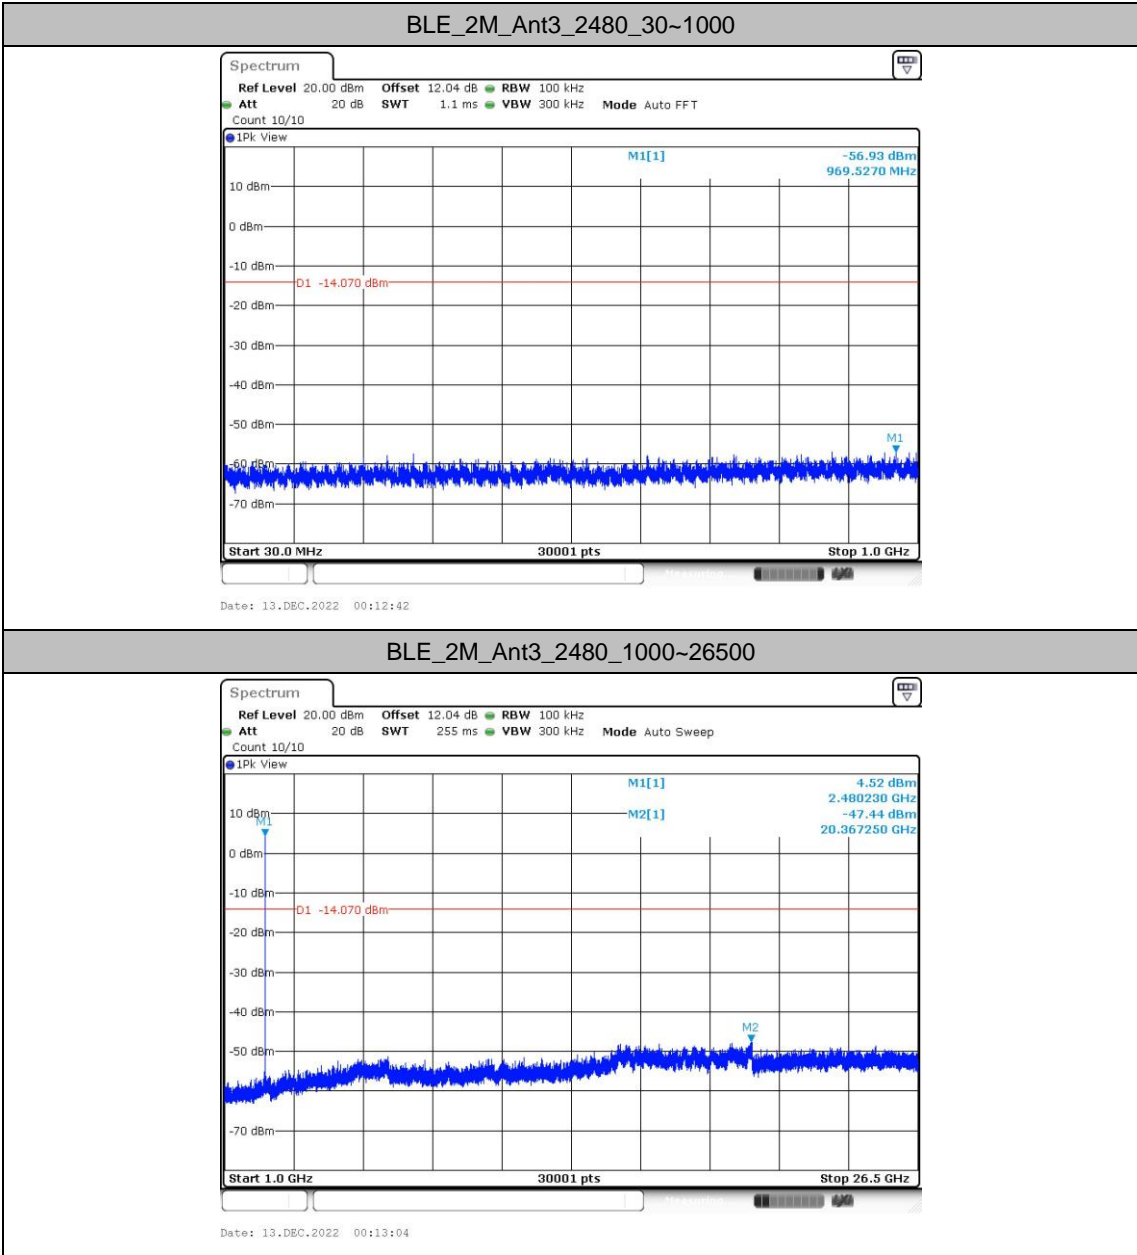



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

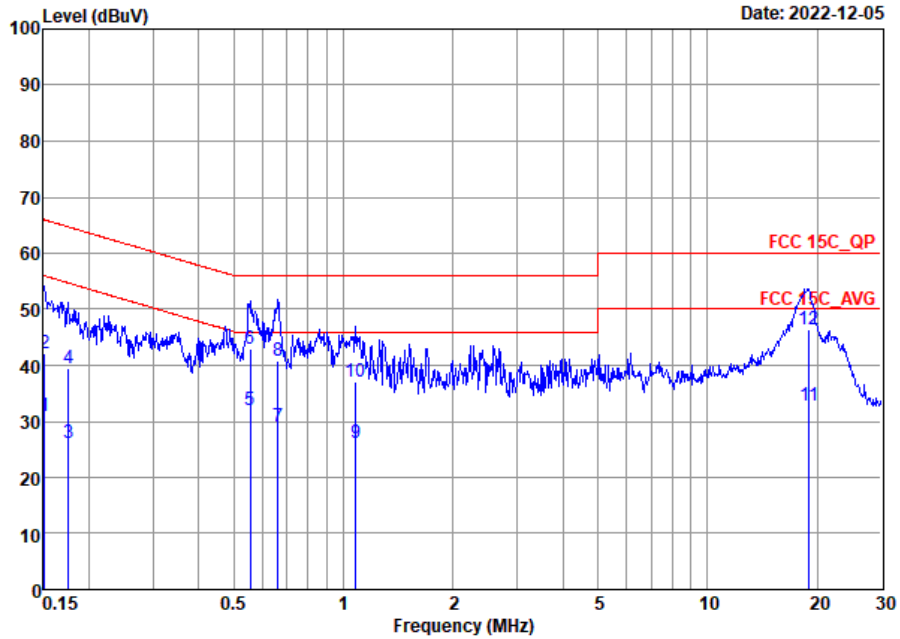


Site : C001-SZ
 Condition: FCC 15C_QP LISN_20220811_ L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	31.05	-24.91	55.96	10.00	10.20	10.85	Average
2	0.15	42.25	-23.71	65.96	21.20	10.20	10.85	QP
3	0.18	26.17	-28.51	54.68	5.50	10.20	10.47	Average
4	0.18	39.57	-25.11	64.68	18.90	10.20	10.47	QP
5	0.56	32.12	-13.88	46.00	10.40	10.11	11.61	Average
6 *	0.56	43.02	-12.98	56.00	21.30	10.11	11.61	QP
7	0.66	29.14	-16.86	46.00	7.80	10.14	11.20	Average
8	0.66	40.84	-15.16	56.00	19.50	10.14	11.20	QP
9	1.08	26.26	-19.74	46.00	5.90	10.13	10.23	Average
10	1.08	37.16	-18.84	56.00	16.80	10.13	10.23	QP
11	19.02	32.91	-17.09	50.00	12.70	9.85	10.36	Average
12	19.02	46.51	-13.49	60.00	26.30	9.85	10.36	QP



Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

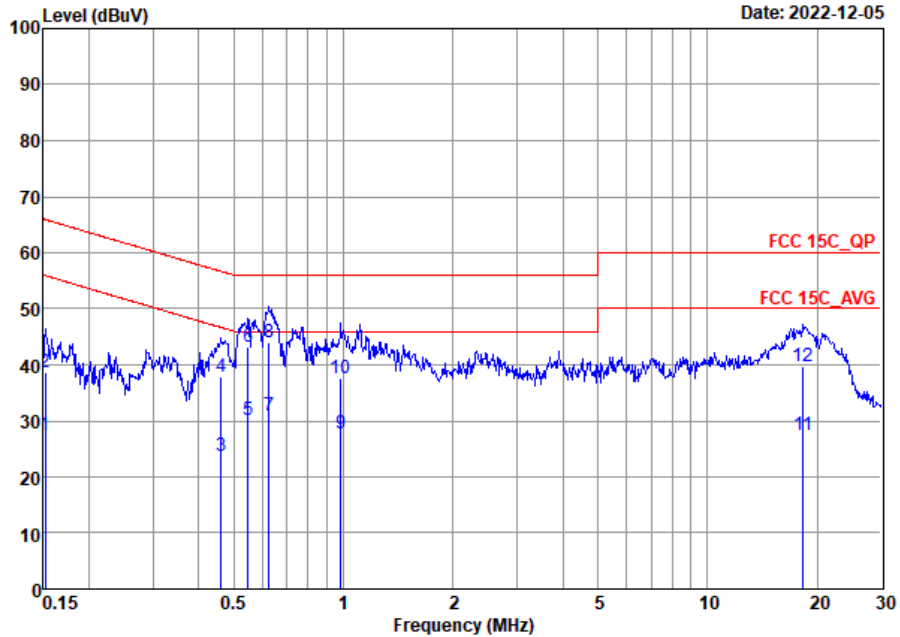

Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20220811_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	27.54	-28.37	55.91	6.40	10.31	10.83	Average
2	0.15	38.64	-27.27	65.91	17.50	10.31	10.83	QP
3	0.46	23.80	-22.87	46.67	1.90	10.19	11.71	Average
4	0.46	37.90	-18.77	56.67	16.00	10.19	11.71	QP
5	0.55	30.17	-15.83	46.00	8.31	10.21	11.65	Average
6	0.55	43.27	-12.73	56.00	21.41	10.21	11.65	QP
7	0.62	30.96	-15.04	46.00	9.40	10.23	11.33	Average
8 *	0.62	44.06	-11.94	56.00	22.50	10.23	11.33	QP
9	0.98	27.77	-18.23	46.00	7.30	10.20	10.27	Average
10	0.98	37.67	-18.33	56.00	17.20	10.20	10.27	QP
11	18.33	27.53	-22.47	50.00	7.40	9.78	10.35	Average
12	18.33	39.63	-20.37	60.00	19.50	9.78	10.35	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 5	2400-2483.5	3	Bluetooth-LE_GSKF	00	2402	1Mbps	-
Mode 6	2400-2483.5	3	Bluetooth-LE_GSKF	19	2440	1Mbps	-
Mode 7	2400-2483.5	3	Bluetooth-LE_GSKF	39	2480	1Mbps	-
Mode 8	2400-2483.5	3	Bluetooth-LE_GSKF	00	2402	2Mbps	-
Mode 9	2400-2483.5	3	Bluetooth-LE_GSKF	19	2440	2Mbps	-
Mode 10	2400-2483.5	3	Bluetooth-LE_GSKF	39	2480	2Mbps	-
Mode 11	2400-2483.5	3	Bluetooth-LE_GSKF	39	2480	2Mbps	LF







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
5	Bluetooth-LE_GSKF	00	2376.47	40.34	54.00	-13.66	H	Average	Pass	Band Edge
6	Bluetooth-LE_GSKF	19	7320.00	47.12	74.00	-26.88	H	Peak	Pass	Harmonic
7	Bluetooth-LE_GSKF	39	2488.92	41.05	54.00	-12.95	H	Average	Pass	Band Edge
8	Bluetooth-LE_GSKF	00	2356.52	42.06	54.00	-11.94	H	Average	Pass	Band Edge
9	Bluetooth-LE_GSKF	19	7320.00	46.46	74.00	-27.54	V	Peak	Pass	Harmonic
10	Bluetooth-LE_GSKF	39	2483.52	42.90	54.00	-11.10	V	Average	Pass	Band Edge
11	Bluetooth-LE_GSKF	39	30.00	27.27	40.00	-12.73	V	Peak	Pass	LF

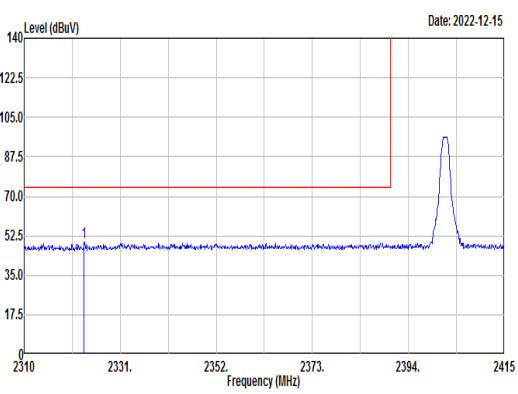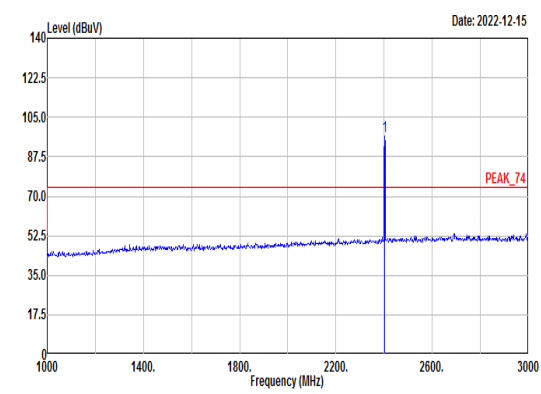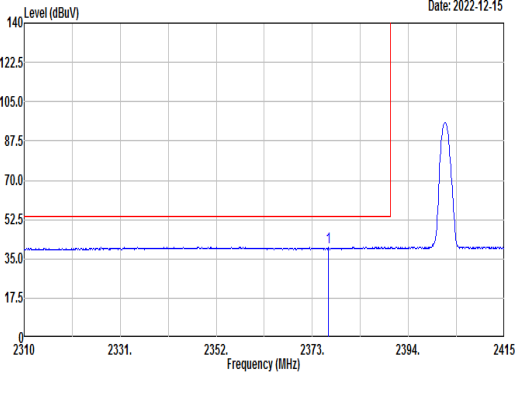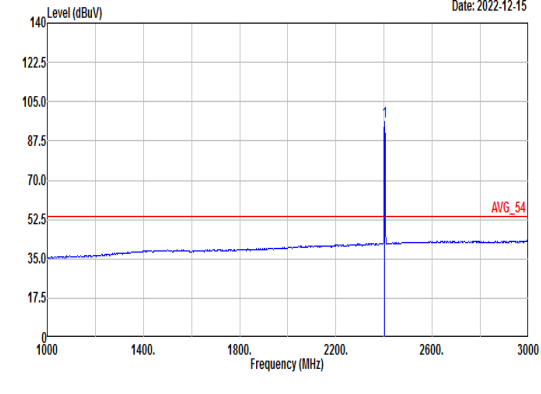

Mode	5																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																	
ANT	3																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th># #</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2323.13</td> <td>49.54</td> <td>74.00</td> <td>-24.46</td> <td>50.80</td> <td>27.30</td> <td>5.30</td> <td>33.86</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>227</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2323.13	49.54	74.00	-24.46	50.80	27.30	5.30	33.86							0.00	227								319 Peak	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th># #</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2402.00</td> <td>96.63</td> <td>-----</td> <td>-----</td> <td>97.57</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>227</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2402.00	96.63	-----	-----	97.57	27.57	5.37	33.88							0.00	227								319 Peak
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																																											
Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 2323.13	49.54	74.00	-24.46	50.80	27.30	5.30	33.86																																																																																											
						0.00	227																																																																																											
							319 Peak																																																																																											
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																																											
Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 2402.00	96.63	-----	-----	97.57	27.57	5.37	33.88																																																																																											
						0.00	227																																																																																											
							319 Peak																																																																																											
Avg	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th># #</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2376.47</td> <td>40.34</td> <td>54.00</td> <td>-13.66</td> <td>41.39</td> <td>27.48</td> <td>5.35</td> <td>33.88</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>227</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2376.47	40.34	54.00	-13.66	41.39	27.48	5.35	33.88							0.00	227								319 Average	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th># #</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2402.00</td> <td>96.18</td> <td>-----</td> <td>-----</td> <td>97.12</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>227</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2402.00	96.18	-----	-----	97.12	27.57	5.37	33.88							0.00	227								319 Average
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																																											
Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 2376.47	40.34	54.00	-13.66	41.39	27.48	5.35	33.88																																																																																											
						0.00	227																																																																																											
							319 Average																																																																																											
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																																											
Freq Level	Line	Margin	Level	Factor	Loss	Factor	# #																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 2402.00	96.18	-----	-----	97.12	27.57	5.37	33.88																																																																																											
						0.00	227																																																																																											
							319 Average																																																																																											

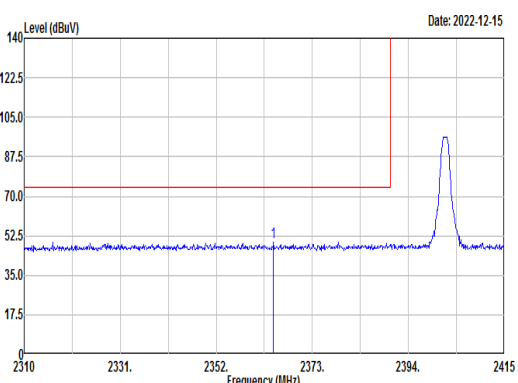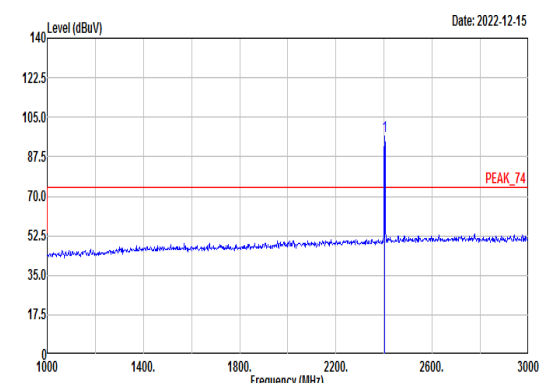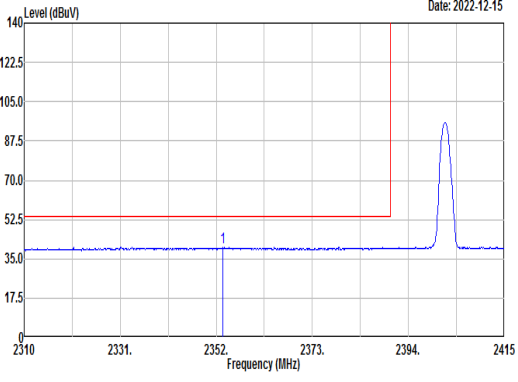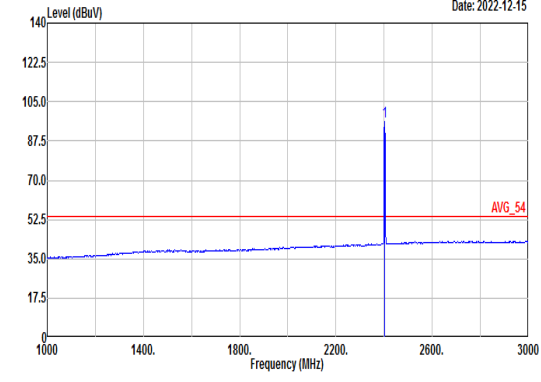

Mode	5																																																																											
	Band Edge																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																											
ANT	3																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2364.50</td> <td>49.66</td> <td>74.00</td> <td>-24.34</td> <td>50.75</td> <td>27.44</td> <td>5.34</td> <td>33.87</td> <td>0.00</td> <td>100</td> <td>76</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2364.50	49.66	74.00	-24.34	50.75	27.44	5.34	33.87	0.00	100	76	Peak	 <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.56</td> <td>-----</td> <td>-----</td> <td>97.50</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>100</td> <td>76</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.56	-----	-----	97.50	27.57	5.37	33.88	0.00	100	76	Peak
	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																				
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2364.50	49.66	74.00	-24.34	50.75	27.44	5.34	33.87	0.00	100	76	Peak																																																																
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2402.00	96.56	-----	-----	97.50	27.57	5.37	33.88	0.00	100	76	Peak																																																																
Avg	 <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.47</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>41.30</td> <td>27.40</td> <td>5.33</td> <td>33.87</td> <td>0.00</td> <td>100</td> <td>76</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2353.47	40.16	54.00	-13.84	41.30	27.40	5.33	33.87	0.00	100	76	Average	 <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.03</td> <td>-----</td> <td>-----</td> <td>96.97</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>100</td> <td>76</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.03	-----	-----	96.97	27.57	5.37	33.88	0.00	100	76	Average
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2353.47	40.16	54.00	-13.84	41.30	27.40	5.33	33.87	0.00	100	76	Average																																																																
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2402.00	96.03	-----	-----	96.97	27.57	5.37	33.88	0.00	100	76	Average																																																																



Mode	5																																																																																			
	Harmonic																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																			
ANT	3																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.76</td> <td>74.00</td> <td>-33.24</td> <td>50.03</td> <td>31.55</td> <td>8.94</td> <td>49.76</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.76	74.00	-33.24	50.03	31.55	8.94	49.76	0.00	--- --- Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 5 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>41.09</td> <td>74.00</td> <td>-32.91</td> <td>50.36</td> <td>31.55</td> <td>8.94</td> <td>49.76</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.09	74.00	-32.91	50.36	31.55	8.94	49.76	0.00	--- --- Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	#	#																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	40.76	74.00	-33.24	50.03	31.55	8.94	49.76	0.00	--- --- Peak																																																																										
Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	#	#																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	4804.00	41.09	74.00	-32.91	50.36	31.55	8.94	49.76	0.00	--- --- Peak																																																																										







Mode	6																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																											
ANT	3																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak	<p>Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 6 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.48</td> <td>74.00</td> <td>-33.52</td> <td>49.87</td> <td>31.68</td> <td>8.71</td> <td>49.78</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>50.69</td> <td>36.22</td> <td>10.18</td> <td>49.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4880.00	40.48	74.00	-33.52	49.87	31.68	8.71	49.78	0.00	---	---	Peak	2	7320.00	47.12	74.00	-26.88	50.69	36.22	10.18	49.97	0.00	---	---	Peak	<p>Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 6 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.71</td> <td>74.00</td> <td>-33.29</td> <td>50.10</td> <td>31.68</td> <td>8.71</td> <td>49.78</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>49.45</td> <td>36.22</td> <td>10.18</td> <td>49.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4880.00	40.71	74.00	-33.29	50.10	31.68	8.71	49.78	0.00	---	---	Peak	2	7320.00	45.88	74.00	-28.12	49.45	36.22	10.18	49.97	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																				
1	4880.00	40.48	74.00	-33.52	49.87	31.68	8.71	49.78	0.00	---	---	Peak																																																																																																
2	7320.00	47.12	74.00	-26.88	50.69	36.22	10.18	49.97	0.00	---	---	Peak																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																				
1	4880.00	40.71	74.00	-33.29	50.10	31.68	8.71	49.78	0.00	---	---	Peak																																																																																																
2	7320.00	45.88	74.00	-28.12	49.45	36.22	10.18	49.97	0.00	---	---	Peak																																																																																																
Avg																																																																																																												



Mode	7																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																													
ANT	3																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2495.96</td> <td>50.29</td> <td>74.00</td> <td>-23.71</td> <td>50.83</td> <td>27.89</td> <td>5.47</td> <td>33.90</td> <td>0.00</td> <td>178 317 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2495.96	50.29	74.00	-23.71	50.83	27.89	5.47	33.90	0.00	178 317 Peak	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>96.97</td> <td>-----</td> <td>-----</td> <td>97.58</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>178 317 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	96.97	-----	-----	97.58	27.83	5.46	33.90	0.00	178 317 Peak
Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	Factor	#	#																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2495.96	50.29	74.00	-23.71	50.83	27.89	5.47	33.90	0.00	178 317 Peak																																																																					
Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	Factor	#	#																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2480.00	96.97	-----	-----	97.58	27.83	5.46	33.90	0.00	178 317 Peak																																																																					
Avg	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2488.92</td> <td>41.05</td> <td>54.00</td> <td>-12.95</td> <td>41.62</td> <td>27.86</td> <td>5.47</td> <td>33.90</td> <td>0.00</td> <td>178 317 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2488.92	41.05	54.00	-12.95	41.62	27.86	5.47	33.90	0.00	178 317 Average	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>94.42</td> <td>-----</td> <td>-----</td> <td>95.03</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>178 317 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	Factor	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	94.42	-----	-----	95.03	27.83	5.46	33.90	0.00	178 317 Average
Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	Factor	#	#																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2488.92	41.05	54.00	-12.95	41.62	27.86	5.47	33.90	0.00	178 317 Average																																																																					
Limit	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	Factor	#	#																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2480.00	94.42	-----	-----	95.03	27.83	5.46	33.90	0.00	178 317 Average																																																																					

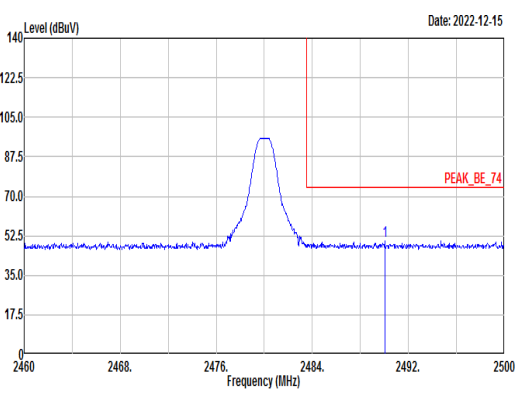
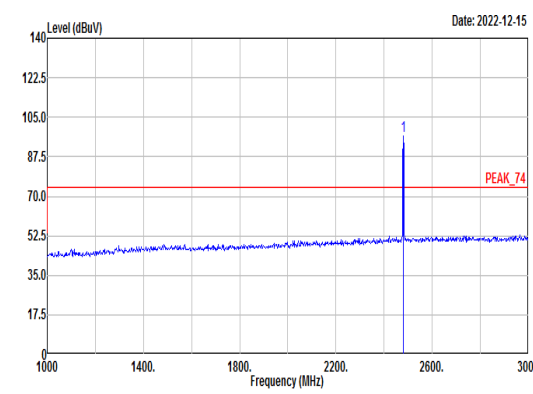
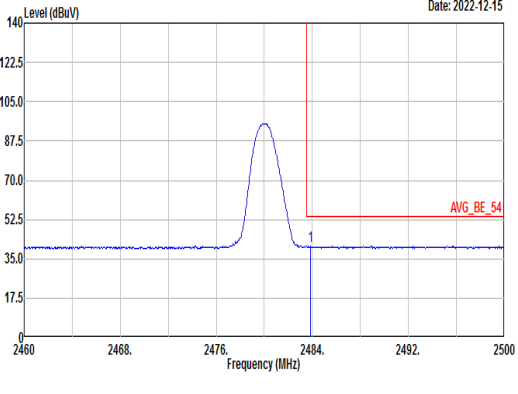
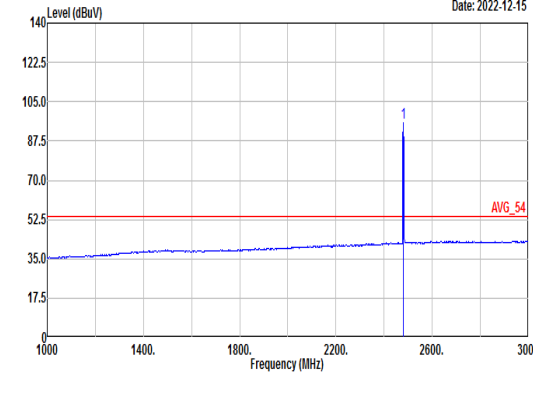


Mode	7																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																															
ANT	3																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV) vs Frequency (MHz) plot showing a peak at 2480 MHz. The y-axis ranges from 0 to 140 dBuV, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the peak level at approximately 74 dBuV.</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 7 INEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2490.04</td> <td>50.08</td> <td>74.00</td> <td>-23.92</td> <td>50.64</td> <td>27.87</td> <td>5.47</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>84 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2490.04	50.08	74.00	-23.92	50.64	27.87	5.47	33.90	0.00	100	84 Peak	 <p>Level (dBuV) vs Frequency (MHz) plot showing a peak at 2480 MHz. The y-axis ranges from 0 to 140 dBuV, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the peak level at approximately 74 dBuV.</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 7 INEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>96.75</td> <td>-----</td> <td>-----</td> <td>97.36</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>84 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	96.75	-----	-----	97.36	27.83	5.46	33.90	0.00	100	84 Peak
	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																							
Freq Level	Line	Level	Factor	Loss	#	#																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2490.04	50.08	74.00	-23.92	50.64	27.87	5.47	33.90	0.00	100	84 Peak																																																																						
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																								
Freq Level	Line	Level	Factor	Loss	#	#																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	96.75	-----	-----	97.36	27.83	5.46	33.90	0.00	100	84 Peak																																																																						
Avg	 <p>Level (dBuV) vs Frequency (MHz) plot showing an average level at 2483.5 MHz. The y-axis ranges from 0 to 140 dBuV, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the average level at approximately 54 dBuV.</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 7 INEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.84</td> <td>40.54</td> <td>54.00</td> <td>-13.46</td> <td>41.13</td> <td>27.85</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>84 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.84	40.54	54.00	-13.46	41.13	27.85	5.46	33.90	0.00	100	84 Average	 <p>Level (dBuV) vs Frequency (MHz) plot showing an average level at 2480 MHz. The y-axis ranges from 0 to 140 dBuV, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the average level at approximately 55 dBuV.</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3kHz SMT:Auto Project : 2N2910 Mode : 7 INEI : 359709930024958 Plane : Z with Accessories : 1H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>95.55</td> <td>-----</td> <td>-----</td> <td>96.16</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>84 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	95.55	-----	-----	96.16	27.83	5.46	33.90	0.00	100	84 Average
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																								
Freq Level	Line	Level	Factor	Loss	#	#																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.84	40.54	54.00	-13.46	41.13	27.85	5.46	33.90	0.00	100	84 Average																																																																						
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																								
Freq Level	Line	Level	Factor	Loss	#	#																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	95.55	-----	-----	96.16	27.83	5.46	33.90	0.00	100	84 Average																																																																						



Mode	7																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																															
ANT	3																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<p style="text-align: right;">Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>Margin</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.74</td> <td>74.00</td> <td>-32.26</td> <td>51.24</td> <td>31.83</td> <td>8.46</td> <td>49.79</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>46.09</td> <td>74.00</td> <td>-27.91</td> <td>49.84</td> <td>36.34</td> <td>10.17</td> <td>50.26</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#		Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.74	74.00	-32.26	51.24	31.83	8.46	49.79	0.00	---	Peak	2	7440.00	46.09	74.00	-27.91	49.84	36.34	10.17	50.26	0.00	---	Peak	<p style="text-align: right;">Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 7 IMEI : 359709930024958 Plane : Z with Accessories : 1M</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>Margin</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.80</td> <td>74.00</td> <td>-33.20</td> <td>50.30</td> <td>31.83</td> <td>8.46</td> <td>49.79</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>45.70</td> <td>74.00</td> <td>-28.30</td> <td>49.45</td> <td>36.34</td> <td>10.17</td> <td>50.26</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#		Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.80	74.00	-33.20	50.30	31.83	8.46	49.79	0.00	---	Peak	2	7440.00	45.70	74.00	-28.30	49.45	36.34	10.17	50.26	0.00	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	#	#																																																																																																								
Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4960.00	41.74	74.00	-32.26	51.24	31.83	8.46	49.79	0.00	---	Peak																																																																																																					
2	7440.00	46.09	74.00	-27.91	49.84	36.34	10.17	50.26	0.00	---	Peak																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	#	#																																																																																																								
Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4960.00	40.80	74.00	-33.20	50.30	31.83	8.46	49.79	0.00	---	Peak																																																																																																					
2	7440.00	45.70	74.00	-28.30	49.45	36.34	10.17	50.26	0.00	---	Peak																																																																																																					

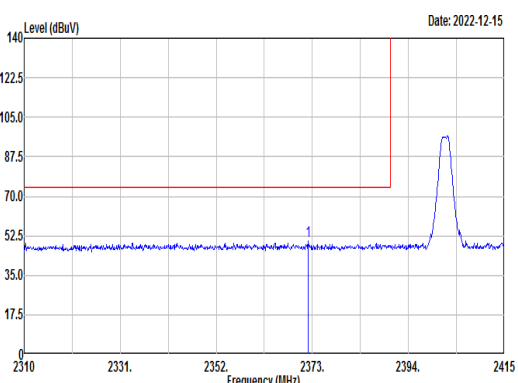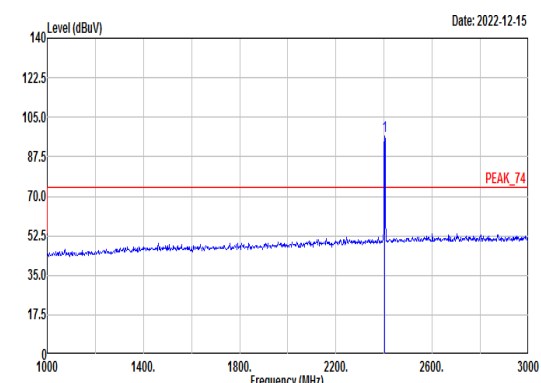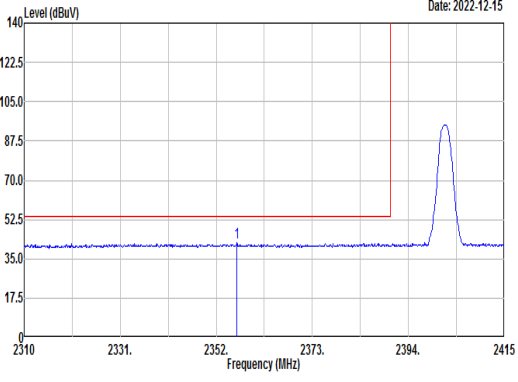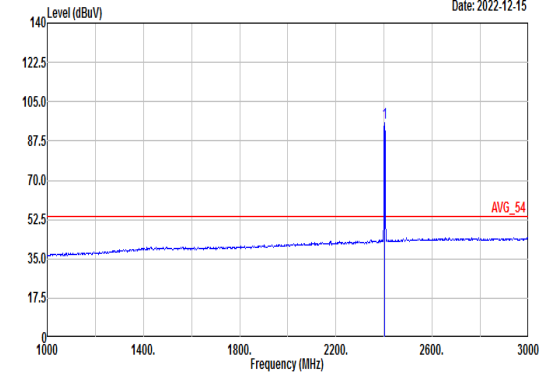

Mode	8																																																																											
	Band Edge																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																											
ANT	3																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SWT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2372.06</td> <td>50.10</td> <td>74.00</td> <td>-23.90</td> <td>51.17</td> <td>27.46</td> <td>5.34</td> <td>33.87</td> <td>0.00</td> <td>229</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2372.06	50.10	74.00	-23.90	51.17	27.46	5.34	33.87	0.00	229	318	Peak	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SWT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.62</td> <td>-----</td> <td>-----</td> <td>97.56</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>229</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.62	-----	-----	97.56	27.57	5.37	33.88	0.00	229	318	Peak
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line	Level	Factor	Loss	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2372.06	50.10	74.00	-23.90	51.17	27.46	5.34	33.87	0.00	229	318	Peak																																																																
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line	Level	Factor	Loss	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2402.00	96.62	-----	-----	97.56	27.57	5.37	33.88	0.00	229	318	Peak																																																																
Avg	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:10kHz SWT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2356.52</td> <td>42.06</td> <td>54.00</td> <td>-11.94</td> <td>43.19</td> <td>27.41</td> <td>5.33</td> <td>33.87</td> <td>0.00</td> <td>229</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2356.52	42.06	54.00	-11.94	43.19	27.41	5.33	33.87	0.00	229	318	Average	 <p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:10kHz SWT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.37</td> <td>-----</td> <td>-----</td> <td>96.31</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>229</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	95.37	-----	-----	96.31	27.57	5.37	33.88	0.00	229	318	Average
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line	Level	Factor	Loss	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2356.52	42.06	54.00	-11.94	43.19	27.41	5.33	33.87	0.00	229	318	Average																																																																
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																					
Freq Level	Line	Level	Factor	Loss	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2402.00	95.37	-----	-----	96.31	27.57	5.37	33.88	0.00	229	318	Average																																																																



Mode	8																																																																							
	Band Edge																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																							
ANT	3																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2341.71</td> <td>49.48</td> <td>74.00</td> <td>-24.52</td> <td>50.67</td> <td>27.36</td> <td>5.32</td> <td>33.87</td> <td>0.00</td> <td>100</td> <td>78 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2341.71	49.48	74.00	-24.52	50.67	27.36	5.32	33.87	0.00	100	78 Peak	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2402.00</td> <td>96.60</td> <td>-----</td> <td>-----</td> <td>97.54</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>100</td> <td>78 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2402.00	96.60	-----	-----	97.54	27.57	5.37	33.88	0.00	100	78 Peak
	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 2341.71	49.48	74.00	-24.52	50.67	27.36	5.32	33.87	0.00	100	78 Peak																																																														
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																	
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 2402.00	96.60	-----	-----	97.54	27.57	5.37	33.88	0.00	100	78 Peak																																																														
Avg	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2389.91</td> <td>41.90</td> <td>54.00</td> <td>-12.10</td> <td>42.89</td> <td>27.53</td> <td>5.36</td> <td>33.88</td> <td>0.00</td> <td>100</td> <td>78 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2389.91	41.90	54.00	-12.10	42.89	27.53	5.36	33.88	0.00	100	78 Average	<p>Date: 2022-12-15</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2402.00</td> <td>95.43</td> <td>-----</td> <td>-----</td> <td>96.37</td> <td>27.57</td> <td>5.37</td> <td>33.88</td> <td>0.00</td> <td>100</td> <td>78 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos		TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 2402.00	95.43	-----	-----	96.37	27.57	5.37	33.88	0.00	100	78 Average
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																	
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 2389.91	41.90	54.00	-12.10	42.89	27.53	5.36	33.88	0.00	100	78 Average																																																														
Limit	Read	Ant	Cable Preamp	APos		TPos	Remark																																																																	
Freq Level	Line Margin	Level Factor	Loss Factor	#	#	cm	deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 2402.00	95.43	-----	-----	96.37	27.57	5.37	33.88	0.00	100	78 Average																																																														







Mode	8																																																															
	Harmonic																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																															
ANT	3																																																															
Pol.	Horizontal	Vertical																																																														
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2M</p> <table border="1"> <thead> <tr> <th>Limit Line</th> <th>Over Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>#</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.30</td> <td>74.00</td> <td>-33.70</td> <td>49.57</td> <td>31.55</td> <td>8.94</td> <td>49.76</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit Line	Over Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	#	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.30	74.00	-33.70	49.57	31.55	8.94	49.76	0.00	--- --- Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 8 IMEI : 359709930024958 Plane : Z with Accessories : 2M</p> <table border="1"> <thead> <tr> <th>Limit Line</th> <th>Over Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>#</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>39.61</td> <td>74.00</td> <td>-34.39</td> <td>48.88</td> <td>31.55</td> <td>8.94</td> <td>49.76</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit Line	Over Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	#	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	39.61	74.00	-34.39	48.88	31.55	8.94	49.76	0.00	--- --- Peak
	Limit Line	Over Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	#	APos	TPos	Remark																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4804.00	40.30	74.00	-33.70	49.57	31.55	8.94	49.76	0.00	--- --- Peak																																																						
Limit Line	Over Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	#	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4804.00	39.61	74.00	-34.39	48.88	31.55	8.94	49.76	0.00	--- --- Peak																																																						







Mode	9																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																													
ANT	3																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<p>Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 9 INEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.79</td> <td>74.00</td> <td>-33.21</td> <td>50.18</td> <td>31.68</td> <td>8.71</td> <td>49.78</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>46.26</td> <td>74.00</td> <td>-27.74</td> <td>49.83</td> <td>36.22</td> <td>10.18</td> <td>49.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#	cm	deg	1	4880.00	40.79	74.00	-33.21	50.18	31.68	8.71	49.78	0.00	---	---	Peak	2	7320.00	46.26	74.00	-27.74	49.83	36.22	10.18	49.97	0.00	---	---	Peak	<p>Site : 03CH04-SZ Margin Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 9 INEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.34</td> <td>74.00</td> <td>-33.66</td> <td>49.73</td> <td>31.68</td> <td>8.71</td> <td>49.78</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>50.03</td> <td>36.22</td> <td>10.18</td> <td>49.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#	cm	deg	1	4880.00	40.34	74.00	-33.66	49.73	31.68	8.71	49.78	0.00	---	---	Peak	2	7320.00	46.46	74.00	-27.54	50.03	36.22	10.18	49.97	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																					
Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#	cm	deg																																																																																					
1	4880.00	40.79	74.00	-33.21	50.18	31.68	8.71	49.78	0.00	---	---	Peak																																																																																		
2	7320.00	46.26	74.00	-27.74	49.83	36.22	10.18	49.97	0.00	---	---	Peak																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																					
Freq Level	Line	Limit	Level	Factor	Loss Factor	#	#	cm	deg																																																																																					
1	4880.00	40.34	74.00	-33.66	49.73	31.68	8.71	49.78	0.00	---	---	Peak																																																																																		
2	7320.00	46.46	74.00	-27.54	50.03	36.22	10.18	49.97	0.00	---	---	Peak																																																																																		

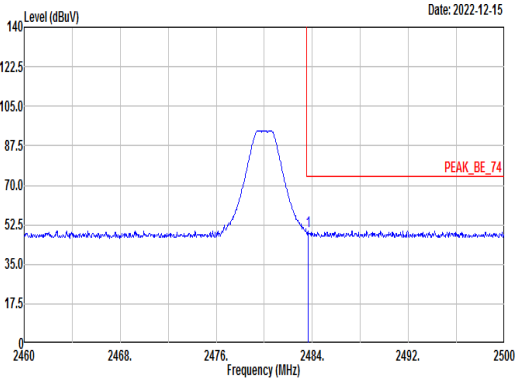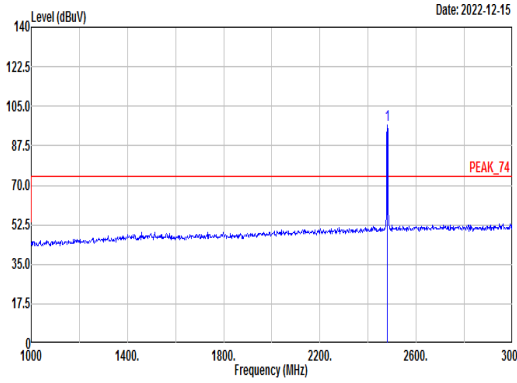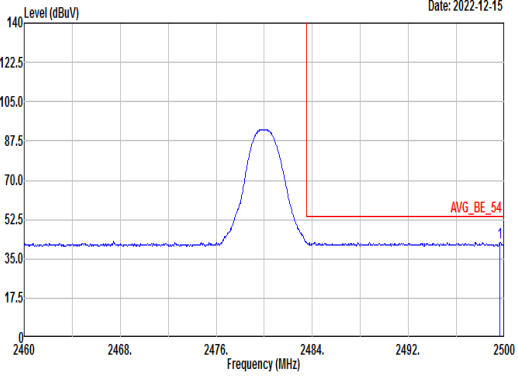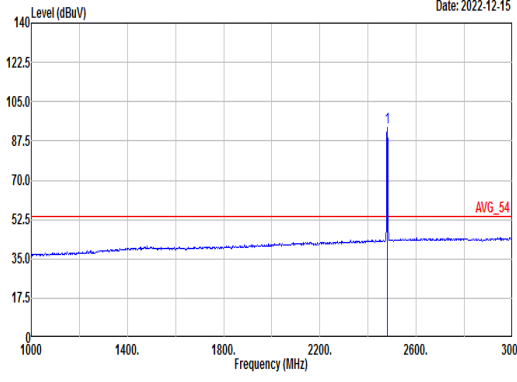

Mode	10																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																													
ANT	3																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.64</td> <td>49.77</td> <td>74.00</td> <td>-24.23</td> <td>50.37</td> <td>27.84</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>260 318 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.64	49.77	74.00	-24.23	50.37	27.84	5.46	33.90	0.00	260 318 Peak	 <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>96.46</td> <td>-----</td> <td>-----</td> <td>97.07</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>260 318 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	96.46	-----	-----	97.07	27.83	5.46	33.90	0.00	260 318 Peak
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.64	49.77	74.00	-24.23	50.37	27.84	5.46	33.90	0.00	260 318 Peak																																																																					
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2480.00	96.46	-----	-----	97.07	27.83	5.46	33.90	0.00	260 318 Peak																																																																					
Avg	 <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2499.60</td> <td>42.31</td> <td>54.00</td> <td>-11.69</td> <td>42.83</td> <td>27.90</td> <td>5.48</td> <td>33.90</td> <td>0.00</td> <td>260 318 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2499.60	42.31	54.00	-11.69	42.83	27.90	5.48	33.90	0.00	260 318 Average	 <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 HORIZONTAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>93.27</td> <td>-----</td> <td>-----</td> <td>93.88</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>260 318 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	93.27	-----	-----	93.88	27.83	5.46	33.90	0.00	260 318 Average
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2499.60	42.31	54.00	-11.69	42.83	27.90	5.48	33.90	0.00	260 318 Average																																																																					
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Margin	Level	Factor	Loss	Factor	#	#																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2480.00	93.27	-----	-----	93.88	27.83	5.46	33.90	0.00	260 318 Average																																																																					

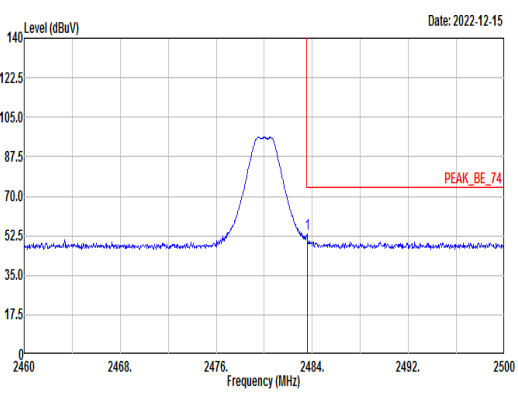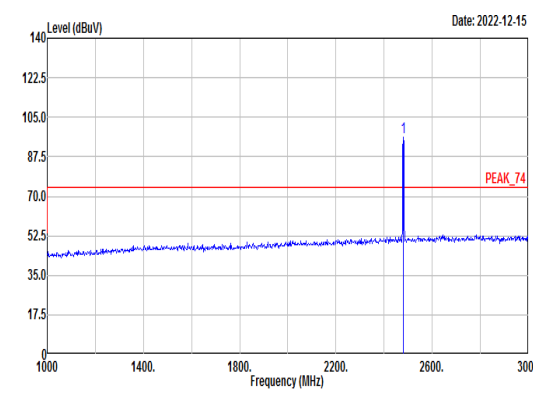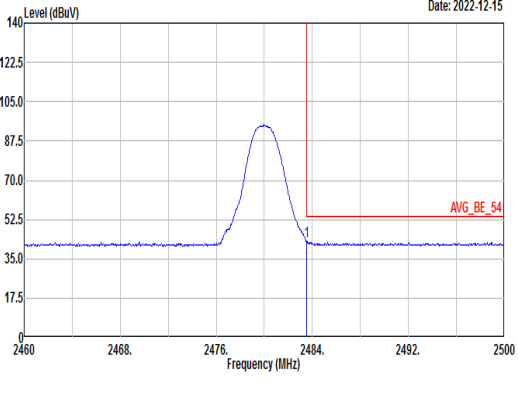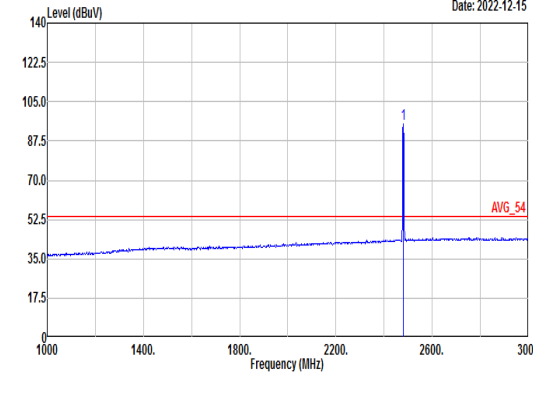

Mode	10																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																													
ANT	3																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Level (dBuV) vs Frequency (MHz) plot for Vertical polarization. Peak at 2483.56 MHz. Limit line at 74.00 dBuV/m.</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>53.27</td> <td>74.00</td> <td>-20.73</td> <td>53.87</td> <td>27.84</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>75 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2483.56	53.27	74.00	-20.73	53.87	27.84	5.46	33.90	0.00	100	75 Peak	 <p>Level (dBuV) vs Frequency (MHz) plot for Fundamental polarization. Peak at 2480.00 MHz. Limit line at 96.24 dBuV/m.</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:3000kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>96.24</td> <td>-----</td> <td>-----</td> <td>96.85</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>75 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2480.00	96.24	-----	-----	96.85	27.83	5.46	33.90	0.00	100	75 Peak
	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																					
Freq Level	Line	Level	Factor	Loss	#	#	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																							
1 2483.56	53.27	74.00	-20.73	53.87	27.84	5.46	33.90	0.00	100	75 Peak																																																																				
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	#	#	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																							
1 2480.00	96.24	-----	-----	96.85	27.83	5.46	33.90	0.00	100	75 Peak																																																																				
Avg	 <p>Level (dBuV) vs Frequency (MHz) plot for Vertical polarization. Average at 2483.52 MHz. Limit line at 54.00 dBuV/m.</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.52</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>43.50</td> <td>27.84</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2483.52	42.90	54.00	-11.10	43.50	27.84	5.46	33.90	0.00	100	75 Average	 <p>Level (dBuV) vs Frequency (MHz) plot for Fundamental polarization. Average at 2480.00 MHz. Limit line at 95.02 dBuV/m.</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m 91200-1474-2022 VERTICAL : RBW:1000kHz VBW:10kHz SMT:Auto Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>95.02</td> <td>-----</td> <td>-----</td> <td>95.63</td> <td>27.83</td> <td>5.46</td> <td>33.90</td> <td>0.00</td> <td>100</td> <td>75 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark	Freq Level	Line	Level	Factor	Loss	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 2480.00	95.02	-----	-----	95.63	27.83	5.46	33.90	0.00	100	75 Average
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	#	#	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																							
1 2483.52	42.90	54.00	-11.10	43.50	27.84	5.46	33.90	0.00	100	75 Average																																																																				
Limit	Read	Ant	Cable	Preamp	Apos		TPos	Remark																																																																						
Freq Level	Line	Level	Factor	Loss	#	#	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																							
1 2480.00	95.02	-----	-----	95.63	27.83	5.46	33.90	0.00	100	75 Average																																																																				



Mode	10																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																			
ANT	3																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Margin</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.35</td> <td>74.00</td> <td>-32.65</td> <td>50.85</td> <td>31.83</td> <td>8.46</td> <td>49.79</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>46.23</td> <td>74.00</td> <td>-27.77</td> <td>49.98</td> <td>36.34</td> <td>10.17</td> <td>50.26</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Margin		APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB				1	4960.00	41.35	74.00	-32.65	50.85	31.83	8.46	49.79	0.00	---	Peak	2	7440.00	46.23	74.00	-27.77	49.98	36.34	10.17	50.26	0.00	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2N2910 Mode : 10 IMEI : 359709930024958 Plane : Z with Accessories : 2H</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Margin</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.54</td> <td>74.00</td> <td>-33.46</td> <td>50.04</td> <td>31.83</td> <td>8.46</td> <td>49.79</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>46.23</td> <td>74.00</td> <td>-27.77</td> <td>49.98</td> <td>36.34</td> <td>10.17</td> <td>50.26</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Margin		APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	#	#	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB				1	4960.00	40.54	74.00	-33.46	50.04	31.83	8.46	49.79	0.00	---	Peak	2	7440.00	46.23	74.00	-27.77	49.98	36.34	10.17	50.26	0.00	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Margin		APos	TPos	Remark																																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	#	#	cm	deg																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	4960.00	41.35	74.00	-32.65	50.85	31.83	8.46	49.79	0.00	---	Peak																																																																																																									
2	7440.00	46.23	74.00	-27.77	49.98	36.34	10.17	50.26	0.00	---	Peak																																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Margin		APos	TPos	Remark																																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	#	#	cm	deg																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																													
1	4960.00	40.54	74.00	-33.46	50.04	31.83	8.46	49.79	0.00	---	Peak																																																																																																									
2	7440.00	46.23	74.00	-27.77	49.98	36.34	10.17	50.26	0.00	---	Peak																																																																																																									



Mode	11																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																									
ANT	3																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/Peak	<p>Date: 2022-12-18</p> <p>Site : 03CH04-SZ Margin Condition: FCC CLASS-B 3m LF_ANT_41909_22 HORIZONTAL Project : 2N2910 Mode : 11 IMEI : 359709930024958 Plane : Z with Accessories : 2M</p> <table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Level (dBuV)</th> <th>Limit (dBuV)</th> <th>Over (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>25.06</td><td>40.00</td><td>-14.94</td><td>30.57</td><td>25.86</td><td>0.53</td><td>31.90</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>63.95</td><td>17.58</td><td>40.00</td><td>-22.42</td><td>36.54</td><td>12.24</td><td>0.80</td><td>32.00</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>106.63</td><td>19.29</td><td>43.50</td><td>-24.21</td><td>33.31</td><td>16.68</td><td>1.05</td><td>31.75</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>227.88</td><td>25.00</td><td>46.00</td><td>-21.00</td><td>37.60</td><td>17.09</td><td>1.55</td><td>31.24</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>287.05</td><td>23.85</td><td>46.00</td><td>-22.15</td><td>33.61</td><td>19.61</td><td>1.76</td><td>31.13</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>962.17</td><td>33.47</td><td>54.00</td><td>-20.53</td><td>30.05</td><td>30.90</td><td>3.25</td><td>30.73</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak #	Freq (MHz)	Level (dBuV)	Limit (dBuV)	Over (dB)	Read (dBuV)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	25.06	40.00	-14.94	30.57	25.86	0.53	31.90	0.00	---	Peak	2	63.95	17.58	40.00	-22.42	36.54	12.24	0.80	32.00	0.00	---	Peak	3	106.63	19.29	43.50	-24.21	33.31	16.68	1.05	31.75	0.00	---	Peak	4	227.88	25.00	46.00	-21.00	37.60	17.09	1.55	31.24	0.00	---	Peak	5	287.05	23.85	46.00	-22.15	33.61	19.61	1.76	31.13	0.00	---	Peak	6	962.17	33.47	54.00	-20.53	30.05	30.90	3.25	30.73	0.00	---	Peak	<p>Date: 2022-12-18</p> <p>Site : 03CH04-SZ Margin Condition: FCC CLASS-B 3m LF_ANT_41909_22 VERTICAL Project : 2N2910 Mode : 11 IMEI : 359709930024958 Plane : Z with Accessories : 2M</p> <table border="1"> <thead> <tr> <th>Peak #</th> <th>Freq (MHz)</th> <th>Level (dBuV)</th> <th>Limit (dBuV)</th> <th>Over (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>27.27</td><td>40.00</td><td>-12.73</td><td>32.78</td><td>25.86</td><td>0.53</td><td>31.90</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>48.43</td><td>21.50</td><td>40.00</td><td>-18.50</td><td>37.05</td><td>15.38</td><td>0.69</td><td>31.62</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>224.97</td><td>22.37</td><td>46.00</td><td>-23.63</td><td>35.20</td><td>16.88</td><td>1.54</td><td>31.25</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>296.75</td><td>23.24</td><td>46.00</td><td>-22.76</td><td>32.70</td><td>19.86</td><td>1.79</td><td>31.11</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>629.46</td><td>29.21</td><td>46.00</td><td>-16.79</td><td>31.12</td><td>26.45</td><td>2.61</td><td>30.97</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>950.53</td><td>33.25</td><td>46.00</td><td>-12.75</td><td>29.67</td><td>31.15</td><td>3.23</td><td>30.80</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak #	Freq (MHz)	Level (dBuV)	Limit (dBuV)	Over (dB)	Read (dBuV)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	27.27	40.00	-12.73	32.78	25.86	0.53	31.90	0.00	---	Peak	2	48.43	21.50	40.00	-18.50	37.05	15.38	0.69	31.62	0.00	---	Peak	3	224.97	22.37	46.00	-23.63	35.20	16.88	1.54	31.25	0.00	---	Peak	4	296.75	23.24	46.00	-22.76	32.70	19.86	1.79	31.11	0.00	---	Peak	5	629.46	29.21	46.00	-16.79	31.12	26.45	2.61	30.97	0.00	---	Peak	6	950.53	33.25	46.00	-12.75	29.67	31.15	3.23	30.80	0.00	---	Peak
	Peak #	Freq (MHz)	Level (dBuV)	Limit (dBuV)	Over (dB)	Read (dBuV)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	30.00	25.06	40.00	-14.94	30.57	25.86	0.53	31.90	0.00	---	Peak																																																																																																																																																															
2	63.95	17.58	40.00	-22.42	36.54	12.24	0.80	32.00	0.00	---	Peak																																																																																																																																																															
3	106.63	19.29	43.50	-24.21	33.31	16.68	1.05	31.75	0.00	---	Peak																																																																																																																																																															
4	227.88	25.00	46.00	-21.00	37.60	17.09	1.55	31.24	0.00	---	Peak																																																																																																																																																															
5	287.05	23.85	46.00	-22.15	33.61	19.61	1.76	31.13	0.00	---	Peak																																																																																																																																																															
6	962.17	33.47	54.00	-20.53	30.05	30.90	3.25	30.73	0.00	---	Peak																																																																																																																																																															
Peak #	Freq (MHz)	Level (dBuV)	Limit (dBuV)	Over (dB)	Read (dBuV)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	27.27	40.00	-12.73	32.78	25.86	0.53	31.90	0.00	---	Peak																																																																																																																																																															
2	48.43	21.50	40.00	-18.50	37.05	15.38	0.69	31.62	0.00	---	Peak																																																																																																																																																															
3	224.97	22.37	46.00	-23.63	35.20	16.88	1.54	31.25	0.00	---	Peak																																																																																																																																																															
4	296.75	23.24	46.00	-22.76	32.70	19.86	1.79	31.11	0.00	---	Peak																																																																																																																																																															
5	629.46	29.21	46.00	-16.79	31.12	26.45	2.61	30.97	0.00	---	Peak																																																																																																																																																															
6	950.53	33.25	46.00	-12.75	29.67	31.15	3.23	30.80	0.00	---	Peak																																																																																																																																																															



Co-location

2.4GHz 2400~2483.5MHz Band Edge @ 3m

EDR CH39 & LTE Band 30

WIFI Ant. 12	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH39 & LTE Band 30	*	2480	95.6	-	-	96.03	27.83	5.46	33.72	274	316	P	H
	*	2480	91.47	-	-	91.9	27.83	5.46	33.72	274	316	A	H
		2483.92	49.77	-24.23	74	50.18	27.85	5.46	33.72	274	316	P	H
		2483.52	39.86	-14.14	54	40.28	27.84	5.46	33.72	274	316	A	H
	*	2480	96.14	-	-	96.75	27.83	5.46	33.9	100	57	P	V
	*	2480	95.22	-	-	95.83	27.83	5.46	33.9	100	57	A	V
		2483.64	53.7	-20.3	74	54.3	27.84	5.46	33.9	100	57	P	V
		2483.52	43.62	-10.38	54	44.22	27.84	5.46	33.9	100	57	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz (Harmonic @ 3m)





EDR CH39& LTE Band 30

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH39 & LTE Band 30	-	4960	42.68	-31.32	74	52.23	31.83	8.41	49.79	-	-	P	H
	-	7440	46.74	-27.26	74	50.49	36.34	10.17	50.26	-	-	P	H
	-	4960	42.51	-31.49	74	52.06	31.83	8.41	49.79	-	-	P	V
	-	7440	47.12	-26.88	74	50.87	36.34	10.17	50.26	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz Band Edge @ 3m

BLE CH39& LTE Band 30 (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39& LTE Band 30	
12	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH04-SZ Condition : PEAK_BE_74 3m 91200-1474-2022 HORIZONTAL REW:1000 000kHz VBW:3000 000kHz Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>	 <p>Site : 03CH04-SZ Condition : PEAK_74 3m 91200-1474-2022 HORIZONTAL REW:1000 000kHz VBW:3000 000kHz Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>
<p>Avg.</p>	 <p>Site : 03CH04-SZ Condition : AVG_BE_54 3m 91200-1474-2022 HORIZONTAL REW:1000 000kHz VBW:10 000kHz Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>	 <p>Site : 03CH04-SZ Condition : AVG_54 3m 91200-1474-2022 HORIZONTAL REW:1000 000kHz VBW:10 000kHz Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>

Remark: The two highest signals are BLE and LTE B30 fundamental signal in the **Fundamental** plot.



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39& LTE Band 30	
12	Vertical	Fundamental
Peak	<p>Site : 03CH04-SZ Condition : PEAK_BE_74 3m 91200-1474-2022 VERTICAL Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>	<p>Site : 03CH04-SZ Condition : PEAK_74 3m 91200-1474-2022 VERTICAL Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>
Avg.	<p>Site : 03CH04-SZ Condition : AVG_BE_54 3m 91200-1474-2022 VERTICAL Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>	<p>Site : 03CH04-SZ Condition : AVG_54 3m 91200-1474-2022 VERTICAL Project : ZK2910 Mode : Mode 25 IMEI : 359709930024958 Plane : Z with Accessories : ZM</p>

Remark: The two highest signals are BLE and LTE B30 fundamental signal in the **Fundamental plot**.



2.4GHz 2400~2483.5MHz Band Edge @ 3m

BLECH39 & LTE Band 30 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge	
ANT	BLE CH39 & LTE Band 30	
12	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH04-SZ Condition : PEAK_74 3m 91200-1474-2022 HORIZONTAL Project : 2K2910 Mode : Mode 25 IMEI : 359709930024958 Plane : 2 with Accessories 2M</p>	<p>Site : 03CH04-SZ Condition : PEAK_74 3m 91200-1474-2022 VERTICAL Project : 2K2910 Mode : Mode 25 IMEI : 359709930024958 Plane : 2 with Accessories 2M</p>



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	62.50	0.391	2.556	3KHz
Bluetooth LE 2Mbps	32.87	0.206	4.859	10KHZ

Bluetooth LE 1Mbps

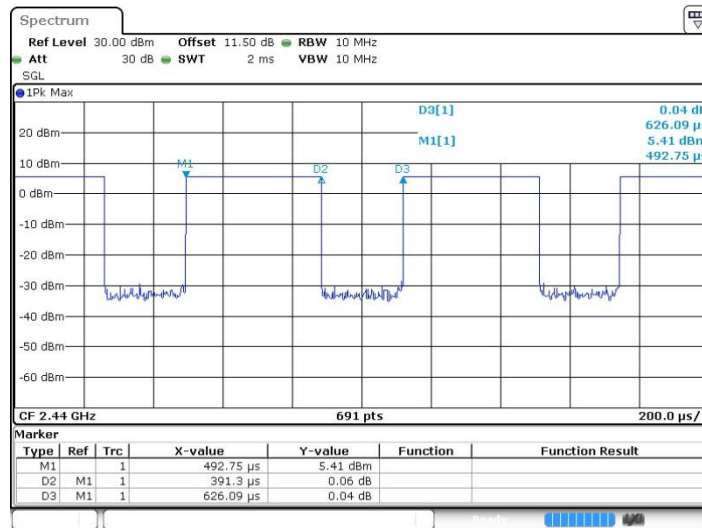

Date: 3 DEC.2022 11:21:58

Bluetooth LE 2Mbps

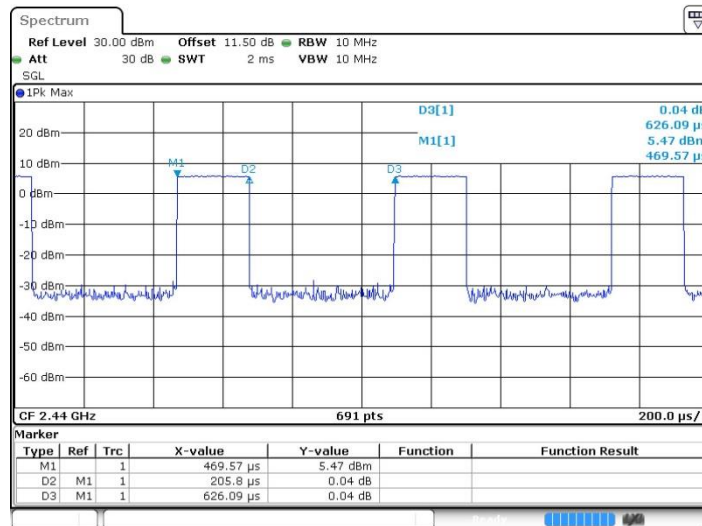

Date: 3 DEC.2022 11:22:33