

**1\_HAC RF GSM850\_ANT0\_Voice\_Ch128**

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.17 V/m; Power Drift = -0.13 dB

Applied MIF = 3.63 dB

RF audio interference level = 35.35 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>33.28 dBV/m</b>	<b>Grid 2 M4</b> <b>34.35 dBV/m</b>	<b>Grid 3 M4</b> <b>34.13 dBV/m</b>
<b>Grid 4 M4</b> <b>34 dBV/m</b>	<b>Grid 5 M4</b> <b>34.91 dBV/m</b>	<b>Grid 6 M4</b> <b>34.67 dBV/m</b>
<b>Grid 7 M4</b> <b>34.86 dBV/m</b>	<b>Grid 8 M4</b> <b>35.35 dBV/m</b>	<b>Grid 9 M4</b> <b>34.82 dBV/m</b>

Total = 35.35 dBV/m

E Category: M4

Location: 0, 25, 8.7 mm

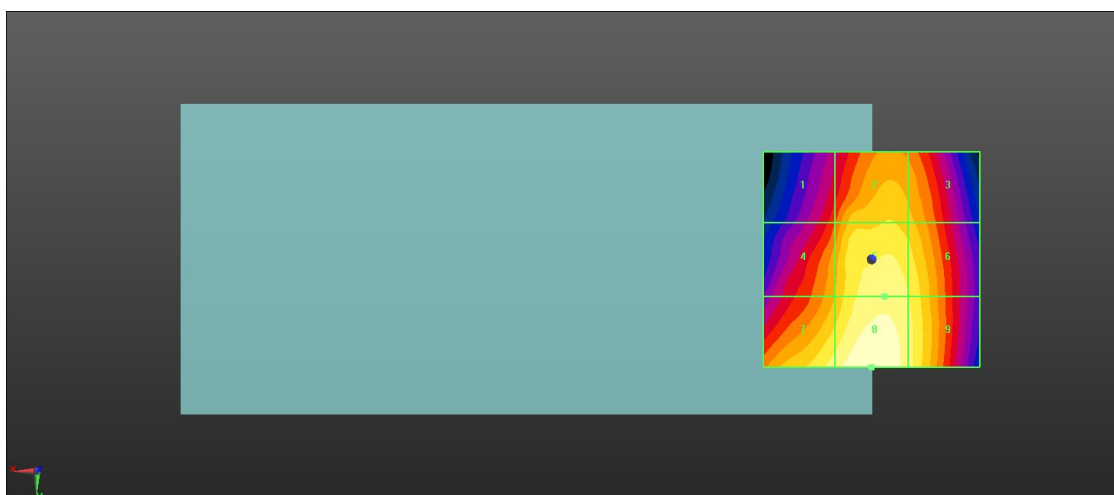

0 dB = 58.56 V/m = 35.35 dBV/m

## 2\_HAC RF GSM850\_ANT0\_Voice\_Ch189

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch189/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 45.96 V/m; Power Drift = -0.17 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.67 dBV/m



MIF scaled E-field

Grid 1 <b>M4</b> <b>32.27 dBV/m</b>	Grid 2 <b>M4</b> <b>33 dBV/m</b>	Grid 3 <b>M4</b> <b>32.64 dBV/m</b>
Grid 4 <b>M4</b> <b>33.32 dBV/m</b>	Grid 5 <b>M4</b> <b>33.96 dBV/m</b>	Grid 6 <b>M4</b> <b>33.5 dBV/m</b>
Grid 7 <b>M4</b> <b>34.42 dBV/m</b>	Grid 8 <b>M4</b> <b>34.67 dBV/m</b>	Grid 9 <b>M4</b> <b>33.88 dBV/m</b>

Total = 34.67 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

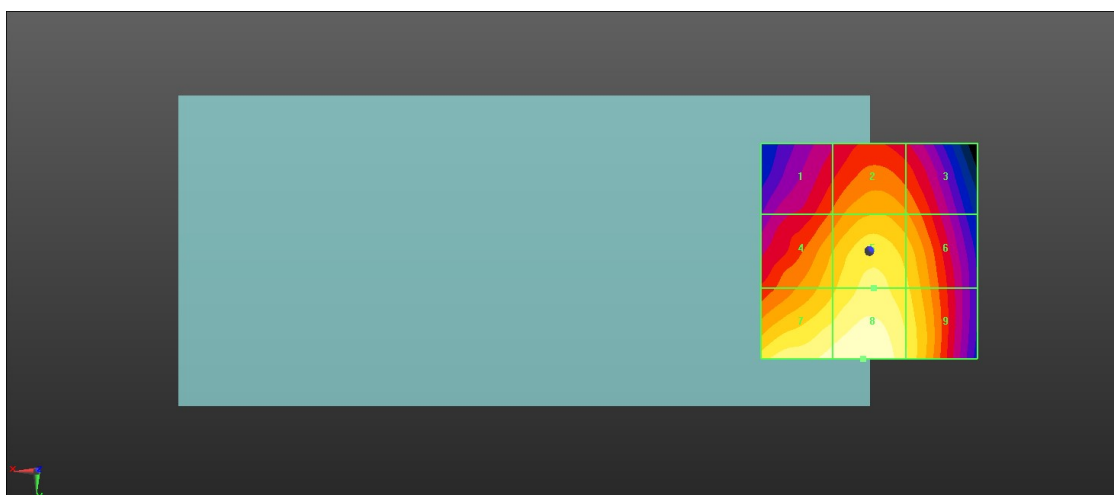

0 dB = 54.11 V/m = 34.67 dBV/m

### 3\_HAC RF GSM850\_ANT0\_Voice\_Ch251

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

#### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 43.41 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 34.02 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>31.93 dBV/m</b>	<b>Grid 2 M4</b> <b>32.76 dBV/m</b>	<b>Grid 3 M4</b> <b>32.36 dBV/m</b>
<b>Grid 4 M4</b> <b>32.84 dBV/m</b>	<b>Grid 5 M4</b> <b>33.56 dBV/m</b>	<b>Grid 6 M4</b> <b>33.26 dBV/m</b>
<b>Grid 7 M4</b> <b>33.68 dBV/m</b>	<b>Grid 8 M4</b> <b>34.02 dBV/m</b>	<b>Grid 9 M4</b> <b>33.5 dBV/m</b>

Total = 34.02 dBV/m

E Category: M4

Location: -3, 25, 8.7 mm

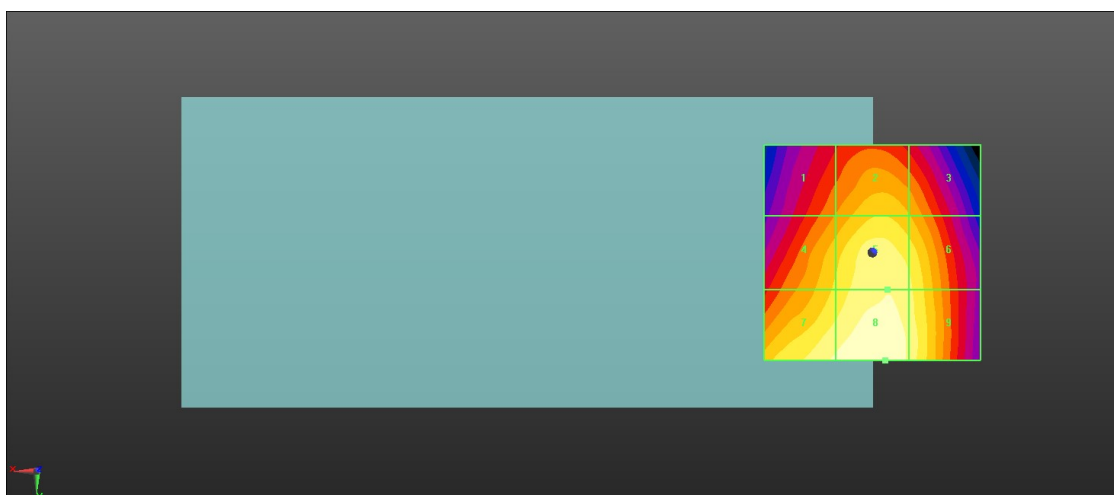

0 dB = 50.23 V/m = 34.02 dBV/m

### 4\_HAC RF GSM850\_ANT1\_Voice\_Ch128

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

#### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.13 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.67 dBV/m



MIF scaled E-field

Grid 1 <b>M4</b> <b>38.66 dBV/m</b>	Grid 2 <b>M3</b> <b>40.67 dBV/m</b>	Grid 3 <b>M3</b> <b>40.16 dBV/m</b>
Grid 4 <b>M4</b> <b>35.5 dBV/m</b>	Grid 5 <b>M4</b> <b>36.67 dBV/m</b>	Grid 6 <b>M4</b> <b>35.84 dBV/m</b>
Grid 7 <b>M4</b> <b>34.65 dBV/m</b>	Grid 8 <b>M4</b> <b>35.04 dBV/m</b>	Grid 9 <b>M4</b> <b>34.36 dBV/m</b>

Total = 40.67 dBV/m

E Category: M3

Location: -2.5, -25, 8.7 mm

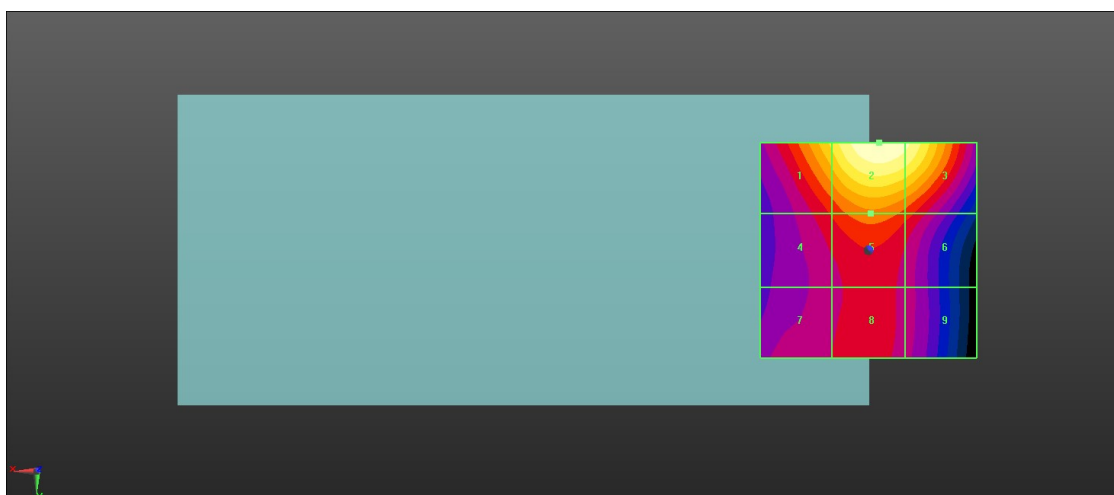

0 dB = 108.0 V/m = 40.67 dBV/m

**5\_HAC RF GSM850\_ANT1\_Voice\_Ch189**

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch189/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.55 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 40.10 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>38.3 dBV/m</b>	<b>Grid 2 M3</b> <b>40.1 dBV/m</b>	<b>Grid 3 M4</b> <b>39.58 dBV/m</b>
<b>Grid 4 M4</b> <b>35.24 dBV/m</b>	<b>Grid 5 M4</b> <b>36.31 dBV/m</b>	<b>Grid 6 M4</b> <b>35.54 dBV/m</b>
<b>Grid 7 M4</b> <b>33.78 dBV/m</b>	<b>Grid 8 M4</b> <b>34.42 dBV/m</b>	<b>Grid 9 M4</b> <b>33.77 dBV/m</b>

Total = 40.10 dBV/m

E Category: M3

Location: -2.5, -25, 8.7 mm

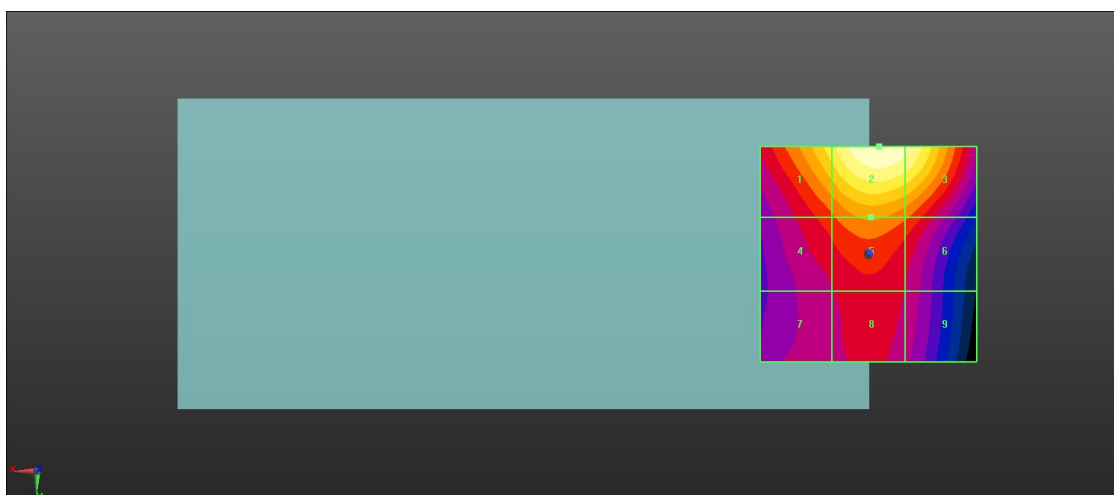

0 dB = 101.1 V/m = 40.10 dBV/m

**6\_HAC RF GSM850\_ANT1\_Voice\_Ch251**

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 48.28 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 39.12 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>37.06 dBV/m</b>	<b>Grid 2 M4</b> <b>39.12 dBV/m</b>	<b>Grid 3 M4</b> <b>38.65 dBV/m</b>
<b>Grid 4 M4</b> <b>33.81 dBV/m</b>	<b>Grid 5 M4</b> <b>34.89 dBV/m</b>	<b>Grid 6 M4</b> <b>34.06 dBV/m</b>
<b>Grid 7 M4</b> <b>33.23 dBV/m</b>	<b>Grid 8 M4</b> <b>33.56 dBV/m</b>	<b>Grid 9 M4</b> <b>32.71 dBV/m</b>

Total = 39.12 dBV/m

E Category: M4

Location: -3, -25, 8.7 mm

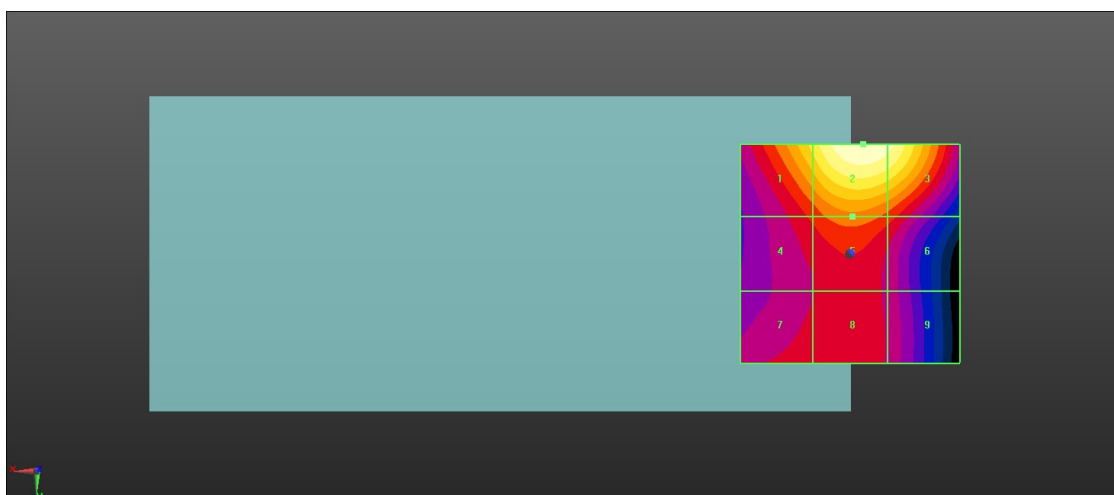

0 dB = 90.32 V/m = 39.12 dBV/m

### 7\_HAC RF GSM1900\_ANT0\_Voice\_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.226 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.57 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>25.35 dBV/m</b>	<b>Grid 2 M4</b> <b>25.57 dBV/m</b>	<b>Grid 3 M4</b> <b>24.26 dBV/m</b>
<b>Grid 4 M4</b> <b>20.44 dBV/m</b>	<b>Grid 5 M4</b> <b>19.29 dBV/m</b>	<b>Grid 6 M4</b> <b>20.81 dBV/m</b>
<b>Grid 7 M4</b> <b>23.78 dBV/m</b>	<b>Grid 8 M4</b> <b>24.24 dBV/m</b>	<b>Grid 9 M4</b> <b>22.98 dBV/m</b>

Total = 25.57 dBV/m

E Category: M4

Location: 1, -25, 8.7 mm

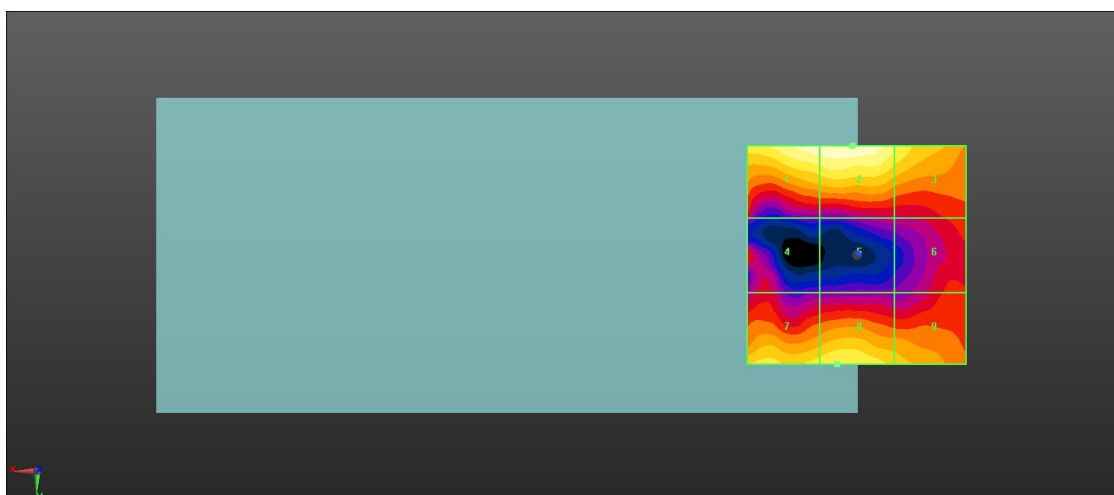

0 dB = 18.98 V/m = 25.57 dBV/m

### 8\_HAC RF GSM1900\_ANT0\_Voice\_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

#### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.192 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.25 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>27.17 dBV/m</b>	<b>Grid 2 M4</b> <b>27.25 dBV/m</b>	<b>Grid 3 M4</b> <b>25.09 dBV/m</b>
<b>Grid 4 M4</b> <b>20.04 dBV/m</b>	<b>Grid 5 M4</b> <b>20.08 dBV/m</b>	<b>Grid 6 M4</b> <b>20.17 dBV/m</b>
<b>Grid 7 M4</b> <b>24.99 dBV/m</b>	<b>Grid 8 M4</b> <b>25.52 dBV/m</b>	<b>Grid 9 M4</b> <b>24.17 dBV/m</b>

Total = 27.25 dBV/m

E Category: M4

Location: 6, -25, 8.7 mm

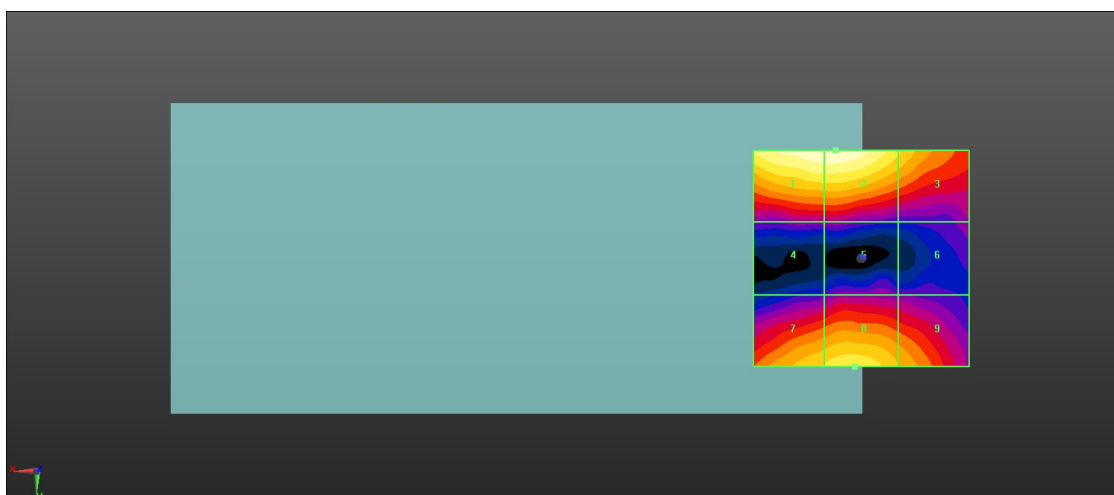

0 dB = 23.04 V/m = 27.25 dBV/m



### 9\_HAC RF GSM1900\_ANT0\_Voice\_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

#### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.409 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 26.53 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>26.53 dBV/m</b>	<b>Grid 2 M4</b> <b>26.53 dBV/m</b>	<b>Grid 3 M4</b> <b>24.84 dBV/m</b>
<b>Grid 4 M4</b> <b>19.03 dBV/m</b>	<b>Grid 5 M4</b> <b>19.68 dBV/m</b>	<b>Grid 6 M4</b> <b>19.15 dBV/m</b>
<b>Grid 7 M4</b> <b>25.01 dBV/m</b>	<b>Grid 8 M4</b> <b>25.33 dBV/m</b>	<b>Grid 9 M4</b> <b>24.7 dBV/m</b>

Total = 26.53 dBV/m

E Category: M4

Location: 8.5, -25, 8.7 mm

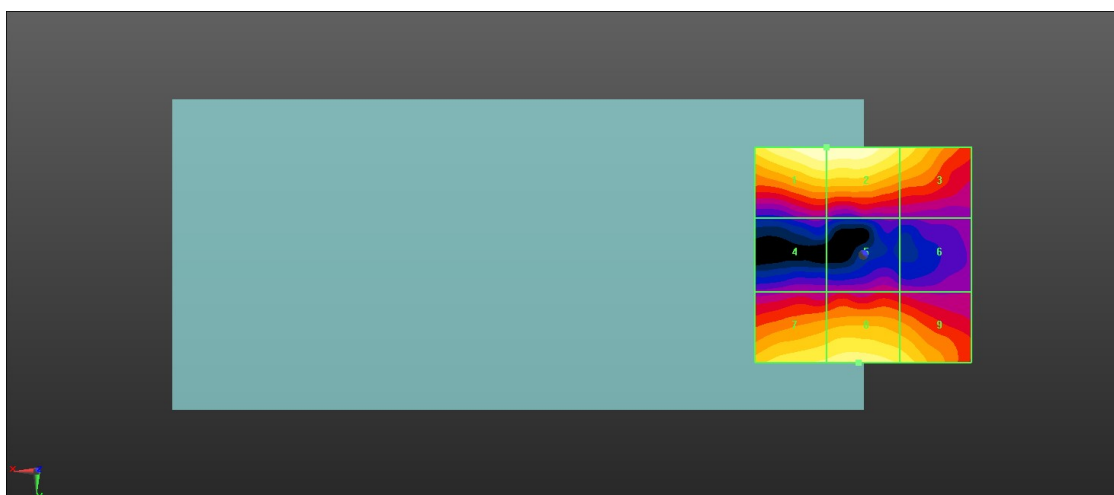

0 dB = 21.21 V/m = 26.53 dBV/m

### 10\_HAC RF GSM1900\_ANT1\_Voice\_Ch512

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 45.40 V/m; Power Drift = 0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.26 dBV/m



MIF scaled E-field

Grid 1 <b>M3</b> <b>30.85 dBV/m</b>	Grid 2 <b>M3</b> <b>32.12 dBV/m</b>	Grid 3 <b>M3</b> <b>32.03 dBV/m</b>
Grid 4 <b>M4</b> <b>27.45 dBV/m</b>	Grid 5 <b>M3</b> <b>32.26 dBV/m</b>	Grid 6 <b>M3</b> <b>32.23 dBV/m</b>
Grid 7 <b>M4</b> <b>27.57 dBV/m</b>	Grid 8 <b>M3</b> <b>31.26 dBV/m</b>	Grid 9 <b>M3</b> <b>31.24 dBV/m</b>

Total = 32.26 dBV/m

E Category: M3

Location: -7, -2.5, 8.7 mm

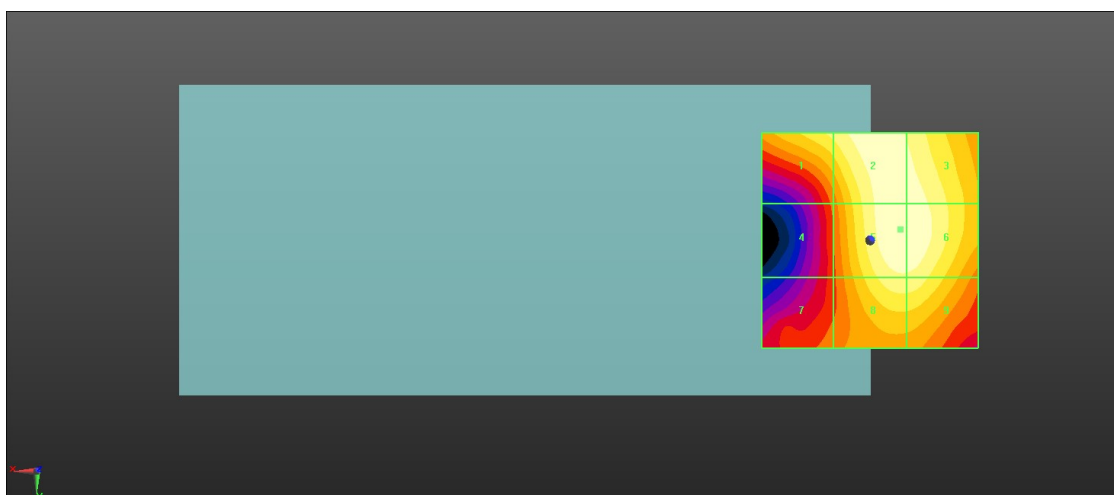

0 dB = 41.03 V/m = 32.26 dBV/m

### 11\_HAC RF GSM1900\_ANT1\_Voice\_Ch661

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

#### DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 43.55 V/m; Power Drift = 0.08 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.33 dBV/m



MIF scaled E-field

Grid 1 <b>M3</b> <b>31.66 dBV/m</b>	Grid 2 <b>M3</b> <b>32.33 dBV/m</b>	Grid 3 <b>M3</b> <b>31.54 dBV/m</b>
Grid 4 <b>M4</b> <b>27.13 dBV/m</b>	Grid 5 <b>M3</b> <b>31.98 dBV/m</b>	Grid 6 <b>M3</b> <b>31.96 dBV/m</b>
Grid 7 <b>M4</b> <b>26.29 dBV/m</b>	Grid 8 <b>M3</b> <b>31.55 dBV/m</b>	Grid 9 <b>M3</b> <b>31.53 dBV/m</b>

Total = 32.33 dBV/m

E Category: M3

Location: 0.5, -25, 8.7 mm

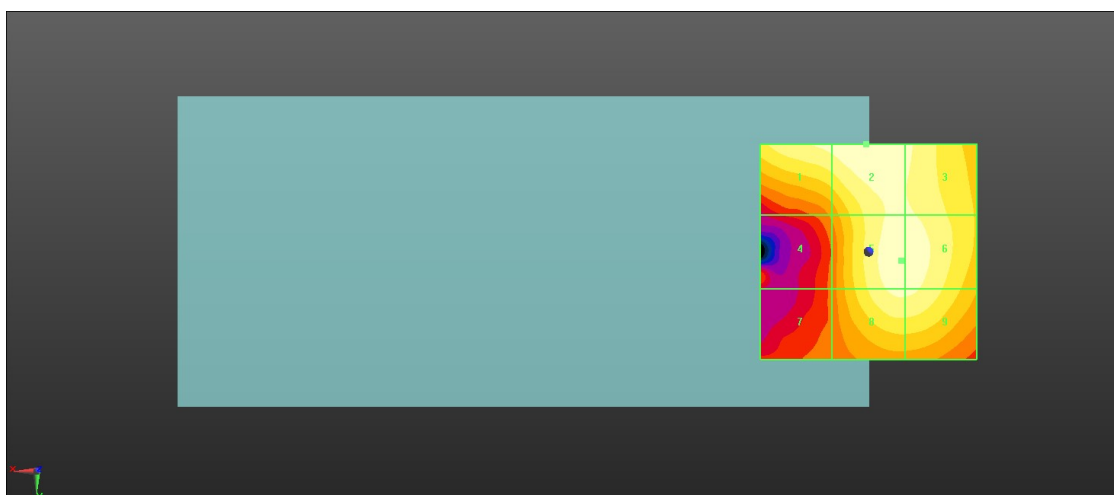

0 dB = 41.36 V/m = 32.33 dBV/m

### 12\_HAC RF GSM1900\_ANT1\_Voice\_Ch810

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.08 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.50 dBV/m



MIF scaled E-field

Grid 1 <b>M3</b> <b>31.7 dBV/m</b>	Grid 2 <b>M3</b> <b>32.5 dBV/m</b>	Grid 3 <b>M3</b> <b>31.84 dBV/m</b>
Grid 4 <b>M4</b> <b>27.2 dBV/m</b>	Grid 5 <b>M3</b> <b>31.05 dBV/m</b>	Grid 6 <b>M3</b> <b>31.05 dBV/m</b>
Grid 7 <b>M4</b> <b>26.87 dBV/m</b>	Grid 8 <b>M3</b> <b>31.05 dBV/m</b>	Grid 9 <b>M3</b> <b>31.05 dBV/m</b>

Total = 32.50 dBV/m

E Category: M3

Location: -0.5, -25, 8.7 mm

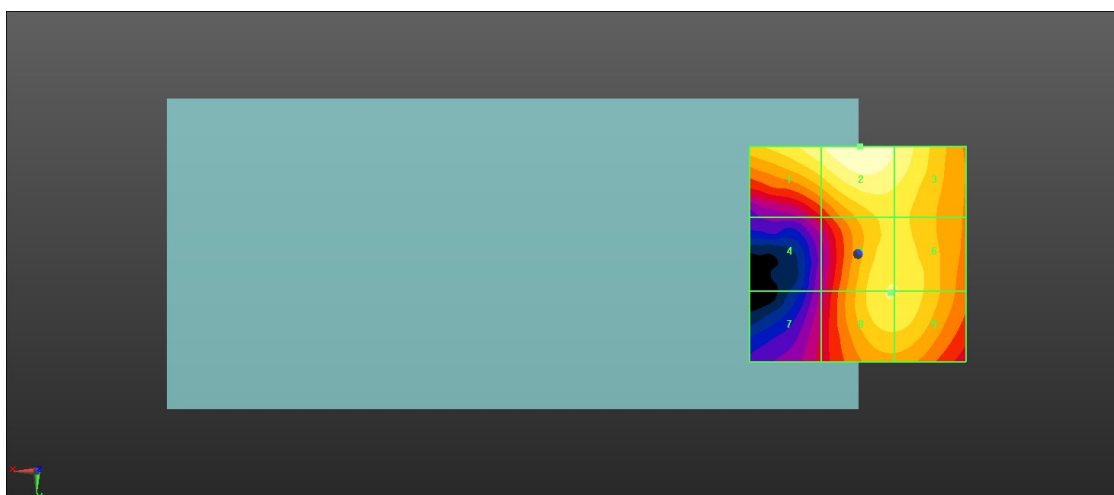

0 dB = 42.18 V/m = 32.50 dBV/m

**13\_HAC RF LTE B41\_20M\_ANT 0\_QPSK\_1RB\_0Offset\_Ch39750**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch39750/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.938 V/m; Power Drift = 0.05 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.48 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.4 dBV/m</b>	<b>Grid 2 M4</b> <b>17.99 dBV/m</b>	<b>Grid 3 M4</b> <b>18.14 dBV/m</b>
<b>Grid 4 M4</b> <b>17.18 dBV/m</b>	<b>Grid 5 M4</b> <b>17.99 dBV/m</b>	<b>Grid 6 M4</b> <b>18.16 dBV/m</b>
<b>Grid 7 M4</b> <b>18.48 dBV/m</b>	<b>Grid 8 M4</b> <b>16.58 dBV/m</b>	<b>Grid 9 M4</b> <b>16.89 dBV/m</b>

Total = 18.48 dBV/m

E Category: M4

Location: 25, 25, 8.7 mm

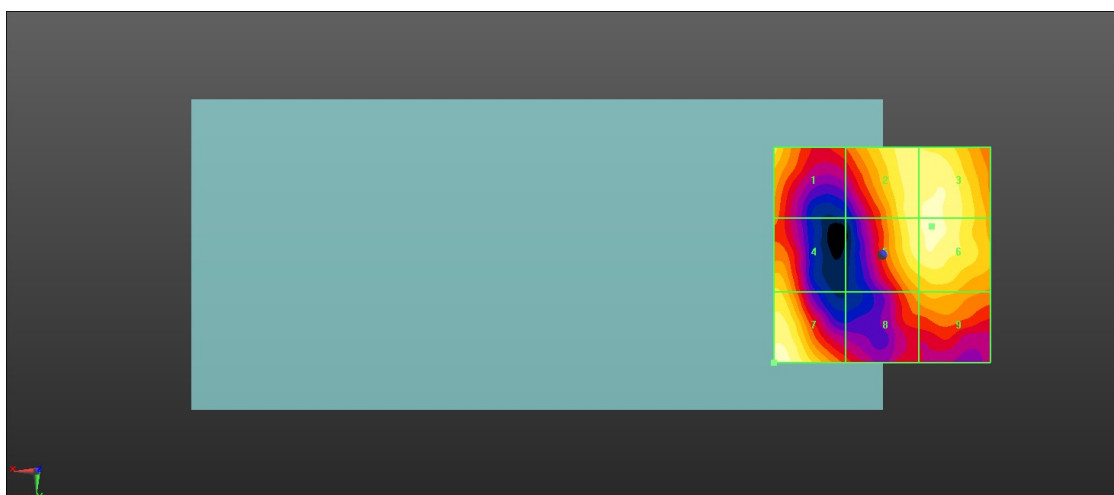

0 dB = 8.398 V/m = 18.48 dBV/m

**14\_HAC RF LTE B41\_20M\_ANT 0\_QPSK\_1RB\_0Offset\_Ch40185**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch40185/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.485 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.94 dBV/m


MIF scaled E-field

<b>Grid 1 M4</b> <b>17.05 dBV/m</b>	<b>Grid 2 M4</b> <b>10.75 dBV/m</b>	<b>Grid 3 M4</b> <b>9 dBV/m</b>
<b>Grid 4 M4</b> <b>10.18 dBV/m</b>	<b>Grid 5 M4</b> <b>11.8 dBV/m</b>	<b>Grid 6 M4</b> <b>17.94 dBV/m</b>
<b>Grid 7 M4</b> <b>10.87 dBV/m</b>	<b>Grid 8 M4</b> <b>13.97 dBV/m</b>	<b>Grid 9 M4</b> <b>7.24 dBV/m</b>

Total = 17.94 dBV/m

E Category: M4

Location: -15, -4.5, 8.7 mm

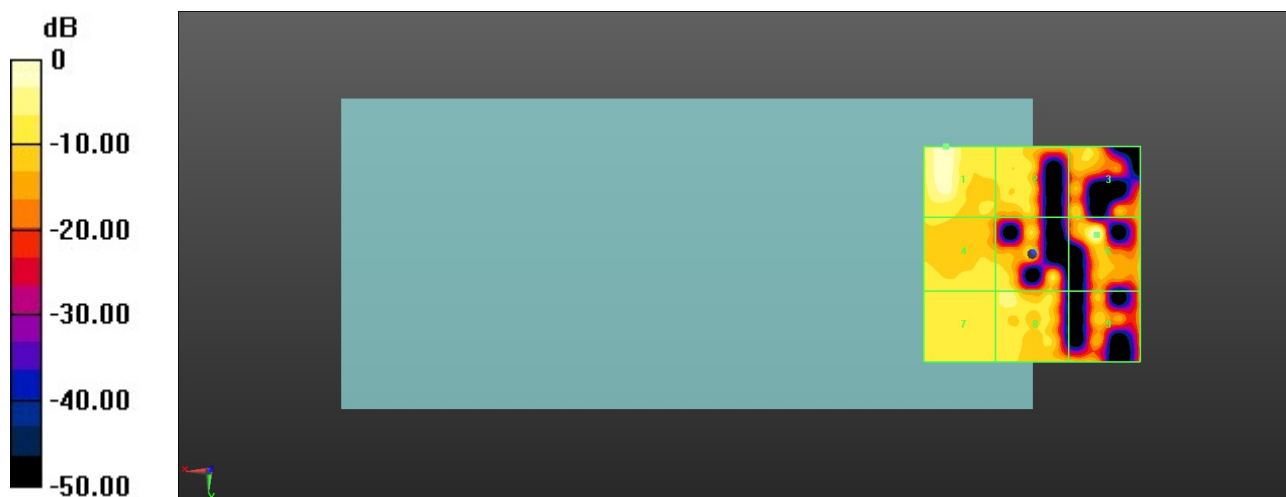

0 dB = 7.893 V/m = 17.94 dBV/m

**15\_HAC RF LTE B41\_20M\_ANT 0\_QPSK\_1RB\_0Offset\_Ch40620**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 2593 MHz;Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch40620/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.033 V/m; Power Drift = 0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.14 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>12.91 dBV/m</b>	<b>Grid 2 M4</b> <b>20.14 dBV/m</b>	<b>Grid 3 M4</b> <b>18.84 dBV/m</b>
<b>Grid 4 M4</b> <b>10.43 dBV/m</b>	<b>Grid 5 M4</b> <b>18.63 dBV/m</b>	<b>Grid 6 M4</b> <b>18.36 dBV/m</b>
<b>Grid 7 M4</b> <b>10.53 dBV/m</b>	<b>Grid 8 M4</b> <b>16.82 dBV/m</b>	<b>Grid 9 M4</b> <b>16.65 dBV/m</b>

Total = 20.14 dBV/m

E Category: M4

Location: -1.5, -25, 8.7 mm

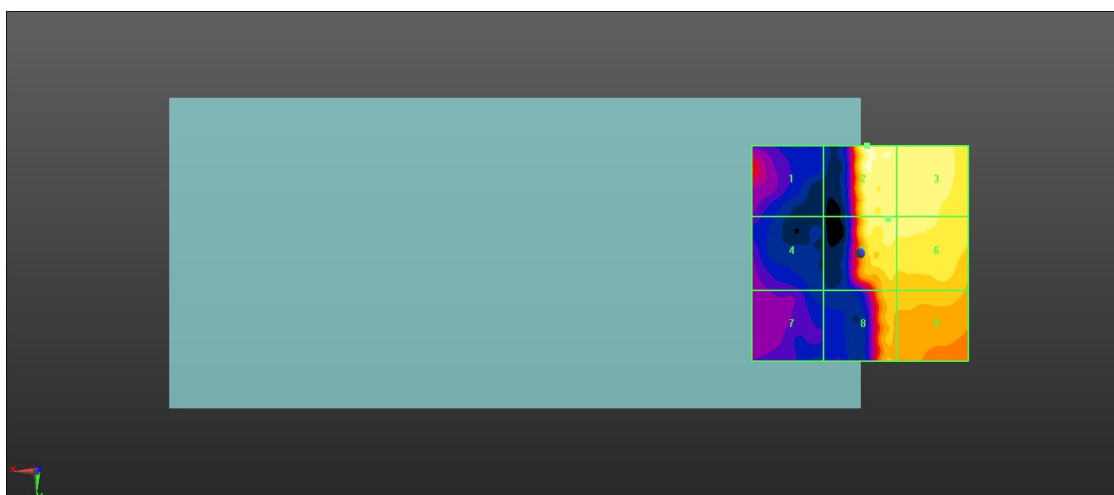

0 dB = 10.17 V/m = 20.15 dBV/m

**16\_HAC RF LTE B41\_20M\_ANT 0\_QPSK\_1RB\_0Offset\_Ch41055**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch41055/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.805 V/m; Power Drift = -0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.17 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>19.17 dBV/m</b>	<b>Grid 2 M4</b> <b>17.25 dBV/m</b>	<b>Grid 3 M4</b> <b>17.64 dBV/m</b>
<b>Grid 4 M4</b> <b>17.43 dBV/m</b>	<b>Grid 5 M4</b> <b>17.26 dBV/m</b>	<b>Grid 6 M4</b> <b>17.66 dBV/m</b>
<b>Grid 7 M4</b> <b>17.58 dBV/m</b>	<b>Grid 8 M4</b> <b>15.66 dBV/m</b>	<b>Grid 9 M4</b> <b>16.89 dBV/m</b>

Total = 19.17 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

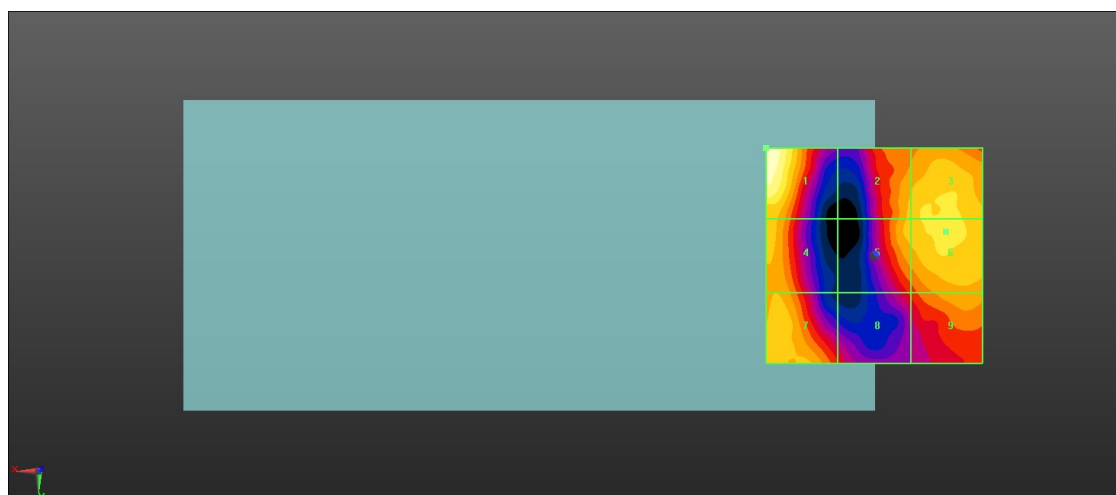

0 dB = 9.088 V/m = 19.17 dBV/m



**17\_HAC RF LTE B41\_20M\_ANT 0\_QPSK\_1RB\_0Offset\_Ch41490**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch41490/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.027 V/m; Power Drift = 0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.97 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.97 dBV/m</b>	<b>Grid 2 M4</b> <b>15.31 dBV/m</b>	<b>Grid 3 M4</b> <b>15.84 dBV/m</b>
<b>Grid 4 M4</b> <b>15.78 dBV/m</b>	<b>Grid 5 M4</b> <b>15.8 dBV/m</b>	<b>Grid 6 M4</b> <b>16.22 dBV/m</b>
<b>Grid 7 M4</b> <b>16.14 dBV/m</b>	<b>Grid 8 M4</b> <b>14.69 dBV/m</b>	<b>Grid 9 M4</b> <b>15.03 dBV/m</b>

Total = 17.97 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

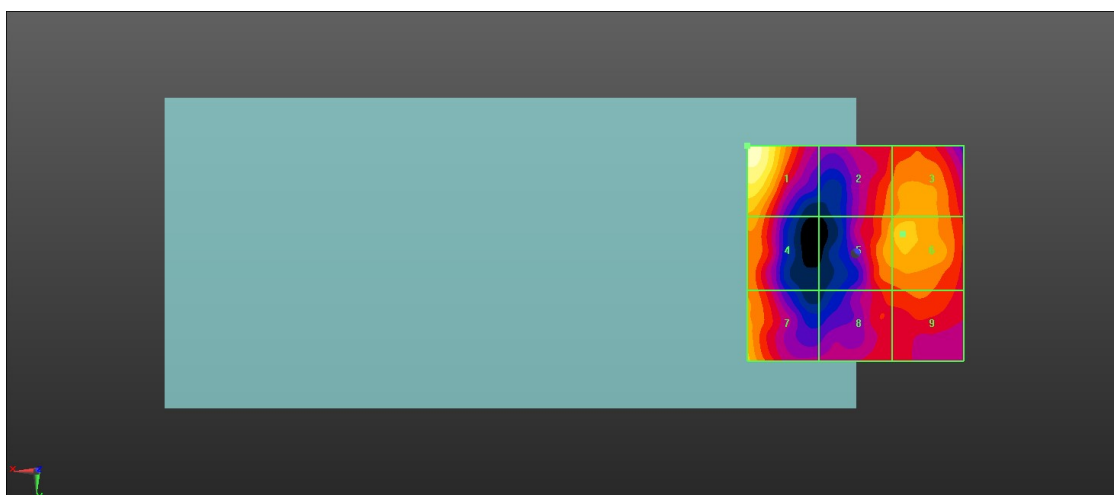

0 dB = 7.914 V/m = 17.97 dBV/m

**18\_HAC RF LTE B42\_20M\_ANT 2\_QPSK\_1RB\_0Offset\_Ch42190**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 3460 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch42190/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.48 V/m; Power Drift = -0.14 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.03 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>25.73 dBV/m</b>	<b>Grid 2 M4</b> <b>26.03 dBV/m</b>	<b>Grid 3 M4</b> <b>24.84 dBV/m</b>
<b>Grid 4 M4</b> <b>25 dBV/m</b>	<b>Grid 5 M4</b> <b>25.07 dBV/m</b>	<b>Grid 6 M4</b> <b>24.18 dBV/m</b>
<b>Grid 7 M4</b> <b>22.75 dBV/m</b>	<b>Grid 8 M4</b> <b>22.99 dBV/m</b>	<b>Grid 9 M4</b> <b>22.35 dBV/m</b>

Total = 26.03 dBV/m

E Category: M4

Location: 3.5, -25, 8.7 mm

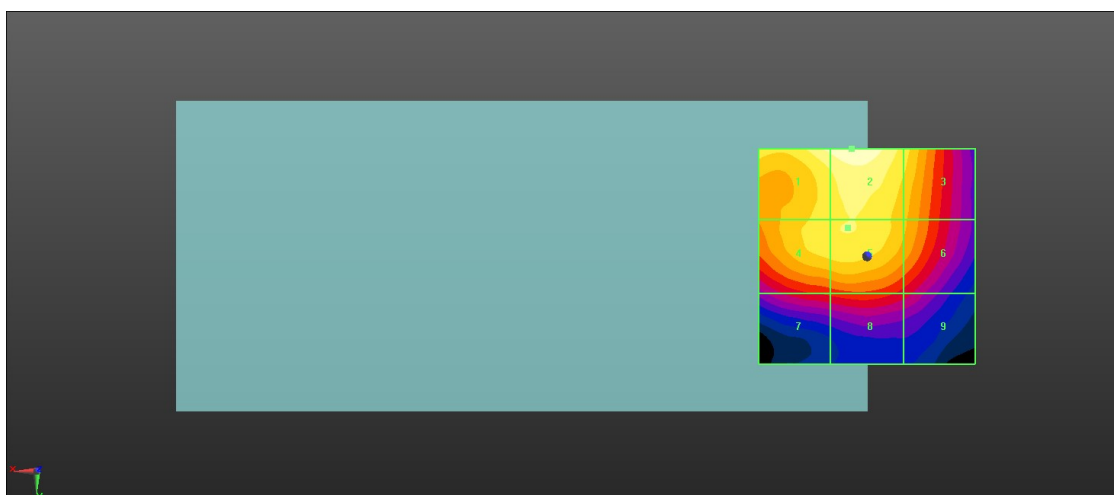

0 dB = 20.03 V/m = 26.03 dBV/m

**19\_HAC RF LTE B42\_20M\_ANT 2\_QPSK\_1RB\_0Offset\_Ch42590**

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 3500 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch42590/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.90 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.00 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>25.55 dBV/m</b>	<b>Grid 2 M4</b> <b>26 dBV/m</b>	<b>Grid 3 M4</b> <b>24.82 dBV/m</b>
<b>Grid 4 M4</b> <b>24.53 dBV/m</b>	<b>Grid 5 M4</b> <b>24.69 dBV/m</b>	<b>Grid 6 M4</b> <b>24.17 dBV/m</b>
<b>Grid 7 M4</b> <b>22.9 dBV/m</b>	<b>Grid 8 M4</b> <b>23 dBV/m</b>	<b>Grid 9 M4</b> <b>22.5 dBV/m</b>

Total = 26.00 dBV/m

E Category: M4

Location: 1.5, -25, 8.7 mm

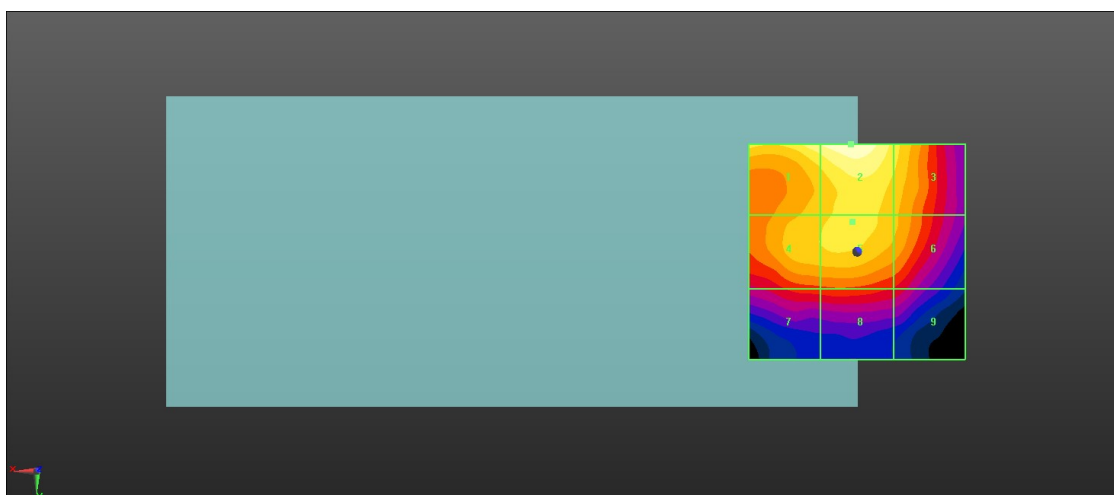

0 dB = 19.95 V/m = 26.00 dBV/m

**20\_HAC RF LTE B42\_20M\_ANT 2\_QPSK\_1RB\_0Offset\_Ch42990**

Communication System: UID 10173 - CAB, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);  
 Frequency: 3540 MHz; Duty Cycle: 1:8.87156

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch42990/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.80 V/m; Power Drift = 0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.13 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>25.61 dBV/m</b>	<b>Grid 2 M4</b> <b>26.13 dBV/m</b>	<b>Grid 3 M4</b> <b>24.93 dBV/m</b>
<b>Grid 4 M4</b> <b>24.94 dBV/m</b>	<b>Grid 5 M4</b> <b>25.33 dBV/m</b>	<b>Grid 6 M4</b> <b>24.78 dBV/m</b>
<b>Grid 7 M4</b> <b>23.4 dBV/m</b>	<b>Grid 8 M4</b> <b>23.5 dBV/m</b>	<b>Grid 9 M4</b> <b>22.98 dBV/m</b>

Total = 26.13 dBV/m

E Category: M4

Location: 1, -25, 8.7 mm

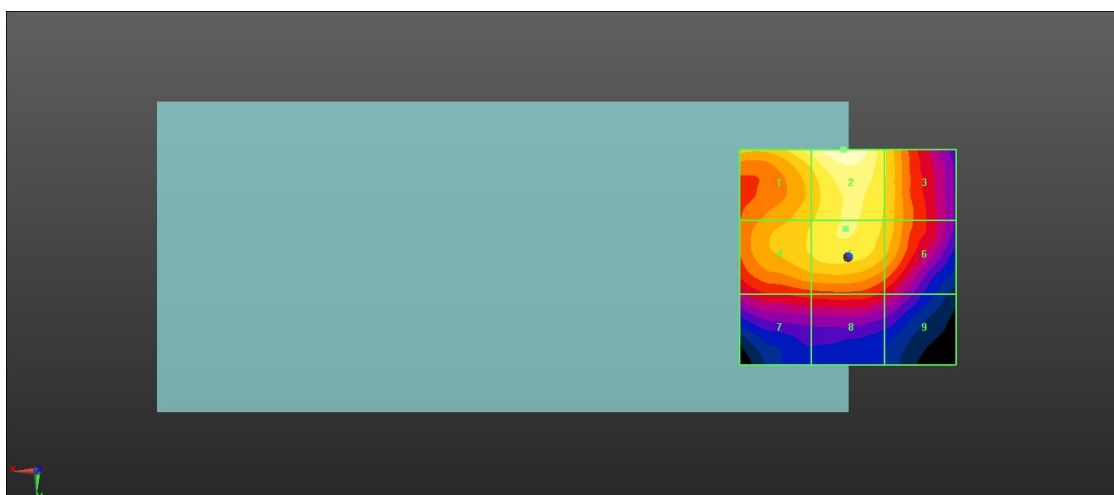

0 dB = 20.24 V/m = 26.12 dBV/m

**24\_HAC RF WLAN2.4GHz\_Ant 6+3\_802.11g 6Mbps\_Ch1**

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);  
 Frequency: 2412 MHz;Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch1/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.52 V/m; Power Drift = -0.13 dB

Applied MIF = 0.12 dB

RF audio interference level = 26.77 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>18.29 dBV/m</b>	<b>Grid 2 M4</b> <b>21.95 dBV/m</b>	<b>Grid 3 M4</b> <b>21.96 dBV/m</b>
<b>Grid 4 M4</b> <b>21.26 dBV/m</b>	<b>Grid 5 M4</b> <b>23.76 dBV/m</b>	<b>Grid 6 M4</b> <b>23.76 dBV/m</b>
<b>Grid 7 M4</b> <b>25.53 dBV/m</b>	<b>Grid 8 M4</b> <b>26.77 dBV/m</b>	<b>Grid 9 M4</b> <b>26.36 dBV/m</b>

Total = 26.77 dBV/m

E Category: M4

Location: -2.5, 25, 8.7 mm

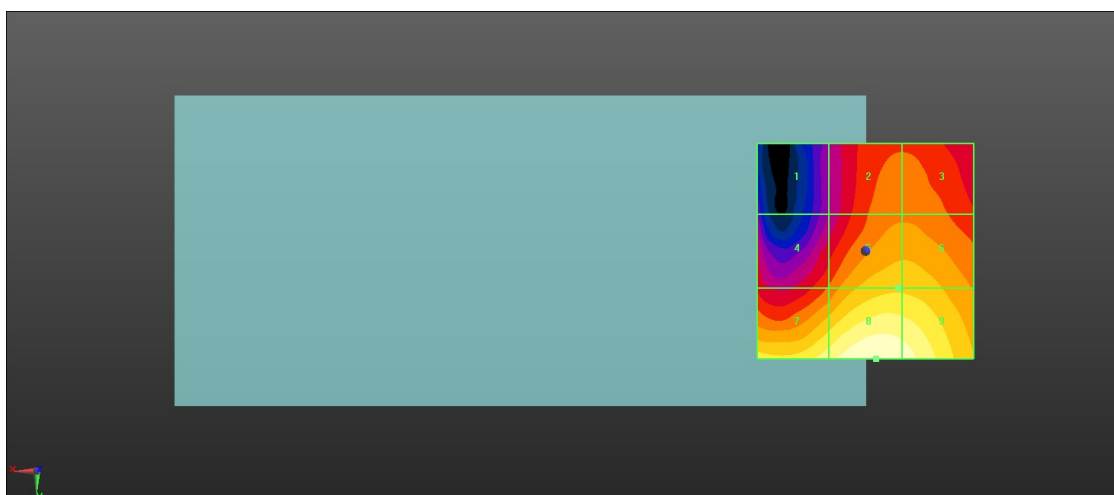

0 dB = 21.81 V/m = 26.77 dBV/m

**25\_HAC RF WLAN2.4GHz\_Ant 6+3\_802.11g 6Mbps\_Ch6**

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);  
 Frequency: 2437 MHz;Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch6/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.34 V/m; Power Drift = -0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 27.04 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>19.77 dBV/m</b>	<b>Grid 2 M4</b> <b>22.73 dBV/m</b>	<b>Grid 3 M4</b> <b>22.74 dBV/m</b>
<b>Grid 4 M4</b> <b>21.46 dBV/m</b>	<b>Grid 5 M4</b> <b>24.03 dBV/m</b>	<b>Grid 6 M4</b> <b>24.01 dBV/m</b>
<b>Grid 7 M4</b> <b>25.69 dBV/m</b>	<b>Grid 8 M4</b> <b>27.04 dBV/m</b>	<b>Grid 9 M4</b> <b>26.53 dBV/m</b>

Total = 27.04 dBV/m

E Category: M4

Location: -2.5, 25, 8.7 mm

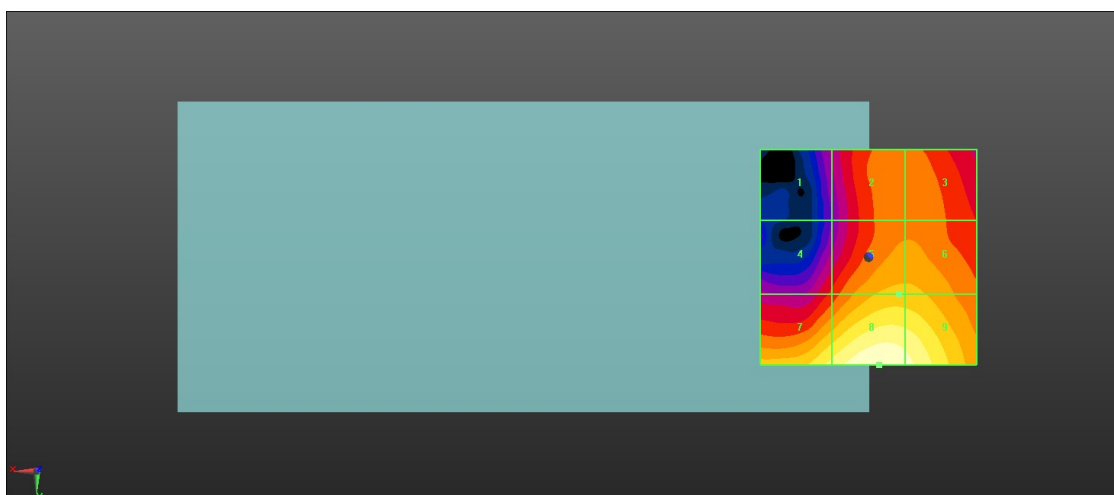

0 dB = 22.50 V/m = 27.04 dBV/m

**26\_HAC RF WLAN2.4GHz\_Ant 6+3\_802.11g 6Mbps\_Ch11**

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);  
 Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ;  $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C;

**DASY5 Configuration:**

- Probe: EF3DV3 - SN4050; ConvF(1, 1, 1); Calibrated: 2023/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1650; Calibrated: 2022/8/5
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Ch11/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.24 V/m; Power Drift = 0.09 dB

Applied MIF = 0.12 dB

RF audio interference level = 27.00 dBV/m



MIF scaled E-field

<b>Grid 1 M4</b> <b>18.22 dBV/m</b>	<b>Grid 2 M4</b> <b>21.03 dBV/m</b>	<b>Grid 3 M4</b> <b>21.02 dBV/m</b>
<b>Grid 4 M4</b> <b>21.04 dBV/m</b>	<b>Grid 5 M4</b> <b>23.46 dBV/m</b>	<b>Grid 6 M4</b> <b>23.44 dBV/m</b>
<b>Grid 7 M4</b> <b>25.51 dBV/m</b>	<b>Grid 8 M4</b> <b>27 dBV/m</b>	<b>Grid 9 M4</b> <b>26.69 dBV/m</b>

Total = 27.00 dBV/m

E Category: M4

Location: -4, 25, 8.7 mm

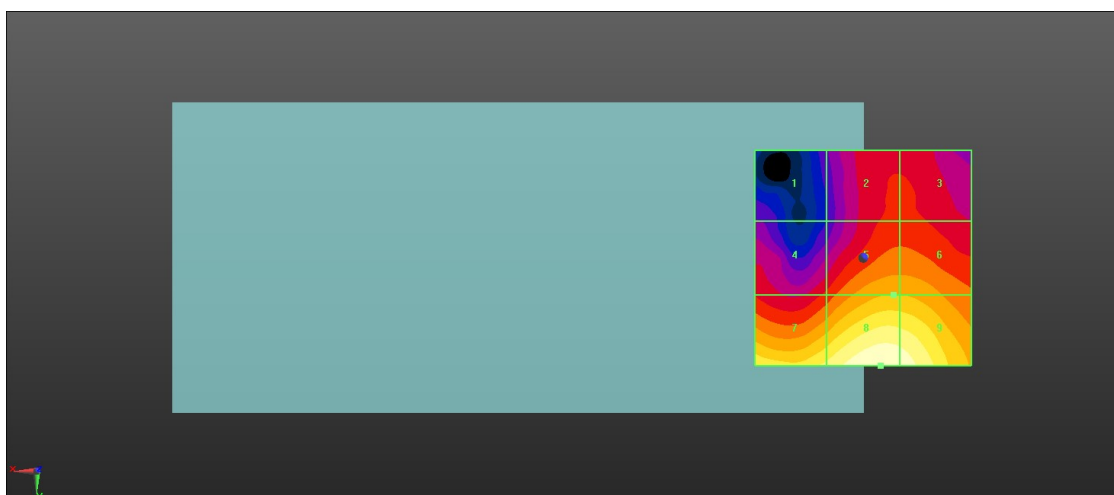

0 dB = 22.40 V/m = 27.00 dBV/m