



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2323-2,XT2323-5,XT2323-6  
**FCC ID** : IHDT56AL9  
**STANDARD** : 47 CFR Part 2, 90(R)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : May 20, 2023 ~ May 26, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Feature of Equipment Under Test ... 5
1.4 Specification of Accessory ... 6
1.5 Maximum ERP and Emission Designator ... 6
1.6 Testing Site ... 6
1.7 Test Software ... 6
1.8 Applied Standards ... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 8
2.1 Test Mode ... 8
2.2 Connection Diagram of Test System ... 9
2.3 Support Unit used in test configuration and system ... 9
2.4 Measurement Results Explanation Example ... 9
3 CONDUCTED TEST ITEMS ... 10
3.1 Measuring Instruments ... 10
3.2 Conducted Output Power and ERP ... 11
3.3 Peak-to-Average Ratio ... 12
3.4 Occupied Bandwidth ... 13
3.5 Conducted Band Edge Measurement ... 14
3.6 Emission Mask ... 15
3.7 Conducted Spurious Emission Measurement ... 16
3.8 Frequency Stability Measurement ... 17
4 RADIATED TEST ITEMS ... 18
4.1 Measuring Instruments ... 18
4.2 Test Setup ... 18
4.3 Test Result of Radiated Test ... 19
4.4 Radiated Spurious Emission Measurement ... 20
5 LIST OF MEASURING EQUIPMENT ... 21
6 MEASUREMENT UNCERTAINTY ... 22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG340401-01J	Rev. 01	Initial issue of report	Jun. 05, 2023

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.2	§2.1046	Conducted Output Power	—	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.3	-	Peak-to-Average Ratio	—	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	—	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)(3)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.6	§2.1051 §90.210(n)	Emission Mask	Mask B	PASS	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
4.4	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 14.69 dB at 1576.000 MHz

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/matrix manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2323-2,XT2323-5,XT2323-6
FCC ID	IHDT56AL9
Tx Frequency	5G NR n14: 788 MHz ~ 798 MHz
Rx Frequency	5G NR n14: 758 MHz ~ 768 MHz
Bandwidth	5MHz / 10MHz
SCS	15kHz
Antenna Type / Gain	Antenna0: Monopole Antenna -4.57 dBi Antenna1: IFA Antenna -4.20 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM
IMEI Code	Conducted: 351606570017474/351606570017482 Radiation: 351606570016070
HW Version	DVT2
SW Version	T2TV33.23
EUT Stage	Identical Prototype

**Remark:**

1. The maximum ERP is calculated from max output power and max antenna gain, only the maximum ERP of Ant. 0 is shown in the report.
2. 5G NR n14 supports SA mode only.

### 1.4 Specification of Accessory

Accessories Information				
AC Adapter	Brand Name	Motorola(Salom)	Model Name	MC-301
Base Battery	Brand Name	Motorola (ATL)	Model Name	PM29
Flip Battery	Brand Name	Motorola (ATL)	Model Name	PV11
USB Cable 1	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217
USB Cable 3	Brand Name	Motorola(Saibao)	Model Name	SC18D13215
USB Cable 4	Brand Name	Motorola(Saibao)	Model Name	SC18D86732

### 1.5 Maximum ERP and Emission Designator

5G NR n14		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	790.5~795.5	0.0455	4M47G7D	0.0440	4M50W7D
10	793	0.0600	9M27G7D	0.0421	9M29W7D

### 1.6 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

## 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI C63.26
- ♦ KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned flip open and close state in three orthogonal panels X, Y, Z.

The worst cases (Z plane with flip open) were recorded in this report

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel		
		1.4	3	5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v		-	-	v	v	v	v	v	v		v	v	v	v
Power	14	-	-		v	-	-	v	v	v	v	v	v		v		v	
Peak-to-Average Ratio	14	-	-		v	-	-	v	v					v		v		v
26dB and 99% Bandwidth	14	-	-	v	v	-	-	v	v	v	v	v				v		v
Conducted Band Edge	14	-	-	v		-	-	v	v					v		v	v	v
	14	-	-		v	-	-	v	v					v		v		v
Emission Mask	14	-	-	v		-	-	v	v					v		v	v	v
	14	-	-		v	-	-	v	v					v		v		v
Conducted Spurious Emission	14	-	-	v		-	-	v	v					v			v	v
	14	-	-		v	-	-	v	v					v				v
Frequency Stability	14	-	-		v	-	-		v							v		v
E.R.P	14	-	-	v		-	-	v	v	v	v	v	v	v		v	v	v
	14	-	-		v	-	-	v	v	v	v	v	v	v		v		v
Radiated Spurious Emission	14	Worst Case														v	v	v
Note	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.4V. ; High Voltage =4.5V</li> </ol>																	



## 2.2 Connection Diagram of Test System

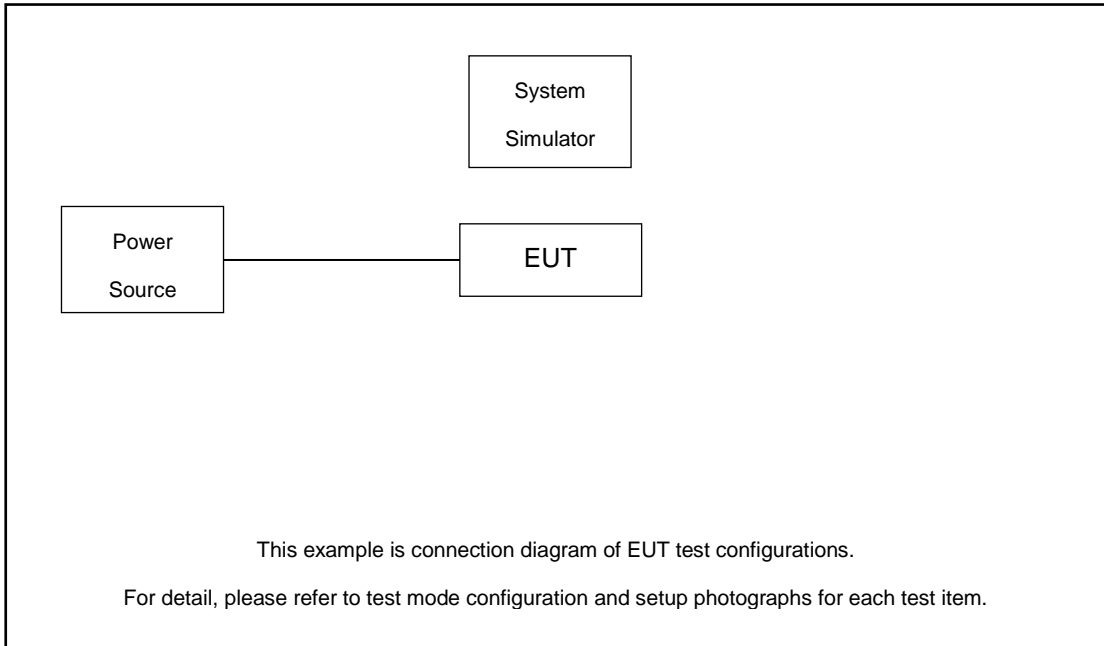

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	Base Station	Anritsu	MT8820/8821	Fcc DoC	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.5 dB and 20dB attenuator.

Example :

$$\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}.$$

$$= 4.5 + 20 = 24.5 \text{ (dB)}$$


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

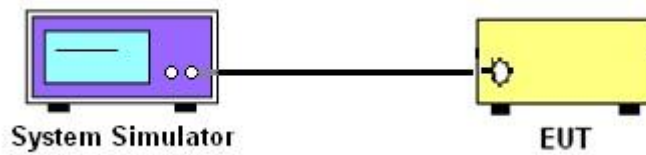

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

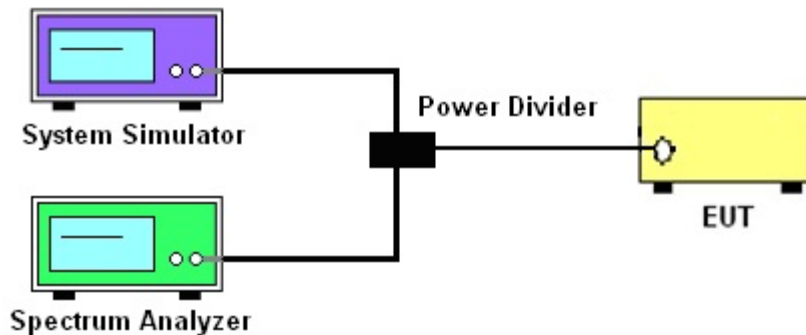

##### 3.1.4 Frequency Stability

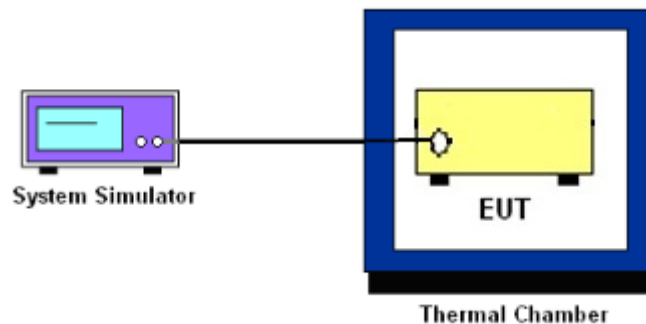

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

## 3.2 Conducted Output Power and ERP

### 3.2.1 Description of the Conducted Output Power Measurement and ERP

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR Band n14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.3.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.5 Conducted Band Edge Measurement

### 3.5.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$

## 3.6 Emission Mask

### 3.6.1 Description of Emission Mask

<Emission Mask B>.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and base station via power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)  
= -13dBm.



## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.8.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

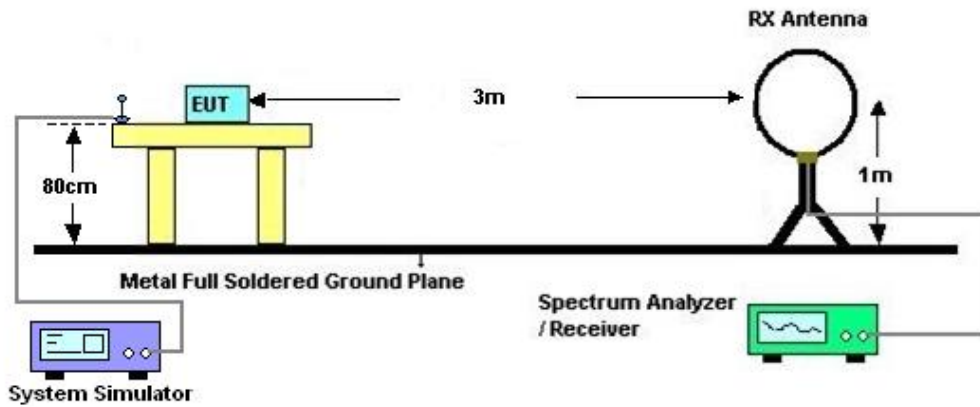

#### 4.2.2 For radiated test from 30MHz to 1GHz

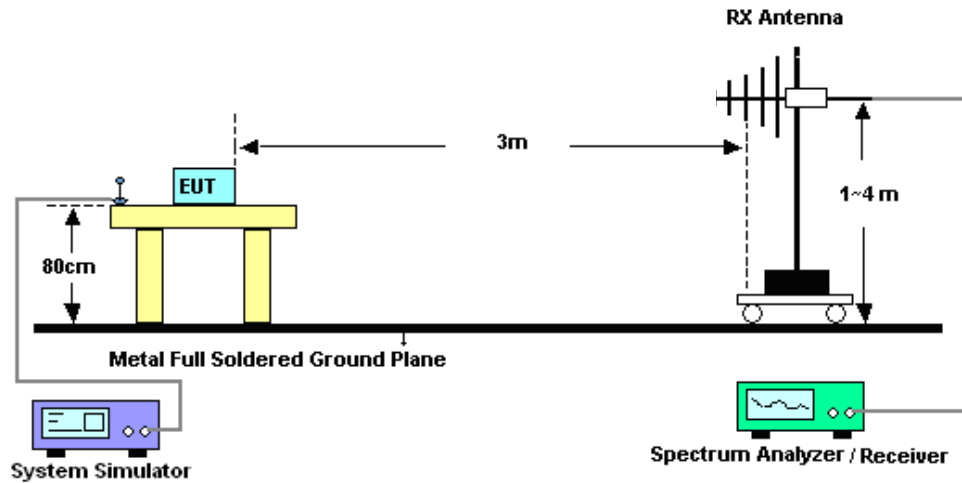

### 4.2.3 For radiated test above 1GHz

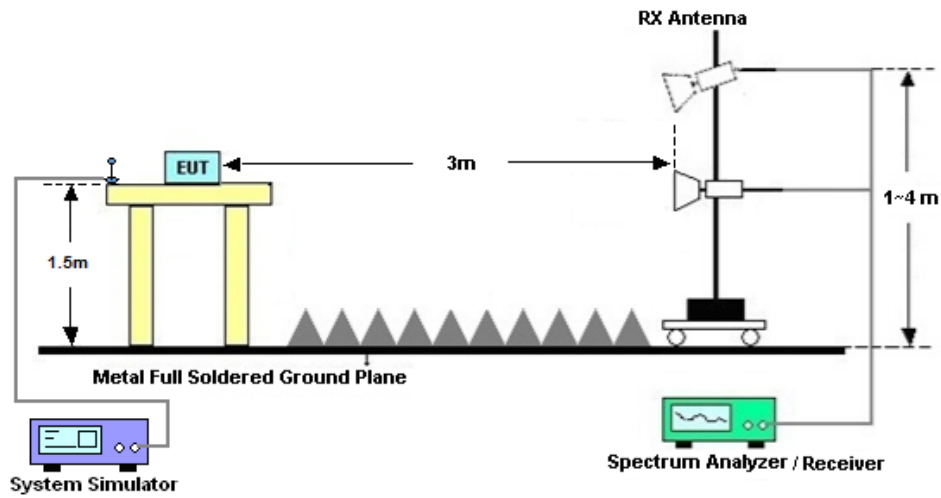

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] (dB)$   
=  $[30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
= -13dBm.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	May 20, 2023~ May 26, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	May 20, 2023~ May 26, 2023	Aug. 25, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	May 20, 2023~ May 26, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 12, 2022	May 24, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	May 24, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	May 24, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	May 24, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	May 24, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 11, 2022	May 24, 2023	Jul. 10, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	May 24, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 12, 2022	May 24, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz~18Ghz	Oct. 12, 2022	May 24, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 24, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 24, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 24, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54dB
---	--------

----- THE END -----



## **Appendix A. Test Results of Conducted Test**

<b>Test Engineer :</b>	Simle Wang	<b>Temperature :</b>	22~23°C
		<b>Relative Humidity :</b>	40~42%

## FR1 N14 (ANT0)

### Transmitter Conducted Output Power And ERP, ( $G_T - L_C$ )=- 4.57dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP(W)
14	15	5	158100	790.5	DFT-s-OFDM PI/2 BPSK	12@6	22.93	18.36	0.0418
14	15	5	158100	790.5	DFT-s-OFDM PI/2 BPSK	1@1	22.77	18.2	0.0403
14	15	5	158100	790.5	DFT-s-OFDM PI/2 BPSK	1@23	22.83	18.26	0.0408
14	15	5	158100	790.5	DFT-s-OFDM QPSK	12@6	22.87	18.3	0.0412
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@1	23.06	18.49	0.0431
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@23	23.08	18.51	0.0433
14	15	5	158100	790.5	DFT-s-OFDM 16 QAM	12@6	22.77	18.2	0.0403
14	15	5	158100	790.5	DFT-s-OFDM 16 QAM	1@1	22.78	18.21	0.0404
14	15	5	158100	790.5	DFT-s-OFDM 16 QAM	1@23	22.94	18.37	0.0419
14	15	5	158100	790.5	DFT-s-OFDM 64 QAM	12@6	22.37	17.8	0.0367
14	15	5	158100	790.5	DFT-s-OFDM 64 QAM	1@1	22.5	17.93	0.0378
14	15	5	158100	790.5	DFT-s-OFDM 64 QAM	1@23	22.56	17.99	0.0384
14	15	5	158100	790.5	DFT-s-OFDM 256 QAM	12@6	20.23	15.66	0.0224
14	15	5	158100	790.5	DFT-s-OFDM 256 QAM	1@1	20	15.43	0.0213
14	15	5	158100	790.5	DFT-s-OFDM 256 QAM	1@23	20.18	15.61	0.0222
14	15	5	158100	790.5	CP-OFDM QPSK	13@6	22.81	18.24	0.0406
14	15	5	158100	790.5	CP-OFDM QPSK	1@1	22.86	18.29	0.0411
14	15	5	158100	790.5	CP-OFDM QPSK	1@23	23	18.43	0.0425
14	15	5	158600	793	DFT-s-OFDM PI/2 BPSK	12@6	22.93	18.36	0.0418
14	15	5	158600	793	DFT-s-OFDM PI/2 BPSK	1@1	22.9	18.33	0.0415
14	15	5	158600	793	DFT-s-OFDM PI/2 BPSK	1@23	22.87	18.3	0.0412
14	15	5	158600	793	DFT-s-OFDM QPSK	12@6	22.97	18.4	0.0422
14	15	5	158600	793	DFT-s-OFDM QPSK	1@1	23.03	18.46	0.0428
14	15	5	158600	793	DFT-s-OFDM QPSK	1@23	23.18	18.61	0.0443
14	15	5	158600	793	DFT-s-OFDM 16 QAM	12@6	22.84	18.27	0.0409
14	15	5	158600	793	DFT-s-OFDM 16 QAM	1@1	23.02	18.45	0.0427
14	15	5	158600	793	DFT-s-OFDM 16 QAM	1@23	23.12	18.55	0.0437
14	15	5	158600	793	DFT-s-OFDM 64 QAM	12@6	22.57	18	0.0385
14	15	5	158600	793	DFT-s-OFDM 64 QAM	1@1	22.55	17.98	0.0383



14	15	5	158600	793	DFT-s-OFDM 64 QAM	1@23	22.55	17.98	0.0383
14	15	5	158600	793	DFT-s-OFDM 256 QAM	12@6	20.34	15.77	0.0230
14	15	5	158600	793	DFT-s-OFDM 256 QAM	1@1	20.19	15.62	0.0222
14	15	5	158600	793	DFT-s-OFDM 256 QAM	1@23	20.26	15.69	0.0226
14	15	5	158600	793	CP-OFDM QPSK	13@6	22.92	18.35	0.0417
14	15	5	158600	793	CP-OFDM QPSK	1@1	22.96	18.39	0.0421
14	15	5	158600	793	CP-OFDM QPSK	1@23	23.04	18.47	0.0429
14	15	5	159100	795.5	DFT-s-OFDM PI/2 BPSK	12@6	22.93	18.36	0.0418
14	15	5	159100	795.5	DFT-s-OFDM PI/2 BPSK	1@1	23.05	18.48	0.0430
14	15	5	159100	795.5	DFT-s-OFDM PI/2 BPSK	1@23	22.87	18.3	0.0412
14	15	5	159100	795.5	DFT-s-OFDM QPSK	12@6	22.97	18.4	0.0422
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@1	23.3	18.73	0.0455
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@23	23.13	18.56	0.0438
14	15	5	159100	795.5	DFT-s-OFDM 16 QAM	12@6	22.86	18.29	0.0411
14	15	5	159100	795.5	DFT-s-OFDM 16 QAM	1@1	23.13	18.56	0.0438
14	15	5	159100	795.5	DFT-s-OFDM 16 QAM	1@23	23.15	18.58	0.0440
14	15	5	159100	795.5	DFT-s-OFDM 64 QAM	12@6	22.48	17.91	0.0377
14	15	5	159100	795.5	DFT-s-OFDM 64 QAM	1@1	22.76	18.19	0.0402
14	15	5	159100	795.5	DFT-s-OFDM 64 QAM	1@23	22.61	18.04	0.0388
14	15	5	159100	795.5	DFT-s-OFDM 256 QAM	12@6	20.36	15.79	0.0231
14	15	5	159100	795.5	DFT-s-OFDM 256 QAM	1@1	20.29	15.72	0.0228
14	15	5	159100	795.5	DFT-s-OFDM 256 QAM	1@23	20.09	15.52	0.0217
14	15	5	159100	795.5	CP-OFDM QPSK	13@6	22.96	18.39	0.0421
14	15	5	159100	795.5	CP-OFDM QPSK	1@1	22.99	18.42	0.0424
14	15	5	159100	795.5	CP-OFDM QPSK	1@23	23.04	18.47	0.0429
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	25@12	22.95	18.38	0.0420
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	1@1	24.5	19.93	0.0600
14	15	10	158600	793	DFT-s-OFDM PI/2 BPSK	1@50	24.12	19.55	0.0550
14	15	10	158600	793	DFT-s-OFDM QPSK	25@12	22.87	18.3	0.0412
14	15	10	158600	793	DFT-s-OFDM QPSK	1@1	22.85	18.28	0.0410
14	15	10	158600	793	DFT-s-OFDM QPSK	1@50	22.97	18.4	0.0422
14	15	10	158600	793	DFT-s-OFDM 16 QAM	25@12	22.96	18.39	0.0421
14	15	10	158600	793	DFT-s-OFDM 16 QAM	1@1	22.91	18.34	0.0416
14	15	10	158600	793	DFT-s-OFDM 16 QAM	1@50	22.85	18.28	0.0410
14	15	10	158600	793	DFT-s-OFDM 64 QAM	25@12	22.59	18.02	0.0386
14	15	10	158600	793	DFT-s-OFDM 64 QAM	1@1	22.54	17.97	0.0382
14	15	10	158600	793	DFT-s-OFDM 64 QAM	1@50	22.52	17.95	0.0380

14	15	10	158600	793	DFT-s-OFDM 256 QAM	25@12	20.32	15.75	0.0229
14	15	10	158600	793	DFT-s-OFDM 256 QAM	1@1	19.91	15.34	0.0208
14	15	10	158600	793	DFT-s-OFDM 256 QAM	1@50	20.23	15.66	0.0224
14	15	10	158600	793	CP-OFDM QPSK	26@13	22.91	18.34	0.0416
14	15	10	158600	793	CP-OFDM QPSK	1@1	22.45	17.88	0.0374
14	15	10	158600	793	CP-OFDM QPSK	1@50	22.56	17.99	0.0384

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0026	<b>PASS</b>	NV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0021	<b>PASS</b>	LV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0025	<b>PASS</b>	HV
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0028	<b>PASS</b>	-30°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0021	<b>PASS</b>	-20°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0019	<b>PASS</b>	-10°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0016	<b>PASS</b>	0°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	-0.0018	<b>PASS</b>	10°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0015	<b>PASS</b>	20°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0021	<b>PASS</b>	30°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0023	<b>PASS</b>	40°C
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	0.0028	<b>PASS</b>	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
14	15	10	158600	793.0	DFT-s-OFDM PI/2 BPSK	50@0	4.07	13	PASS
14	15	10	158600	793.0	DFT-s-OFDM PI/2 BPSK	1@0	3.89	13	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	5.1	13	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	4.35	13	PASS

N14(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




N14(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH



N14(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

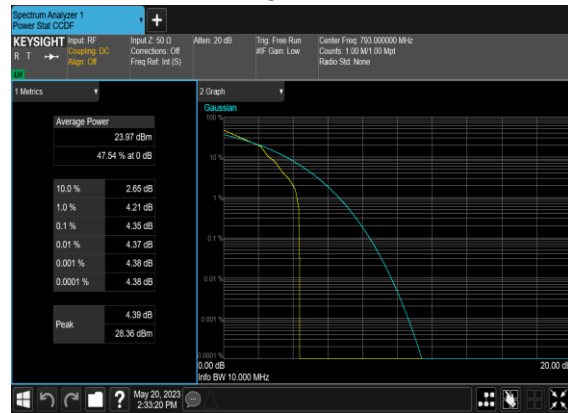


## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
14	15	5	158600	793.0	CP-OFDM QPSK	25@0	4.4688	4.991
14	15	5	158600	793.0	CP-OFDM 16 QAM	25@0	4.4976	5.214
14	15	5	158600	793.0	CP-OFDM 64 QAM	25@0	4.4646	5.029
14	15	5	158600	793.0	CP-OFDM 256 QAM	25@0	4.483	5.022
14	15	10	158600	793.0	CP-OFDM QPSK	52@0	9.2693	10.08
14	15	10	158600	793.0	CP-OFDM 16 QAM	52@0	9.2819	10.08
14	15	10	158600	793.0	CP-OFDM 64 QAM	52@0	9.2531	9.843
14	15	10	158600	793.0	CP-OFDM 256 QAM	52@0	9.286	9.951

### N14(5M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

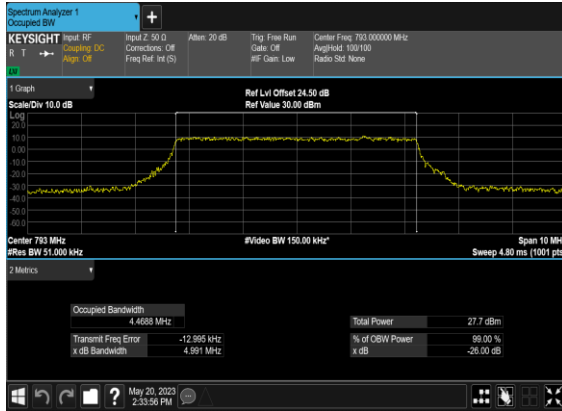

### N14(5M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

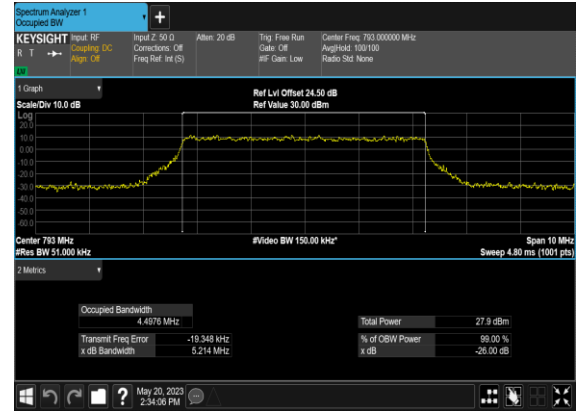


### N14(5M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N14(5M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH




### N14(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

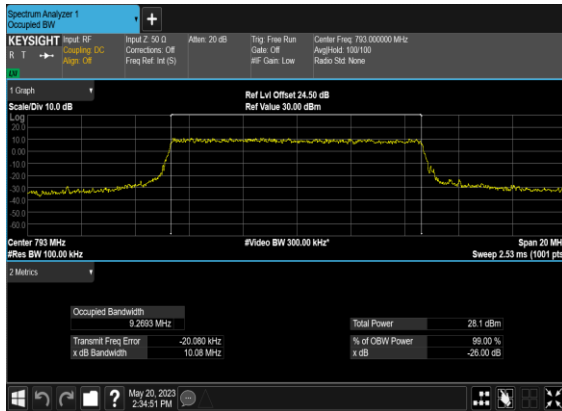


### N14(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

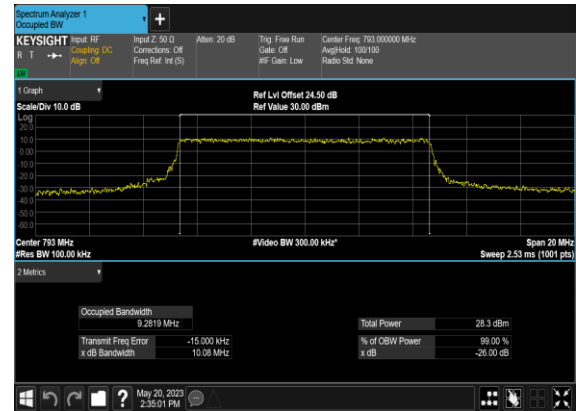

## N14(10M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

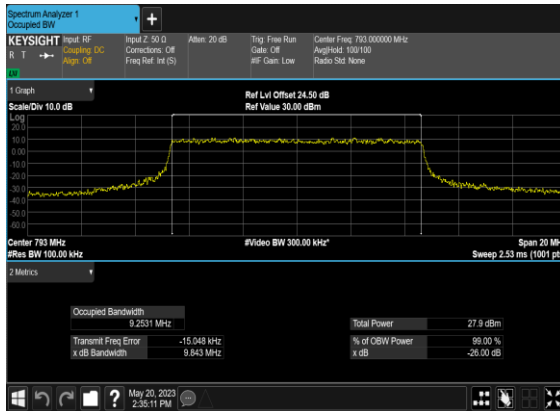

## N14(10M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

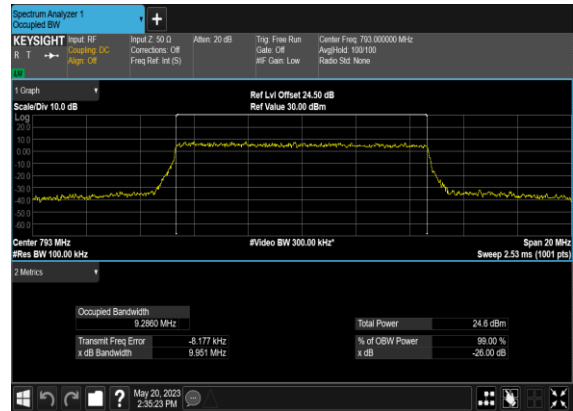





## Emission Mask

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Limit (dBm/MHz)	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	158100	790.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	158600	793.0	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
14	15	5	159100	795.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	see graph	PASS


N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

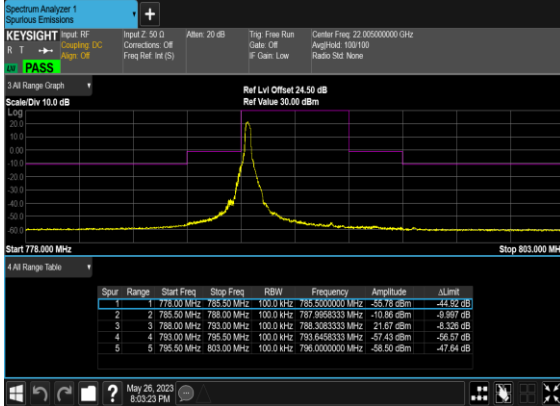


N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

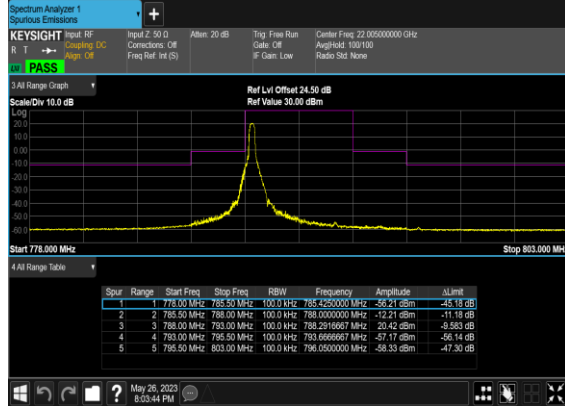


N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_Low\_CH

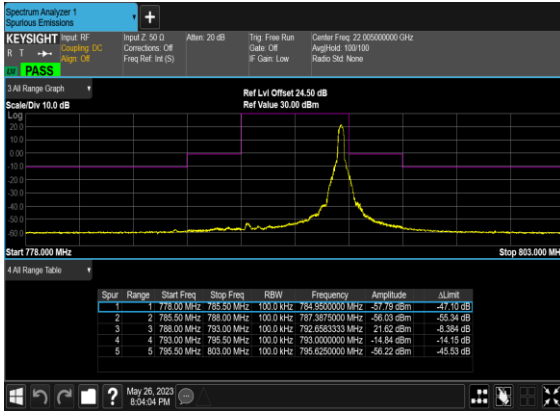


N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Low\_CH

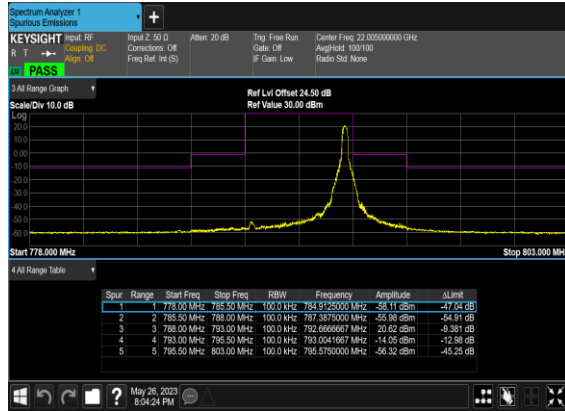


N14(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

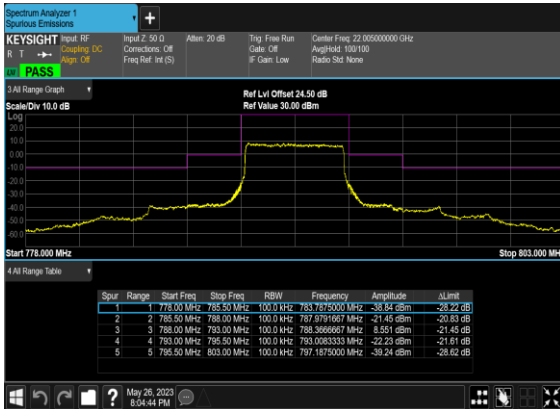


N14(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

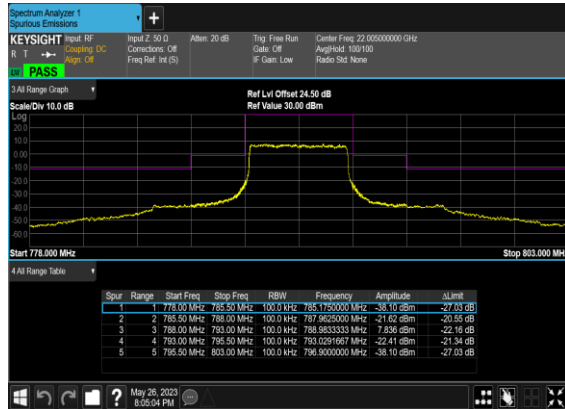


### N14(5M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

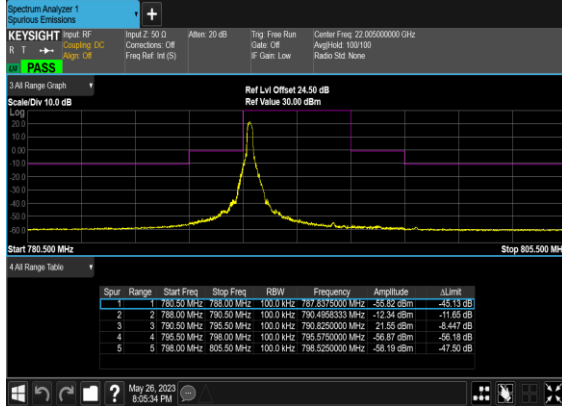


### N14(5M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

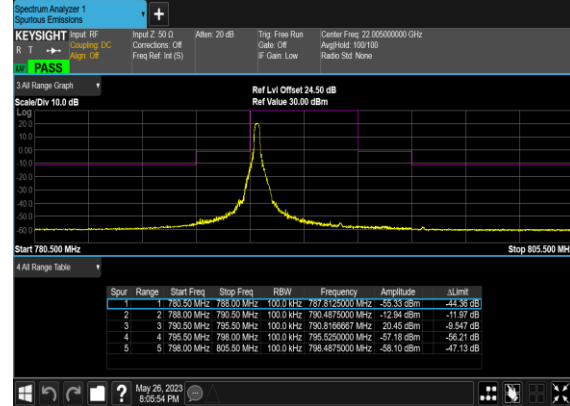


### N14(5M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

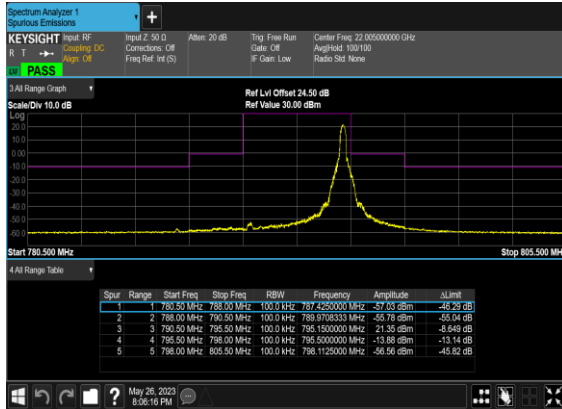


### N14(5M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

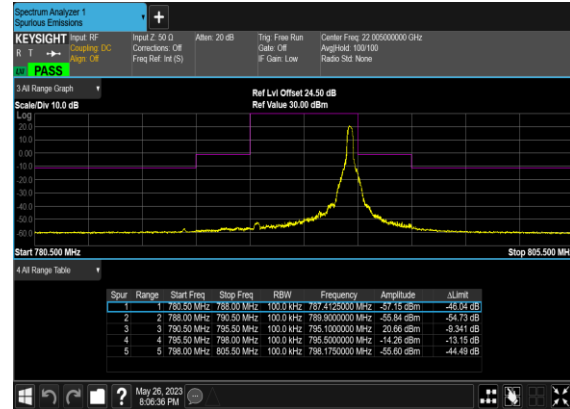


### N14(5M)\_DFT-s- OFDM\_BPSK\_Outer\_Full\_Mid\_CH

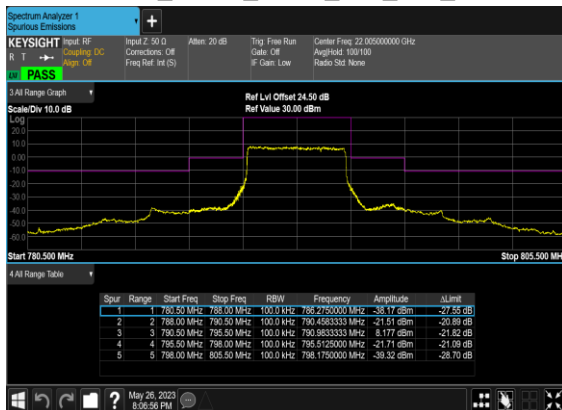


### N14(5M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

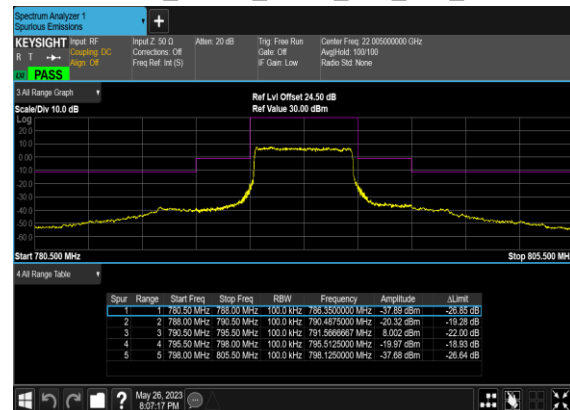


N14(5M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

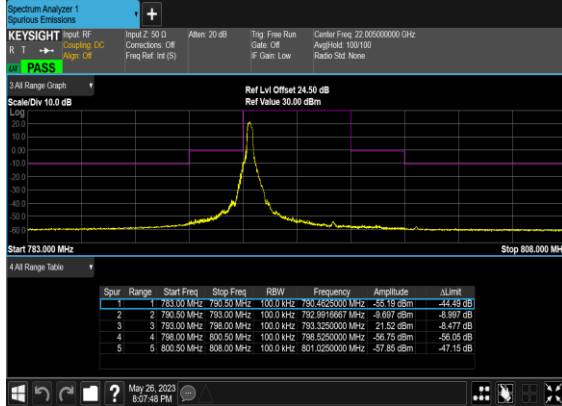


N14(5M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

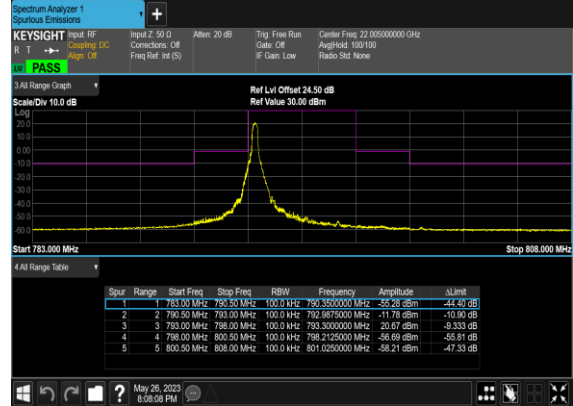


N14(5M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

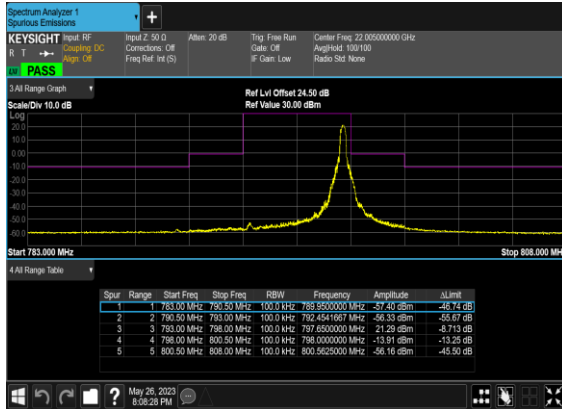


N14(5M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

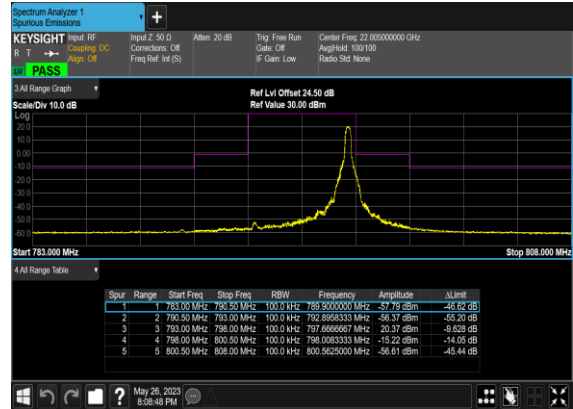


N14(5M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_High\_CH

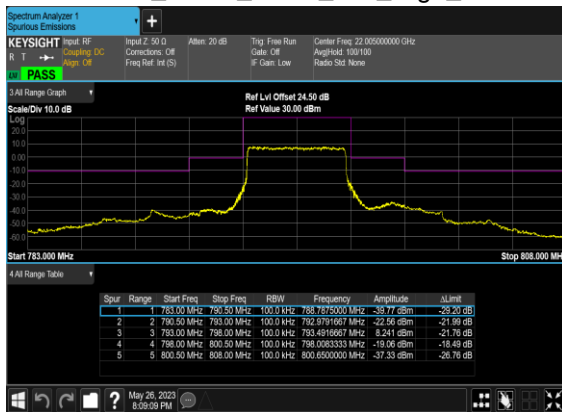


N14(5M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_High\_CH

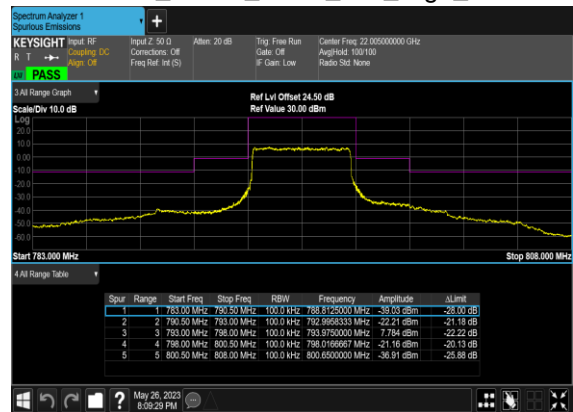


### N14(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

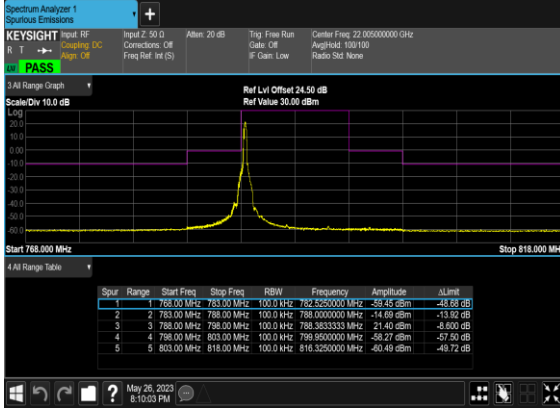


### N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

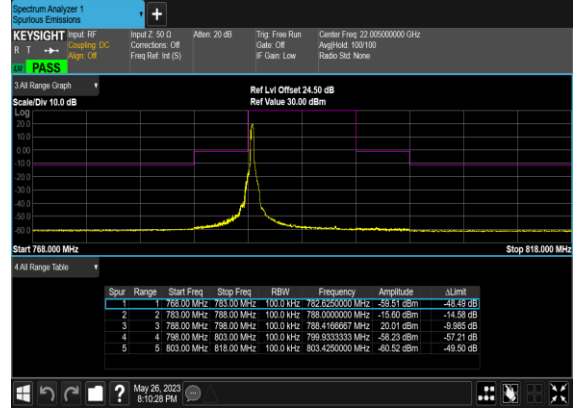


### N14(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

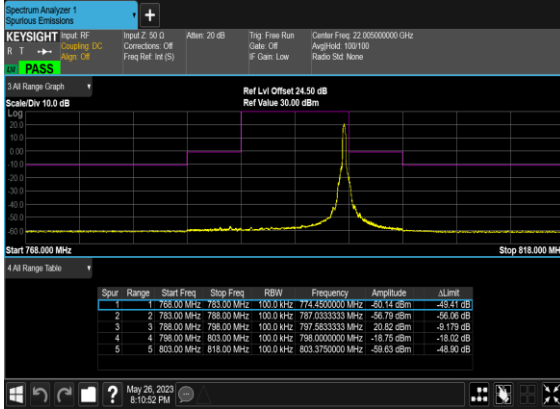


### N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

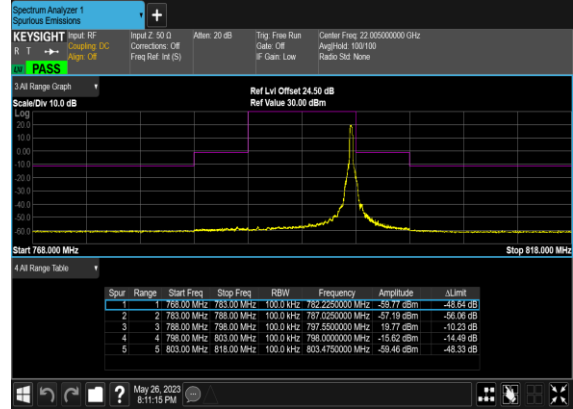

### N14(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Mid\_CH

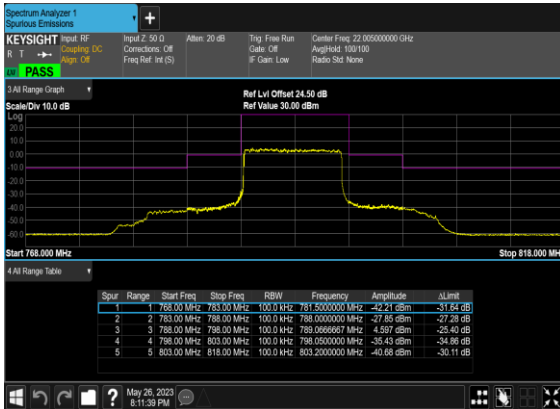


### N14(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

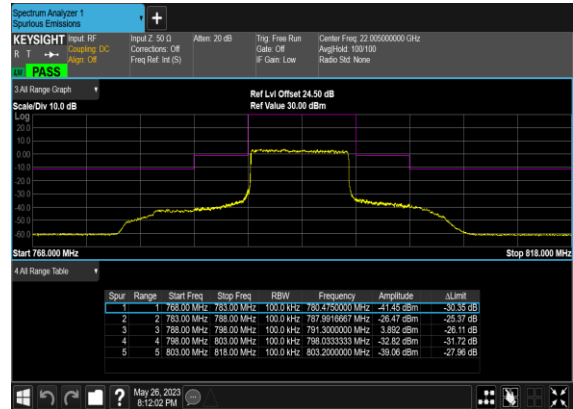


## Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	---
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	---
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>


### N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

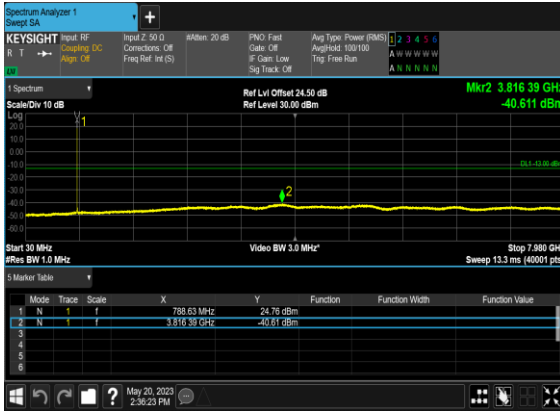


### N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

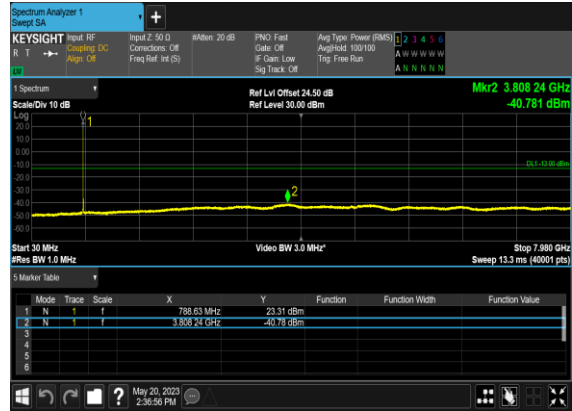


### N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

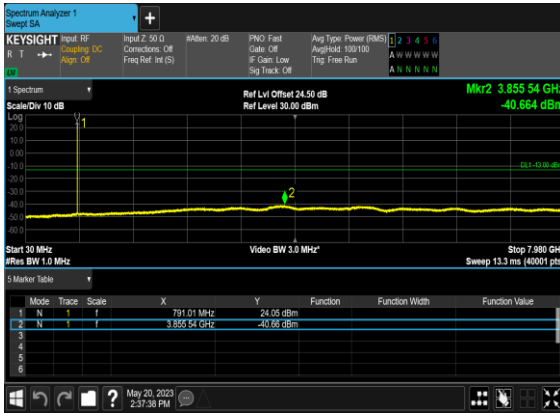


### N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

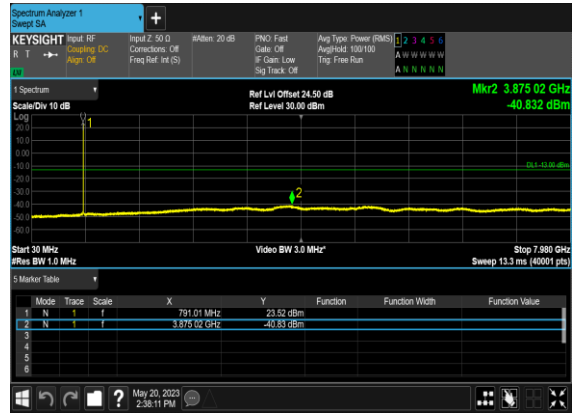


### N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

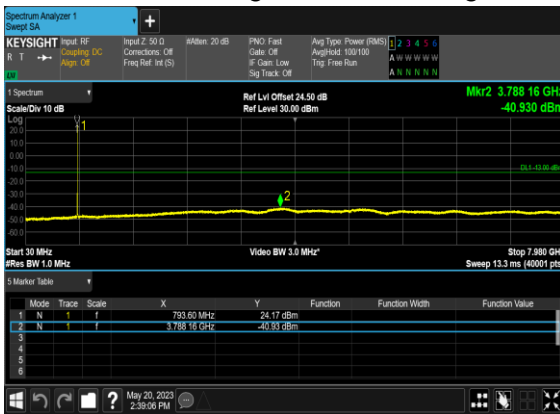


### N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

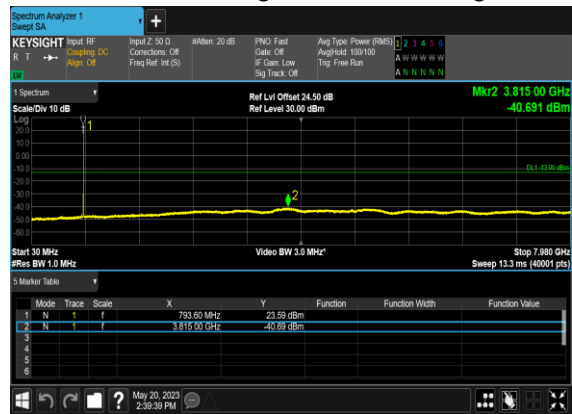

## N14(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

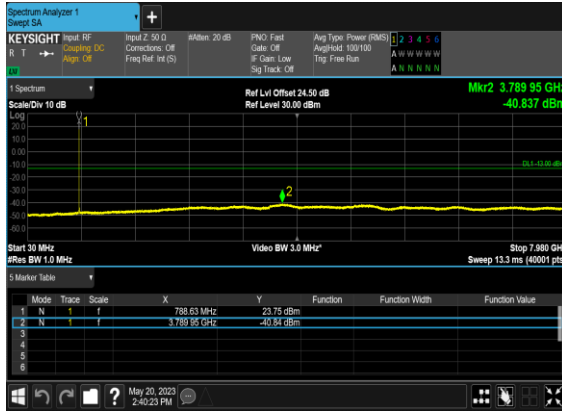

## N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

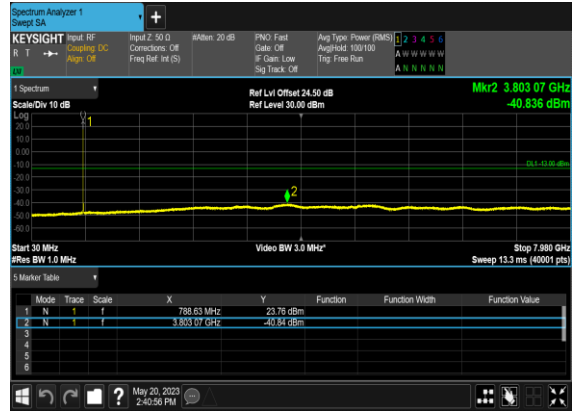





## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
14	15	5	158100	790.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	5	158100	790.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
14	15	5	158100	790.5	DFT-s-OFDM BPSK	25@0	see graph	<b>PASS</b>
14	15	5	158100	790.5	DFT-s-OFDM QPSK	25@0	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM BPSK	1@24	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM QPSK	1@24	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM BPSK	25@0	see graph	<b>PASS</b>
14	15	5	159100	795.5	DFT-s-OFDM QPSK	25@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM BPSK	1@51	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM QPSK	1@51	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM BPSK	50@0	see graph	<b>PASS</b>
14	15	10	158600	793.0	DFT-s-OFDM QPSK	50@0	see graph	<b>PASS</b>


### N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

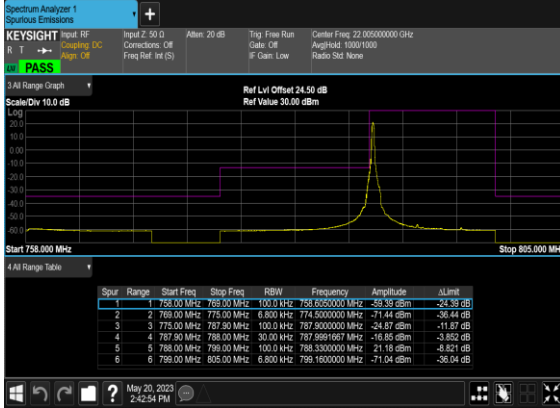


### N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

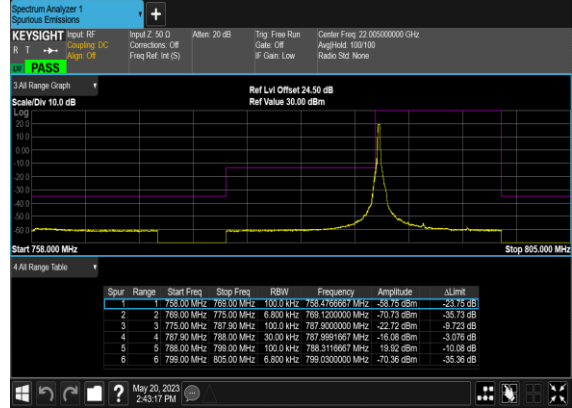


### N14(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

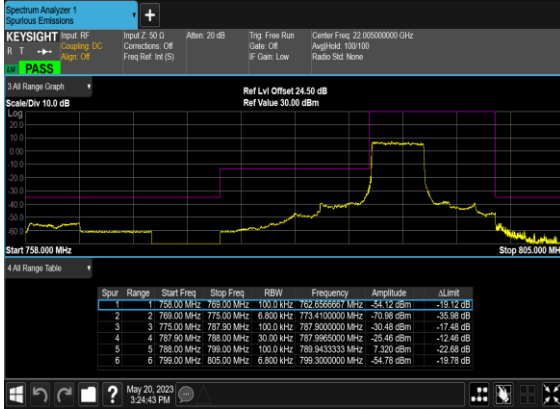


### N14(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

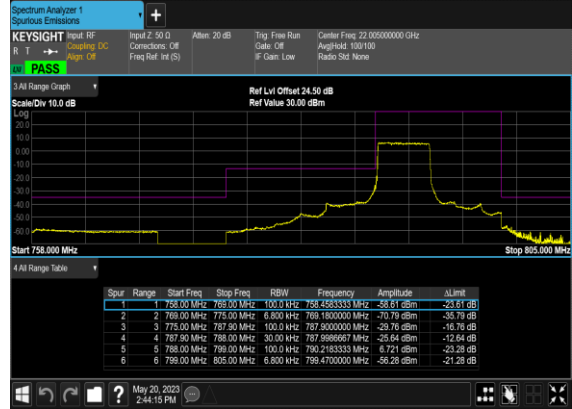


### N14(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

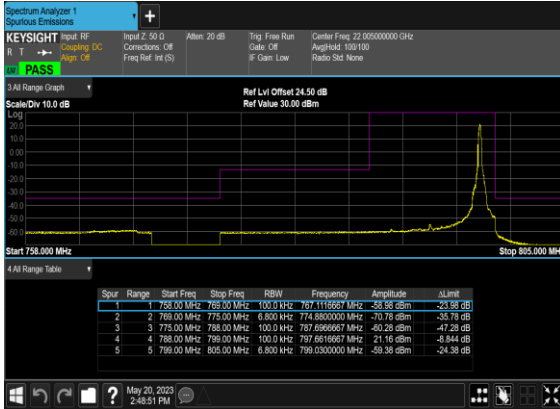


### N14(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

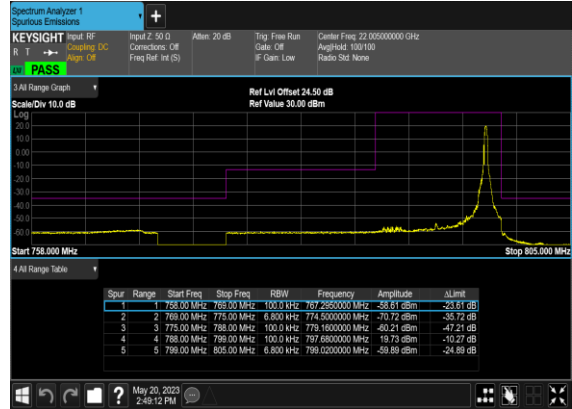


N14(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

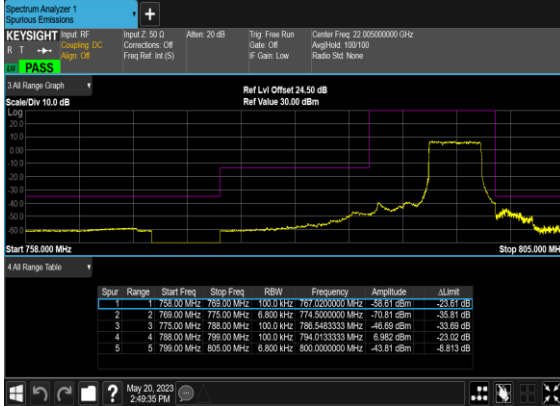


N14(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

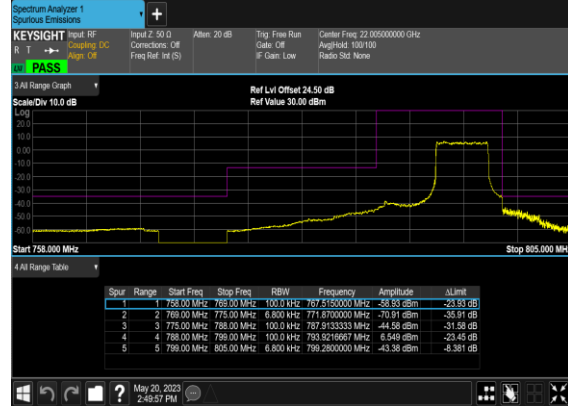


N14(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

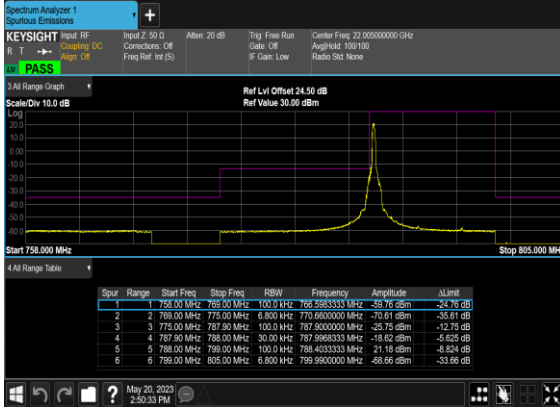


N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

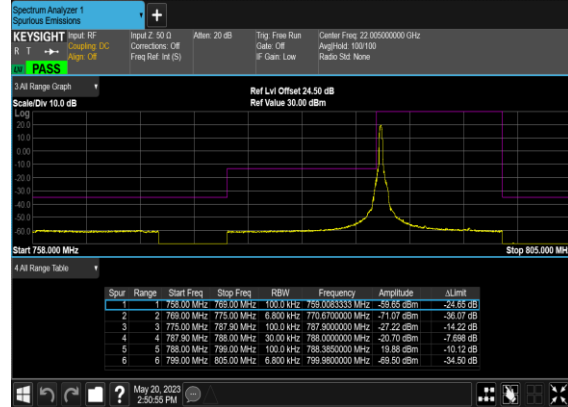


N14(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

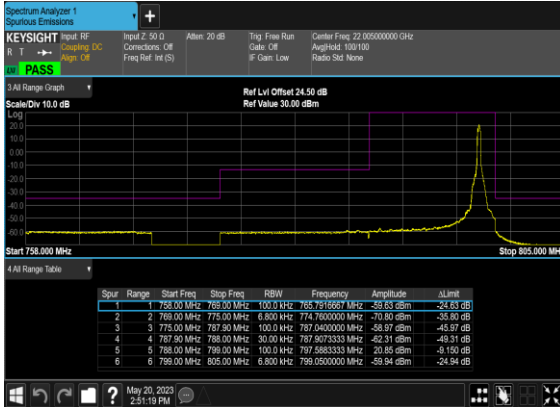


N14(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

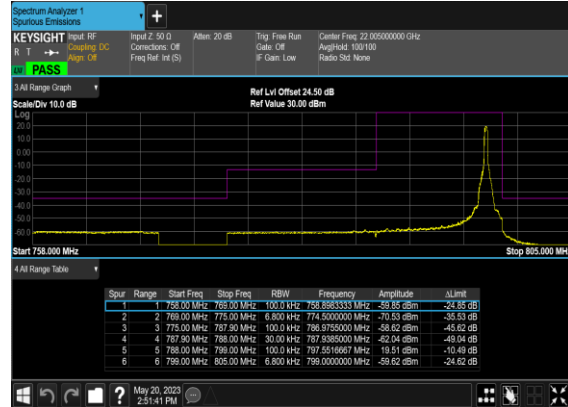

## N14(10M)\_DFT-s- OFDM\_BPSK\_Outer\_Full\_Mid\_CH

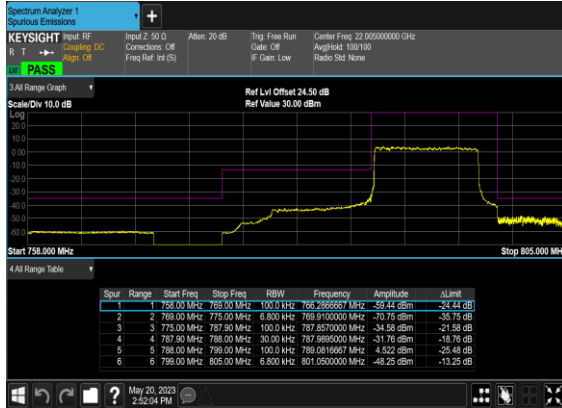

## N14(10M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

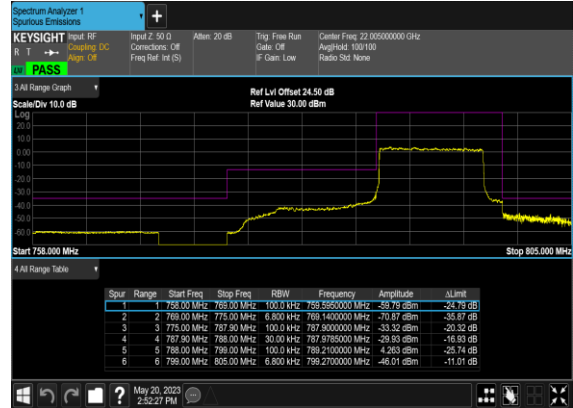

## Appendix B. Test Results of Radiated Test

### Field Strength of Spurious Radiated

Test Engineer :	Carry Xu	Temperature :	23~25°C
		Relative Humidity :	41~42%

RSE Pre-scanned harmonic for the different antennas, we choose the worst antenna mode to perform final test and record in the report.

SA n14 / NR 5MHz / QPSK / Ant. 0								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi)	Polarization (H/V)
Lowest	1576	-59.71	-42.15	-17.56	-62.34	1.09	5.87	H
	2368	-47.81	-13	-34.81	-50.21	1.37	5.92	H
	3152	-58.12	-13	-45.12	-62.01	1.64	7.68	H
	1576	-64.10	-42.15	-21.95	-66.73	1.09	5.87	V
	2368	-57.89	-13	-44.89	-60.29	1.37	5.92	V
	3152	-58.23	-13	-45.23	-62.12	1.64	7.68	V
Middle	1584	-61.26	-42.15	-19.11	-63.89	1.09	5.87	H
	2376	-55.34	-13	-42.34	-57.74	1.37	5.92	H
	3160	-58.04	-13	-45.04	-61.93	1.64	7.68	H
	1584	-59.28	-42.15	-17.13	-61.91	1.09	5.87	V
	2376	-47.96	-13	-34.96	-50.36	1.37	5.92	V
	3160	-57.72	-13	-44.72	-61.61	1.64	7.68	V
Highest	1584	-60.74	-42.15	-18.59	-63.37	1.09	5.87	H
	2376	-53.96	-13	-40.96	-56.36	1.37	5.92	H
	3176	-58.47	-13	-45.47	-62.36	1.64	7.68	H
	1584	-62.72	-42.15	-20.57	-65.35	1.09	5.87	V
	2376	-56.07	-13	-43.07	-58.47	1.37	5.92	V
	3176	-58.39	-13	-45.39	-62.28	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SA n14 / NR 10MHz / QPSK / Ant. 0								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi)	Polarization (H/V)
Middle	1576	-56.89	-42.15	-14.74	-59.52	1.09	5.87	H
	2368	-47.76	-13	-34.76	-50.16	1.37	5.92	H
	3152	-58.29	-13	-45.29	-62.18	1.64	7.68	H
	1576	-56.84	-42.15	-14.69	-59.47	1.09	5.87	V
	2368	-48.21	-13	-35.21	-50.61	1.37	5.92	V
	3152	-58.05	-13	-45.05	-61.94	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.