

# FCC SAR Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2323-2, XT2323-5, XT2323-6  
FCC ID : IHDT56AL9  
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

**Sporton International Inc. (Kunshan)**  
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 7
3. Guidance Applied ..... 7
4. Equipment Under Test (EUT) Information ..... 8
4.1 General Information ..... 8
4.2 General LTE SAR Test and Reporting Considerations ..... 11
4.3 General 5G NR SAR Test and Reporting Considerations ..... 15
5. Smart Transmit feature for RF Exposure compliance ..... 19
6. Proximity Sensor Triggering Test ..... 24
7. RF Exposure Limits ..... 26
7.1 Uncontrolled Environment ..... 26
7.2 Controlled Environment ..... 26
8. Specific Absorption Rate (SAR) ..... 27
8.1 Introduction ..... 27
8.2 SAR Definition ..... 27
9. System Description and Setup ..... 28
9.1 E-Field Probe ..... 29
9.2 Data Acquisition Electronics (DAE) ..... 29
9.3 Phantom ..... 30
9.4 Device Holder ..... 31
10. Measurement Procedures ..... 32
10.1 Spatial Peak SAR Evaluation ..... 32
10.2 Power Reference Measurement ..... 33
10.3 Area Scan ..... 33
10.4 Zoom Scan ..... 34
10.5 Volume Scan Procedures ..... 34
10.6 Power Drift Monitoring ..... 34
11. Test Equipment List ..... 35
12. System Verification ..... 36
12.1 Tissue Simulating Liquids ..... 36
12.2 Tissue Verification ..... 36
12.3 System Performance Check Results ..... 38
13. RF Exposure Positions ..... 41
13.1 Ear and handset reference point ..... 41
13.2 Definition of the cheek position ..... 42
13.3 Definition of the tilt position ..... 43
13.4 Body Worn Accessory ..... 44
13.5 Product Specific 10g SAR Exposure ..... 45
13.6 Wireless Router ..... 45
14. Conducted RF Output Power (Unit: dBm) ..... 46
15. Antenna Location ..... 65
16. SAR Test Results ..... 66
16.1 Head SAR ..... 70
16.2 Hotspot SAR ..... 89
16.3 Body Worn Accessory SAR ..... 126
16.4 Product specific 10g SAR ..... 167
16.5 Repeated SAR Measurement ..... 189
16.6 TDD LTE and NR Linearity Data Analysis ..... 191
17. Simultaneous Transmission Analysis ..... 199
17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis ..... 201
17.2 Head Exposure Conditions ..... 202
17.3 Hotspot Exposure Conditions ..... 203
17.4 Body-Worn Accessory Exposure Conditions ..... 204
17.5 Product specific 10g SAR Exposure Conditions ..... 205
17.6 SPLSR Evaluation and Analysis ..... 206
17.7 Separation distance between Peak SAR locations of each one pair Calculation results ..... 208
18. Supplemental tuner tests results ..... 228
18.1 Supplemental Tuner Head & Body SAR Results ..... 228
19. Uncertainty Assessment ..... 229
20. References ..... 230
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate



Appendix D. Test Setup Photos  
Appendix E. Conducted RF Output Power Table  
Appendix F. Supplemental Tuner SAR Results

### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA340401-01	Rev. 01	Initial issue of report.	Jun. 06, 2023
FA340401-01	Rev. 02	Updated the relevant supplemental data in section 18 and Appendix F	Jun. 21, 2023



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2323-2, XT2323-5, XT2323-6**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.93	1.30	1.30	1.59
		GSM1900	0.93	<b>1.31</b>	<b>1.31</b>	
	WCDMA	WCDMA II	0.91	1.27	1.29	
		WCDMA IV	0.92	1.28	1.30	
		WCDMA V	0.91	1.27	1.24	
	LTE	LTE Band 7	0.91	1.28	1.30	
		LTE Band 12/17	0.92	0.70	0.96	
		LTE Band 13	0.93	1.26	1.26	
		LTE Band 14	0.93	1.22	1.28	
		LTE Band 25/2	0.92	1.28	1.28	
		LTE Band 26/5	0.91	1.27	1.26	
		LTE Band 30	0.96	1.29	1.28	
		LTE Band 66/4	0.93	1.28	1.28	
		LTE Band 71	0.92	1.23	0.95	
		LTE Band 41/38	0.97	1.30	<b>1.31</b>	
		LTE Band 48	0.93	0.64	0.94	
	5G NR	FR1 n7	0.92	1.29	1.30	
		FR1 n12	0.80	0.88	0.93	
		FR1 n14	0.92	0.92	0.92	
		FR1 n25/n2	0.92	1.29	1.29	
		FR1 n26/n5	0.77	1.28	0.99	
		FR1 n30	0.91	1.29	1.14	
		FR1 n66	0.93	1.29	1.29	
FR1 n70		0.92	1.28	1.26		
FR1 n71		0.91	0.85	0.83		
FR1 n41		0.93	1.28	1.30		
FR1 n48		0.93	1.28	1.29		
FR1 n77/78	0.93	1.27	1.29			
DTS	WLAN	2.4GHz WLAN	1.15	0.57	1.28	1.59
NII		5GHz WLAN	1.14	0.56	1.10	1.58
DSS	Bluetooth	2.4GHz Bluetooth	<b>1.20</b>	0.36	0.40	1.57



Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	1.81	3.97
		GSM1900	2.47	
	WCDMA	WCDMA II	3.18	
		WCDMA IV	2.87	
		WCDMA V	1.73	
	LTE	LTE Band 7	3.18	
		LTE Band 12	2.44	
		LTE Band 13	3.14	
		LTE Band 14	3.01	
		LTE Band 25/2	3.06	
		LTE Band 26/5	2.30	
		LTE Band 30	3.06	
		LTE Band 66/4	3.14	
		LTE Band 71	3.00	
		LTE Band 41/38	3.17	
		LTE Band 48	2.46	
		5G NR	FR1 n2	
	FR1 n7		<b>3.21</b>	
	FR1 n12		0.91	
	FR1 n14		1.05	
FR1 n25/2	2.99			
FR1 n26/5	1.34			
FR1 n30	2.44			
FR1 n66	3.10			
FR1 n70	2.48			
FR1 n41	3.18			
FR1 n48	3.18			
FR1 n77/78	2.49			
DTS	WLAN	2.4GHz WLAN	2.43	3.92
NII		5GHz WLAN	2.82	3.97
Date of Testing:			2023/4/22 ~ 2023/6/3	

**Remark:**

- This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41.
- This device supports 5GNR n78/n5/n2 and n77/n26/n25. Since the supported frequency span for 5GNR n78/n5/n2 falls completely within the supports frequency span for n77/n26/n25, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n77/n26/n25.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the



manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



### 2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR02-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

### 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2323-2, XT2323-5, XT2323-6
FCC ID	IHDT56AL9
IMEI Code	IMEI 1 : 351606570015577 IMEI 2 : 351606570015585
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA





	HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
<b>HW Version</b>	DVT2
<b>SW Version</b>	T2TV33.23
<b>GSM / (E)GPRS Transfer mode</b>	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). WLAN 6GHz has no hotspot function.
4. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.
5. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
6. For dual SIM card mobile has single SIM slots + eSIM (electronic SIM) and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
7. The device implements the power management, Hall sensor and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
8. For WLAN/BT when transmit simultaneous with WWAN, power reduction will be activated to head. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
9. For some WWAN bands, sensor on power level is higher than hotspot power level, so front/back sensor on SAR can represent hotspot conservatively.
10. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the LTE and 5G NR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information can be referred to section 18 and appendix F.
11. This device supports HPUE for LTE Band 41 and 5G NR n41/n77 with class 2 level, HPUE power has been measured separately. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
12. 5G NR n41/n77/n78/n48 supports UL MIMO.
13. The device supports HPUE (power class 2) under SISO mode and HPUE (power class 1.5) under UL MIMO mode for 5G NR n41/n77.
14. For 5G NR n41/n77 HPUE, 5G NR n41/n77 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
15. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
16. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
17. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
18. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is

- unnecessary.
19. The three model names XT2323-2, XT2323-5, XT2323-6 are the same product except model name different for market segment.
  20. SAR and Power density test report for WLAN 6GHz U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WWAN/Bluetooth always chose higher SAR of WLAN5G U-NII-1/2A/2C/3 and WLAN 6GHz U-NII-5/6/7/8.
  21. The device support DBS (Dual Band Simultaneous) function, when the device 2.4GHz and 5GHz or 6GHz transmit at the same time the module will limit different output power for simultaneous transmission compliance.
  22. This device supports 5GNR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.
  23. This device has NFC function and the NFC SAR report will be separately submitted.

**<5G NR>**

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n12	FDD	15	5, 10, 15
	n25	FDD	15	5, 10, 15, 20
	n30	FDD	15	5, 10
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n71	FDD	15	5, 10, 15, 20
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
n78	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100	
SA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40
	n12	FDD	15	5, 10, 15
	n14	FDD	15	5, 10
	n25	FDD	15	5, 10, 15, 20
	n26	FDD	15	5, 10, 15, 20
	n30	FDD	15	5, 10
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n70	FDD	15	5, 10, 15
	n71	FDD	15	5, 10, 15, 20
	n41	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n48	TDD	30	10, 20, 30, 40
	n77	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
n78	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56AL9																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R16, Cat18																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body -worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782					
M	23230		782		23230		782					
H	23255		784.5		23230		782					
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793					
M	23330		793		23330		793					
H	23355		795.5		23330		793					
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		



LTE Band 30																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	27685		2307.5		27710		2310									
M	27710		2310													
H	27735		2312.5													
LTE Band 38																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38175	2612.5	38150	2610				
LTE Band 41																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41515	2682.5	41490	2680				
LTE Band 66																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720				
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745				
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770				
LTE Band 71																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673	133197	670.5	133222	673				
M	133247	675.5	133272	678	133297	680.5	133322	683	133297	680.5	133322	683				
H	133447	695.5	133422	693	133397	690.5	133372	688	133397	690.5	133372	688				
LTE Band 48																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560	55315	3557.5	55340	3560				
LM	55810	3607	55815	3607.5	55820	3608	55830	3609	55820	3608	55830	3609				
MH	56170	3643	56165	3642.5	56160	3642	56150	3641	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690	56665	3692.5	56640	3690				

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 25	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 17			Yes	Yes		
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes



2) LTE Bands tune up:

Band	Antenna	Open					Close				DSI4 sensor off	Default
		Head	Body Worn	Body Worn	Hotspot	Extremity	Body Worn	Body Worn	Hotspot			
		DSI2	DSI3	DSI3 Simultaneous	DSI9	DSI6	DSI5	DSI5 Simultaneous	DSI10			
		Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit		
LTE Band 2 Other PA	Ant 0	24	21.3	21.3	21.3	24	21.2	20.4	19.1	24	24	
LTE Band 2 Main PA		24	21.3	21.3	21.3	24	21.2	20.4	19.1	24	24	
LTE Band 25		24	21.3	21.3	21.3	24	21.2	20.4	19.1	24	24	
LTE Band 2 Other PA	Ant 1	21	17.5	16.7	12.3	22.1	17.5	16.7	13	24	24	
LTE Band 2 Main PA		21	17.5	16.7	12.3	22.1	17.5	16.7	13	24	24	
LTE Band 25		21	17.5	16.7	12.3	22.1	17.5	16.7	13	24	24	
LTE Band 2 Other PA	Ant 2	23.5	22.3	22.3	20.3	23.5	22.6	21.8	20.4	23.5	23.5	
LTE Band 2 Main PA		23.5	22.3	22.3	20.3	23.5	22.6	21.8	20.4	23.5	23.5	
LTE Band 25		23.5	22.3	22.3	20.3	23.5	22.6	21.8	20.4	23.5	23.5	
LTE Band 2 Other PA	Ant 3	16.1	20.5	19.7	16.2	21.6	21.4	20.6	18.6	23.5	23.5	
LTE Band 2 Main PA		16.1	20.5	19.7	16.2	21.6	21.4	20.6	18.6	24	24	
LTE Band 25		16.1	20.5	19.7	16.2	21.6	21.4	20.6	18.6	24	24	
LTE Band 5	Ant 0	24	24	24	23.5	24	22.4	21.6	20.7	24	24	
LTE Band 26		24	24	24	23.5	24	22.4	21.6	20.7	24	24	
LTE Band 5	Ant 1	18.7	20.8	20	18.2	24	23	22.2	20.8	24	24	
LTE Band 26		18.7	20.8	20	18.2	24	23	22.2	20.8	24	24	
LTE Band 12	Ant 0	24	24	24	24	24	24	23.2	22.7	24	24	
LTE Band 17		24	24	24	24	24	24	23.2	22.7	24	24	
LTE Band 12	Ant 1	19.9	22.8	22	18.2	24	22.6	21.8	21.4	24	24	
LTE Band 17		19.9	22.8	22	18.2	24	22.6	21.8	21.4	24	24	
LTE Band 66 Other PA	Ant 0	24	20.5	20.5	20.5	24	19.1	18.3	15.9	24	24	
LTE Band 4 Main PA		24	20.5	20.5	20.5	24	19.1	18.3	15.9	24	24	
LTE Band 66 Main PA		24	20.5	20.5	20.5	24	19.1	18.3	15.9	24	24	
LTE Band 66 Other PA	Ant 1	15.7	16.7	15.9	12.3	20.8	17.8	17	12.8	24	24	
LTE Band 4 Main PA		15.7	16.7	15.9	12.3	20.8	17.8	17	12.8	24	24	
LTE Band 66 Main PA		15.7	16.7	15.9	12.3	20.8	17.8	17	12.8	24	24	
LTE Band 66 Other PA	Ant 2	24	22	22	20.9	24	21.7	20.9	18.6	24	24	
LTE Band 4 Main PA		23	22	22	20.9	23	21.7	20.9	18.6	23	23	
LTE Band 66 Main PA		23	22	22	20.9	23	21.7	20.9	18.6	23	23	
LTE Band 66 Other PA	Ant 3	17.2	20.8	20	16.5	23	22.1	21.3	17	24	24	
LTE Band 4 Main PA		17.2	20.8	20	16.5	23	22.1	21.3	17	24	24	
LTE Band 66 Main PA		17.2	20.8	20	16.5	23	22.1	21.3	17	24	24	
LTE Band 38	Ant 0	22	22	22	21	22	20.6	19.8	18.6	22	22	
LTE Band 41		24	22.4	22.4	21	23.8	20.6	19.8	18.6	24	24	
LTE Band 38	Ant 1	19	21.1	20.3	16.8	22	20.4	19.6	14.7	22	22	
LTE Band 41		19	21.1	20.3	16.8	23	20.4	19.6	14.7	24	24	
LTE Band 38	Ant 2	23	22.6	22.6	20.8	23	21.3	20.5	20.1	23	23	
LTE Band 41		23	22.6	22.6	20.8	23	21.3	20.5	20.1	23	23	
LTE Band 38	Ant 3	17.6	20.4	19.6	19	23.2	22.8	22	19.9	24	24	
LTE Band 41		17.6	20.4	19.6	19	23.2	22.8	22	19.9	24	24	

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.



### 4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n2	LTE B5/712/13/14/30/48/66/71
LTE Anchor Bands for n5	LTE B2/7/30/48/66
LTE Anchor Bands for n7	LTE B66
LTE Anchor Bands for n12	LTE B2/66
LTE Anchor Bands for n25	LTE B7/12/26/66
LTE Anchor Bands for n30	LTE B2/5/12/14/66
LTE Anchor Bands for n41	LTE B2/4/12/25/26/66/71
LTE Anchor Bands for n66	LTE B2/5/7/12/13/14/30/48/71
LTE Anchor Bands for n71	LTE B2/7/48/66
LTE Anchor Bands for n77	LTE B2/5/7/12/13/14/30/66
LTE Anchor Bands for n78	LTE B2/4/5/7/12/13/25/66/71

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550



NR Band 12						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	140300	701.5	140800	704	141300	706.5
M	141500	707.5	141500	707.5	141500	707.5
H	142700	713.5	142200	711	141700	708.5

NR Band 14				
	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	158100	790.5	158600	793
M	158600	793		
H	159100	795.5		

NR Band 25								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905

NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 30				
	Bandwidth 5MHz		Bandwidth 10MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	461500	2307.5	462000	2310
M	462000	2310		
H	462500	2312.5		

NR Band 66												
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760

NR Band 70						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	339500	1697.5	340000	1700	340500	1702.5
M	340500	1702.5	340500	1702.5		
H	341500	1707.5	341000	1705		

NR Band 71								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133100	665.5	133600	668	134100	670.5	134600	673
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5
H	139100	695.5	138600	693	138100	690.5	137600	688





NR Band 41																		
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640

NR Band 48								
	Bandwidth 10MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	637000	3555	637334	3560.01	637668	3565.02	638000	3570
M	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99
H	646332	3694.98	646000	3690	645666	3684.99	645332	3679.98

NR Band 77																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664834	3972.51	664666	3970.02	664500	3967.5	664332	3965.01	664000	3960	663668	3955.02	663332	3950.01	663000	3945	662666	3940.02	662332	3935.01	662000	3930

NR Band 78																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02		
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H	653000	3795	652834	3792.51	652668	3790.02	652500	3787.5	652334	3785.01	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01		

For <3450 MHz ~ 3550 MHz >

NR Band 77																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

NR Band 78																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634668	3520.02	634334	3515.01	634000	3510	633668	3505.02		



<For NR Overlap Bands Description>

1) NR Bands BW

Band	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	90 MHz	100 MHz
FR1 n5	Yes	Yes	Yes	Yes									
FR1 n26	Yes	Yes	Yes	Yes									
FR1 n2	Yes	Yes	Yes	Yes									
FR1 n25	Yes	Yes	Yes	Yes									
FR1 n78		Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FR1 n77		Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

2) NR Bands Tune up:

Band	Antenna	Open					Close			DSI4 sensor off	Default
		Head	Body Worn	Body Worn	Hotspot	Extremity	Body Worn	Body Worn	Hotspot		
		DSI2	DSI3	DSI3 Simultaneous	DSI9	DSI6	DSI5	DSI5 Simultaneous	DSI10		
		Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit		
FR1 n5	Ant 0	24	24	24	21.4	24	24	23.2	22.2	24	24
FR1 n26		24	24	24	21.4	24	24	23.2	22.2	24	24
FR1 n5	Ant 1	20.1	22.5	21.7	19.6	24	22.7	21.9	21.3	24	24
FR1 n26		20.1	22.5	21.7	19.6	24	22.7	21.9	21.3	24	24
FR1 n2 Other PA	Ant 0	25	21.1	21.1	20.1	23.3	20.4	19.6	18.1	25	25
FR1 n2 Main PA		23	21.1	21.1	20.1	23	20.4	19.6	18.1	23	23
FR1 n25 Main PA		23	21.1	21.1	20.1	23	20.4	19.6	18.1	23	23
FR1 n2 Other PA	Ant 1	14.8	15	14.2	9.9	20	18	17.2	12.9	24	24
FR1 n2 Main PA		16.1	19.5	18.5	15.2	21.2	21.5	20.5	15.6	24	24
FR1 n25 Main PA		16.2	19.6	18.6	15.4	21.3	21.6	20.6	15.7	24	24
FR1 n2 Other PA	Ant 2	24	23.2	23.2	22.7	24	22.4	22.4	22.4	24	24
FR1 n2 Main PA		23	23	23	22.7	23	22.4	22.4	22.4	23	23
FR1 n25 Main PA		23	23	23	22.7	23	22.4	22.4	22.4	23	23
FR1 n2 Other PA	Ant 3	17.2	20.4	19.6	17.1	22	22.1	21.3	19.3	24	24
FR1 n2 Main PA		17.2	20.4	19.6	17.1	22	22.1	21.3	19.3	24	24
FR1 n25 Main PA		17.2	20.4	19.6	17.1	22	22.1	21.3	19.3	24	24
5G NR n77 Other PA	Ant 1	13.5	19	18.2	13.4	21.3	24.5	24.5	12.6	24.5	24.5
5G NR n78 Main PA		13.5	19	18.2	13.4	21.3	22	22	12.6	22	22
5G NR n77 Main PA		13.5	19	18.2	13.4	21.3	23	23	12.6	23	23
5G NR n77 Other PA	Ant 2	24	23.4	23.4	21.7	24	21.7	20.9	20.2	24	24
5G NR n78 Main PA		23	23	23	21.7	23	21.7	20.9	20.2	23	23
5G NR n77 Main PA		23	23	23	21.7	23	21.7	20.9	20.2	23	23
5G NR n77 Other PA	Ant 3	15.7	17.9	17.1	11.6	19.5	18.8	18	12.6	24	24
5G NR n78 Main PA		15.7	17.9	17.1	11.6	19.5	18.8	18	12.6	25	25
5G NR n77 Main PA		15.7	17.9	17.1	11.6	19.5	18.8	18	12.6	24.5	24.5
5G NR n77 Other PA	Ant 5	17	20.5	19.7	13.6	22.2	21	20.2	14.5	23	23
5G NR n78 Main PA		17	20.5	19.7	13.6	22.2	21	20.2	14.5	25	25
5G NR n77 Main PA		17	20.5	19.7	13.6	22.2	21	20.2	14.5	25	25

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

## 5. Smart Transmit feature for RF Exposure compliance

The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with RF exposure limit over a defined time window, for SAR (transmit frequency  $\leq$  6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

Note that WLAN/BT operations are not enabled with Smart Transmit.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

### <Terminologies in this report>

$P_{limit}$	The time-averaged RF power which corresponds to SAR_design_target.
$P_{max}$	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	$P_{limit}$ for all the technologies/bands for all applicable DSI

### <SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for  $f < 6$  GHz.

### <SAR design target and uncertainty>

Item	Uncertainty dB (k=2)
Total uncertainty	1.5

To account for total uncertainty, SAR\_design\_target should be determined as:

$$SAR_{design\_target} < SAR_{regulatory\_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$



The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR\_design\_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

**<P<sub>limit</sub> for supported technologies and bands (P<sub>limit</sub> in EFS file)>**

Band	Antenna	Open					Close			Sensor Off DSI4	Pmax
		Head DSI2	Body Worn Standalone DSI3	Body Worn Simultaneous DSI3	Hotspot DSI9	Extremely DSI6	Body Worn Standalone DSI5	Body Worn Simultaneous DSI5	Hotspot DSI10		
GSM850 (3 Tx slots)	Ant 0	31.9	24.2	24.2	24.2	26.7	24.3	24.3	24.3	24.2	24.2
GSM850 (3 Tx slots)	Ant 1	19.8	20.7	19.9	19.6	26.5	22.0	21.2	20.8	24.2	24.2
GSM1900 (3 Tx slots)	Ant 0	32.0	18.4	18.4	18.4	24.1	19.7	18.9	18.3	21.7	21.7
GSM1900 (3 Tx slots)	Ant 1	15.7	17.0	16.2	12.5	21.8	17.5	16.7	12.4	21.2	21.2
GSM1900 (3 Tx slots)	Ant 2	31.3	23.3	23.3	22.9	25.1	23.2	22.4	22.3	22.2	22.2
GSM1900 (3 Tx slots)	Ant 3	18.3	20.5	19.7	17.9	23.0	22.2	21.4	19.1	23.2	23.2
WCDMA II	Ant 0	30.7	18.6	18.6	17.7	21.2	18.2	17.4	16.0	23.0	23.0
WCDMA II	Ant 1	14.1	15.3	14.5	12.7	21.7	15.8	15.0	11.6	23.0	23.0
WCDMA II	Ant 2	30.7	22.6	22.6	19.8	24.2	22.1	21.3	20.2	23.0	23.0
WCDMA II	Ant 3	16.0	20.8	20.0	16.6	22.4	21.0	20.2	17.1	24.0	24.0
WCDMA IV	Ant 0	29.6	18.1	18.1	18.1	23.4	17.7	16.9	15.0	23.0	23.0
WCDMA IV	Ant 1	15.5	15.8	15.0	11.1	20.8	17.1	16.3	11.9	23.0	23.0
WCDMA IV	Ant 2	30.5	22.8	22.8	21.8	24.7	21.7	20.9	18.1	23.0	23.0
WCDMA IV	Ant 3	16.8	20.8	20.0	16.2	22.3	21.3	20.5	17.5	24.0	24.0
WCDMA V	Ant 0	30.2	24.1	24.1	23.3	27.3	23.8	23.0	22.3	24.0	24.0
WCDMA V	Ant 1	18.9	20.8	20.0	20.4	25.5	21.7	20.9	20.4	24.0	24.0
LTE Band 12(17)	Ant 0	29.0	24.3	24.3	24.3	23.0	23.0	22.2	21.7	23.0	23.0
LTE Band 12(17)	Ant 1	18.9	21.8	21.0	17.2	23.0	21.6	20.8	20.4	23.0	23.0
LTE Band 13	Ant 0	30.0	23.1	23.1	23.1	22.7	22.4	21.6	21.5	23.0	23.0
LTE Band 13	Ant 1	19.2	20.5	19.7	18.5	23.8	21.8	21.0	20.3	23.0	23.0
LTE Band 14	Ant 0	29.1	23.0	23.0	23.0	23.2	22.8	22.0	21.2	23.0	23.0
LTE Band 14	Ant 1	18.4	20.1	19.3	18.1	23.9	21.4	20.6	20.3	23.0	23.0
LTE Band 26(5)	Ant 0	29.0	23.1	23.1	22.5	24.4	21.4	20.6	19.7	23.0	23.0
LTE Band 26(5)	Ant 1	17.7	19.8	19.0	17.2	23.4	22.0	21.2	19.8	23.0	23.0
LTE Band 30	Ant 0	34.4	20.2	20.2	18.1	20.1	18.2	17.4	15.2	21.0	21.0
LTE Band 30	Ant 1	15.1	17.5	16.7	12.4	20.6	19.3	18.5	14.3	21.0	21.0
LTE Band 30	Ant 2	32.4	22.9	22.9	21.6	23.7	21.3	21.3	21.3	22.0	22.0
LTE Band 30	Ant 3	14.8	19.8	19.0	18.5	21.9	21.8	21.0	20.1	23.0	23.0
LTE Band 66(4) Main PA	Ant 0	30.2	19.5	19.5	19.5	23.0	18.1	17.3	14.9	23.0	23.0
LTE Band 66 Other PA	Ant 0	30.2	19.5	19.5	19.5	23.0	18.1	17.3	14.9	23.0	23.0
LTE Band 66(4) Main PA	Ant 1	14.7	15.7	14.9	11.3	19.8	16.8	16.0	11.8	23.0	23.0
LTE Band 66 Other PA	Ant 1	14.7	15.7	14.9	11.3	19.8	16.8	16.0	11.8	23.0	23.0
LTE Band 66(4) Main PA	Ant 2	28.6	21.0	21.0	19.9	23.0	20.7	19.9	17.6	23.0	22.0
LTE Band 66 Other PA	Ant 2	28.6	21.0	21.0	19.9	23.0	20.7	19.9	17.6	23.0	23.0
LTE Band 66(4) Main PA	Ant 3	16.2	19.8	19.0	15.5	22.0	21.1	20.3	16.0	23.0	23.0
LTE Band 66 Other PA	Ant 3	16.2	19.8	19.0	15.5	22.0	21.1	20.3	16.0	23.0	23.0
LTE Band 71	Ant 0	28.5	24.3	24.3	23.2	23.3	23.0	22.2	23.0	23.0	23.0
LTE Band 71	Ant 1	19.3	21.3	20.5	19.8	23.1	23.0	22.2	22.7	23.0	23.0
LTE Band 25(2) Main PA	Ant 0	31.5	20.3	20.3	20.3	23.8	20.2	19.4	18.1	23.0	23.0
LTE Band 2 Other PA	Ant 0	31.5	20.3	20.3	20.3	23.8	20.2	19.4	18.1	23.0	23.0
LTE Band 25(2) Main PA	Ant 1	20.0	16.5	15.7	11.3	21.1	16.5	15.7	12.0	23.0	23.0
LTE Band 2 Other PA	Ant 1	20.0	16.5	15.7	11.3	21.1	16.5	15.7	12.0	23.0	23.0
LTE Band 25(2) Main PA	Ant 2	29.7	21.3	21.3	19.3	22.7	21.6	20.8	19.4	22.5	22.5
LTE Band 2 Other PA	Ant 2	29.7	21.3	21.3	19.3	22.7	21.6	20.8	19.4	22.5	22.5
LTE Band 25(2) Main PA	Ant 3	15.1	19.5	18.7	15.2	20.6	20.4	19.6	17.6	23.0	23.0



LTE Band 2 Other PA	Ant 3	15.1	19.5	18.7	15.2	20.6	20.4	19.6	17.6	23.0	22.5
LTE Band 7 Main PA	Ant 0	32.2	17.8	17.8	16.7	20.2	15.8	15.0	14.1	23.0	22.0
LTE Band 7 Other PA	Ant 0	32.2	17.8	17.8	16.7	20.2	15.8	15.0	14.1	23.0	23.0
LTE Band 7 Main PA	Ant 1	15.0	18.6	17.8	13.6	20.3	15.9	15.1	12.8	22.5	22.5
LTE Band 7 Other PA	Ant 1	15.0	18.6	17.8	13.6	20.3	15.9	15.1	12.8	22.5	22.5
LTE Band 7 Main PA	Ant 2	33.9	19.8	19.8	19.7	22.0	19.8	19.0	18.6	22.0	22.0
LTE Band 7 Other PA	Ant 2	33.9	19.8	19.8	19.7	22.0	19.8	19.0	18.6	22.0	21.5
LTE Band 7 Main PA	Ant 3	14.7	18.6	17.8	17.7	20.2	19.7	18.9	17.3	23.0	23.0
LTE Band 7 Other PA	Ant 3	14.7	18.6	17.8	17.7	20.2	19.7	18.9	17.3	23.0	22.5
LTE Band 38 PC3	Ant 0	31.1	19.4	19.4	18.0	20.8	17.6	16.8	15.6	19.0	19.0
LTE Band 41 PC3	Ant 0	31.1	19.4	19.4	18.0	20.8	17.6	16.8	15.6	21.4	21.0
LTE Band 41 PC2	Ant 0	31.1	19.4	19.4	18.0	20.8	17.6	16.8	15.6	21.4	21.4
LTE Band 38 PC3	Ant 1	16.0	18.1	17.3	13.8	20.0	17.4	16.6	11.7	21.0	19.0
LTE Band 41 PC3	Ant 1	16.0	18.1	17.3	13.8	20.0	17.4	16.6	11.7	21.4	21.0
LTE Band 41 PC2	Ant 1	16.0	18.1	17.3	13.8	20.0	17.4	16.6	11.7	21.4	21.4
LTE Band 41 PC3(38PC3)	Ant 2	29.7	19.6	19.6	17.8	21.8	18.3	17.5	17.1	20.0	20.0
LTE Band 41 PC2	Ant 2	29.7	19.6	19.6	17.8	21.8	18.3	17.5	17.1	20.0	19.9
LTE Band 41 PC3(38PC3)	Ant 3	14.6	17.4	16.6	16.0	20.2	19.8	19.0	16.9	21.4	21.0
LTE Band 41 PC2	Ant 3	14.6	17.4	16.6	16.0	20.2	19.8	19.0	16.9	21.4	21.4
LTE Band 48	Ant 5	12.8	16.4	15.6	11.9	20.3	18.3	17.5	12.8	21.0	21.0
LTE Band 48	Ant 1	16.8	17.6	16.2	12.8	21.2	17.5	17.5	12.6	17.0	17.0
LTE Band 48	Ant 2	27.8	24.0	24.0	22.2	25.0	22.8	22.0	21.1	18.0	18.0
LTE Band 48	Ant 3	12.1	15.8	15.0	10.1	17.8	16.8	16.0	11.0	20.0	20.0
5G NR n25(2) Main PA	Ant 0	31.5	20.1	20.1	19.1	22.3	19.4	18.6	17.1	24.0	22.0
5G NR n2 Other PA	Ant 0	31.5	20.1	20.1	19.1	22.3	19.4	18.6	17.1	24.0	24.0
5G NR n25(2) Main PA	Ant 1	13.8	14.0	13.2	8.9	19.0	17.0	16.2	11.9	23.0	22.0
5G NR n2 Other PA	Ant 1	13.8	14.0	13.2	8.9	19.0	17.0	16.2	11.9	23.0	23.0
5G NR n25(2) Main PA	Ant 2	31.5	22.2	22.2	21.7	23.9	21.4	21.4	21.4	23.0	22.0
5G NR n2 Other PA	Ant 2	31.5	22.2	22.2	21.7	23.9	21.4	21.4	21.4	23.0	23.0
5G NR n25(2) Main PA	Ant 3	16.2	19.4	18.6	16.1	21.0	21.1	20.3	18.3	23.0	23.0
5G NR n2 Other PA	Ant 3	16.2	19.4	18.6	16.1	21.0	21.1	20.3	18.3	23.0	23.0
5G NR n26(5)	Ant 0	30.8	24.1	24.1	20.4	27.2	23.1	22.2	21.2	23.0	23.0
5G NR n26(5)	Ant 1	19.1	21.5	20.7	18.6	25.7	21.7	20.9	20.3	23.0	23.0
5G NR n7 Other PA	Ant 0	31.8	18.9	18.9	17.6	21.2	16.3	15.5	15.6	24.0	24.0
5G NR n7 Main PA	Ant 0	31.8	18.9	18.9	17.6	21.2	16.3	15.5	15.6	24.0	23.0
5G NR n7 Other PA	Ant 1	14.9	18.0	17.2	13.9	20.4	20.0	19.2	15.0	23.0	23.0
5G NR n7 Main PA	Ant 1	14.9	18.0	17.2	13.9	20.4	20.0	19.2	15.0	23.0	22.0
5G NR n7 Other PA	Ant 2	34.3	20.9	20.9	20.8	22.0	20.3	19.5	17.3	23.0	23.0
5G NR n7 Main PA	Ant 2	34.3	20.9	20.9	20.8	22.0	20.3	19.5	17.3	23.0	22.0
5G NR n7 Other PA	Ant 3	15.1	19.4	18.6	17.8	21.2	20.7	19.9	17.4	23.0	23.0
5G NR n7 Main PA	Ant 3	15.1	19.4	18.6	17.8	21.2	20.7	19.9	17.4	23.0	23.0
5G NR n12	Ant 0	32.3	25.3	25.3	24.8	23.0	24.8	24.0	23.3	23.0	23.0
5G NR n12	Ant 1	20.3	22.5	21.7	20.0	27.3	24.8	24.0	22.0	23.0	23.0
5G NR n14	Ant 0	32.0	25.0	25.0	24.5	29.6	25.2	24.4	23.4	23.0	23.0
5G NR n14	Ant 1	20.5	22.3	21.5	19.7	26.7	23.9	23.1	21.9	23.0	23.0
5G NR n30	Ant 0	31.5	21.8	21.8	18.8	22.9	20.8	20.0	18.3	21.0	21.0
5G NR n30	Ant 1	14.6	17.5	16.7	12.7	23.0	18.4	17.6	15.0	21.0	21.0
5G NR n30	Ant 2	31.5	22.9	22.9	22.7	24.5	23.5	22.7	22.0	22.0	22.0
5G NR n30	Ant 3	15.5	20.4	19.6	18.0	22.2	23.0	22.2	20.7	23.0	23.0
5G NR n66 Other PA	Ant 0	30.8	20.4	20.4	20.4	23.1	17.8	17.0	15.6	23.0	23.0
5G NR n66 Main PA	Ant 0	30.8	20.4	20.4	20.4	23.1	17.8	17.0	15.6	23.0	22.0
5G NR n66 Other PA	Ant 1	16.0	17.8	17.0	12.9	20.5	19.1	18.3	12.5	23.0	23.0
5G NR n66 Main PA	Ant 1	16.0	17.8	17.0	12.9	20.5	19.1	18.3	12.5	23.0	22.0
5G NR n66 Other PA	Ant 2	31.8	22.7	22.7	20.4	23.5	20.3	19.5	18.0	23.0	23.0
5G NR n66 Main PA	Ant 2	31.8	22.7	22.7	20.4	23.5	20.3	19.5	18.0	23.0	22.0
5G NR n66 Other PA	Ant 3	16.6	20.9	20.1	16.4	21.6	21.1	20.3	17.0	23.0	23.0



5G NR n66 Main PA	Ant 3	16.6	20.9	20.1	16.4	21.6	21.1	20.3	17.0	23.0	23.0
5G NR n70	Ant 0	34.3	21.9	21.9	21.1	24.1	20.3	19.5	18.4	22.0	22.0
5G NR n70	Ant 1	14.6	17.3	16.5	12.5	20.1	18.6	17.8	12.4	21.0	21.0
5G NR n70	Ant 2	32.3	22.3	22.3	21.2	23.9	20.6	19.8	17.8	22.0	22.0
5G NR n70	Ant 3	16.0	21.2	20.4	16.6	21.6	20.7	19.9	17.6	23.0	23.0
5G NR n71	Ant 0	32.0	25.7	25.7	24.8	29.5	25.9	25.1	24.2	23.0	23.0
5G NR n71	Ant 1	21.8	24.0	22.7	21.2	28.7	25.4	24.6	23.0	23.5	23.5
5G NR n41 PC3 Other PA	Ant 0	31.3	21.1	21.1	19.3	21.0	16.7	15.9	14.1	23.0	23.0
5G NR n41 PC3 Main PA	Ant 0	31.3	21.1	21.1	19.3	21.0	16.7	15.9	14.1	23.0	23.0
5G NR n41 PC2 Other PA	Ant 0	31.3	21.1	21.1	19.3	21.0	16.7	15.9	14.1	23.0	23.0
5G NR n41 PC2 Main PA	Ant 0	31.3	21.1	21.1	19.3	21.0	16.7	15.9	14.1	23.0	23.0
5G NR n41 PC3 Main PA	Ant 1	15.6	18.4	17.6	14.6	20.5	18.9	18.1	17.2	23.0	23.0
5G NR n41 PC3 Other PA	Ant 1	15.6	18.4	17.6	14.6	20.5	18.9	18.1	17.2	23.0	23.0
5G NR n41 PC2 Main PA	Ant 1	15.6	18.4	17.6	14.6	20.5	18.9	18.1	17.2	23.0	23.0
5G NR n41 PC2 Other PA	Ant 1	15.6	18.4	17.6	14.6	20.5	18.9	18.1	17.2	23.0	23.0
5G NR n41 PC3 Main PA	Ant 2	35.1	20.4	20.4	19.4	21.5	19.3	18.5	18.0	23.0	23.0
5G NR n41 PC3 Other PA	Ant 2	35.1	20.4	20.4	19.4	21.5	19.3	18.5	18.0	23.0	23.0
5G NR n41 PC2 Main PA	Ant 2	35.1	20.4	20.4	19.4	21.5	19.3	18.5	18.0	23.0	23.0
5G NR n41 PC2 Other PA	Ant 2	35.1	20.4	20.4	19.4	21.5	19.3	18.5	18.0	23.0	23.0
5G NR n41 PC3 Main PA	Ant 3	14.8	18.8	18.0	17.3	20.2	20.6	19.8	18.9	23.0	23.0
5G NR n41 PC3 Other PA	Ant 3	14.8	18.8	18.0	17.3	20.2	20.6	19.8	18.9	23.0	23.0
5G NR n41 PC2 Main PA	Ant 3	14.8	18.8	18.0	17.3	20.2	20.6	19.8	18.9	23.0	23.0
5G NR n41 PC2 Other PA	Ant 3	14.8	18.8	18.0	17.3	20.2	20.6	19.8	18.9	23.0	23.0
5G NR n48	Ant 5	17.4	20.1	19.3	16.2	21.7	22.4	21.6	16.3	24.5	24.5
5G NR n48	Ant 1	15.2	22.1	21.2	13.3	24.9	23.7	22.9	13.2	22.0	22.0
5G NR n48	Ant 2	27.8	22.8	22.8	20.7	22.8	20.2	19.4	18.4	23.0	23.0
5G NR n48	Ant 3	14.5	17.1	16.3	11.8	19.4	16.8	16.0	11.6	23.5	23.5
5G NR n77(78) PC3 Main PA	Ant 5	16.0	19.5	18.7	12.6	21.2	20.0	19.2	13.5	24.0	24.0
5G NR n77 PC3 Other PA	Ant 5	16.0	19.5	18.7	12.6	21.2	20.0	19.2	13.5	24.0	22.0
5G NR n77 PC2 Main PA	Ant 5	16.0	19.5	18.7	12.6	21.2	20.0	19.2	13.5	24.0	24.0
5G NR n77 PC2 Other PA	Ant 5	16.0	19.5	18.7	12.6	21.2	20.0	19.2	13.5	24.0	22.0
5G NR n77 PC3 Other PA	Ant 1	12.5	18.0	17.2	12.4	20.3	24.0	24.0	11.6	23.5	23.5
5G NR n77 PC3 Main PA	Ant 1	12.5	18.0	17.2	12.4	20.3	24.0	24.0	11.6	23.5	22.0
5G NR n78 PC3 Main PA	Ant 1	12.5	18.0	17.2	12.4	20.3	24.0	24.0	11.6	23.5	21.0
5G NR n77 PC2 Other PA	Ant 1	12.5	18.0	17.2	12.4	20.3	24.0	24.0	11.6	23.5	23.5
5G NR n77 PC2 Main PA	Ant 1	12.5	18.0	17.2	12.4	20.3	24.0	24.0	11.6	23.5	22.0
5G NR n77 PC3 Other PA	Ant 2	27.7	22.4	22.4	20.7	23.2	20.7	19.9	19.2	23.0	23.0
5G NR n77(78) PC3 Main PA	Ant 2	27.7	22.4	22.4	20.7	23.2	20.7	19.9	19.2	23.0	22.0
5G NR n77 PC2 Other PA	Ant 2	27.7	22.4	22.4	20.7	23.2	20.7	19.9	19.2	23.0	23.0
5G NR n77 PC2 Main PA	Ant 2	27.7	22.4	22.4	20.7	23.2	20.7	19.9	19.2	23.0	22.0
5G NR n77 PC3 Main PA	Ant 3	14.7	16.9	16.1	10.6	18.5	17.8	17.0	11.6	24.0	23.5
5G NR n78 PC3 Main PA	Ant 3	14.7	16.9	16.1	10.6	18.5	17.8	17.0	11.6	24.0	24.0
5G NR n77 PC3 Other PA	Ant 3	14.7	16.9	16.1	10.6	18.5	17.8	17.0	11.6	24.0	23.0
5G NR n77 PC2 Main PA	Ant 3	14.7	16.9	16.1	10.6	18.5	17.8	17.0	11.6	24.0	23.5
5G NR n77 PC2 Other PA	Ant 3	14.7	16.9	16.1	10.6	18.5	17.8	17.0	11.6	24.0	23.0

**Note:**

- 1) \*P<sub>max</sub> is used for RF tune up procedure. The maximum allowed output power is equal to P<sub>max</sub> + 1.0 dB device uncertainty.
- 2) All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).
- 3) The max allowed output power is the Plimit + 1.0 dB device uncertainty, and if Plimit is higher than P<sub>max</sub>, the device output power will be P<sub>max</sub> instead.
- 4) For 5G NR n41/n77 HPUE, 5G NR n41/n77 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
- 5) The following table is duty cycle and factor used for calculating time average power.




<b>GSM/FDD/TDD</b>	<b>Duty Cycle</b>	<b>Time average calculation factor(dB)</b>
GSM 1TX	12.50%	-9.0
GSM 2TX	25%	-6.0
GSM 3TX	37.50%	-4.3
GSM 4TX	50%	-3.0
FDD LTE	100%	0.0
TDD LTE	63.30%	-2.0
TDD HPUE	43.30%	-3.6
NR FDD/TDD	100%	0.0
NR FDD/TDD only for n41/77	50%	-3.0

## 6. Proximity Sensor Triggering Test

### <Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

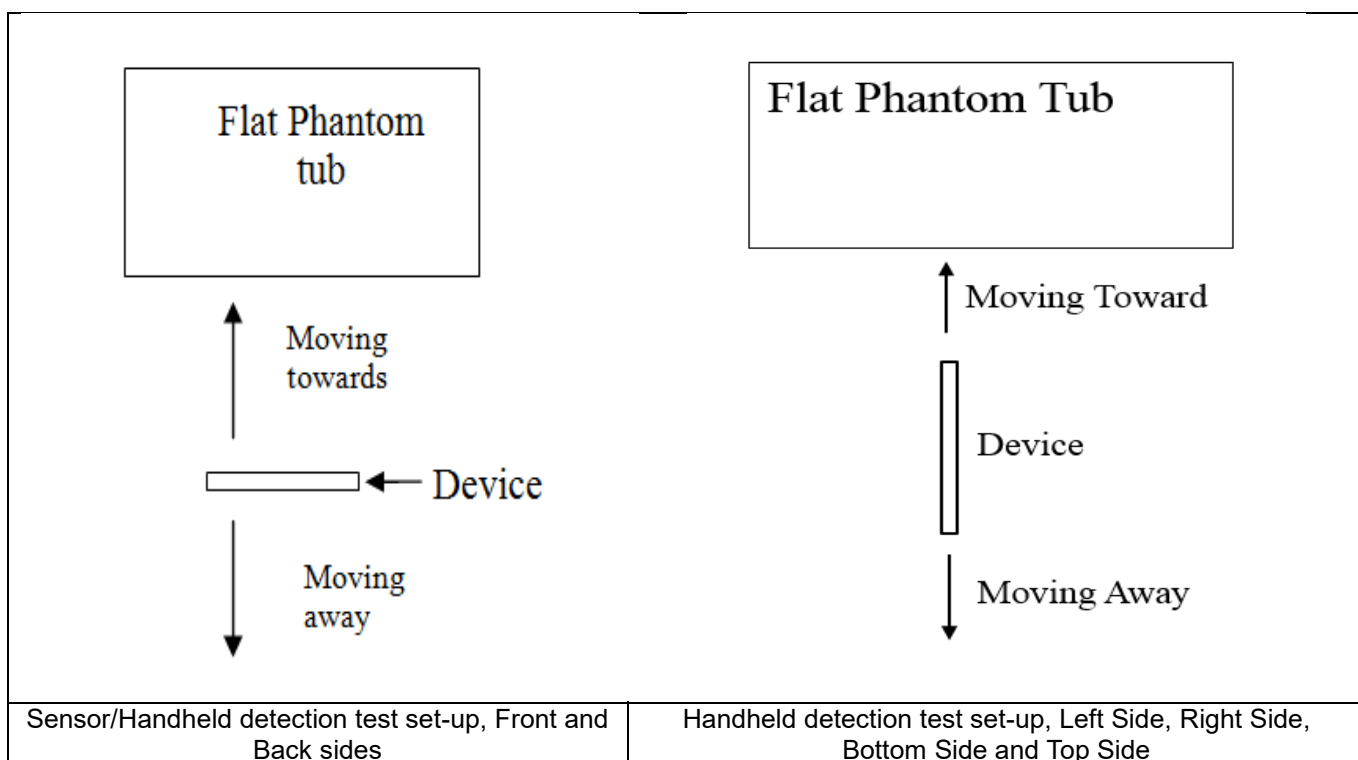

### <Flip-Open Mode> <P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	18	24	19	26





**<Handheld for ANT 0>**

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	15	7	9	7	9	12	17

**<Handheld for ANT1>**

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Left Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	9	16	9	12	14	20

**<Handheld for ANT2>**

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	12	9	14	8	12	11	16

**<Handheld for ANT 3>**

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	16	5	8	9	13	10	16

**<Handheld for ANT 4+5/4+6>**

Proximity Sensor Triggering Distance (mm)										
Position	Front		Back		Left Side		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	9	16	10	15	11	18	12	16	12	18

**<Handheld for ANT 5 for n77/n78>**

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Right Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	11	17	12	18	12	16

**<Flip-Close Mode>**

**<P-Sensor>**

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	15	18	16	19

## **7. RF Exposure Limits**

### **7.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **7.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **8. Specific Absorption Rate (SAR)**

### **8.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **8.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## **9. System Description and Setup**

The DASY5 system used for performing compliance tests consists of the following items:

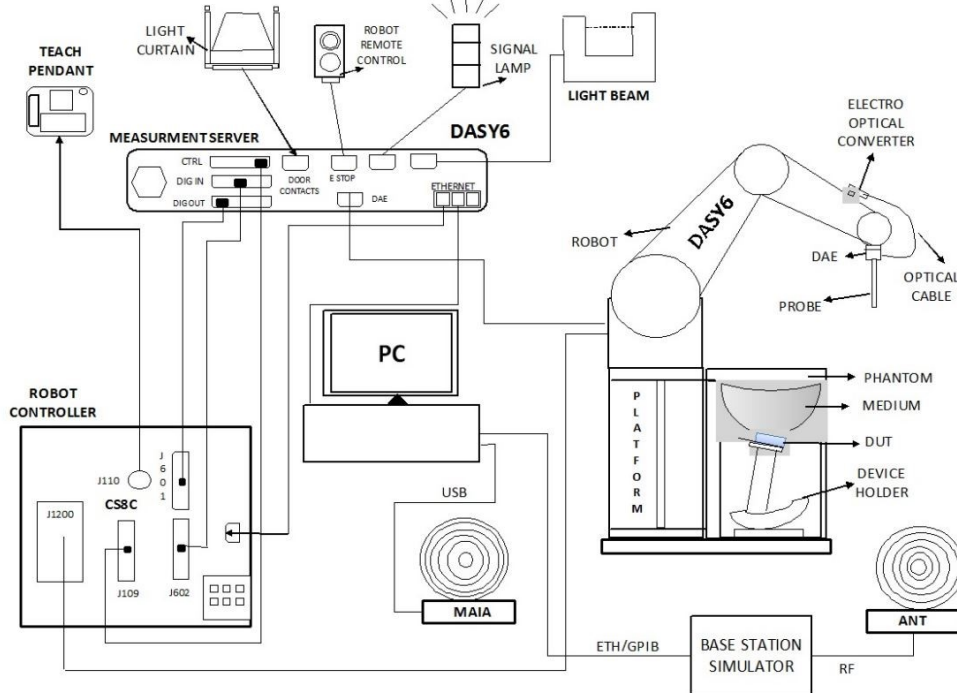


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win10 and the DASY5 or DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**9.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
<b>Directivity</b>	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**9.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Photo of DAE**


**9.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

## 9.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## 10. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



### 10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### 10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2025/2/23
SPEAG	835MHz System Validation Kit	D835V2	4d091	2022/8/19	2023/8/18
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2025/2/23
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	2021/12/20	2024/12/19
SPEAG	2300MHz System Validation Kit	D2300V2	1055	2020/9/15	2023/9/13
SPEAG	2450MHz System Validation Kit	D2450V2	1095	2022/12/7	2023/12/6
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/24
SPEAG	3500MHz System Validation Kit	D3500V2	1037	2020/11/25	2023/11/23
SPEAG	3700MHz System Validation Kit	D3700V2	1008	2020/11/25	2023/11/23
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2023/3/9	2024/3/8
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2022/9/23	2023/9/22
SPEAG	Data Acquisition Electronics	DAE4	1303	2022/11/24	2023/11/23
SPEAG	Data Acquisition Electronics	DAE4	1691	2022/12/12	2023/12/11
SPEAG	Dosimetric E-Field Probe	ES3DV3	3293	2022/11/22	2023/11/21
SPEAG	Dosimetric E-Field Probe	EX3DV4	3578	2022/6/23	2023/6/22
SPEAG	Dosimetric E-Field Probe	EX3DV4	7734	2022/6/17	2023/6/16
SPEAG	SAM Twin Phantom	SAM Twin	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-2024	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2022/7/14	2023/7/13
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2022/9/2	2023/9/1
SPEAG	Dielectric Probe Kit	DAK-3.5	1144	2022/8/15	2023/8/14
Anritsu	Vector Signal Generator	MG3710A	6201682672	2023/1/5	2024/1/4
Rohde & Schwarz	Power Meter	NRVD	102081	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2022/7/14	2023/7/13
R&S	BLUETOOTH TESTER	CBT	101246	2023/5/15	2024/5/14
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2022/10/12	2023/10/11
TES	DIGITAC THERMOMETER	1310	220305411	2023/1/8	2024/1/7
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/7/20	2023/7/19
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

**Note:**

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

## 12. System Verification

### 12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

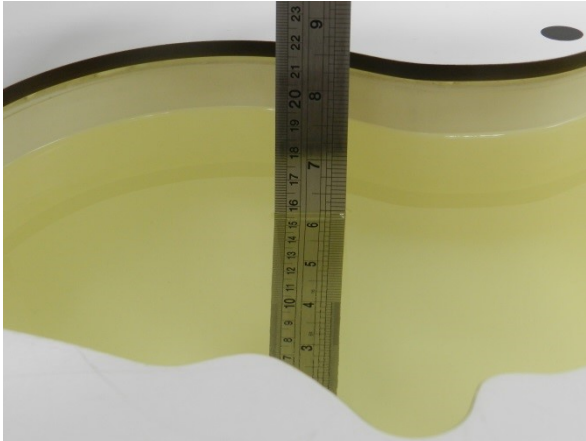


Fig 11.1 Photo of Liquid Height for Head SAR

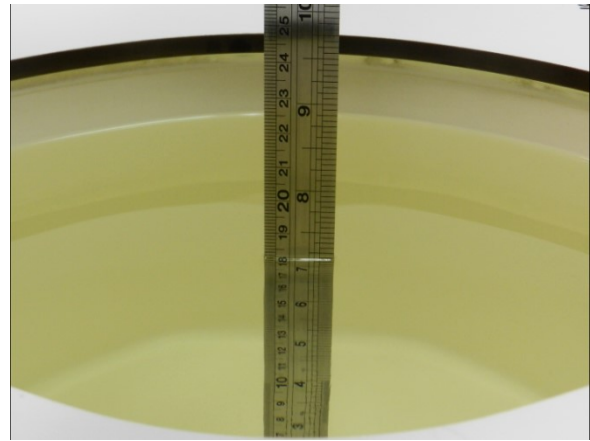


Fig 11.2 Photo of Liquid Height for Body SAR

### 12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

#### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	Head	22.6	0.906	42.762	0.89	41.90	1.80	2.06	±5	2023/4/22
835	Head	22.7	0.935	42.525	0.90	41.50	3.89	2.47	±5	2023/4/23
1750	Head	22.7	1.370	41.290	1.37	40.10	0.00	2.97	±5	2023/4/24
1900	Head	22.7	1.427	38.725	1.40	40.00	1.93	-3.19	±5	2023/4/25
2300	Head	22.8	1.719	39.465	1.67	39.50	2.93	-0.09	±5	2023/4/26
2600	Head	22.9	1.931	39.054	1.96	39.00	-1.48	0.14	±5	2023/4/27
3500	Head	22.7	2.786	38.813	2.91	37.90	-4.26	2.41	±5	2023/4/28
3700	Head	22.8	2.995	38.682	3.12	37.70	-4.01	2.60	±5	2023/4/29
3900	Head	22.8	3.174	38.230	3.32	37.50	-4.40	1.95	±5	2023/4/30
750	Head	22.6	0.888	42.264	0.89	41.90	-0.22	0.87	±5	2023/5/1
835	Head	22.7	0.911	41.930	0.90	41.50	1.22	1.04	±5	2023/5/2
1750	Head	22.6	1.316	40.209	1.37	40.10	-3.94	0.27	±5	2023/5/3
1900	Head	22.7	1.406	40.194	1.40	40.00	0.43	0.49	±5	2023/5/4
2300	Head	22.7	1.652	39.636	1.67	39.50	-1.08	0.34	±5	2023/5/5
2600	Head	22.8	2.030	40.346	1.96	39.00	3.57	3.45	±5	2023/5/6
3500	Head	22.6	2.879	38.500	2.91	37.90	-1.07	1.58	±5	2023/5/7
3700	Head	22.7	3.076	38.038	3.12	37.70	-1.41	0.90	±5	2023/5/8
3900	Head	22.6	3.279	37.617	3.32	37.50	-1.23	0.31	±5	2023/5/9
750	Head	22.7	0.900	41.184	0.89	41.90	1.12	-1.71	±5	2023/5/10
835	Head	22.7	0.930	40.910	0.90	41.50	3.33	-1.42	±5	2023/5/11
1750	Head	22.8	1.410	40.671	1.37	40.10	2.92	1.42	±5	2023/5/12
1900	Head	22.6	1.398	41.444	1.40	40.00	-0.14	3.61	±5	2023/5/13
2300	Head	22.9	1.720	39.459	1.67	39.50	2.99	-0.10	±5	2023/5/14
2600	Head	22.6	2.013	40.642	1.96	39.00	2.70	4.21	±5	2023/5/15
3500	Head	22.7	2.810	38.710	2.91	37.90	-3.44	2.14	±5	2023/5/16
3700	Head	22.8	2.988	38.359	3.12	37.70	-4.23	1.75	±5	2023/5/17
3900	Head	22.8	3.171	38.036	3.32	37.50	-4.49	1.43	±5	2023/5/18
2450	Head	22.6	1.810	38.600	1.80	39.20	0.56	-1.53	±5	2023/5/19
5250	Head	22.9	4.580	36.300	4.71	35.90	-2.76	1.11	±5	2023/5/21
5600	Head	22.8	4.950	35.700	5.07	35.50	-2.37	0.56	±5	2023/5/23
5750	Head	22.7	5.130	35.600	5.22	35.40	-1.72	0.56	±5	2023/5/25
750	Head	22.7	0.903	41.400	0.89	41.90	1.46	-1.19	±5	2023/5/25
835	Head	22.7	0.934	41.200	0.90	41.50	3.78	-0.72	±5	2023/5/25
1750	Head	22.7	1.430	40.400	1.37	40.10	4.38	0.75	±5	2023/5/31
1900	Head	22.8	1.400	40.200	1.40	40.00	0.00	0.50	±5	2023/5/26
2300	Head	22.8	1.720	38.700	1.67	39.50	2.99	-2.03	±5	2023/5/28
2600	Head	22.6	1.930	38.200	1.96	39.00	-1.53	-2.05	±5	2023/5/29
3500	Head	22.8	2.830	39.100	2.91	37.90	-2.75	3.17	±5	2023/6/3
3700	Head	22.7	3.040	38.200	3.12	37.70	-2.56	1.33	±5	2023/6/3
3900	Head	22.9	3.230	38.400	3.32	37.50	-2.71	2.40	±5	2023/6/3



### 12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.


<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2023/4/22	750	Head	50	1087	3293	1303	0.398	8.58	7.96	-7.23
2023/4/23	835	Head	50	4d091	3293	1303	0.478	9.45	9.56	1.16
2023/4/24	1750	Head	50	1090	3293	1303	1.810	37.00	36.2	-2.16
2023/4/25	1900	Head	50	5d182	3293	1303	2.030	39.60	40.6	2.53
2023/4/26	2300	Head	50	1055	3293	1303	2.460	47.70	49.2	3.14
2023/4/27	2600	Head	50	1061	3293	1303	2.700	56.60	54	-4.59
2023/4/28	3500	Head	50	1037	3578	1303	3.130	68.00	62.6	-7.94
2023/4/29	3700	Head	50	1008	3578	1303	3.390	67.60	67.8	0.30
2023/4/30	3900	Head	50	1048	3578	1303	3.270	69.10	65.4	-5.35
2023/5/1	750	Head	50	1087	3293	1303	0.396	8.58	7.92	-7.69
2023/5/2	835	Head	50	4d091	3293	1303	0.464	9.45	9.28	-1.80
2023/5/3	1750	Head	50	1090	3293	1303	1.740	37.00	34.8	-5.95
2023/5/4	1900	Head	50	5d182	3293	1303	1.990	39.60	39.8	0.51
2023/5/5	2300	Head	50	1055	3293	1303	2.360	47.70	47.2	-1.05
2023/5/6	2600	Head	50	1061	3293	1303	2.730	56.60	54.6	-3.53
2023/5/7	3500	Head	50	1037	3578	1303	3.200	68.00	64	-5.88
2023/5/8	3700	Head	50	1008	3578	1303	3.470	67.60	69.4	2.66
2023/5/9	3900	Head	50	1048	3578	1303	3.390	69.10	67.8	-1.88
2023/5/10	750	Head	50	1087	3293	1303	0.400	8.58	8.00	-6.76
2023/5/11	835	Head	50	4d091	3293	1303	0.474	9.45	9.48	0.32
2023/5/12	1750	Head	50	1090	3293	1303	1.860	37.00	37.2	0.54
2023/5/13	1900	Head	50	5d182	3293	1303	1.980	39.60	39.6	0.00
2023/5/14	2300	Head	50	1055	3293	1303	2.460	47.70	49.2	3.14
2023/5/15	2600	Head	50	1061	3293	1303	2.710	56.60	54.2	-4.24
2023/5/16	3500	Head	50	1037	3578	1303	3.130	68.00	62.6	-7.94
2023/5/17	3700	Head	50	1008	3578	1303	3.390	67.60	67.8	0.30
2023/5/18	3900	Head	50	1048	3578	1303	3.280	69.10	65.6	-5.07
2023/5/19	2450	Head	50	1095	7734	1691	2.440	52.00	48.8	-6.15
2023/5/21	5250	Head	50	1113	7734	1691	3.760	81.50	75.2	-7.73
2023/5/23	5600	Head	50	1113	7734	1691	3.800	82.60	76	-7.99
2023/5/25	5750	Head	50	1113	7734	1691	3.740	80.80	74.8	-7.43
2023/5/25	750	Head	50	1087	7734	1691	0.396	8.58	7.92	-7.69
2023/5/25	835	Head	50	4d091	7734	1691	0.466	9.45	9.32	-1.38
2023/5/31	1750	Head	50	1090	7734	1691	1.940	37.00	38.8	4.86
2023/5/26	1900	Head	50	5d182	7734	1691	1.990	39.60	39.8	0.51
2023/5/28	2300	Head	50	1055	7734	1691	2.300	47.70	46	-3.56
2023/5/29	2600	Head	50	1061	7734	1691	2.610	56.60	52.2	-7.77
2023/6/3	3500	Head	50	1037	7734	1691	3.330	68.00	66.6	-2.06
2023/6/3	3700	Head	50	1008	7734	1691	3.110	67.60	62.2	-7.99
2023/6/3	3900	Head	50	1048	7734	1691	3.300	69.10	66	-4.49



<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2023/4/22	750	Head	50	1087	3293	1303	0.262	5.65	5.24	-7.26
2023/4/23	835	Head	50	4d091	3293	1303	0.313	6.22	6.26	0.64
2023/4/24	1750	Head	50	1090	3293	1303	0.966	19.50	19.32	-0.92
2023/4/25	1900	Head	50	5d182	3293	1303	1.050	20.20	21	3.96
2023/4/26	2300	Head	50	1055	3293	1303	1.170	22.90	23.4	2.18
2023/4/27	2600	Head	50	1061	3293	1303	1.180	25.10	23.6	-5.98
2023/4/28	3500	Head	50	1037	3578	1303	1.200	25.40	24	-5.51
2023/4/29	3700	Head	50	1008	3578	1303	1.260	24.40	25.2	3.28
2023/4/30	3900	Head	50	1048	3578	1303	1.160	24.10	23.2	-3.73
2023/5/1	750	Head	50	1087	3293	1303	0.270	5.65	5.4	-4.42
2023/5/2	835	Head	50	4d091	3293	1303	0.304	6.22	6.08	-2.25
2023/5/3	1750	Head	50	1090	3293	1303	0.926	19.50	18.52	-5.03
2023/5/4	1900	Head	50	5d182	3293	1303	1.030	20.20	20.6	1.98
2023/5/5	2300	Head	50	1055	3293	1303	1.130	22.90	22.6	-1.31
2023/5/6	2600	Head	50	1061	3293	1303	1.240	25.10	24.8	-1.20
2023/5/7	3500	Head	50	1037	3578	1303	1.230	25.40	24.6	-3.15
2023/5/8	3700	Head	50	1008	3578	1303	1.290	24.40	25.8	5.74
2023/5/9	3900	Head	50	1048	3578	1303	1.200	24.10	24	-0.41
2023/5/10	750	Head	50	1087	3293	1303	0.273	5.65	5.46	-3.36
2023/5/11	835	Head	50	4d091	3293	1303	0.310	6.22	6.2	-0.32
2023/5/12	1750	Head	50	1090	3293	1303	0.991	19.50	19.82	1.64
2023/5/13	1900	Head	50	5d182	3293	1303	1.020	20.20	20.4	0.99
2023/5/14	2300	Head	50	1055	3293	1303	1.170	22.90	23.4	2.18
2023/5/15	2600	Head	50	1061	3293	1303	1.230	25.10	24.6	-1.99
2023/5/16	3500	Head	50	1037	3578	1303	1.200	25.40	24	-5.51
2023/5/17	3700	Head	50	1008	3578	1303	1.250	24.40	25	2.46
2023/5/18	3900	Head	50	1048	3578	1303	1.160	24.10	23.2	-3.73
2023/5/19	2450	Head	50	1095	7734	1691	1.150	24.60	23	-6.50
2023/5/21	5250	Head	50	1113	7734	1691	1.120	23.30	22.4	-3.86
2023/5/23	5600	Head	50	1113	7734	1691	1.100	23.70	22	-7.17
2023/5/25	5750	Head	50	1113	7734	1691	1.090	23.00	21.8	-5.22
2023/5/25	750	Head	50	1087	7734	1691	0.263	5.65	5.26	-6.90
2023/5/25	835	Head	50	4d091	7734	1691	0.303	6.22	6.06	-2.57
2023/5/31	1750	Head	50	1090	7734	1691	0.965	19.50	19.3	-1.03
2023/5/26	1900	Head	50	5d182	7734	1691	1.060	20.20	21.2	4.95
2023/5/28	2300	Head	50	1055	7734	1691	1.100	22.90	22	-3.93
2023/5/29	2600	Head	50	1061	7734	1691	1.180	25.10	23.6	-5.98
2023/6/3	3500	Head	50	1037	7734	1691	1.310	25.40	26.2	3.15
2023/6/3	3700	Head	50	1008	7734	1691	1.130	24.40	22.6	-7.38
2023/6/3	3900	Head	50	1048	7734	1691	1.210	24.10	24.2	0.41

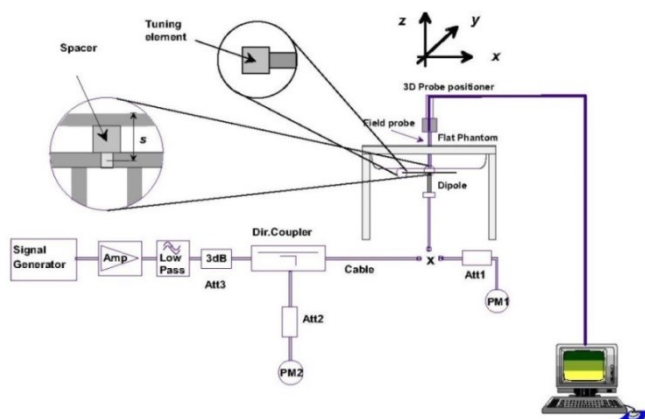

**Fig 11.3.1 System Performance Check Setup**




**Fig 11.3.2 Setup Photo**




### **13. RF Exposure Positions**

#### **13.1 Ear and handset reference point**


Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

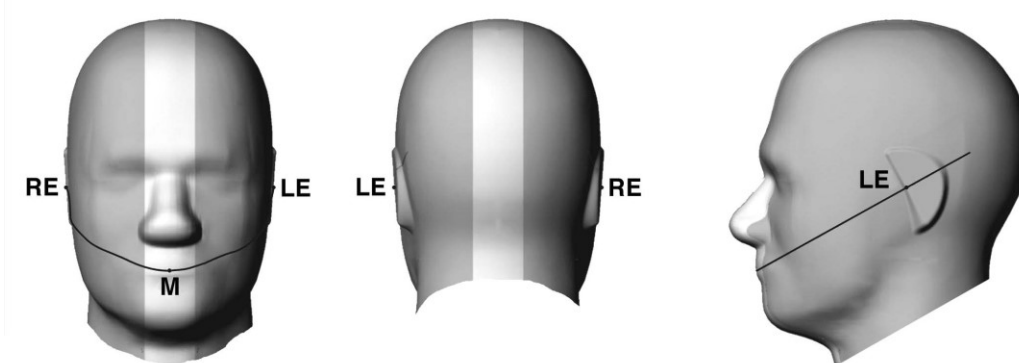

**Fig 12.1.1 Front, back, and side views of SAM twin phantom**

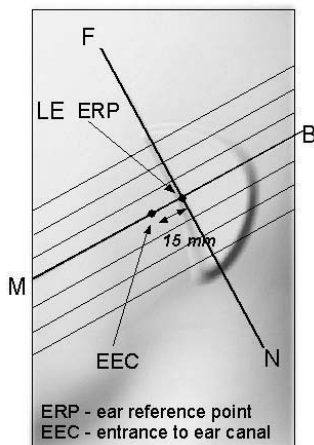

**Fig 12.1.2 Close-up side view of phantom showing the ear region.**

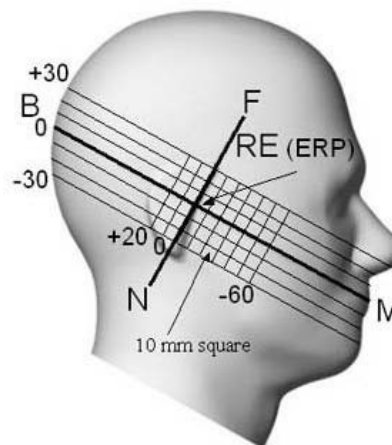

**Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations**

### 13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

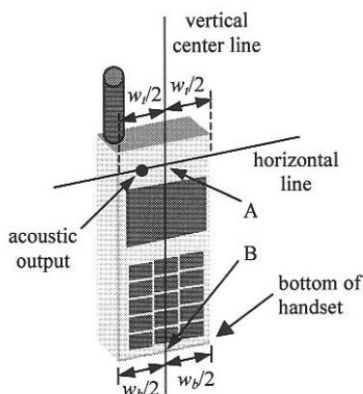


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

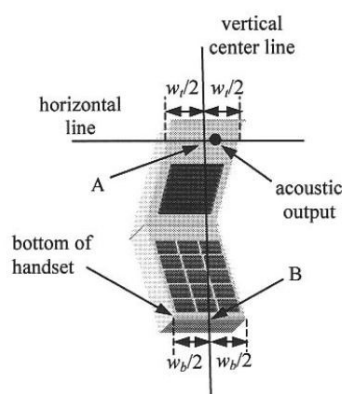


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

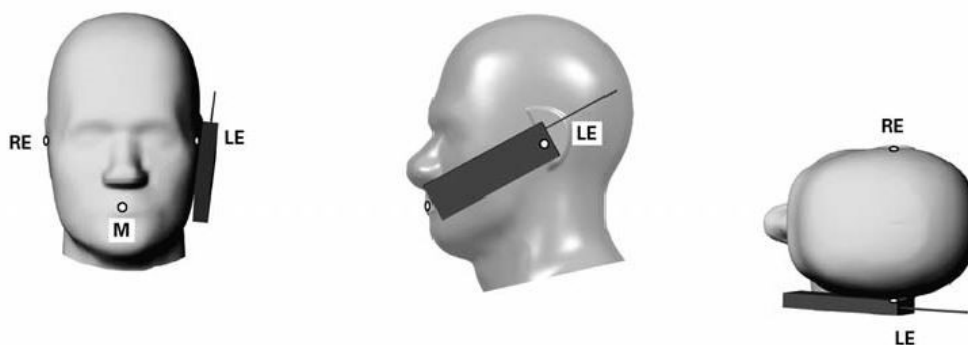


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

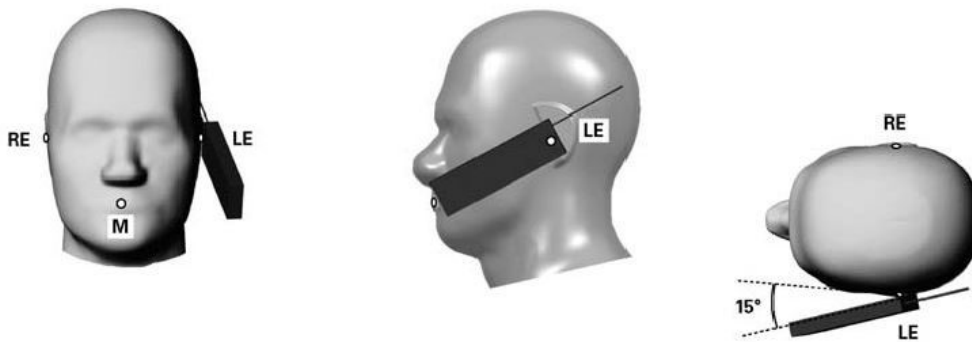


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

### 13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

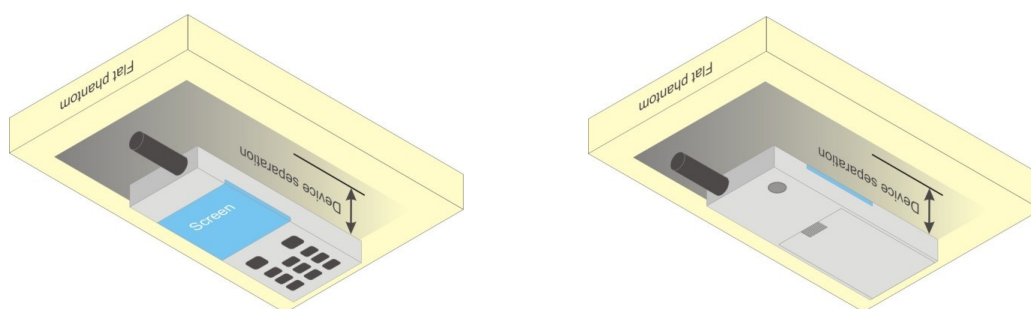


Fig 12.4 Body Worn Position

### 13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### 13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## **14. Conducted RF Output Power (Unit: dBm)**

The detailed conducted power table can refer to Appendix E.

### **<GSM Conducted Power>**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### **<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

### **HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_o/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_o/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_o/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**



**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

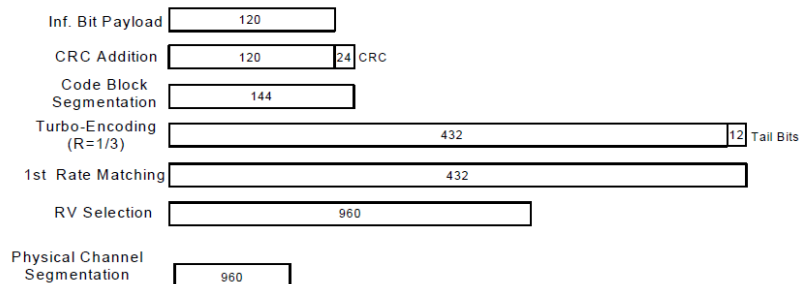

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK) Setup Configuration**



**<WCDMA Conducted Power>**


**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41 / B48; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

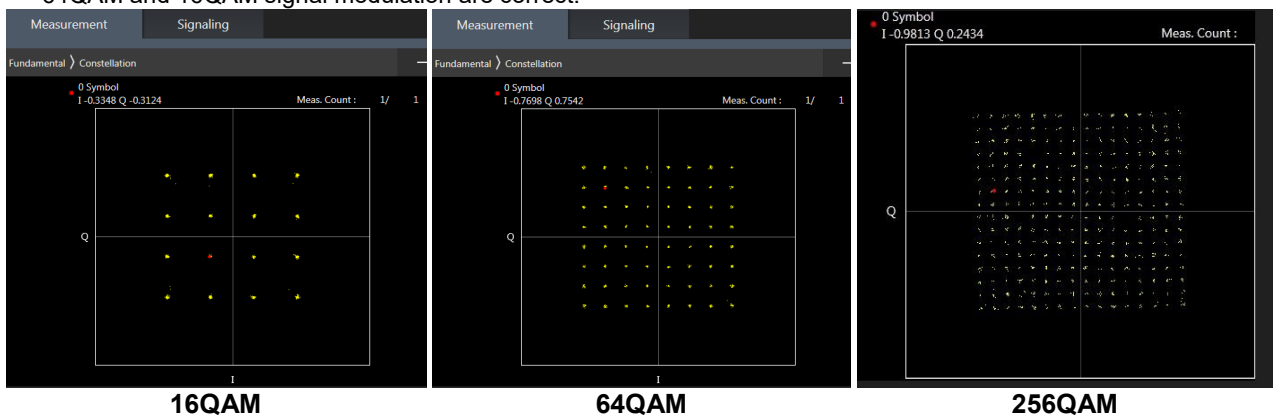

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

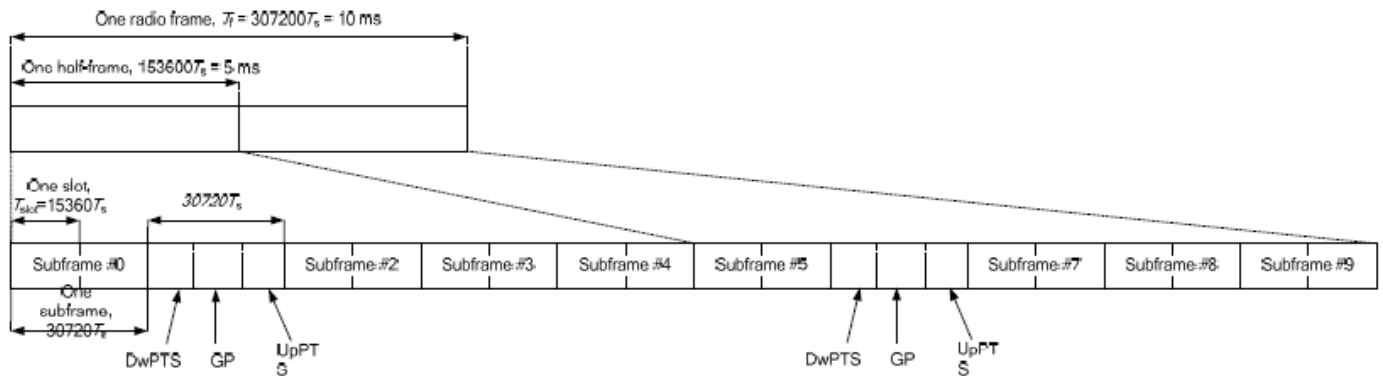


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	D	S	U	U	D	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts	
1	19760 · Ts			20480 · Ts			
2	21952 · Ts			23040 · Ts			
3	24144 · Ts			25600 · Ts			
4	26336 · Ts	4384 · Ts	5120 · Ts	7680 · Ts	4384 · Ts	5120 · Ts	
5	6592 · Ts			20480 · Ts			
6	19760 · Ts			23040 · Ts			
7	21952 · Ts			12800 · Ts			
8	24144 · Ts			-			-
9	13168 · Ts	-	-	-	-	-	

Special subframe (30720·T <sub>s</sub> ): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T <sub>s</sub> ): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $43.3\%/42.9\% = 1.009$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

For LTE TDD Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power, but Only LTE Band 29/46 is limited to Scell.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation			4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
1	CA_2A-12A	4CC-229	72	CA_4A-4A-71A		215	CA_12A-30A-66A-66A	
2	CA_2A-13A	4CC-232	73	CA_4A-4A-7A		216	CA_12B-66A-66A	
3	CA_2A-14A	4CC-237	74	CA_4A-5A-30A		217	CA_13A-46C-66A	
4	CA_2A-29A	3CC-142	75	CA_4A-5B	4CC-274	218	CA_13A-46D	
5	CA_2A-2A	3CC-144	76	CA_4A-7A-12A		219	CA_13A-48A-48C	
6	CA_2A-30A	4CC-260	77	CA_4A-7A-7A	4CC-275	220	CA_13A-48A-66B	
7	CA_2A-46A	3CC-157	78	CA_4A-7C	4CC-276	221	CA_13A-48A-66C	
8	CA_2A-48A	3CC-161	79	CA_5A-30A-66A	4CC-317	222	CA_13A-48C-66A	
9	CA_2A-4A	3CC-167	80	CA_5A-46A-66A		223	CA_13A-48D	
10	CA_2A-5A	3CC-170	81	CA_5A-46C	4CC-318	224	CA_13A-66A-66B	
11	CA_2A-66A	3CC-177	82	CA_5A-48A-66A	4CC-320	225	CA_14A-30A-66A-66A	
12	CA_2A-71A	3CC-168	83	CA_5A-48C	4CC-278	226	CA_14A-66A-66A-66A	
13	CA_2A-7A	3CC-180	84	CA_5A-5A-66A	4CC-279	227	CA_25A-41D	
14	CA_2C	3CC-186	85	CA_5A-66A-66A	4CC-280	228	CA_29A-30A-66A-66A	
15	CA_4A-12A	3CC-163	86	CA_5A-66B	4CC-281	229	CA_2A-12A-66A-66A	
16	CA_4A-13A	3CC-164	87	CA_5A-66C	4CC-282	230	CA_2A-12A-66C	
17	CA_4A-17A		88	CA_5A-7A-66A	4CC-326	231	CA_2A-12B-66A	
18	CA_4A-29A	3CC-165	89	CA_5A-7A-7A	4CC-283	232	CA_2A-13A-46C	
19	CA_4A-30A	3CC-208	90	CA_5A-7C	4CC-327	233	CA_2A-13A-48C	
20	CA_4A-46A	3CC-209	91	CA_5B-30A	4CC-91	234	CA_2A-13A-66A-66A	
21	CA_4A-48A		92	CA_5B-46A		235	CA_2A-13A-66B	
22	CA_4A-4A	3CC-166	93	CA_5B-66A		236	CA_2A-13A-66C	
23	CA_4A-5A	3CC-167	94	CA_66A-66A-66A	4CC-286	237	CA_2A-14A-66A-66A	
24	CA_4A-71A	3CC-168	95	CA_66A-66A-71A	4CC-287	238	CA_2A-2A-12A-30A	
25	CA_4A-7A	3CC-169	96	CA_66A-66B	4CC-288	239	CA_2A-2A-12A-66A	
26	CA_5A-30A	3CC-170	97	CA_66A-66C		240	CA_2A-2A-12B	
27	CA_5A-46A	3CC-171	98	CA_66C-71A	4CC-289	241	CA_2A-2A-13A-66A	
28	CA_5A-48A	3CC-172	99	CA_7A-12A-66A	4CC-333	242	CA_2A-2A-14A-30A	
29	CA_5A-5A	3CC-84	100	CA_7A-13A-66A		243	CA_2A-2A-14A-66A	
30	CA_5A-66A	3CC-173	101	CA_7A-25A-25A	4CC-334	244	CA_2A-2A-29A-30A	
31	CA_5A-7A	3CC-88	102	CA_7A-29A-66A	4CC-335	245	CA_2A-2A-30A-66A	
32	CA_5B	3CC-91	103	CA_7A-66A-66A	4CC-336	246	CA_2A-2A-46C	
33	CA_66A-66A	3CC-95	104	CA_7A-7A-13A	4CC-291	247	CA_2A-2A-4A-12A	
34	CA_66A-71A	3CC-177	105	CA_7A-7A-25A	4CC-334	248	CA_2A-2A-4A-4A	
35	CA_66B	3CC-178	106	CA_7A-7A-29A	4CC-355	249	CA_2A-2A-4A-5A	
36	CA_66C	3CC-179	107	CA_7A-7A-66A	4CC-336	250	CA_2A-2A-4A-71A	
37	CA_7A-12A	3CC-99	108	CA_7C-13A	4CC-337	251	CA_2A-2A-5A-30A	
38	CA_7A-13A	3CC-100	109	CA_7C-29A		252	CA_2A-2A-5A-66A	
39	CA_7A-25A	3CC-101	110	CA_7C-66A	4CC-338	253	CA_2A-2A-5B	
40	CA_7A-29A	3CC-102	111	CA_12A-30A-66A	4CC-215	254	CA_2A-2A-66A-66A	
41	CA_7A-66A	3CC-183	112	CA_12A-48C		255	CA_2A-2A-66A-71A	
42	CA_7A-7A	3CC-184	113	CA_12A-66A-66A	4CC-229	256	CA_2A-2A-66B	
43	CA_7B		114	CA_12A-66C	4CC-230	257	CA_2A-2A-66C	
44	CA_7C	3CC-78	115	CA_12B-66A	4CC-216	258	CA_2A-2A-7A-12A	



45	CA_12A-30A	3CC-111	116	CA_13A-46A-46A		259	CA_2A-2A-7A-66A	
46	CA_12A-46A		117	CA_13A-46A-66A		260	CA_2A-30A-66A-66A	
47	CA_12A-48A		118	CA_13A-46C	4CC-217	261	CA_2A-46A-46C	
48	CA_12A-66A	3CC-99	119	CA_13A-48A-48A		262	CA_2A-46A-48C	
49	CA_12B	3CC-115	120	CA_13A-48A-66A		263	CA_2A-46A-66A-66A	
50	CA_13A-46A	3CC-117	121	CA_13A-48C	4CC-222	264	CA_2A-46C-48A	
51	CA_13A-48A	3CC-120	122	CA_13A-66A-66A	4CC-234	265	CA_2A-46C-66A	
52	CA_13A-66A	3CC-100	123	CA_13A-66B	4CC-235	266	CA_2A-46D	
53	CA_14A-30A	3CC-125	124	CA_13A-66C	4CC-236	267	CA_2A-48A-48C	
54	CA_14A-66A	3CC-243	125	CA_14A-30A-66A	4CC-225	268	CA_2A-48A-66A-66A	
55	CA_25A-25A	3CC-128	126	CA_14A-66A-66A	4CC-237	269	CA_2A-48C-66A	
56	CA_25A-26A	3CC-128	127	/	/	270	CA_2A-48D	
57	CA_25A-41A		128	CA_25A-25A-26A		271	CA_2A-4A-12B	
58	CA_25A-66A	3CC-129	129	CA_25A-25A-66A		272	CA_2A-4A-4A-12A	
59	CA_26A-41A		130	CA_25A-41C		273	CA_2A-4A-4A-5A	
60	CA_29A-30A	3CC-132	131	CA_26A-41C		274	CA_2A-4A-5B	
61	CA_29A-66A	3CC-143	132	CA_29A-30A-66A	4CC-228	275	CA_2A-4A-7A-7A	
62	CA_30A-66A	3CC-132	133	CA_29A-66A-66A	4CC-228	276	CA_2A-4A-7C	
63	/	/	134	CA_2A-12A-30A	4CC-238	277	CA_2A-5A-46C	
64	CA_41A-41A		135	CA_2A-12A-66A	4CC-239	278	CA_2A-5A-48C	
65	CA_41C	3CC-130	136	CA_2A-12B	4CC-240	279	CA_2A-5A-5A-66A	
66	CA_46A-66A	3CC-117	137	CA_2A-13A-46A		280	CA_2A-5A-66A-66A	
67	CA_48A-48A	3CC-119	138	CA_2A-13A-48A		281	CA_2A-5A-66B	
68	CA_48A-66A	3CC-120	139	CA_2A-13A-66A	4CC-234	282	CA_2A-5A-66C	
69	CA_48A-71A	3CC-198	140	CA_2A-14A-30A	4CC-242	283	CA_2A-5A-7A-7A	
70	CA_48B		141	CA_2A-14A-66A	4CC-243	284	CA_2A-5B-30A	
			142	CA_2A-29A-30A	4CC-244	285	CA_2A-5B-66A	
			143	CA_2A-29A-66A		286	CA_2A-66A-66A-66A	
			144	CA_2A-2A-12A	4CC-238	287	CA_2A-66A-66A-71A	
			145	CA_2A-2A-13A	4CC-241	288	CA_2A-66A-66B	
			146	CA_2A-2A-14A	4CC-242	289	CA_2A-66C-71A	
			147	CA_2A-2A-29A	4CC-244	290	CA_2A-7A-66A-66A	
			148	CA_2A-2A-30A	4CC-245	291	CA_2A-7A-7A-13A	
			149	CA_2A-2A-46A		292	CA_2A-7A-7A-29A	
			150	CA_2A-2A-4A		293	CA_2A-7A-7A-66A	
			151	CA_2A-2A-5A	4CC-247	294	CA_2A-7C-13A	
			152	CA_2A-2A-66A	4CC-251	295	CA_2A-7C-66A	
			153	CA_2A-2A-71A	4CC-255	296	CA_2C-66A-66A	
			154	CA_2A-2A-7A	4CC-258	297	CA_46A-46C-66A	
			155	CA_2A-30A-66A	4CC-260	298	CA_46A-48C-66A	
			156	CA_2A-46A-46A		299	CA_46C-48A-66A	
			157	CA_2A-46A-48A		300	CA_46C-66A-66A	
			158	CA_2A-46A-66A	4CC-263	301	CA_46D-66A	
			159	CA_2A-46C	4CC-264	302	CA_48A-48A-66B	
			160	CA_2A-48A-48A		303	CA_48A-48A-66C	
			161	CA_2A-48A-66A	4CC-268	304	CA_48A-48C-66A	
			162	CA_2A-48C	4CC-269	305	CA_48A-48D	
			163	CA_2A-4A-12A	4CC-247	306	CA_48C-48C	
			164	CA_2A-4A-13A		307	CA_48C-66A-66A	
			165	CA_2A-4A-29A		308	CA_48C-66B	
			166	CA_2A-4A-4A	4CC-272	309	CA_48C-66C	
			167	CA_2A-4A-5A	4CC-273	310	CA_48D-66A	
			168	CA_2A-4A-71A	4CC-250	311	CA_48E	
			169	CA_2A-4A-7A	4CC-275	312	CA_4A-46A-46C	
			170	CA_2A-5A-30A	4CC-251	313	CA_4A-46D	
			171	CA_2A-5A-46A		314	CA_4A-48D	



			172	CA_2A-5A-48A		315	CA_4A-4A-12B	
			173	CA_2A-5A-66A	4CC-280	316	CA_4A-4A-5B	
			174	CA_2A-5A-7A	4CC-283	317	CA_5A-30A-66A-66A	
			175	CA_2A-5B	4CC-284	318	CA_5A-46C-66A	
			176	CA_2A-66A-66A	4CC-286	319	CA_5A-46D	
			177	CA_2A-66A-71A	4CC-287	320	CA_5A-48A-66A-66A	
			178	CA_2A-66B	4CC-256	321	CA_5A-48C-66A	
			179	CA_2A-66C	4CC-257	322	CA_5A-48D	
			180	CA_2A-7A-12A	4CC-258	323	CA_5A-5A-66A-66A	
			181	CA_2A-7A-13A		324	CA_5A-5A-66B	
			182	CA_2A-7A-29A		325	CA_5A-5A-66C	
			183	CA_2A-7A-66A	4CC-290	326	CA_5A-7A-66A-66A	
			184	CA_2A-7A-7A	4CC-291	327	CA_5A-7C-66A	
			185	CA_2A-7C	4CC-294	328	CA_5B-30A-66A	
			186	CA_2C-12A		329	CA_5B-46C	
			187	CA_2C-66A	4CC-296	330	CA_5B-66A-66A	
			188	CA_30A-66A-66A	4CC-215	331	CA_5B-66B	
			189	CA_41A-41C		332	CA_5B-66C	
			190	CA_41D	4CC-227	333	CA_7A-12A-66A-66A	
			191	CA_46A-46A-66A		334	CA_7A-7A-25A-25A	
			192	CA_46A-48A-66A		335	CA_7A-7A-29A-66A	
			193	CA_46A-66A-66A	4CC-263	336	CA_7A-7A-66A-66A	
			194	CA_46A-66C		337	CA_7C-13A-66A	
			195	CA_46C-66A	4CC-297	338	CA_7C-66A-66A	
			196	CA_48A-48A-48A				
			197	CA_48A-48A-66A				
			198	CA_48A-48A-71A				
			199	CA_48A-48C	4CC-219			
			200	CA_48A-66A-66A	4CC-268			
			201	CA_48A-66B	4CC-302			
			202	CA_48A-66C	4CC-303			
			203	CA_48C-66A	4CC-304			
			204	CA_48C-71A				
			205	CA_48D	4CC-310			
			206	CA_4A-12A-30A				
			207	CA_4A-12B	4CC-271			
			208	CA_4A-29A-30A				
			209	CA_4A-46A-46A				
			210	CA_4A-46C				
			211	CA_4A-48C				
			212	CA_4A-4A-12A	4CC-272			
			213	CA_4A-4A-13A				
			214	CA_4A-4A-5A	4CC-273			



**LTE Carrier Aggregation Conducted Power (Downlink)**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink seven carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**LTE 4x4 MIMO (Downlink)**

This device supports downlink 4x4 MIMO operations for LTE Band 2/4/7/25/30/38/41/48/66 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/7/25/30/38/41/48/66

**LTE Carrier Aggregation Conducted Power (Uplink)**

LTE Uplink CA	2CC Uplink Carrier Aggregation			
	Main Antenna Tx	ASDiv-1 Tx	ASDiv-2 Tx	ASDiv-3 Tx
CA_5B	Ant0	Ant1	/	/
CA_66B	Ant3	Ant1	Ant2	Ant0
CA_66C	Ant3	Ant1	Ant2	Ant0
CA_7C	Ant3	Ant1	Ant2	Ant0
CA_41C	Ant3	Ant1	Ant2	Ant0
CA_48C	Ant3	Ant2	Ant5	Ant1

**<Intra-band>**

**General Note:**

- i. The device supports intra-band uplink carrier aggregation for LTE B5/7/66/41/48 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.
- v. LTE CA\_66B test was covered by CA\_66C; therefore, SAR was only assessed for CA\_66C.

**<Inter-band uplink carrier aggregation consideration>**

LTE Uplink CA	2CC Uplink Carrier Aggregation			
	Inter-band	Main Antenna Tx	ASDiv-1 Tx	ASDiv-2 Tx
CA_12A-30A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_12A-66A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_13A-66A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_14A-30A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_14A-66A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_2A-12A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_2A-13A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_2A-14A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_2A-30A	Ant3 + Ant1/Ant2/Ant0	Ant1 + Ant3/Ant2/Ant0	Ant2 + Ant3/Ant1/Ant0	Ant0 + Ant3/Ant1/Ant2
CA_2A-4A	Ant3 + Ant1/Ant2/Ant0	Ant1 + Ant3/Ant2/Ant0	Ant2 + Ant3/Ant1/Ant0	Ant0 + Ant3/Ant1/Ant2
CA_2A-5A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_2A-66A	Ant3 + Ant1/Ant2/Ant0	Ant1 + Ant3/Ant2/Ant0	Ant2 + Ant3/Ant1/Ant0	Ant0 + Ant3/Ant1/Ant2
CA_2A-7A	Ant3 + Ant1/Ant2/Ant0	Ant1 + Ant3/Ant2/Ant0	Ant2 + Ant3/Ant1/Ant0	Ant0 + Ant3/Ant1/Ant2
CA_4A-12A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_4A-13A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_4A-5A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1
CA_4A-7A	Ant3 + Ant1/Ant2/Ant0	Ant1 + Ant3/Ant2/Ant0	Ant2 + Ant3/Ant1/Ant0	Ant0 + Ant3/Ant1/Ant2
CA_5A-30A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_5A-66A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_5A-7A	Ant0 + Ant3/Ant1/Ant2	Ant1 + Ant3/Ant2/Ant0	/	/
CA_7A-8A	Ant3 + Ant0/Ant1	Ant1 + Ant0	Ant2 + Ant0/Ant1	Ant0 + Ant1

**General Note:**

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter CA bands to not exceed FCC limit. In Part 1 Report, simultaneous transmission compliance was evaluated with other Radios (WLAN or BT) using standalone LTE SAR mode.

### 5G NR Output Power (Unit: dBm)

#### **General Note:**

1. 5G NR n2/n5/n7/n12/n25/n30/n66/n71/n41/n77/n78 is NSA mode.
2. 5G NR n2/n5/n7/n12/n14/n25/n26/n30/n66/n70/n71/n41/n48/n77/n78 is SA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
  - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
  - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
  - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
  - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
  - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
  - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
  - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. This device supports HPUE for 5G NR n41/n77 with class 2 level, HPUE power has been measured separately. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
5. For 5G NR n41/n77 HPUE, 5G NR n41/n77 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
6. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
7. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
8. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
9. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
10. 5G NR n41/n77/n78/n48 supports UL MIMO.

**<3GPP 38.101 MPR for EN-DC>**

**Table 6.2.2-1 Maximum power reduction (MPR) for power class 3**

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$ $\leq 0.5^2$	$\leq 1.2^1$ $\leq 0.5^2$	$\leq 0.2^1$ 0 <sup>2</sup>
	QPSK		$\leq 1$	0
	16 QAM		$\leq 2$	$\leq 1$
	64 QAM		$\leq 2.5$	
	256 QAM		$\leq 4.5$	
CP-OFDM	QPSK		$\leq 3$	$\leq 1.5$
	16 QAM		$\leq 3$	$\leq 2$
	64 QAM		$\leq 3.5$	
	256 QAM		$\leq 6.5$	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

**Table 6.2.2-2 Maximum power reduction (MPR) for power class 2**

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5$	$\leq 0.5$	0
	QPSK	$\leq 3.5$	$\leq 1$	0
	16 QAM	$\leq 3.5$	$\leq 2$	$\leq 1$
	64 QAM	$\leq 3.5$	$\leq 2.5$	
	256 QAM		$\leq 4.5$	
CP-OFDM	QPSK	$\leq 3.5$	$\leq 3$	$\leq 1.5$
	16 QAM	$\leq 3.5$	$\leq 3$	$\leq 2$
	64 QAM		$\leq 3.5$	
	256 QAM		$\leq 6.5$	

**<EN-DC combination>**

ENDC	Main Antenna Tx		ASDiv-1 Tx		ASDiv-2 Tx		ASDiv-3 Tx	
	LTE TX	NR TX	LTE TX	NR TX	LTE TX	NR TX	LTE TX	NR TX
DC_12A_n25A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_12A_n2A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_12A_n30A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_12A_n41A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_12A_n66A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_12A_n77A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_12A_n78A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_13A_n2A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_13A_n66A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_13A_n77A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_13A_n78A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_14A_n2A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_14A_n30A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_14A_n66A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_14A_n77A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_25A_n41A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_25A_n78A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_26A_n25A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_26A_n41A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_2A_n12A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_2A_n30A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_2A_n41A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_2A_n5A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_2A_n66A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_2A_n71A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_2A_n77A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1



DC_2A_n78A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_30A_n2A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_30A_n5A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_30A_n66A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_30A_n77A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_48A_n2A	Ant3	Ant1/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant5	Ant3/Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0
DC_48A_n5A	Ant3	Ant0/Ant1	Ant2	Ant0/Ant1	Ant5	Ant0/Ant1	Ant1	Ant0
DC_48A_n66A	Ant3	Ant1/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant5	Ant3/Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0
DC_48A_n71A	Ant3	Ant0/Ant1	Ant2	Ant0/Ant1	Ant5	Ant0/Ant1	Ant1	Ant0
DC_4A_n41A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_4A_n78A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_5A_n2A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_5A_n30A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_5A_n66A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_5A_n77A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_5A_n78A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_66A_n12A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_66A_n25A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_66A_n2A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_66A_n30A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_66A_n41A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_66A_n5A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_66A_n71A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_66A_n77A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_66A_n78A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_66A_n7A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_71A_n2A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_71A_n41A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_71A_n66A	Ant0	Ant3/Ant1/Ant2	Ant1	Ant3/Ant2/Ant0	/	/	/	/
DC_71A_n78A	Ant0	Ant3/Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	/	/	/	/
DC_7A_n25A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_7A_n2A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_7A_n5A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_7A_n66A	Ant3	Ant1/Ant2/Ant0	Ant1	Ant3/Ant2/Ant0	Ant2	Ant3/Ant1/Ant0	Ant0	Ant3/Ant1/Ant2
DC_7A_n71A	Ant3	Ant0/Ant1	Ant1	Ant0	Ant2	Ant0/Ant1	Ant0	Ant1
DC_7A_n77A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1
DC_7A_n78A	Ant3	Ant2/Ant5/Ant1	Ant1	Ant3/Ant2/Ant5	Ant2	Ant3/Ant5/Ant1	Ant0	Ant3/Ant2/Ant5/Ant1

**NR UL MIMO Bands Configuration:**

NR UL MIMO	Main Antenna Tx	ASDiv-1 Tx
n41	ant3+ant1	ant2+ant0
n48	ant3+ant2	ant5+ant1
n77	ant3+ant2	ant5+ant1
n78	ant3+ant2	ant5+ant1

### <WLAN Conducted Power>

#### General Note:



1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
6. 802.11ax full tone and partial tone supported for WLAN2.4GHz/WLAN5GHz, after verification for the partial tone power level is far less than full tone power level, so we chose full tone power to be measured in this report.
7. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.



<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.72% for ANT4, 76.86% for ANT6 as following figure, Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

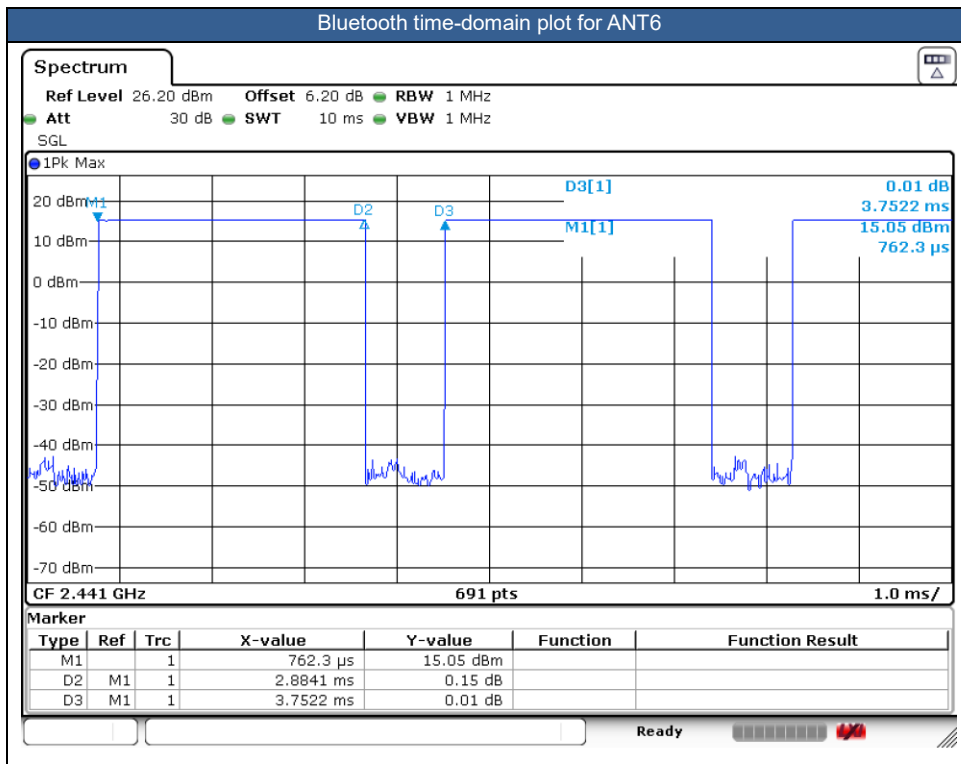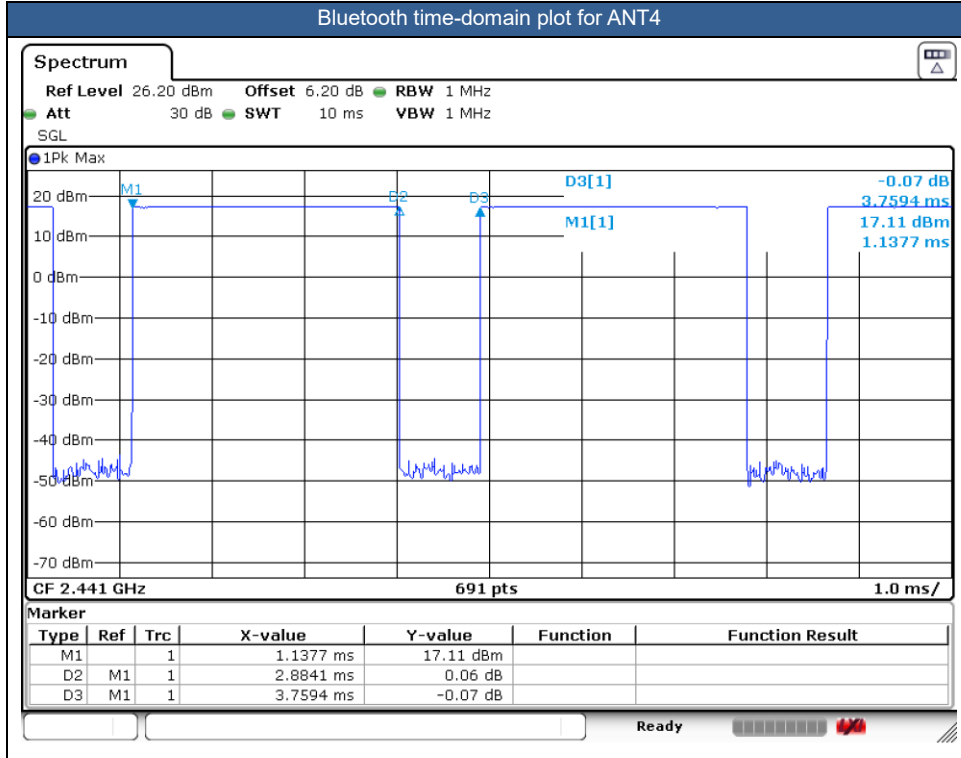





## **15. Antenna Location**

The detailed antenna location information can refer to SAR Test Setup Photos.

## 16. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) \*83.3%".
  - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
  - g. For TDD LTE SAR measurement of power class 2, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 43.3%/42.9% = 1.009 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or  $1.5$  W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or  $1.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is  $\geq 0.8$ W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management, Hall sensor and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. For WLAN when transmit simultaneous with WWAN, power reduction will be activated to head and Handheld. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
6. This device supports HPUE for LTE Band 41 and 5G NR n41/n77 with class 2 level, HPUE power has been measured separately. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
7. For 5G NR n41/n77 HPUE, 5G NR n41/n77 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
8. Per KDB648474 D04v01r03, when the EUT is in flip open configuration with smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the  $1.2$  W/kg SAR test reduction threshold.
  - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than  $1.2$ W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/7/12/13/14/25/26/30/66/38/41/48, 5G NR n2/n7/n12/n14/n25/n26/n30/n66/n70/n71/n41/n48/n77/n78, WLAN2.4/5.2GHz/5.8GHz, therefore product specific 10g



SAR is necessary.

- b. WLAN 5.3/5.5GHz/6GHz tested the product specific 10g SAR since it has no hotspot mode.
  - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
9. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
  10. Although the distance 1gSAR is greater than 0.8 W/kg at body-worn exposure conditions, the distance SAR verified the worst of the non-distance SAR and less than non-distance SAR, so there is no need to be tested other channels.
  11. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
  12. As long as either sensor was triggered, conducted power of MIMO mode for ant4 and ant5 could be reduced
  13. The EUT has two work states, flip open and flip close, SAR testing have been evaluated two states. For head mode, only flip open mode is performed SAR testing. When it is in flip close configuration since the diagonal dimension is < 160 mm, 10-g extremity SAR tests are not required. When it is in flip open configuration since the diagonal dimension is > 160 mm and < 200 mm. Therefore, 10-g extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Additional SAR tests for 10-g extremity SAR were evaluated per KDB 616217 Section 6.
  14. LTE B2/4/7/66 at ant0/1/2/3, 5GNR n2/7/66/38/41 at ant0/1/2/3 and 5GNR n77/78 at ant1/2/3/5 support different PAs for some antennas. For LTE B2/7 at ant0/1/2/3, LTE B4/66 at ant0/1/3, 5GNR n2/7/66/38/41 at ant0/1/2/3, 5GNR n77/78 at ant3/5, the maximum power of Main PA is higher than and very close to the other PA, for RF exposure, after verification all PAs in a same position, so choose the worst-case main PA to perform full SAR tested to ensure the RF exposure is compliance and other PA verify the worst case. For LTE B4/66 at ant2, 5GNR n77/78 at ant1/2, the maximum power of Main PA is less than and very close to the other PA, for RF exposure, after verification all PAs in a same position, so choose the worst-case other PA to perform full SAR tested to ensure the RF exposure is compliance and Main PA verify the worst case.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq$  ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq$  ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq$  1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41 / B48; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

**5G NR Note:**

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
  - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
  - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
  - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
  - d.  $\pi/2$  BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not  $\frac{1}{2}$  dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg,  $\pi/2$  BPSK /16QAM/64QAM/256QAM SAR testing are not required.
  - e. Smaller bandwidth output power for each RB allocation configuration for this device will not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg, smaller bandwidth SAR testing is not required for this device
  - f. For 5G FR1 n5 /n7/n12/n25/n26/n66/n71/n41 /n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WWAN bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is Pmax power, When Plimit power higher than Pmax power, the output power will be limited at Pmax, and so the SAR will use Pmax power to do the testing.

Exposure Condition	DSI	EUT Flip State	Trigger conditions
Head SAR-Standalone	DSI 2	Flip Open	Earpiece On
Head SAR-Simultaneous	DSI 2	Flip Open	Earpiece On
Hotspot Mode SAR	DSI 9	Flip Open	Hotspot On
Hotspot Mode SAR	DSI 10	Flip Close	Hotspot On
Body worn Mode SAR-Standalone	DSI 3	Flip Open	Sensor On
Body worn Mode SAR- Simultaneous	DSI 3	Flip Open	Sensor On
Body worn Mode SAR-Standalone	DSI 5	Flip Close	Sensor On
Body worn Mode SAR-Simultaneous	DSI 5	Flip Close	Sensor On
Extremity (Handheld) SAR-Standalone	DSI 6	Flip Open	Sensor On
Extremity (Handheld) SAR-Simultaneous	DSI 6	Flip Open	Sensor On
Sensor off SAR	DSI 4	Flip Open/Flip Close	Sensor Off