



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2343-2  
FCC ID : IHDT56AM5  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Jul. 10, 2023 ~ Jul. 12, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 7

    1.7. Test Software ..... 8

    1.8. Applicable Standards ..... 8

    1.9. Specification of Accessory ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1. Test Mode ..... 9

    2.2. Connection Diagram of Test System ..... 11

    2.3. Support Unit used in test configuration and system ..... 11

    2.4. EUT Operation Test Setup ..... 12

**3. TEST RESULT ..... 13**

    3.1. Test of AC Conducted Emission Measurement ..... 13

    3.2. Test of Radiated Emission Measurement ..... 17

**4. LIST OF MEASURING EQUIPMENT ..... 22**

**5. MEASUREMENT UNCERTAINTY ..... 23**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC352916-01	Rev. 01	Initial issue of report	Jul. 25, 2023



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.29 dB at 0.158 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.53 dB at 30.000 MHz

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2343-2
FCC ID	IHDT56AM5
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/NFC/FM
IMEI Code	Conduction: 353361260010979/353361260010987 for Sample 1 353361260020358/353361260020366 for Sample 2 Radiation: 353361260010979 for Sample 1 353361260020358 for Sample 2 353361260020630 for Sample 3
HW Version	DVT2
SW Version	TTD33.32
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT, the sample 1 is 1st source + Battery 1, the sample 2 is 2nd source + Battery 2 and the sample 3 is 3rd source + Battery 2. The differences could be referred to the XT2343-2\_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to full test and the sample 2/3 is verified for the difference
3. The device supports single P-SIM + E-SIM and Dual SIM.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz; 5G NR n78 : 3700 MHz ~ 3800 MHz; 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
<b>Rx Frequency</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n26 : 859 MHz ~ 894 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz; 5G NR n78 : 3700 MHz ~ 3800 MHz; 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz



	FM : 88 MHz ~ 108 MHz
<b>Antenna Type</b>	WWAN : PIFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna NFC: FPC + Ferrite Antenna FM : External Earphone Antenna
<b>Type of Modulation</b>	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH07-KS	CN1257	314309



### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

### 1.9. Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 1 (EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-102
AC Adapter 1 (UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-103
AC Adapter 1 (AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-105
AC Adapter 2 (US)	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2 (EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-102
AC Adapter 2 (UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-103
AC Adapter 2 (AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-105
AC Adapter 3 (US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3 (EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3 (UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3 (AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 4 (US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 4 (EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 4 (UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-203L
AC Adapter 4 (AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-205L
AC Adapter 5 (US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 5 (EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 5 (UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-203L
AC Adapter 5 (AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-205L
AC Adapter 6 (US)	Brand Name	Motorola(Chenyang)	Model Name	MC-201L
AC Adapter 6 (EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-202L
Battery 1	Brand Name	Motorola(ATL)	Model Name	PC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	PC50
USB Cable 1	Brand Name	Motorola (WASHIN)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	S928D95755





## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1 ) + SIM for Sample 1
	Mode 2: WCDMA Band 5 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2 (Charging from Adapter 2 ) + E-SIM for Sample 1
	Mode 3: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1(Charging from Adapter 3) + SIM for Sample 1
	Mode 4: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + SIM for Sample 1
	Mode 5: LTE Band 38 RX + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98MHz) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM for Sample 1
	Mode 6: LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1
	Mode 7: 5G N5 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD)+ SIM for Sample 1
	Mode 8: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + SIM for Sample 1
	Mode 9: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1(Charging from Adapter 4) + SIM for Sample 1
	Mode 10 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1(Charging from Adapter 5) + SIM for Sample 1
	Mode 11 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1(Charging from Adapter 6) + SIM for Sample 1
	Mode 12 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 2 + USB Cable2(Charging from Adapter 2) + SIM for Sample 2
	Mode 13 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery 2 + USB Cable2(Charging from Adapter 2) + SIM for Sample 2



Radiated Emissions	<p>Mode 1 : GSM 850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter 1 ) + SIM for Sample 1</p> <p>Mode 2 : WCDMA Band 5 Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2 (Charging from Adapter 2 ) + E-SIM for Sample 1</p> <p>Mode 3 : LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable1(Charging from Adapter 3) + SIM for Sample 1</p> <p>Mode 4 : LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook)+ EUT (eMMC) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 5 : LTE Band 38 RX + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(88MHz) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM for Sample 1</p> <p>Mode 6 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 7 : 5G N5 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + SIM for Sample 1</p> <p>Mode 8 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 9 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 4) + SIM for Sample 1</p> <p>Mode 10 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 5) + SIM for Sample 1</p> <p>Mode 11 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 6) + SIM for Sample 1</p> <p>Mode 12 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + Earphone + Battery 2 + USB Cable 1(Charging from Adapter 6) + SIM for Sample 2</p> <p>Mode 13 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM for Sample 2</p> <p>Mode 14 : LTE Band 41 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable 1(Charging from Adapter 6) + SIM for Sample 3</p>
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 3; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 11; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook/PC means data application transferred mode between EUT and Notebook/PC.</li> <li>4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 26/ 5G N5 and FM Rx, the worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

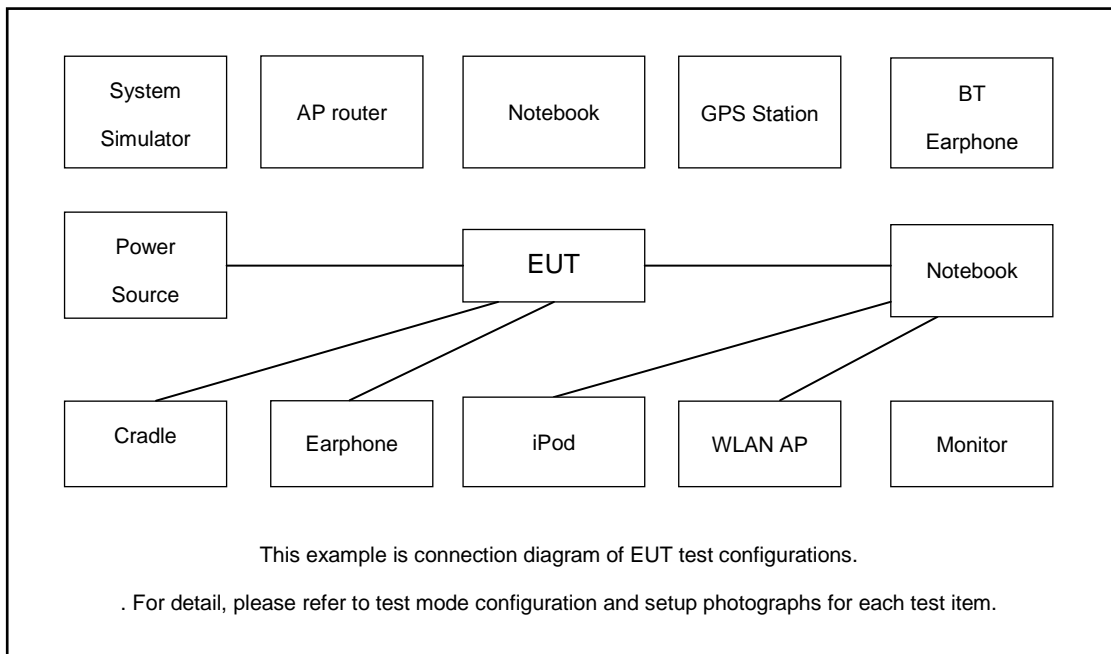

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
3.	5G NR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
6.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
7.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
8.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
9.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m



10.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
11.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
12.	Hard disk	KINGSHARE	KSP6120G	N/A	N/A	N/A
13.	SD Card	Kingston	8GB	N/A	N/A	N/A
14.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
15.	Earphone	Motorola	N/A	N/A	Unshielded, 1.2m	N/A

## 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

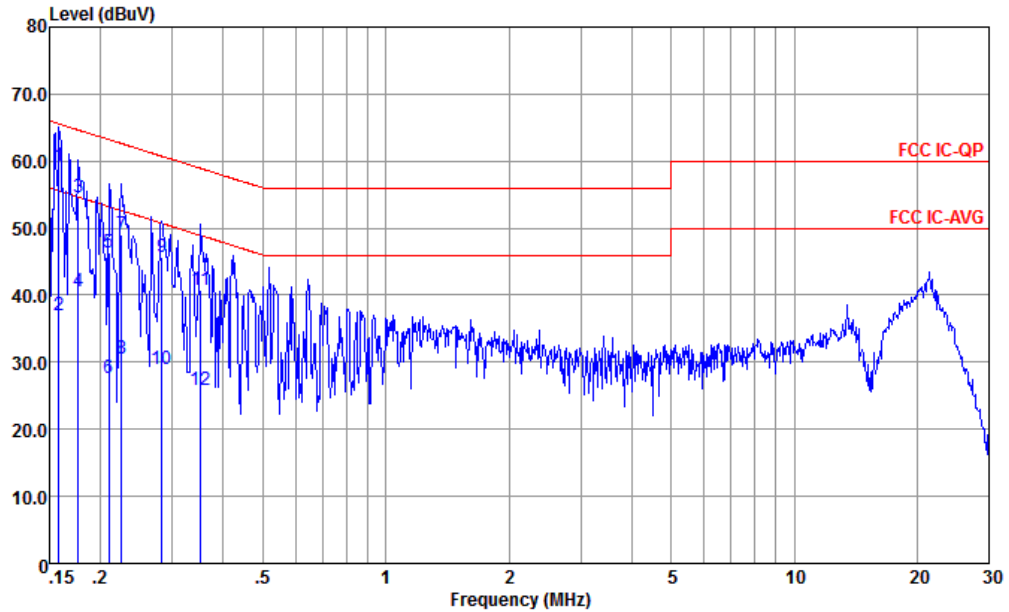


Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-L 2023 LINE

IMEI : 353361260010979/353361260010987 #6

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.158	59.27	-6.29	65.56	48.79	0.05	10.43	QP
2	0.158	37.07	-18.49	55.56	26.59	0.05	10.43	Average
3	0.177	54.66	-9.98	64.64	44.20	0.04	10.42	QP
4	0.177	40.66	-13.98	54.64	30.20	0.04	10.42	Average
5	0.209	46.34	-16.89	63.23	35.90	0.03	10.41	QP
6	0.209	27.64	-25.59	53.23	17.20	0.03	10.41	Average
7	0.226	49.03	-13.58	62.61	38.60	0.03	10.40	QP
8	0.226	30.63	-21.98	52.61	20.20	0.03	10.40	Average
9	0.283	45.60	-15.12	60.72	35.20	0.04	10.36	QP
10	0.283	28.90	-21.82	50.72	18.50	0.04	10.36	Average
11	0.352	40.84	-18.07	58.91	30.50	0.02	10.32	QP
12	0.352	25.94	-22.97	48.91	15.60	0.02	10.32	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

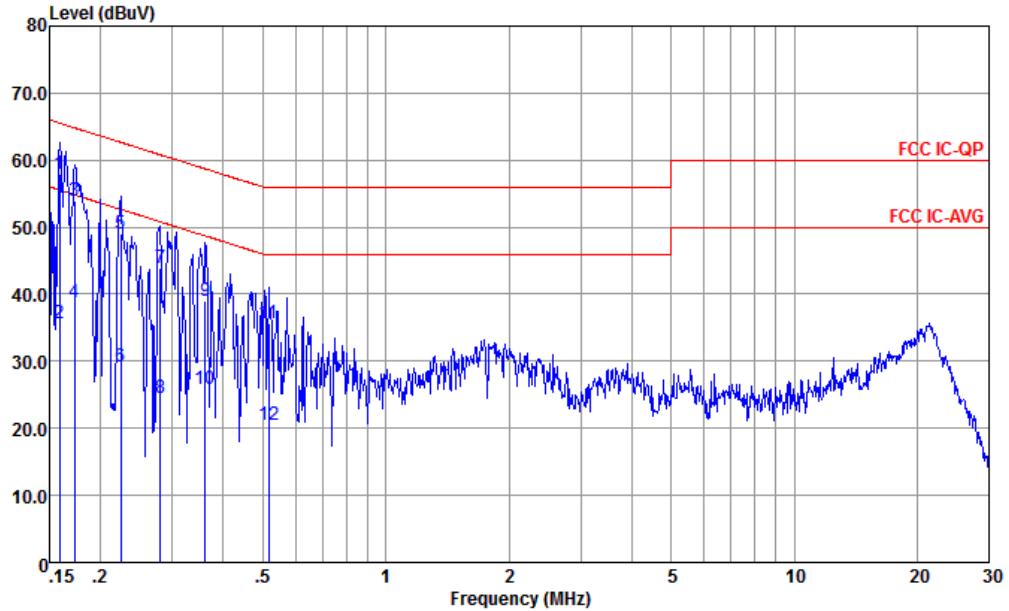

Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-N 2023 NEUTRAL

IMEI : 353361260010979/353361260010987 #6

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.159	57.97	-7.55	65.52	47.50	0.04	10.43	QP
2	0.159	35.67	-19.85	55.52	25.20	0.04	10.43	Average
3	0.173	53.97	-10.84	64.81	43.50	0.04	10.43	QP
4	0.173	38.77	-16.04	54.81	28.30	0.04	10.43	Average
5	0.224	48.92	-13.74	62.66	38.50	0.02	10.40	QP
6	0.224	29.22	-23.44	52.66	18.80	0.02	10.40	Average
7	0.280	43.94	-16.87	60.81	33.61	-0.03	10.36	QP
8	0.280	24.54	-26.27	50.81	14.21	-0.03	10.36	Average
9	0.361	39.07	-19.62	58.69	28.80	-0.05	10.32	QP
10	0.361	25.77	-22.92	48.69	15.50	-0.05	10.32	Average
11	0.516	35.64	-20.36	56.00	25.50	-0.07	10.21	QP
12	0.516	20.44	-25.56	46.00	10.30	-0.07	10.21	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest radiation.
5. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
6. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
8. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
9. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
10. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
11. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

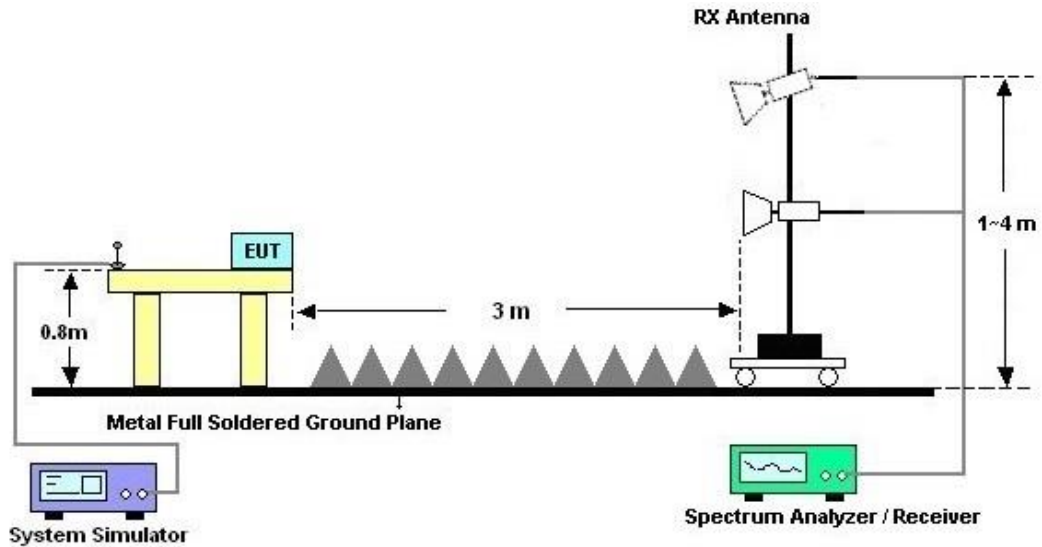



3.2.5. Test Result of Radiated Emission

Test Engineer :	chen hui	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

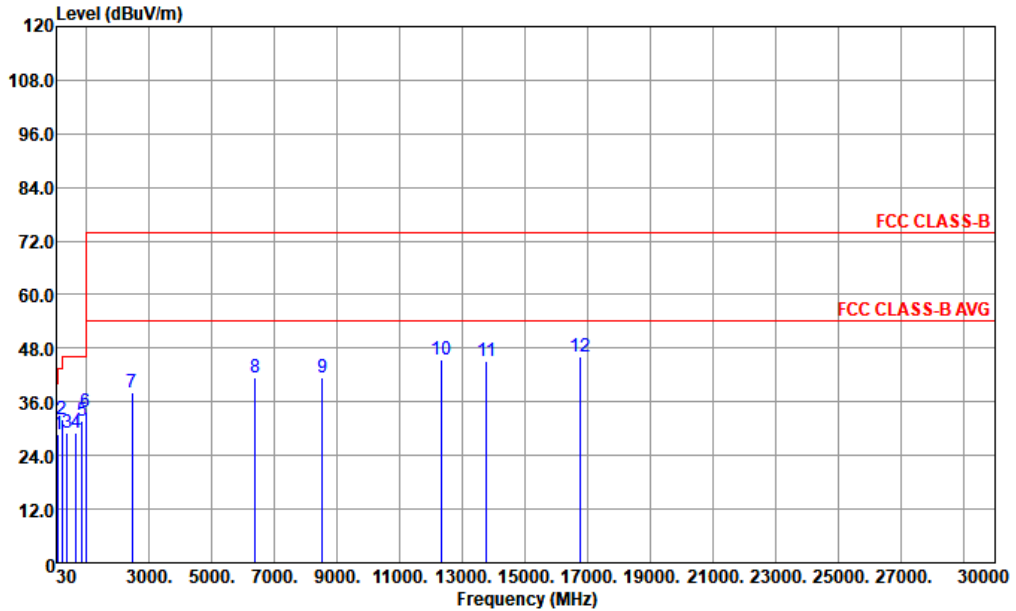


Site : 03CH07-KS  
 Condition : FCC CLASS-B 3m 3117 SN00240138 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	97.90	28.60	-14.90	43.50	43.60	15.61	1.44	32.05	---	---	Peak
2 p	204.60	32.10	-11.40	43.50	47.04	14.94	2.09	31.97	---	---	Peak
3	382.11	28.95	-17.05	46.00	37.10	21.05	2.85	32.05	---	---	Peak
4	662.44	28.97	-17.03	46.00	31.33	26.09	3.76	32.21	---	---	Peak
5	860.32	31.81	-14.19	46.00	29.04	30.02	4.27	31.52	---	---	Peak
6	973.81	33.61	-20.39	54.00	28.95	30.92	4.54	30.80	---	---	Peak
7	2445.00	38.15	-35.85	74.00	62.77	32.24	7.22	64.08	---	---	Peak
8	6389.00	41.59	-32.41	74.00	58.89	35.33	11.85	64.48	---	---	Peak
9	8531.00	41.61	-32.39	74.00	55.83	35.82	13.87	63.91	---	---	Peak
10	12322.00	45.60	-28.40	74.00	52.48	38.93	16.67	62.48	---	---	Peak
11	13767.00	45.14	-28.86	74.00	52.18	38.75	17.82	63.61	---	---	Peak
12	16742.00	46.13	-27.87	74.00	50.76	41.55	19.52	65.70	---	---	Peak



Test Engineer :	chen hui	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

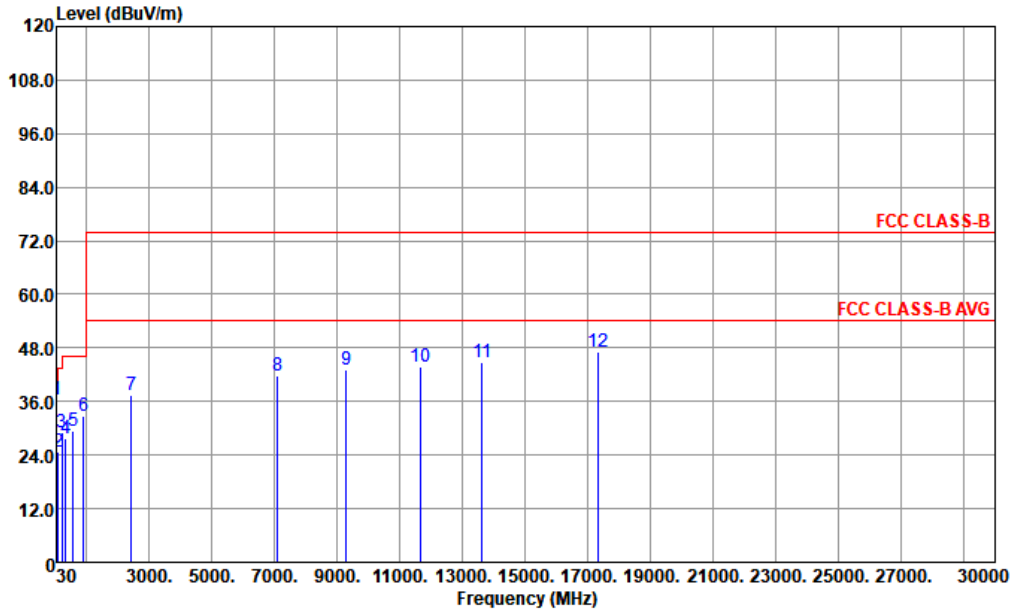

Site : 03CH07-KS  
 Condition : FCC CLASS-B 3m 3117 SN00240138 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 p	30.00	36.47	-3.53	40.00	42.97	25.12	0.50	32.12	100	144 Peak	
2	99.84	24.74	-18.76	43.50	39.48	15.85	1.46	32.05	---	---	Peak
3	202.66	29.05	-14.45	43.50	44.03	14.91	2.08	31.97	---	---	Peak
4	332.64	27.71	-18.29	46.00	37.28	19.80	2.66	32.03	---	---	Peak
5	574.17	29.27	-16.73	46.00	32.09	25.92	3.49	32.23	---	---	Peak
6	904.94	32.80	-13.20	46.00	30.58	29.12	4.38	31.28	---	---	Peak
7	2428.00	37.36	-36.64	74.00	62.02	32.22	7.19	64.07	---	---	Peak
8	7103.00	41.72	-32.28	74.00	57.20	35.60	12.68	63.76	---	---	Peak
9	9296.00	43.20	-30.80	74.00	55.86	36.39	14.43	63.48	---	---	Peak
10	11659.00	43.85	-30.15	74.00	51.47	38.39	16.23	62.24	---	---	Peak
11	13614.00	44.85	-29.15	74.00	51.78	38.78	17.70	63.41	---	---	Peak
12	17337.00	47.04	-26.96	74.00	51.65	41.23	19.94	65.78	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jul. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jul. 12, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jul. 12, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jul. 12, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 12, 2022	Jul. 10, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	Jul. 10, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 26, 2022	Jul. 10, 2023	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jul. 07, 2023	Jul. 10, 2023	Jul. 06, 2024	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 17, 2022	Jul. 10, 2023	Oct. 16, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	Jul. 10, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Jul. 10, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Jul. 10, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 10, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jul. 10, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jul. 10, 2023	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.20dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.86dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.24dB
---	--------