

01_HAC RF_GSM850_GSM Voice_Ch128_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 62.26 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.97 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 36.17 dBV/m	Grid 2 M4 36.42 dBV/m	Grid 3 M4 35.38 dBV/m
Grid 4 M4 36.57 dBV/m	Grid 5 M4 36.82 dBV/m	Grid 6 M4 36.08 dBV/m
Grid 7 M4 36.6 dBV/m	Grid 8 M4 36.97 dBV/m	Grid 9 M4 36.28 dBV/m

Cursor:

Total = 36.97 dBV/m

E Category: M4

Location: 0.5, 20.5, 7.7 mm

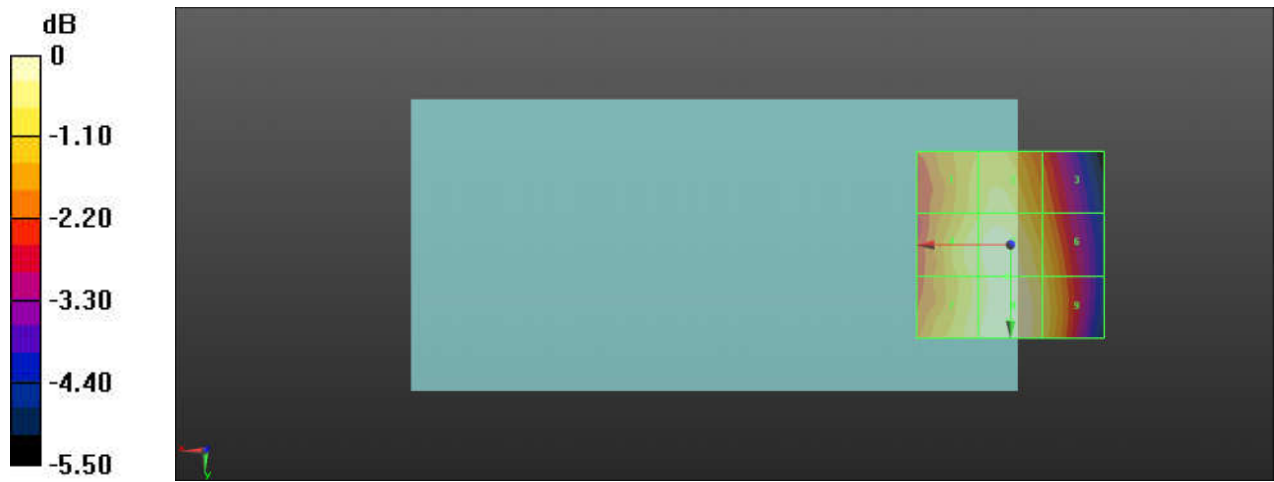

0 dB = 70.55 V/m = 36.97 dBV/m

02_HAC RF_GSM850_GSM Voice_Ch189_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 60.82 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.83 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 36.13 dBV/m	Grid 2 M4 36.36 dBV/m	Grid 3 M4 35.06 dBV/m
Grid 4 M4 36.48 dBV/m	Grid 5 M4 36.73 dBV/m	Grid 6 M4 35.93 dBV/m
Grid 7 M4 36.36 dBV/m	Grid 8 M4 36.83 dBV/m	Grid 9 M4 36.1 dBV/m

Cursor:

Total = 36.83 dBV/m

E Category: M4

Location: 0.5, 20.5, 7.7 mm

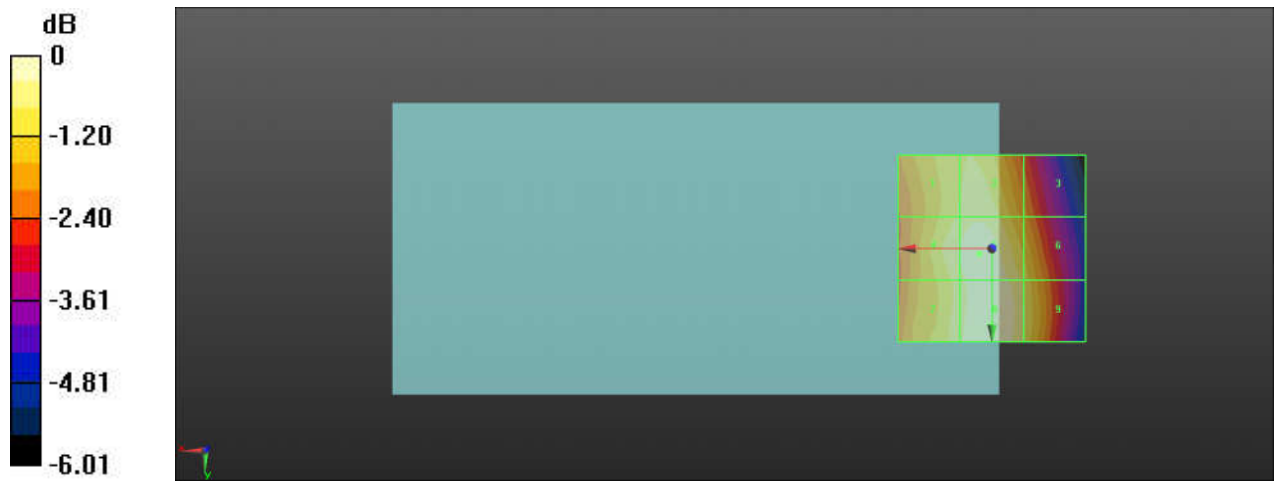

0 dB = 69.42 V/m = 36.83 dBV/m

03_HAC RF_GSM850_GSM Voice_Ch251_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 60.89 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.82 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 36.21 dBV/m	Grid 2 M4 36.48 dBV/m	Grid 3 M4 35.27 dBV/m
Grid 4 M4 36.53 dBV/m	Grid 5 M4 36.82 dBV/m	Grid 6 M4 36.03 dBV/m
Grid 7 M4 36.27 dBV/m	Grid 8 M4 36.8 dBV/m	Grid 9 M4 36.15 dBV/m

Cursor:

Total = 36.82 dBV/m

E Category: M4

Location: 3, 1, 7.7 mm

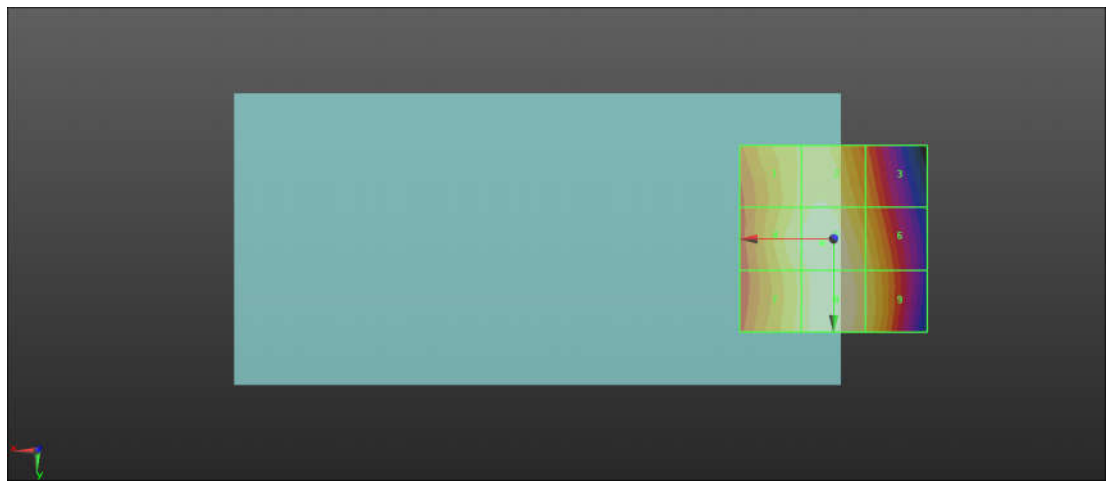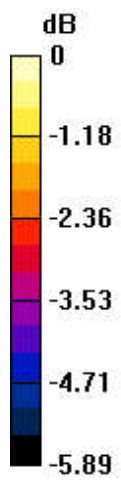

0 dB = 69.34 V/m = 36.82 dBV/m

04_HAC RF_GSM1900_GSM Voice_Ch512_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.46 V/m; Power Drift = 0.13 dB

Applied MIF = 3.63 dB

RF audio interference level = 27.71 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.41 dBV/m	Grid 2 M4 26.16 dBV/m	Grid 3 M4 22.05 dBV/m
Grid 4 M4 27.71 dBV/m	Grid 5 M4 26.55 dBV/m	Grid 6 M4 23.03 dBV/m
Grid 7 M4 27.42 dBV/m	Grid 8 M4 26.22 dBV/m	Grid 9 M4 22.51 dBV/m

Cursor:

Total = 27.71 dBV/m

E Category: M4

Location: 20, 4.5, 7.7 mm

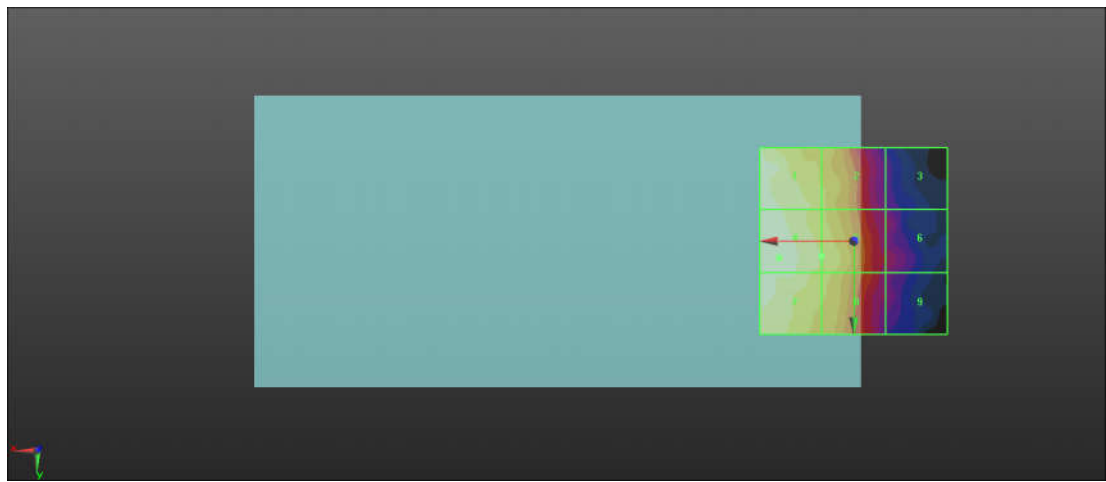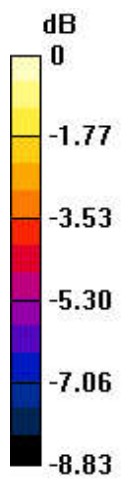

0 dB = 24.29 V/m = 27.71 dBV/m

05_HAC RF_GSM1900_GSM Voice_Ch661_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
 Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 14.67 V/m; Power Drift = 0.11 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 27.78 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 M4 27.41 dBV/m	Grid 2 M4 26.49 dBV/m	Grid 3 M4 22.96 dBV/m
Grid 4 M4 27.78 dBV/m	Grid 5 M4 26.98 dBV/m	Grid 6 M4 24.04 dBV/m
Grid 7 M4 27.55 dBV/m	Grid 8 M4 26.62 dBV/m	Grid 9 M4 23.58 dBV/m

Cursor:

Total = 27.78 dBV/m
 E Category: M4
 Location: 20, 4.5, 7.7 mm

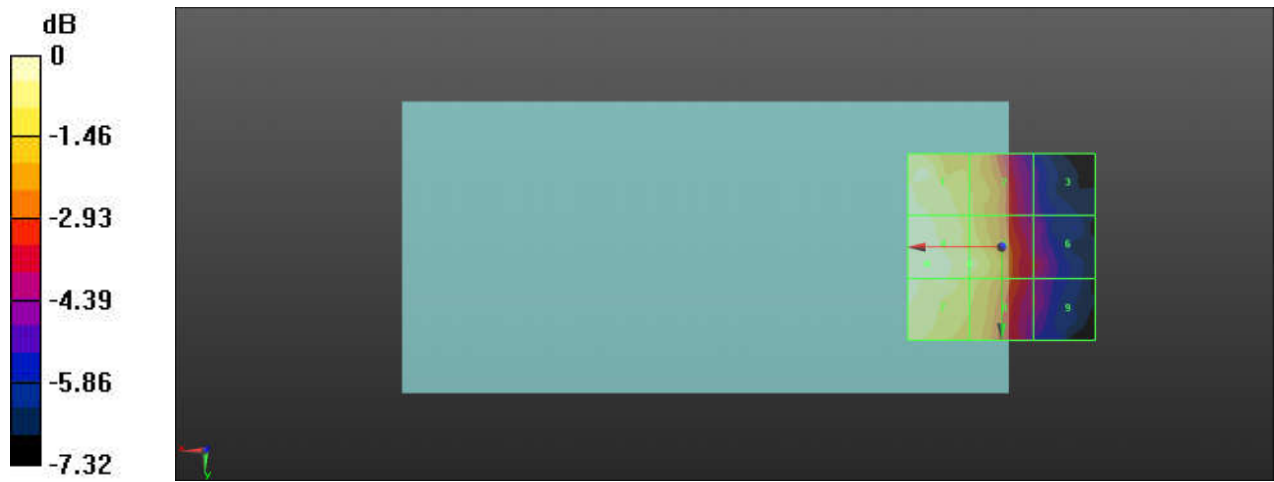

0 dB = 24.50 V/m = 27.78 dBV/m

06_HAC RF_GSM1900_GSM Voice_Ch810_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
 Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 14.73 V/m; Power Drift = 0.11 dB
 Applied MIF = 3.63 dB
 RF audio interference level = 27.86 dBV/m
Emission category: M4

MIF scaled E-field

Grid 1 M4 27.53 dBV/m	Grid 2 M4 26.54 dBV/m	Grid 3 M4 22.86 dBV/m
Grid 4 M4 27.86 dBV/m	Grid 5 M4 26.97 dBV/m	Grid 6 M4 23.92 dBV/m
Grid 7 M4 27.57 dBV/m	Grid 8 M4 26.63 dBV/m	Grid 9 M4 23.41 dBV/m

Cursor:

Total = 27.86 dBV/m
 E Category: M4
 Location: 20, 4.5, 7.7 mm

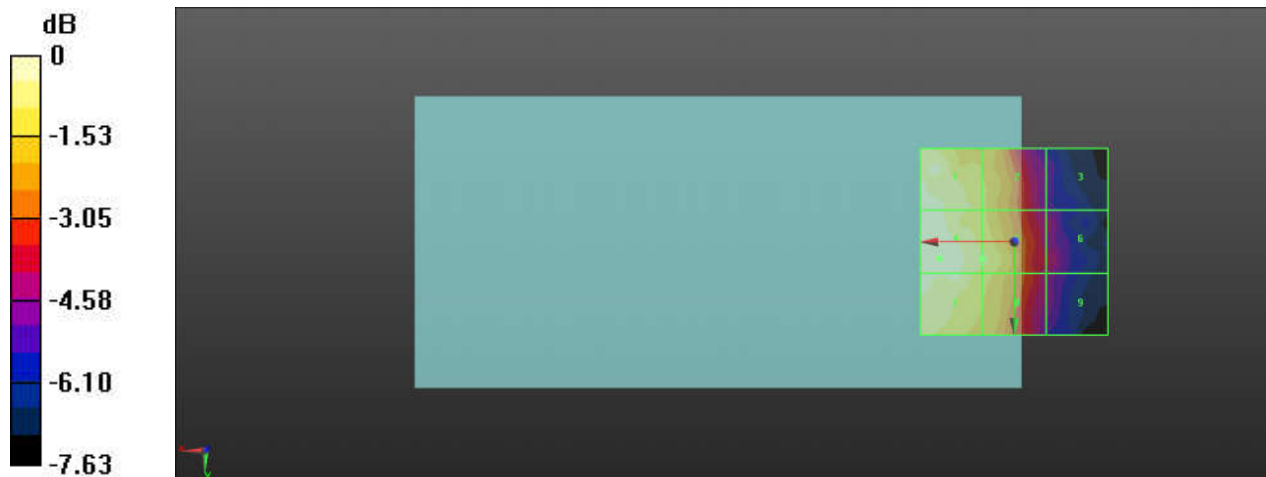

0 dB = 24.73 V/m = 27.86 dBV/m

07_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch39750_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz;Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 59.97 V/m; Power Drift = -0.04 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 32.96 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 32.24 dBV/m	Grid 2 M3 32.96 dBV/m	Grid 3 M3 32.6 dBV/m
Grid 4 M4 29.63 dBV/m	Grid 5 M3 31.96 dBV/m	Grid 6 M3 31.94 dBV/m
Grid 7 M4 26.73 dBV/m	Grid 8 M4 29.7 dBV/m	Grid 9 M4 29.7 dBV/m

Cursor:

Total = 32.96 dBV/m
 E Category: M3
 Location: -2.5, -25, 7.7 mm

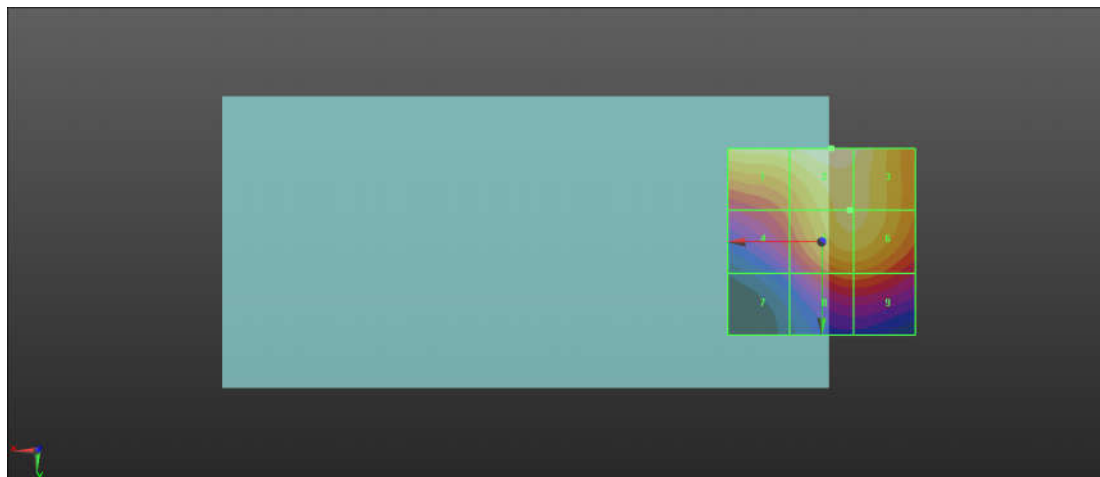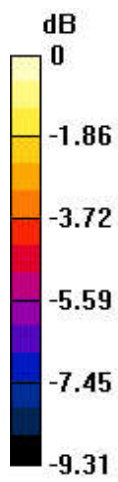

0 dB = 44.45 V/m = 32.96 dBV/m

08_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40185_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 69.02 V/m; Power Drift = 0.01 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 33.87 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 33.58 dBV/m	Grid 2 M3 33.87 dBV/m	Grid 3 M3 33.44 dBV/m
Grid 4 M3 31.68 dBV/m	Grid 5 M3 33.22 dBV/m	Grid 6 M3 33.11 dBV/m
Grid 7 M4 28.41 dBV/m	Grid 8 M3 30.25 dBV/m	Grid 9 M3 30.16 dBV/m

Cursor:

Total = 33.87 dBV/m
 E Category: M3
 Location: -0.5, -25, 7.7 mm

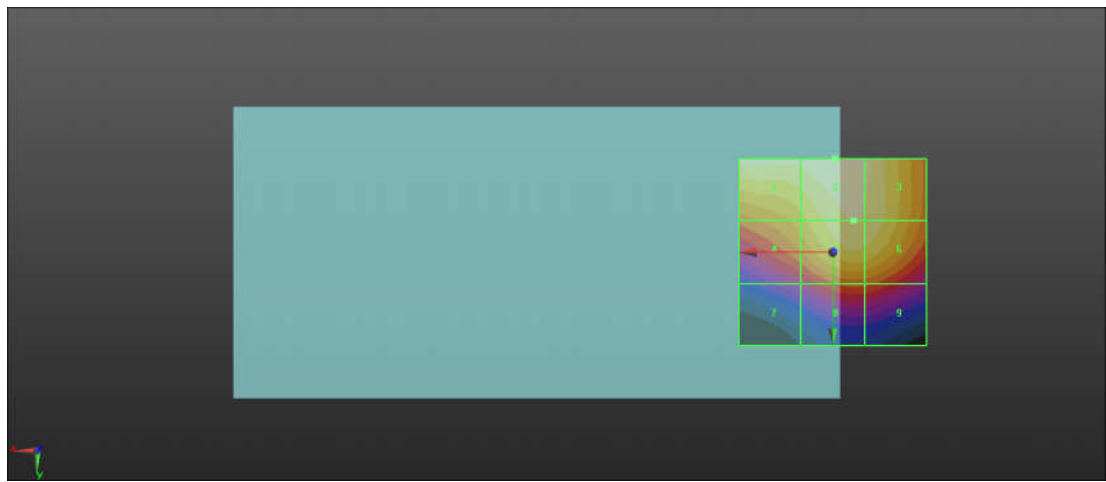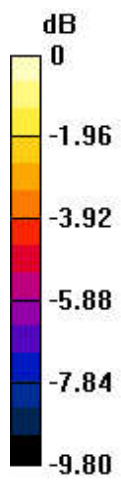

0 dB = 49.37 V/m = 33.87 dBV/m

09_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40620_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz;Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 73.89 V/m; Power Drift = -0.02 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 34.03 dBV/m


Emission category: M3

MIF scaled E-field

Grid 1 M3 33.71 dBV/m	Grid 2 M3 34.03 dBV/m	Grid 3 M3 33.54 dBV/m
Grid 4 M3 32.4 dBV/m	Grid 5 M3 33.53 dBV/m	Grid 6 M3 33.38 dBV/m
Grid 7 M3 30.03 dBV/m	Grid 8 M3 31.39 dBV/m	Grid 9 M3 31.3 dBV/m

Cursor:

Total = 34.03 dBV/m
 E Category: M3
 Location: 0, -25, 7.7 mm

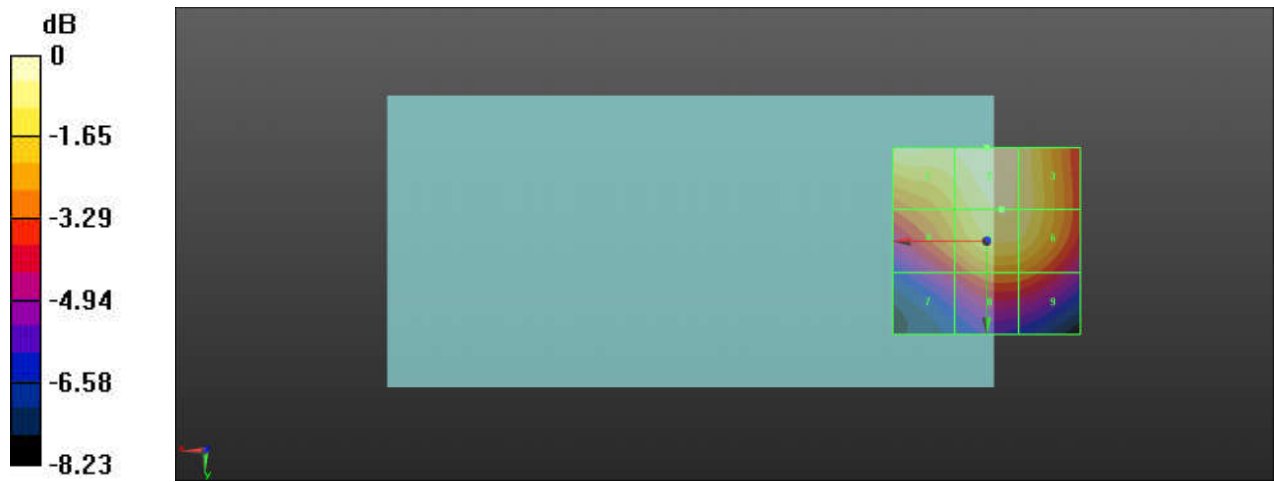

0 dB = 50.29 V/m = 34.03 dBV/m

10_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41055_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 64.04 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 34.00 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 34 dBV/m	Grid 2 M3 33.87 dBV/m	Grid 3 M3 33.34 dBV/m
Grid 4 M3 31.44 dBV/m	Grid 5 M3 32.47 dBV/m	Grid 6 M3 32.32 dBV/m
Grid 7 M4 29.67 dBV/m	Grid 8 M3 30.7 dBV/m	Grid 9 M3 30.49 dBV/m

Cursor:

Total = 34.00 dBV/m

E Category: M3

Location: 22.5, -25, 7.7 mm

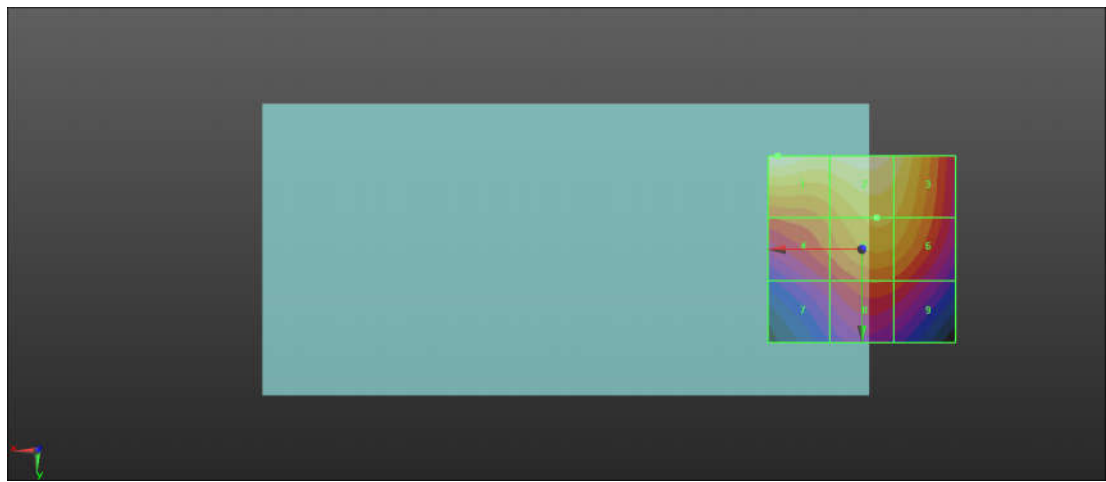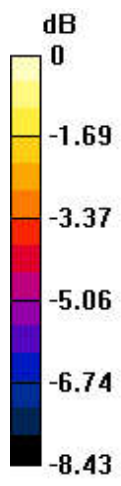

0 dB = 50.09 V/m = 34.00 dBV/m

11_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41490_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz;Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 64.65 V/m; Power Drift = 0.01 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 34.06 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 34.06 dBV/m	Grid 2 M3 33.88 dBV/m	Grid 3 M3 33.33 dBV/m
Grid 4 M3 31.83 dBV/m	Grid 5 M3 32.69 dBV/m	Grid 6 M3 32.39 dBV/m
Grid 7 M4 29.66 dBV/m	Grid 8 M3 30.57 dBV/m	Grid 9 M3 30.27 dBV/m

Cursor:

Total = 34.06 dBV/m
 E Category: M3
 Location: 22.5, -25, 7.7 mm

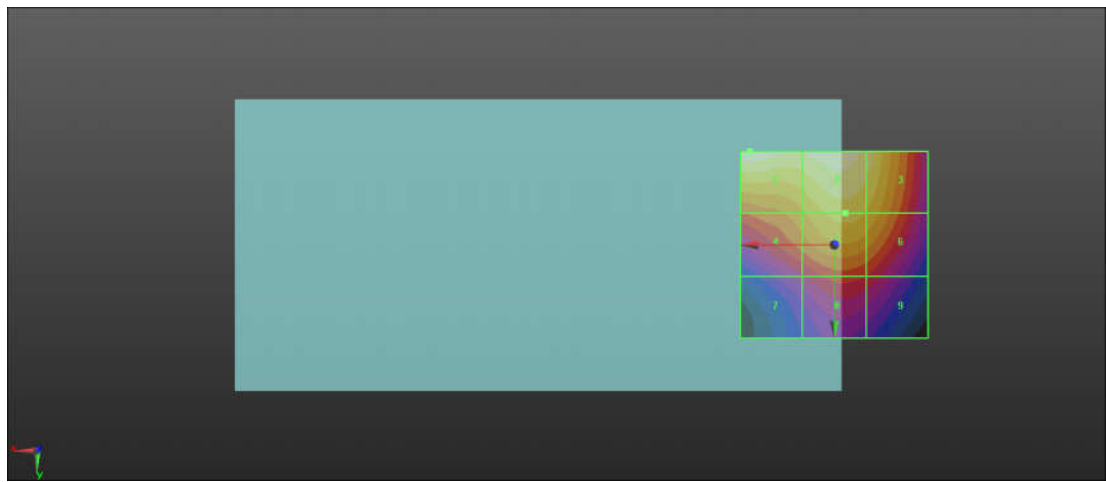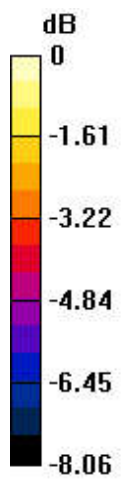

0 dB = 50.45 V/m = 34.06 dBV/m

12_HAC_RF_LTE Band 41_HPUE_20M_QPSK_1RB_0Offset_Ch39750_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2506 MHz;Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C;

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 47.61 V/m; Power Drift = -0.15 dB

Applied MIF = -1.44 dB

RF audio interference level = 30.98 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 30.27 dBV/m	Grid 2 M3 30.98 dBV/m	Grid 3 M3 30.7 dBV/m
Grid 4 M4 27.8 dBV/m	Grid 5 M3 30.04 dBV/m	Grid 6 M3 30.03 dBV/m
Grid 7 M4 25.05 dBV/m	Grid 8 M4 27.84 dBV/m	Grid 9 M4 27.84 dBV/m

Cursor:

Total = 30.98 dBV/m

E Category: M3

Location: -3, -25, 7.7 mm

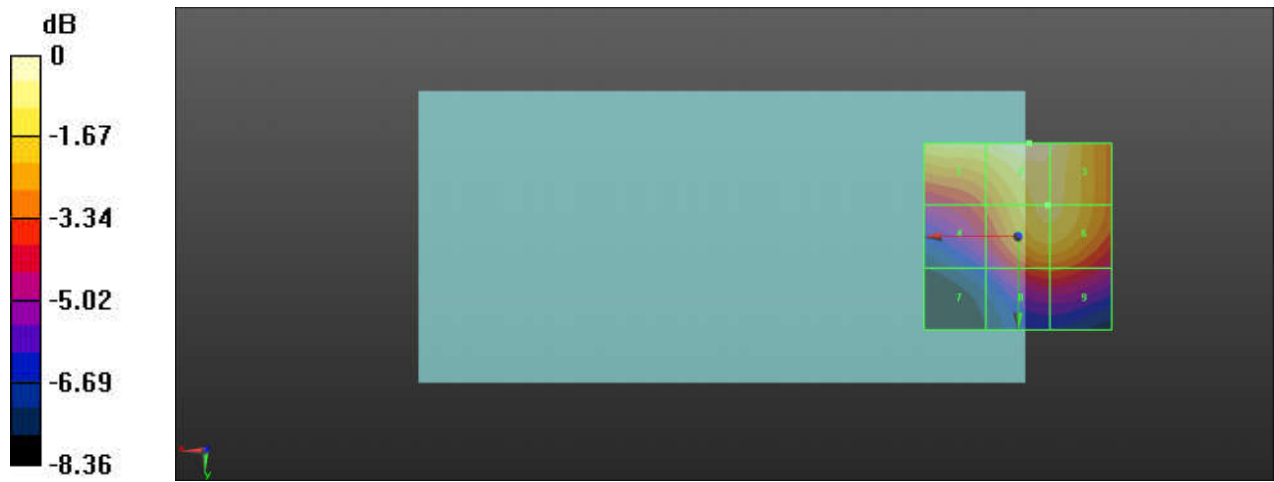

0 dB = 35.42 V/m = 30.98 dBV/m

13_HAC_RF_LTE Band 41_HPUE_20M_QPSK_1RB_0Offset_Ch40185_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.39 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 32.00 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 31.65 dBV/m	Grid 2 M3 32 dBV/m	Grid 3 M3 31.62 dBV/m
Grid 4 M4 29.88 dBV/m	Grid 5 M3 31.39 dBV/m	Grid 6 M3 31.31 dBV/m
Grid 7 M4 26.71 dBV/m	Grid 8 M4 28.49 dBV/m	Grid 9 M4 28.44 dBV/m

Cursor:

Total = 32.00 dBV/m

E Category: M3

Location: -2, -25, 7.7 mm

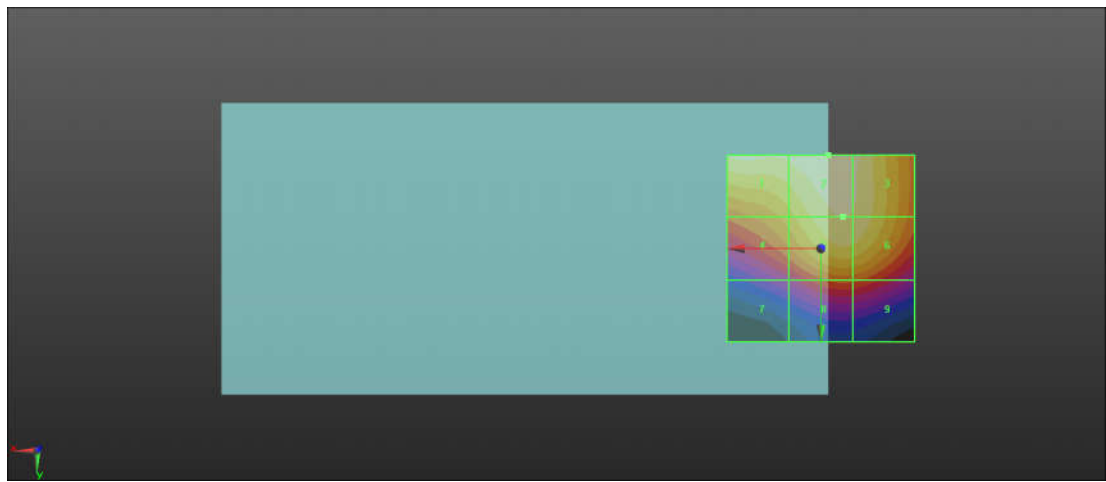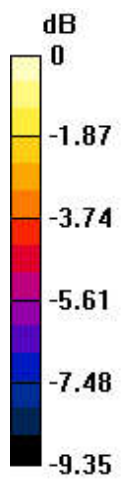

0 dB = 39.80 V/m = 32.00 dBV/m

14_HAC_RF_LTE Band 41_HPUE_20M_QPSK_1RB_0Offset_Ch40620_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2593 MHz;Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.63 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 32.17 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.78 dBV/m	Grid 2 M3 32.17 dBV/m	Grid 3 M3 31.71 dBV/m
Grid 4 M3 30.54 dBV/m	Grid 5 M3 31.76 dBV/m	Grid 6 M3 31.59 dBV/m
Grid 7 M4 28.29 dBV/m	Grid 8 M4 29.72 dBV/m	Grid 9 M4 29.58 dBV/m

Cursor:

Total = 32.17 dBV/m

E Category: M3

Location: -1, -25, 7.7 mm

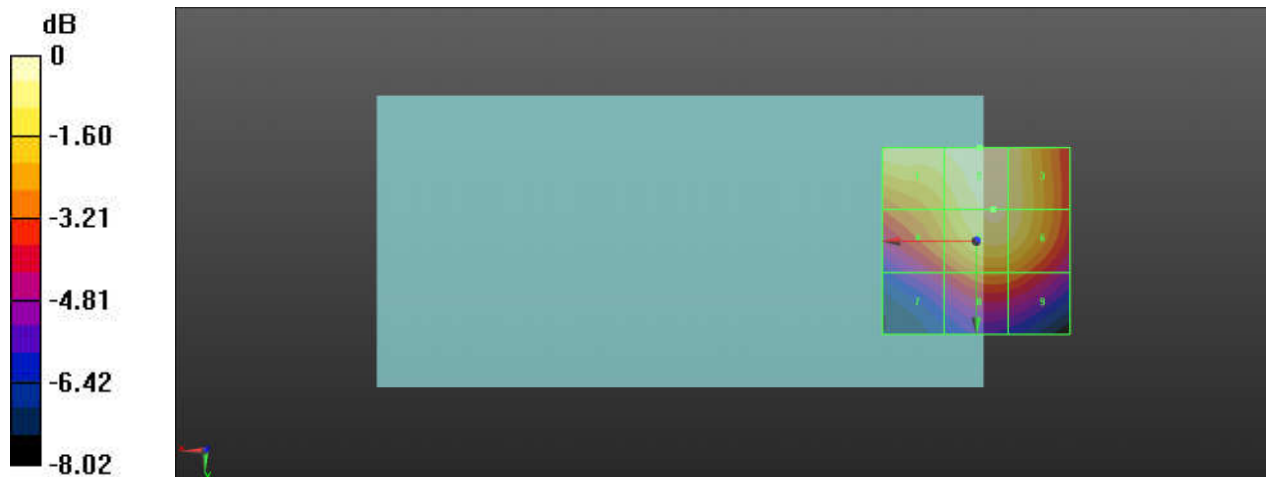

0 dB = 40.61 V/m = 32.17 dBV/m

15_HAC_RF_LTE Band 41_HPUE_20M_QPSK_1RB_0Offset_Ch41055_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 52.36 V/m; Power Drift = -0.03 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 32.23 dBV/m


Emission category: M3

MIF scaled E-field

Grid 1 M3 32.23 dBV/m	Grid 2 M3 32.12 dBV/m	Grid 3 M3 31.6 dBV/m
Grid 4 M4 29.76 dBV/m	Grid 5 M3 30.79 dBV/m	Grid 6 M3 30.59 dBV/m
Grid 7 M4 28.07 dBV/m	Grid 8 M4 29.08 dBV/m	Grid 9 M4 28.82 dBV/m

Cursor:

Total = 32.23 dBV/m
 E Category: M3
 Location: 22, -25, 7.7 mm

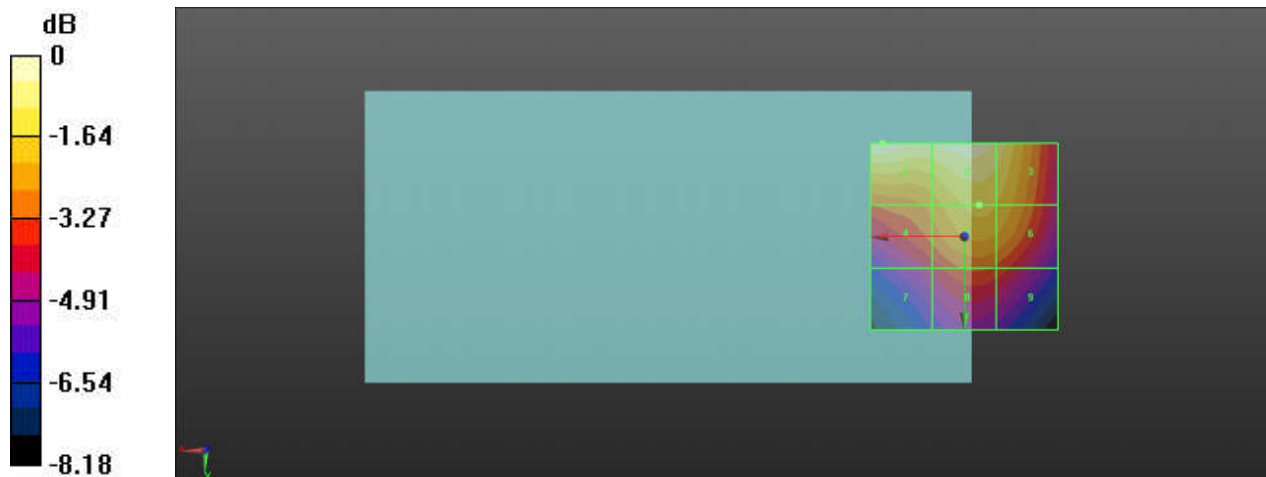

0 dB = 40.87 V/m = 32.23 dBV/m

16_HAC_RF_LTE Band 41_HPUE_20M_QPSK_1RB_0Offset_Ch41490_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz;Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 53.09 V/m; Power Drift = -0.04 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 32.28 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 32.28 dBV/m	Grid 2 M3 32.17 dBV/m	Grid 3 M3 31.62 dBV/m
Grid 4 M3 30.15 dBV/m	Grid 5 M3 31.01 dBV/m	Grid 6 M3 30.72 dBV/m
Grid 7 M4 28.07 dBV/m	Grid 8 M4 28.93 dBV/m	Grid 9 M4 28.65 dBV/m

Cursor:

Total = 32.28 dBV/m
 E Category: M3
 Location: 22, -25, 7.7 mm

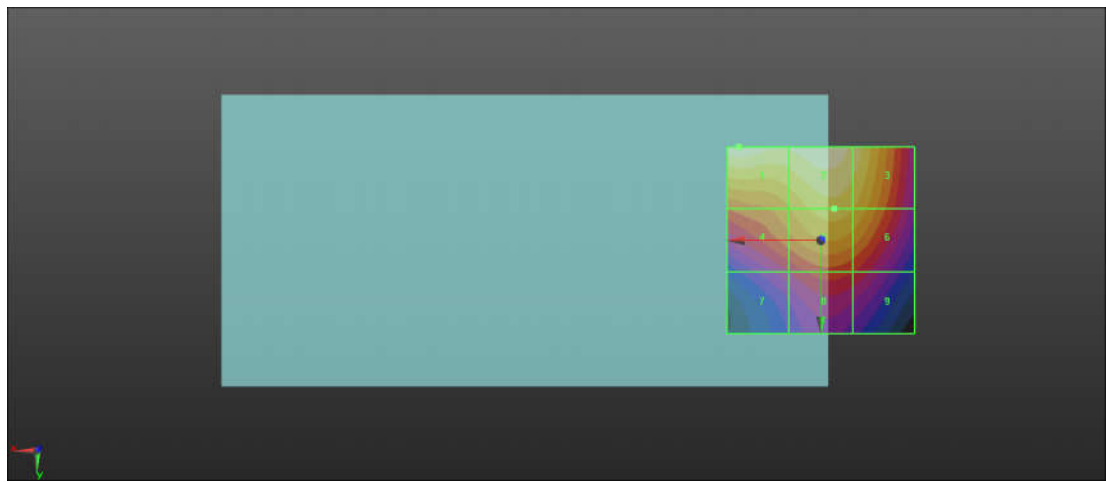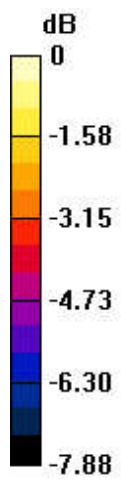

0 dB = 41.11 V/m = 32.28 dBV/m

17_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch39750_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.29 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.75 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.75 dBV/m	Grid 2 M4 27.75 dBV/m	Grid 3 M4 25.34 dBV/m
Grid 4 M4 22.68 dBV/m	Grid 5 M4 23.49 dBV/m	Grid 6 M4 23.18 dBV/m
Grid 7 M4 19.72 dBV/m	Grid 8 M4 20.63 dBV/m	Grid 9 M4 20.55 dBV/m

Cursor:

Total = 27.75 dBV/m

E Category: M4

Location: 9.5, -25, 7.7 mm

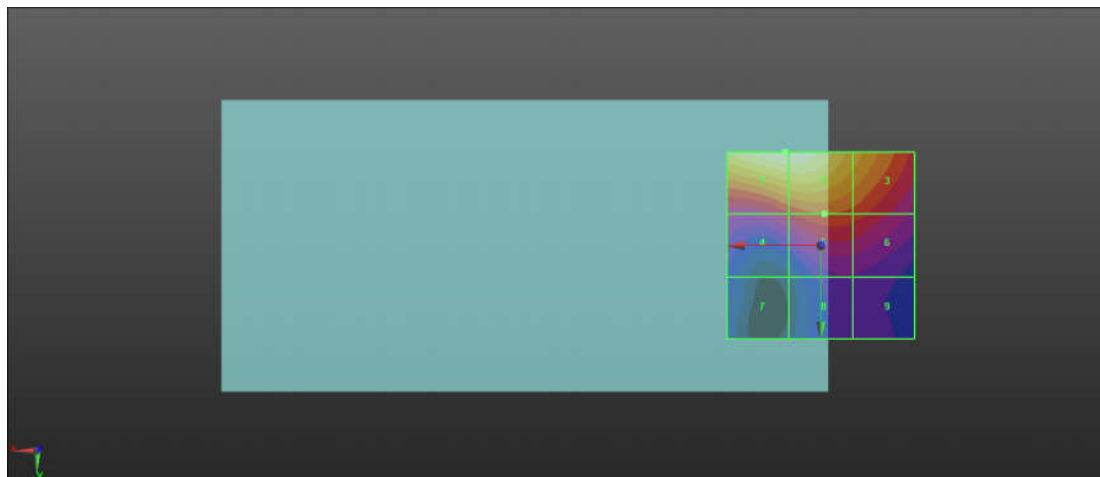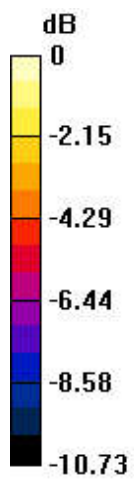

0 dB = 24.41 V/m = 27.75 dBV/m

18_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40185_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 19.64 V/m; Power Drift = 0.18 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 26.42 dBV/m



Emission category: M4

MIF scaled E-field

Grid 1 M4 26.42 dBV/m	Grid 2 M4 26.24 dBV/m	Grid 3 M4 26.17 dBV/m
Grid 4 M4 21.42 dBV/m	Grid 5 M4 24.03 dBV/m	Grid 6 M4 24.02 dBV/m
Grid 7 M4 19.88 dBV/m	Grid 8 M4 20.36 dBV/m	Grid 9 M4 20.48 dBV/m

Cursor:

Total = 26.42 dBV/m
 E Category: M4
 Location: 25, -25, 7.7 mm

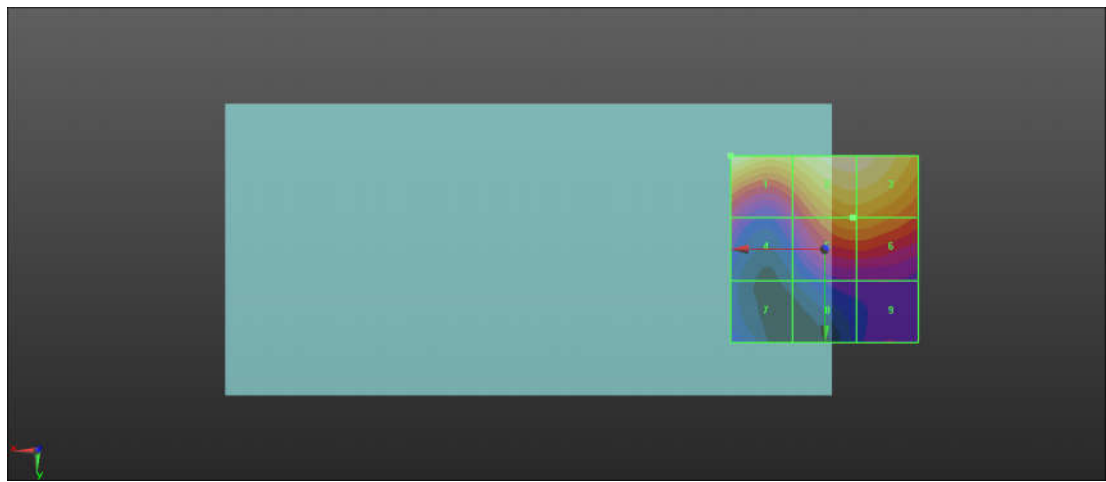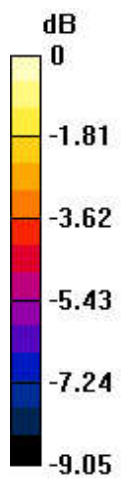

0 dB = 20.93 V/m = 26.42 dBV/m

19_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40620_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.15 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.72 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 27.72 dBV/m	Grid 2 M4 27.72 dBV/m	Grid 3 M4 25.31 dBV/m
Grid 4 M4 22.66 dBV/m	Grid 5 M4 23.52 dBV/m	Grid 6 M4 23.05 dBV/m
Grid 7 M4 19.72 dBV/m	Grid 8 M4 20.49 dBV/m	Grid 9 M4 20.4 dBV/m

Cursor:

Total = 27.72 dBV/m

E Category: M4

Location: 9.5, -25, 7.7 mm

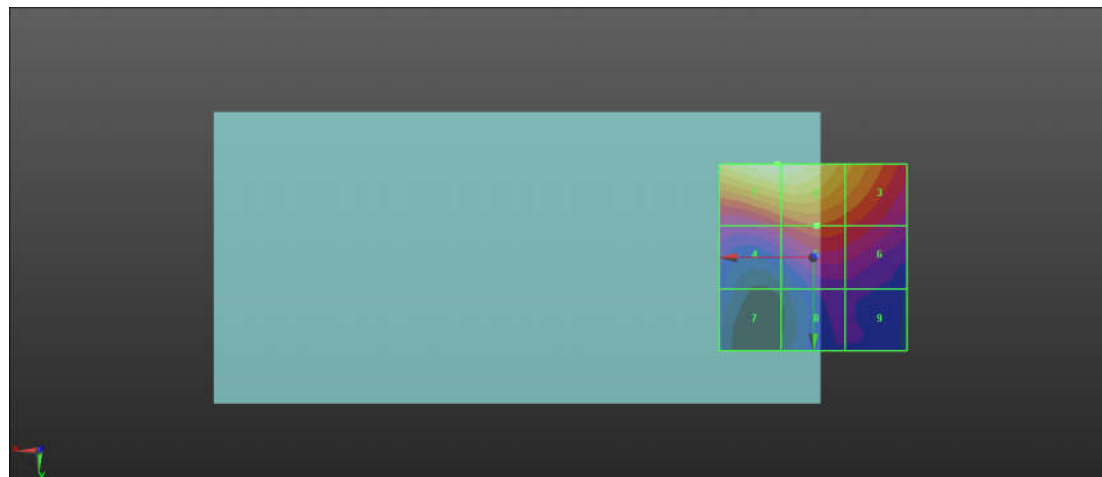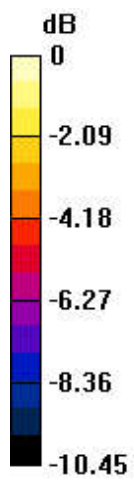

0 dB = 24.33 V/m = 27.72 dBV/m

20_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41055_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 17.92 V/m; Power Drift = 0.14 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 27.44 dBV/m



Emission category: M4

MIF scaled E-field

Grid 1 M4 27.44 dBV/m	Grid 2 M4 27.44 dBV/m	Grid 3 M4 25.13 dBV/m
Grid 4 M4 22.39 dBV/m	Grid 5 M4 23.16 dBV/m	Grid 6 M4 22.8 dBV/m
Grid 7 M4 19.55 dBV/m	Grid 8 M4 20.58 dBV/m	Grid 9 M4 20.49 dBV/m

Cursor:

Total = 27.44 dBV/m
 E Category: M4
 Location: 9, -25, 7.7 mm

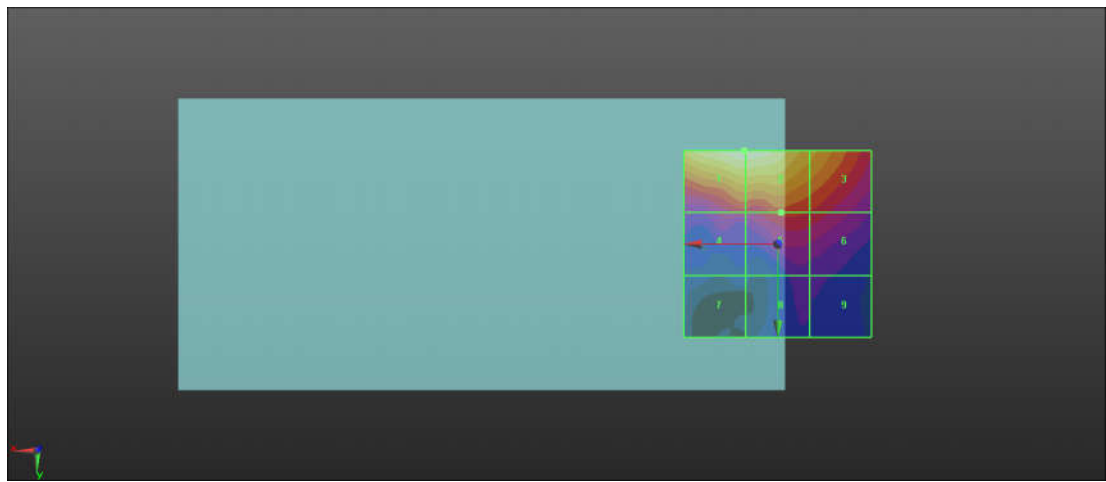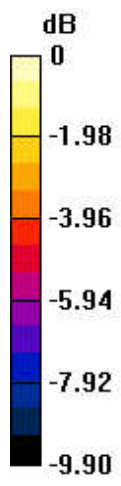

0 dB = 23.55 V/m = 27.44 dBV/m

21_HAC_RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41490_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 2680 MHz; Duty Cycle: 1:8.8736
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 19.67 V/m; Power Drift = 0.01 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 26.38 dBV/m



Emission category: M4

MIF scaled E-field

Grid 1 M4 26.38 dBV/m	Grid 2 M4 26.25 dBV/m	Grid 3 M4 26.21 dBV/m
Grid 4 M4 21.4 dBV/m	Grid 5 M4 24.04 dBV/m	Grid 6 M4 24.04 dBV/m
Grid 7 M4 19.85 dBV/m	Grid 8 M4 20.42 dBV/m	Grid 9 M4 20.46 dBV/m

Cursor:

Total = 26.38 dBV/m
 E Category: M4
 Location: 25, -25, 7.7 mm

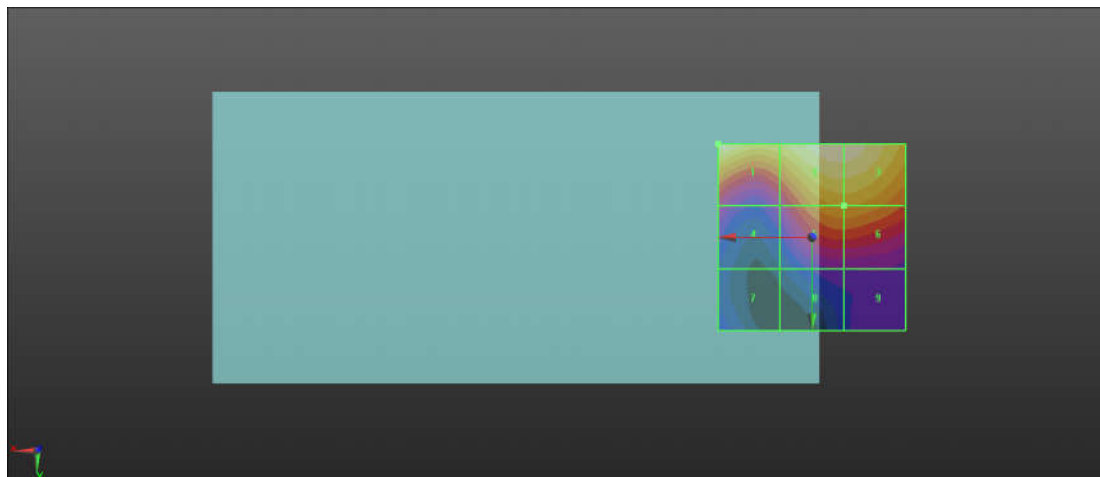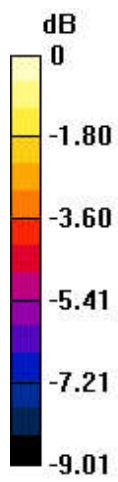

0 dB = 20.85 V/m = 26.38 dBV/m

22_HAC_RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42190_E

Communication System: UID 10173 - CAA, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3460 MHz; Duty Cycle: 1:8.87156
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42190/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 79.97 V/m; Power Drift = 0.03 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 34.73 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 30.14 dBV/m	Grid 2 M3 31.3 dBV/m	Grid 3 M3 30.86 dBV/m
Grid 4 M3 31.9 dBV/m	Grid 5 M3 34.06 dBV/m	Grid 6 M3 33.53 dBV/m
Grid 7 M3 33.8 dBV/m	Grid 8 M3 34.73 dBV/m	Grid 9 M3 33.9 dBV/m

Cursor:

Total = 34.73 dBV/m
 E Category: M3
 Location: -0.5, 25, 7.7 mm

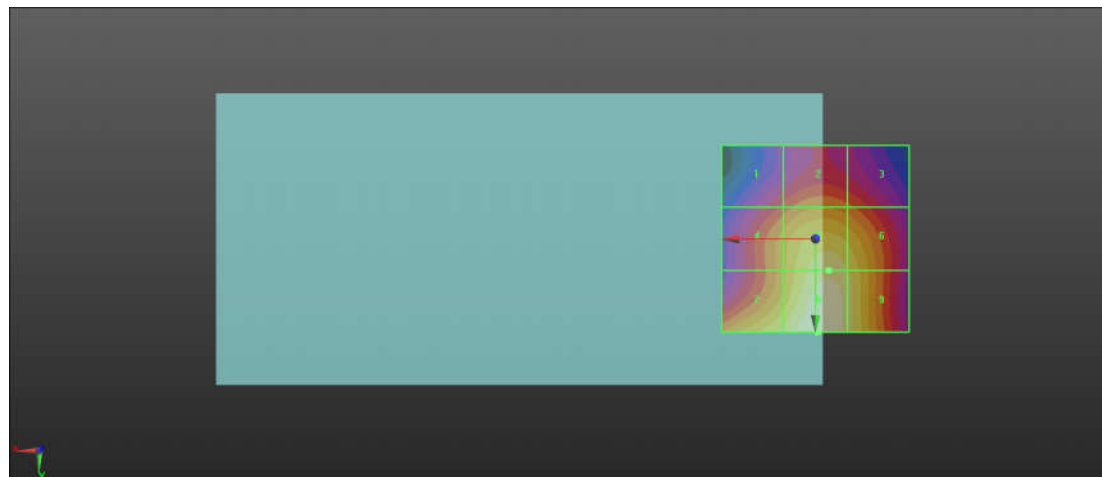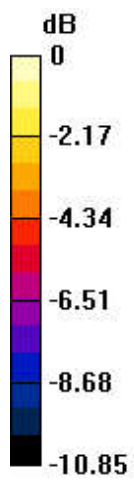

0 dB = 55.76 V/m = 34.73 dBV/m

22A_HAC_RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42190_E

Communication System: UID 10173 - CAA, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 3460 MHz; Duty Cycle: 1:8.87156
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)



Ch42190/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
 Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 50.95 V/m; Power Drift = 0.00 dB
 Applied MIF = 0.00 dB
 RF audio interference level = 31.22 dBV/m
Emission category: M3

MIF scaled E-field

Grid 1 M4 28.57 dBV/m	Grid 2 M4 29.93 dBV/m	Grid 3 M4 29.7 dBV/m
Grid 4 M4 29.62 dBV/m	Grid 5 M3 30.88 dBV/m	Grid 6 M3 30.31 dBV/m
Grid 7 M3 30.18 dBV/m	Grid 8 M3 31.22 dBV/m	Grid 9 M3 30.1 dBV/m

Cursor:

Total = 31.22 dBV/m
 E Category: M3
 Location: -0.5, 21.5, 7.7 mm

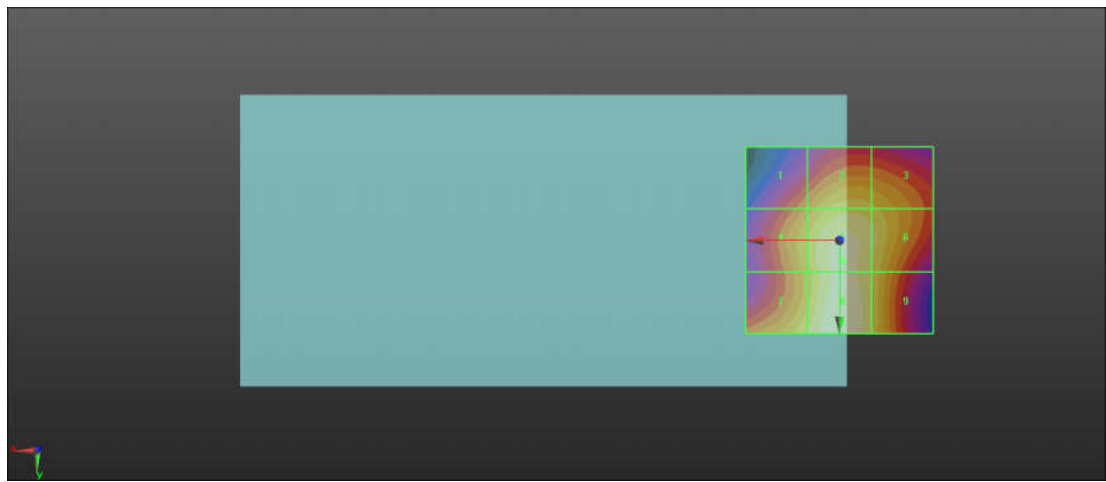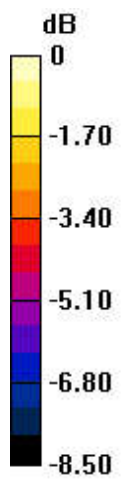

0 dB = 36.38 V/m = 31.22 dBV/m

23_HAC_RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42590_E

Communication System: UID 10173 - CAA, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3500 MHz; Duty Cycle: 1:8.87156
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)



Ch42590/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
 Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 83.93 V/m; Power Drift = 0.01 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 34.61 dBV/m
Emission category: M3

MIF scaled E-field

Grid 1 M3 30.57 dBV/m	Grid 2 M3 31.82 dBV/m	Grid 3 M3 31.45 dBV/m
Grid 4 M3 32.05 dBV/m	Grid 5 M3 34.08 dBV/m	Grid 6 M3 33.65 dBV/m
Grid 7 M3 33.56 dBV/m	Grid 8 M3 34.61 dBV/m	Grid 9 M3 33.76 dBV/m

Cursor:

Total = 34.61 dBV/m
 E Category: M3
 Location: -0.5, 25, 7.7 mm

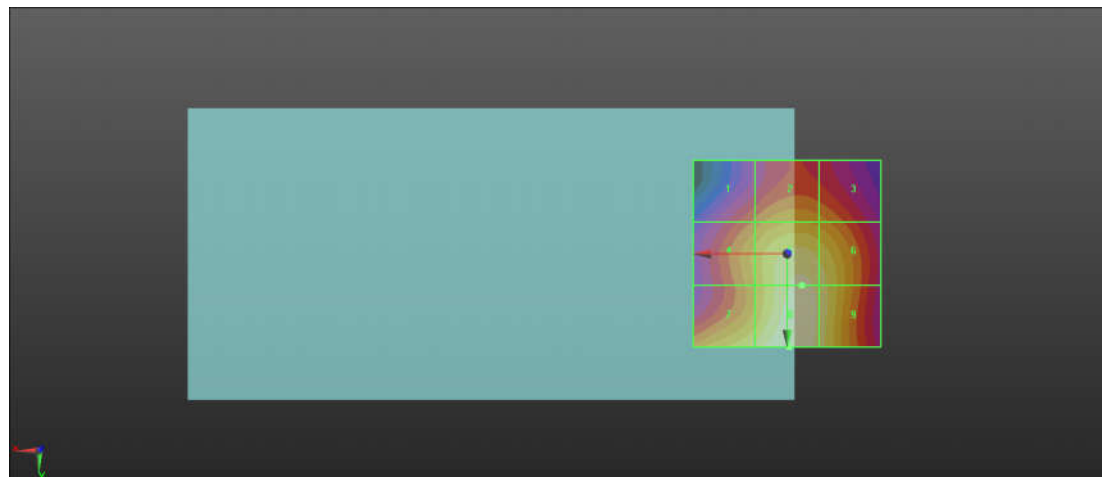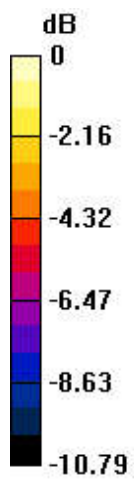

0 dB = 53.79 V/m = 34.61 dBV/m

24_HAC_RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42990_E

Communication System: UID 10173 - CAA, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);
 Frequency: 3540 MHz; Duty Cycle: 1:8.87156
 Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42990/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm
 Reference Value = 82.12 V/m; Power Drift = -0.01 dB
 Applied MIF = -1.44 dB
 RF audio interference level = 34.11 dBV/m



Emission category: M3

MIF scaled E-field

Grid 1 M3 30.4 dBV/m	Grid 2 M3 31.65 dBV/m	Grid 3 M3 31.31 dBV/m
Grid 4 M3 31.72 dBV/m	Grid 5 M3 33.61 dBV/m	Grid 6 M3 33.21 dBV/m
Grid 7 M3 33.09 dBV/m	Grid 8 M3 34.11 dBV/m	Grid 9 M3 33.27 dBV/m

Cursor:

Total = 34.11 dBV/m
 E Category: M3
 Location: -0.5, 25, 7.7 mm

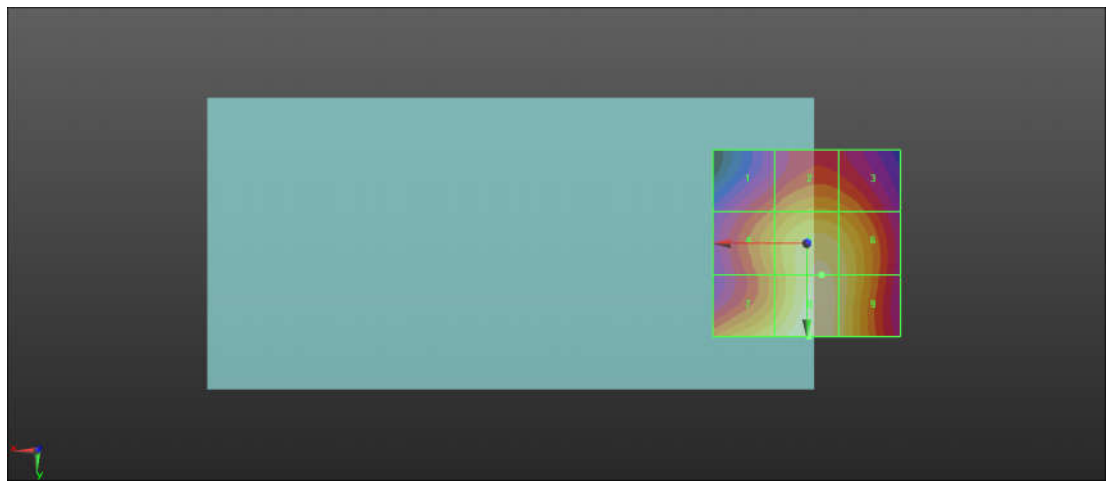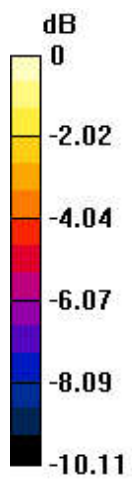

0 dB = 50.78 V/m = 34.11 dBV/m

25_HAC_RF_WLAN_2.4G_802.11g_6Mbps_Ch1_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.72 V/m; Power Drift = 0.09 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.62 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 27.64 dBV/m	Grid 2 M4 29.06 dBV/m	Grid 3 M4 28.96 dBV/m
Grid 4 M3 30.19 dBV/m	Grid 5 M3 31.06 dBV/m	Grid 6 M3 30.77 dBV/m
Grid 7 M3 32.62 dBV/m	Grid 8 M3 32.61 dBV/m	Grid 9 M3 31.84 dBV/m

Cursor:

Total = 32.62 dBV/m

E Category: M3

Location: 22.5, 25, 7.7 mm

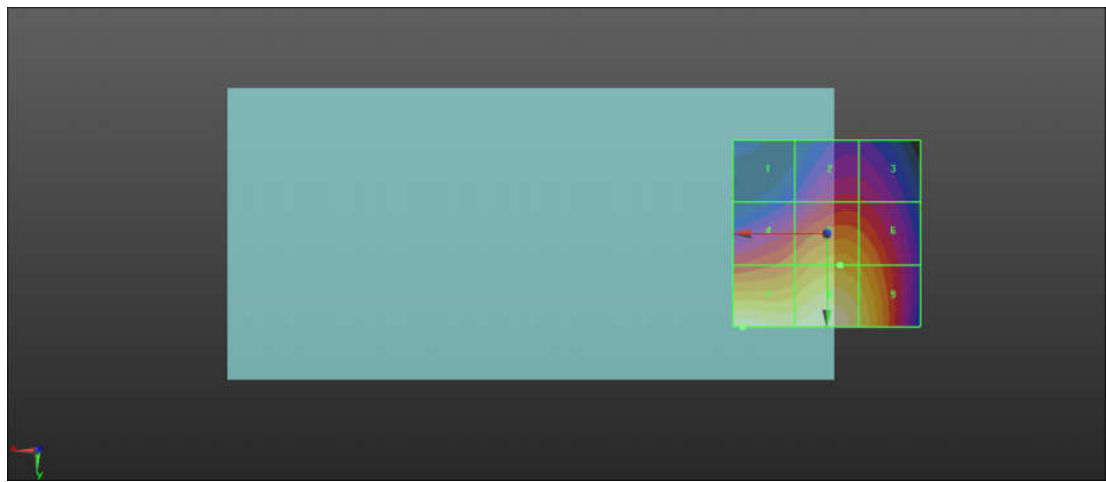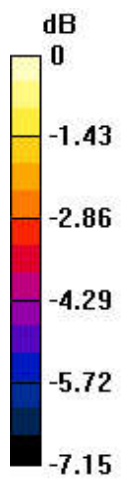

0 dB = 42.77 V/m = 32.62 dBV/m

26_HAC_RF_WLAN_2.4G_802.11g_6Mbps_Ch6_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 40.57 V/m; Power Drift = -0.03 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.48 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 27.46 dBV/m	Grid 2 M4 28.84 dBV/m	Grid 3 M4 28.7 dBV/m
Grid 4 M4 29.87 dBV/m	Grid 5 M3 30.84 dBV/m	Grid 6 M3 30.55 dBV/m
Grid 7 M3 32.32 dBV/m	Grid 8 M3 32.48 dBV/m	Grid 9 M3 31.72 dBV/m

Cursor:

Total = 32.48 dBV/m

E Category: M3

Location: 0.5, 25, 7.7 mm

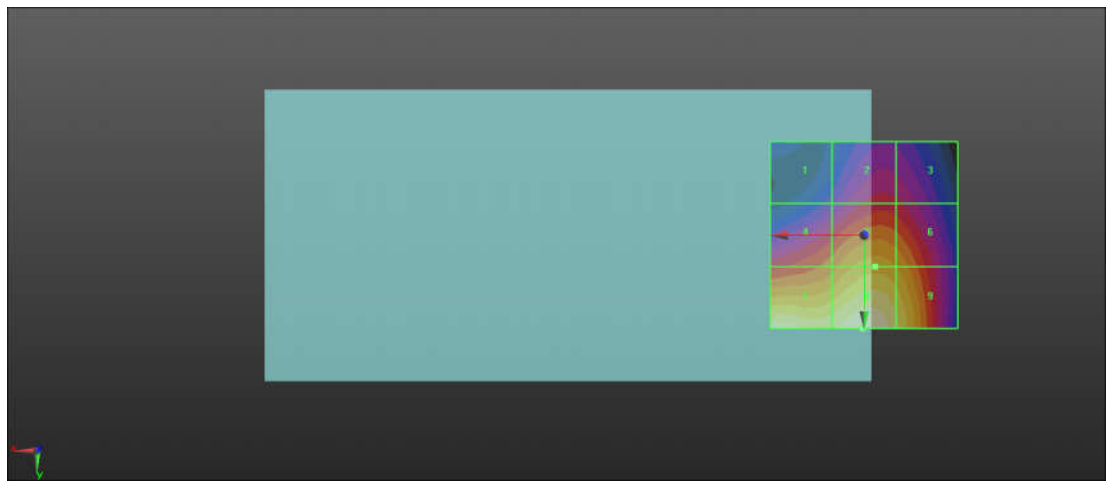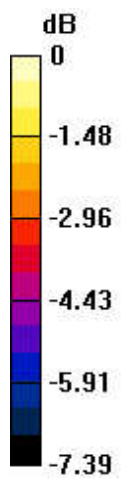

0 dB = 42.10 V/m = 32.49 dBV/m

27_HAC_RF_WLAN_2.4G_802.11g_6Mbps_Ch11_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4053; ConvF(1, 1, 1); Calibrated: 2022/7/27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1311; Calibrated: 2022/8/25
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 38.60 V/m; Power Drift = 0.11 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.49 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 27.43 dBV/m	Grid 2 M4 28.63 dBV/m	Grid 3 M4 28.49 dBV/m
Grid 4 M4 29.63 dBV/m	Grid 5 M3 30.63 dBV/m	Grid 6 M3 30.33 dBV/m
Grid 7 M3 31.98 dBV/m	Grid 8 M3 32.49 dBV/m	Grid 9 M3 31.73 dBV/m

Cursor:

Total = 32.49 dBV/m

E Category: M3

Location: 0, 25, 7.7 mm

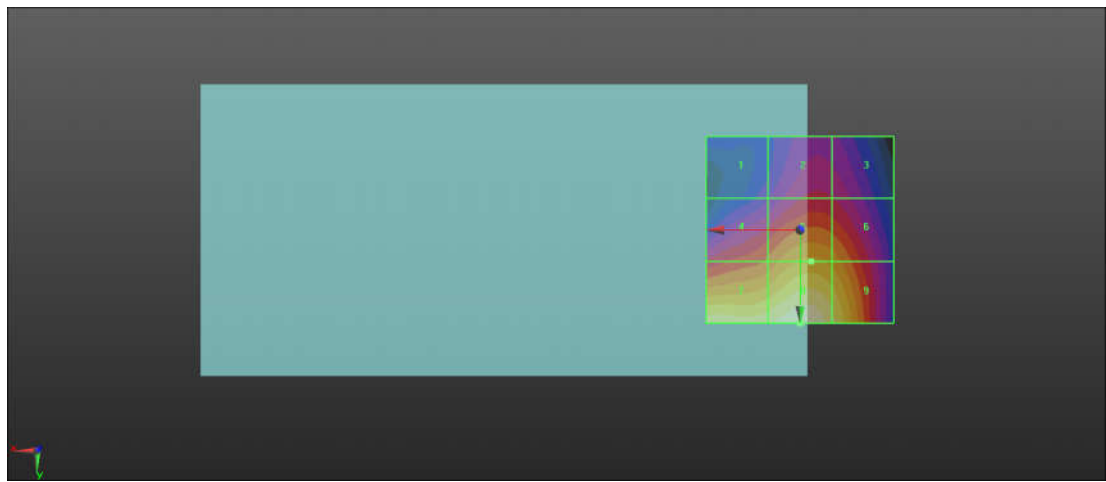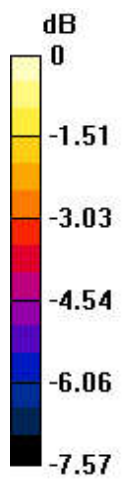

0 dB = 42.10 V/m = 32.49 dBV/m