

45_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262

Communication System: UID 0, Generic WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_231017 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.428 \text{ S/m}$; $\epsilon_r = 40.993$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature: 22.3 °C ; Liquid Temperature: 22.3 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9262/Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.57 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.55 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 2.08 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.512 W/kg
 Maximum value of SAR (measured) = 1.66 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.55 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.486 W/kg
 Maximum value of SAR (measured) = 1.44 W/kg

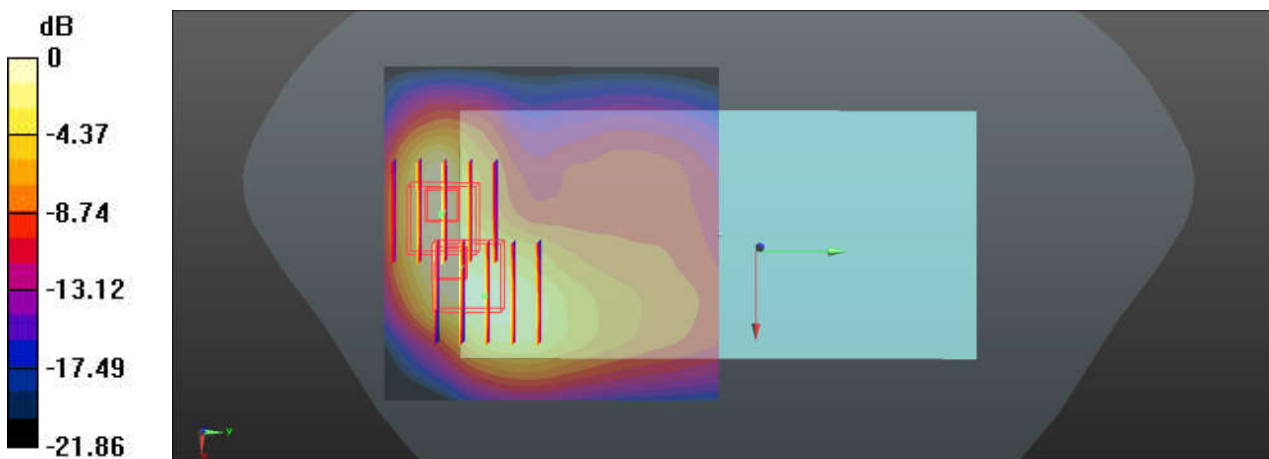

0 dB = 1.44 W/kg

46_LTE Band 2_20M_QPSK_1RB_49Offset_Back_5mm_Ch18900

Communication System: UID 0, Generic LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_231017 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch18900/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.35 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.13 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.471 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

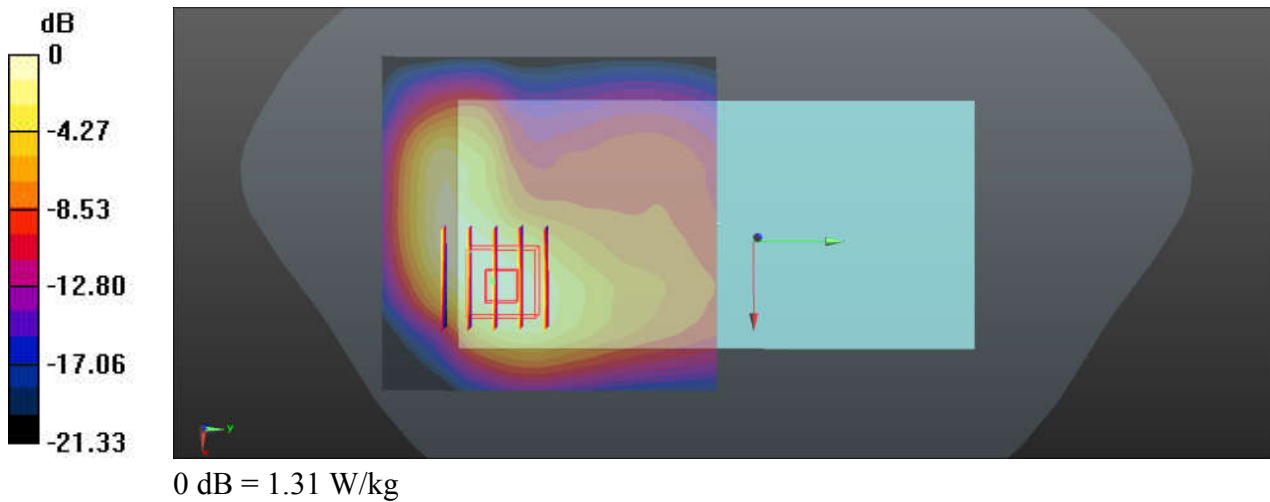

47_LTE Band 30_10M_QPSK_1RB_0Offset_Back_5mm_Ch27710

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
 Medium: HSL_2300_231019 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.697$ S/m; $\epsilon_r = 40.432$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C ; **Liquid Temperature:** 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.91, 7.91, 7.91); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch27710/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.12 W/kg


Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.993 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

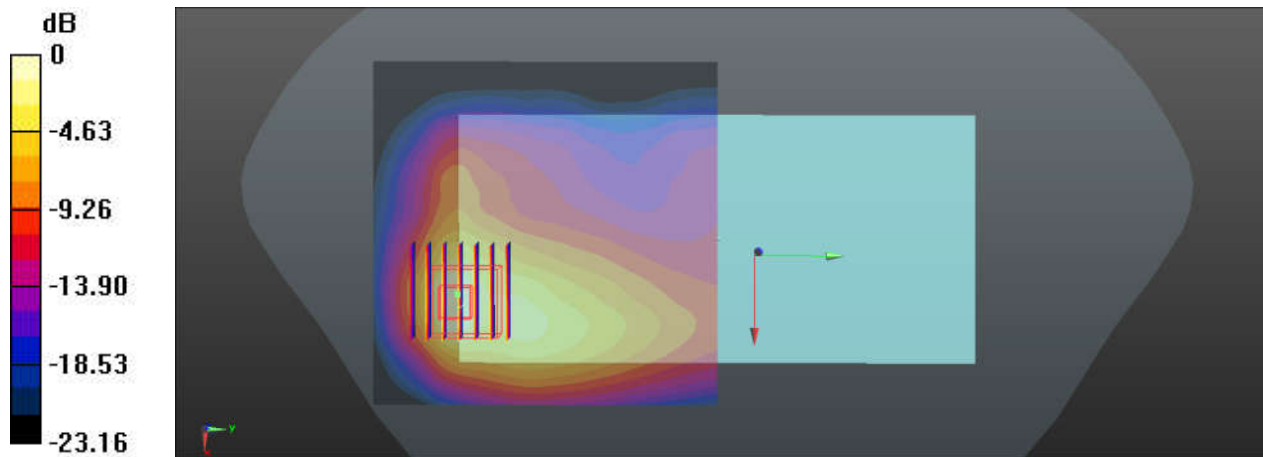

0 dB = 2.00 W/kg

48_LTE Band 7_20M_QPSK_1RB_49Offset_Back_5mm_Ch21350

Communication System: UID 0, Generic LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231021 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 40.041$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.2 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch21350/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.85 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.307 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

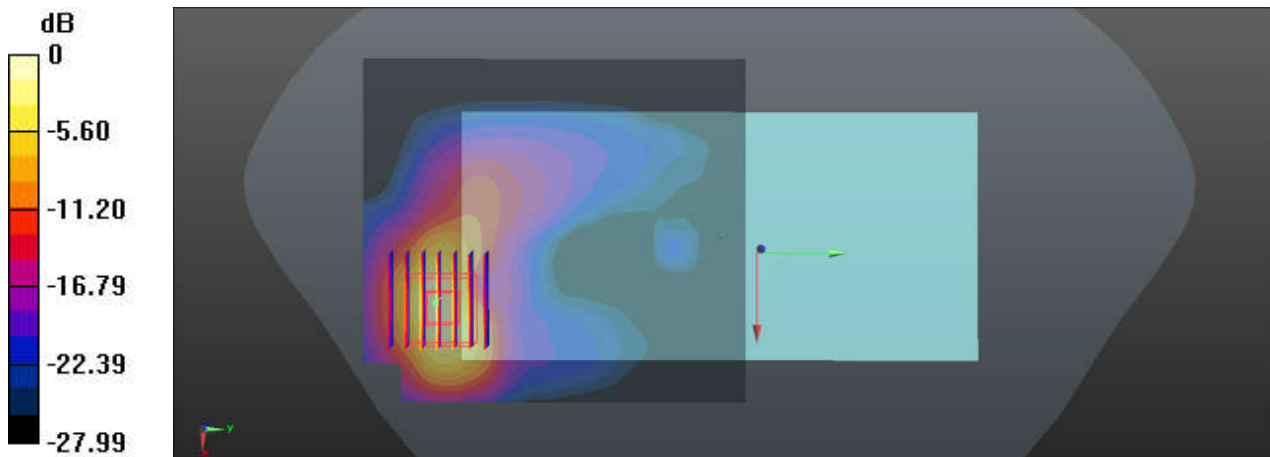

0 dB = 1.77 W/kg

49_Bluetooth_DH5 1Mbps_Back_5mm_Ch0

Communication System: UID 0, BT (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3
 Medium: HSL_2450_231020 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 40.389$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.2 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.64, 7.64, 7.64); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch0/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.251 W/kg


Ch0/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.497 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

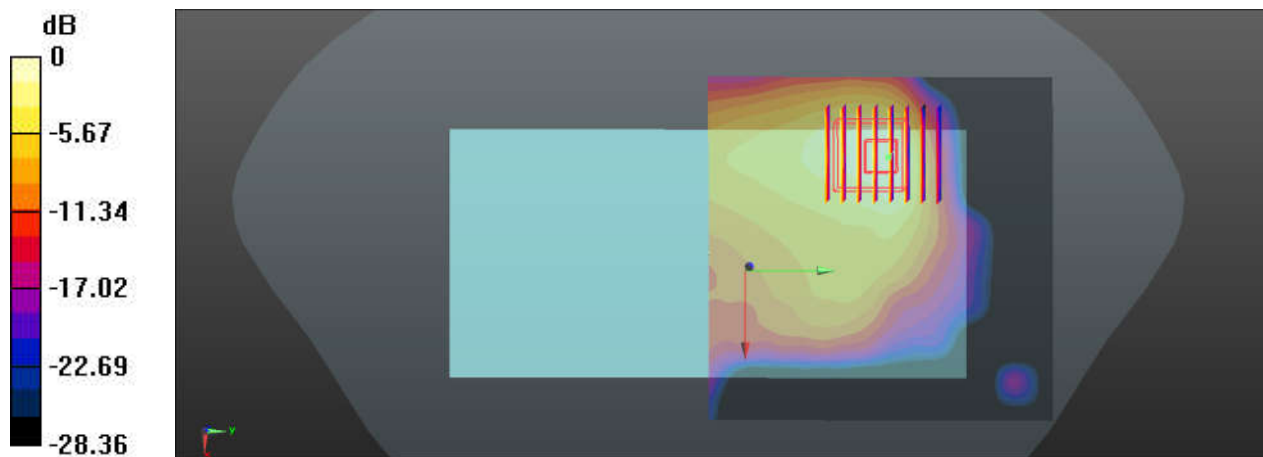

0 dB = 0.217 W/kg

50_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.018
Medium: HSL_2450_231020 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 40.332$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.2 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.64, 7.64, 7.64); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.94 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.915 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.944 W/kg; SAR(10 g) = 0.439 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

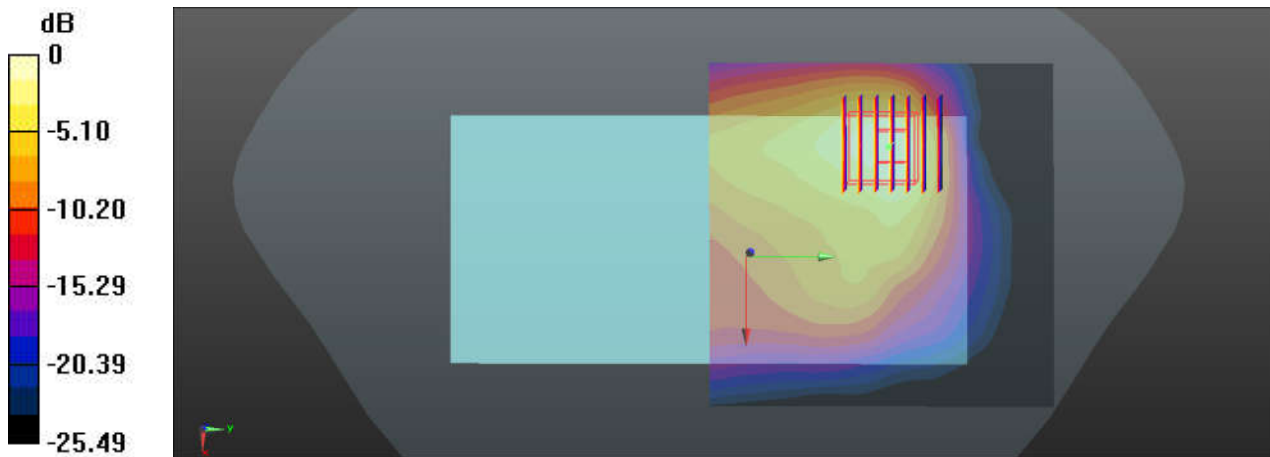

0 dB = 1.62 W/kg

51_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch58

Communication System: UID 0, WIFI (0); Frequency: 5290 MHz; Duty Cycle: 1:1.082
Medium: HSL_5250_231022 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.571$ S/m; $\epsilon_r = 35.722$;
 $\rho = 1000$ kg/m³


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch58/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Ch58/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.176 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.87 W/kg
SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.229 W/kg
Maximum value of SAR (measured) = 1.66 W/kg

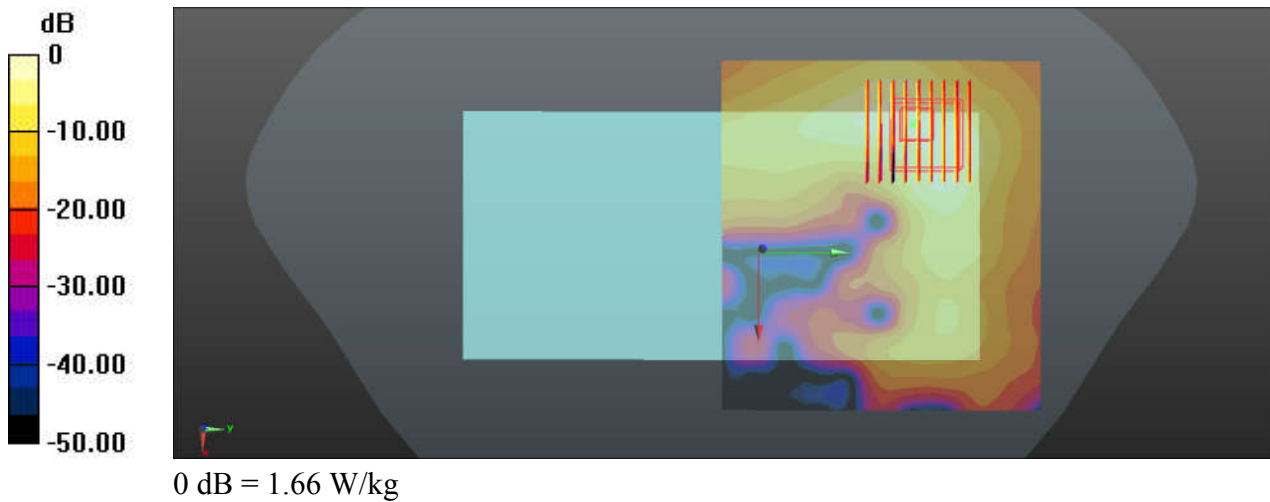

52_WLAN5GHz_802.11a 6Mbps_Back_5mm_Ch144

Communication System: UID 0, WIFI (0); Frequency: 5720 MHz;Duty Cycle: 1:1.018
Medium: HSL_5750_231024 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.051$ S/m; $\epsilon_r = 34.999$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.65, 4.65, 4.65); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Ch144/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.83 W/kg


Ch144/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.385 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.30 W/kg

SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 2.04 W/kg

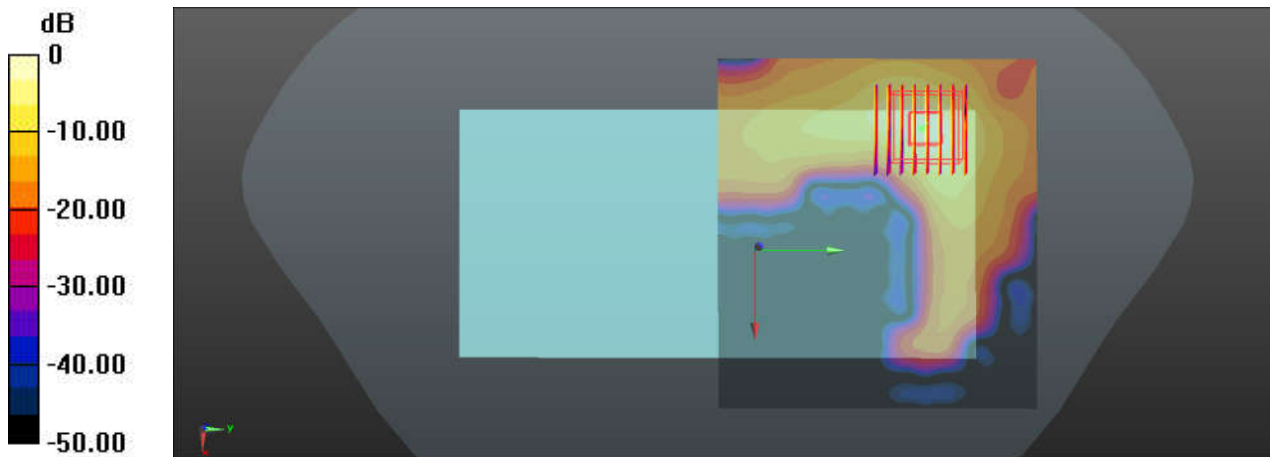

0 dB = 2.04 W/kg

53_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.082
Medium: HSL_5750_231024 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.097$ S/m; $\epsilon_r = 36.322$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.65, 4.65, 4.65); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.91 W/kg


Ch155/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

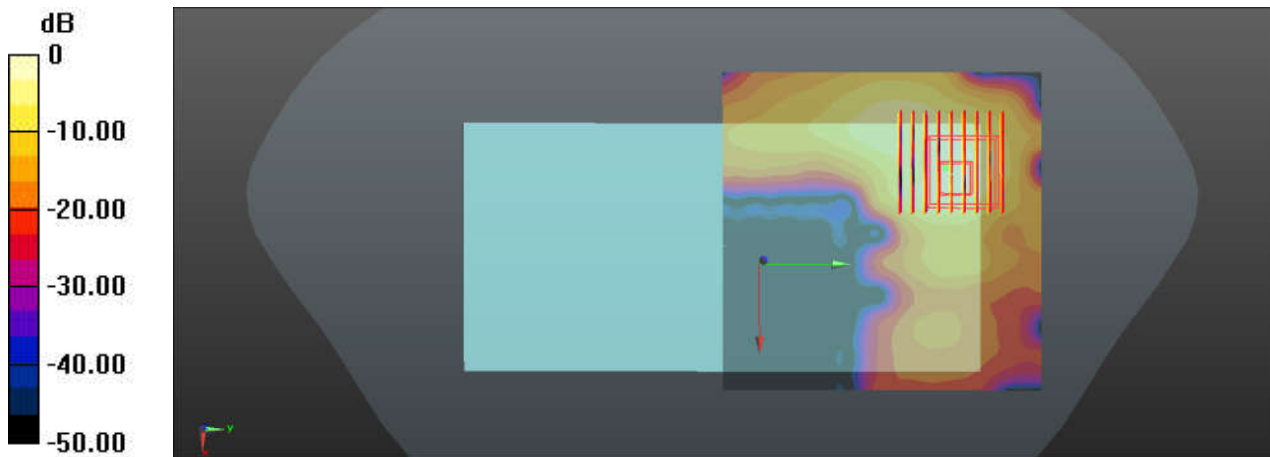

0 dB = 1.80 W/kg

54_LTE Band 12_10M_QPSK_1RB_25Offset_Back_0mm_Ch23095

Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_231012 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 43.661$;
 $\rho = 1000$ kg/m³


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.71, 9.71, 9.71); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23095/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 9.72 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.52 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 19.8 W/kg
SAR(1 g) = 4.65 W/kg; SAR(10 g) = 1.86 W/kg
Maximum value of SAR (measured) = 13.4 W/kg

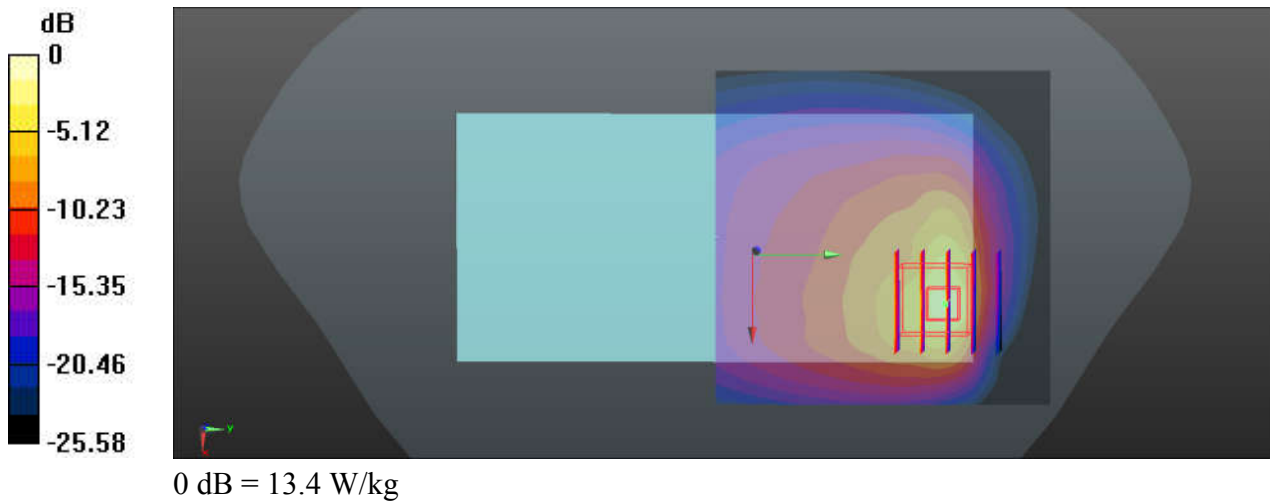

55_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4132

Communication System: UID 0, Generic WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: HSL_835_231013 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 43.191$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4132/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 8.88 W/kg

Ch4132/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.71 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 16.4 W/kg
SAR(1 g) = 4.33 W/kg; SAR(10 g) = 2.12 W/kg
 Maximum value of SAR (measured) = 8.43 W/kg

Ch4132/Zoom Scan (6x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.71 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 14.7 W/kg
SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.78 W/kg
 Maximum value of SAR (measured) = 8.00 W/kg

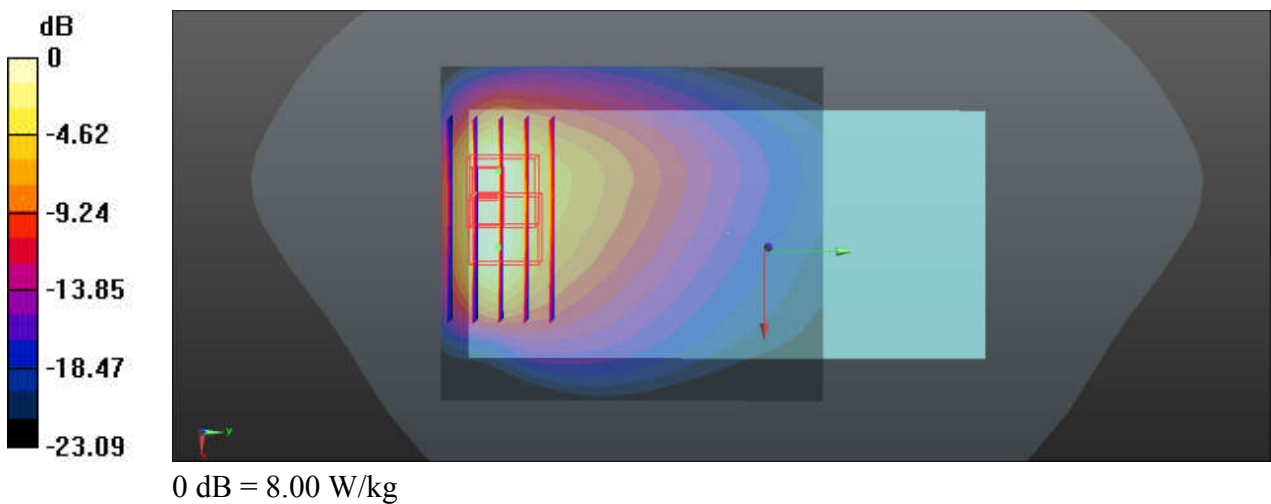

56_LTE Band 5_10M_QPSK_1RB_25Offset_Back_0mm_Ch20525

Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_231013 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 43.236$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.49, 9.49, 9.49); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20525/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 11.6 W/kg


Ch20525/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 20.9 W/kg

SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

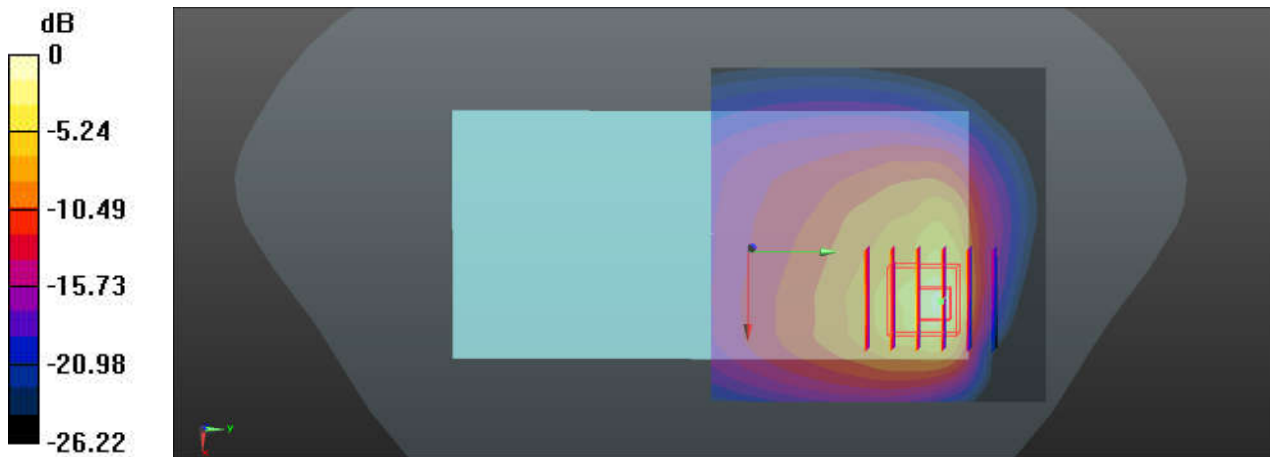

0 dB = 14.6 W/kg

57_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1312

Communication System: UID 0, Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_231015 Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.305 \text{ S/m}$; $\epsilon_r = 38.934$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1312/Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 12.0 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 81.52 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 14.0 W/kg
SAR(1 g) = 5.54 W/kg; SAR(10 g) = 2.44 W/kg
 Maximum value of SAR (measured) = 10.8 W/kg

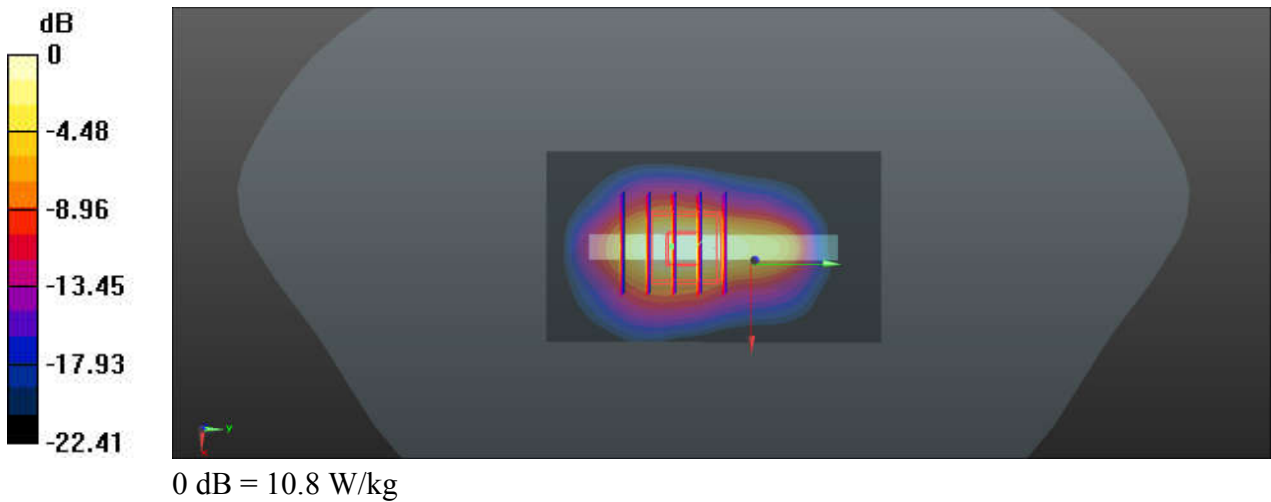

58_LTE Band 66_20M_QPSK_1RB_49Offset_Bottom Side_0mm_Ch132072

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1750_231015 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.58, 8.58, 8.58); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132072/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.6 W/kg


Ch132072/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 76.43 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 5.03 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

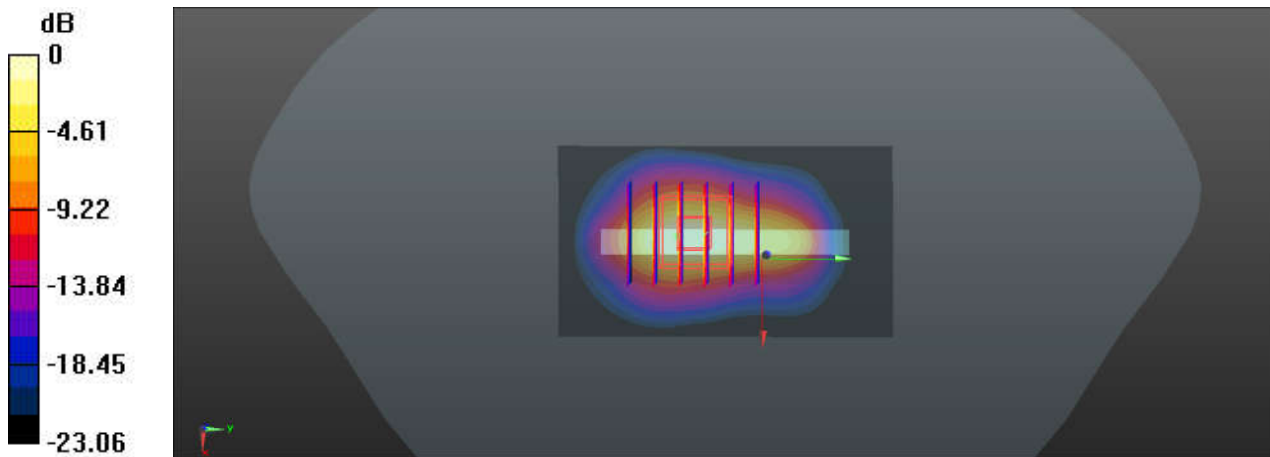

0 dB = 10.2 W/kg

59_GSM1900_GPRS (2 Tx slots)_Back_0mm_Ch810

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15
 Medium: HSL_1900_231017 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 40.967$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.3 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 4.85 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.779 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 7.72 W/kg
SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.68 W/kg
 Maximum value of SAR (measured) = 5.31 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.779 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 7.79 W/kg
SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.29 W/kg
 Maximum value of SAR (measured) = 4.90 W/kg

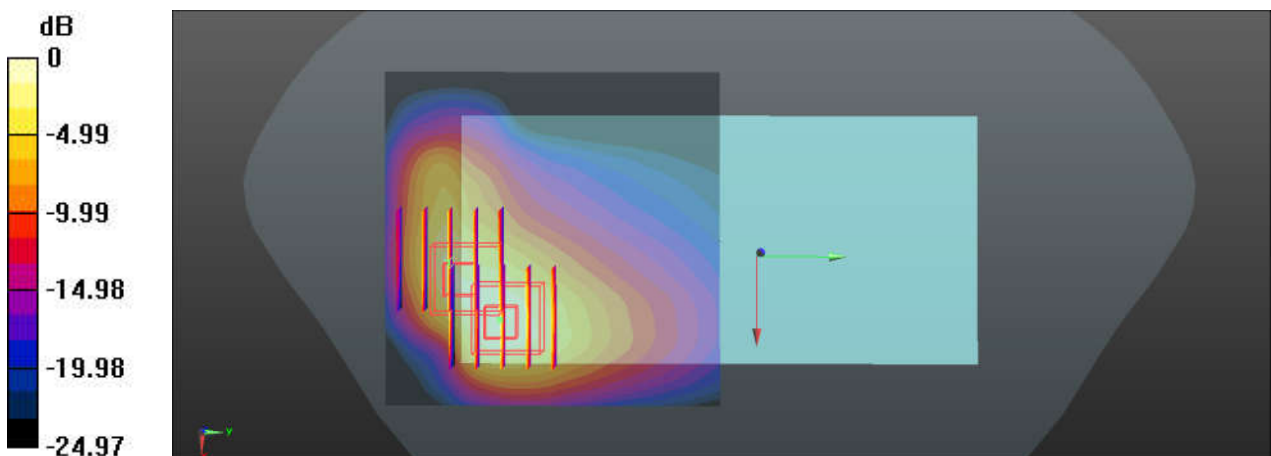

0 dB = 4.90 W/kg

60_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262

Communication System: UID 0, Generic WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1900_231017 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 40.993$; $\rho = 1000$ kg/m³


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9262/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.8 W/kg

Ch9262/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 95.77 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 16.5 W/kg
SAR(1 g) = 6.6 W/kg; SAR(10 g) = 2.88 W/kg
Maximum value of SAR (measured) = 13.0 W/kg

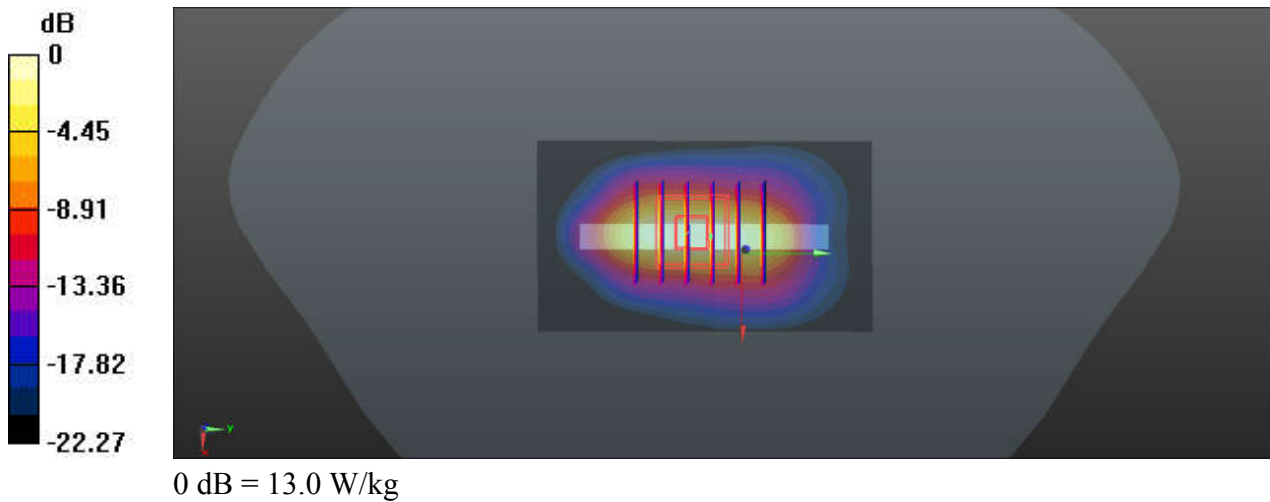

61_LTE Band 2_20M_QPSK_1RB_49Offset_Bottom Side_0mm_Ch18900

Communication System: UID 0, Generic LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900_231017 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 40.97$; $\rho = 1000$ kg/m³



Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(8.29, 8.29, 8.29); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Ch18900/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.1 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 80.38 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 12.5 W/kg
SAR(1 g) = 4.76 W/kg; SAR(10 g) = 2.08 W/kg
Maximum value of SAR (measured) = 9.70 W/kg

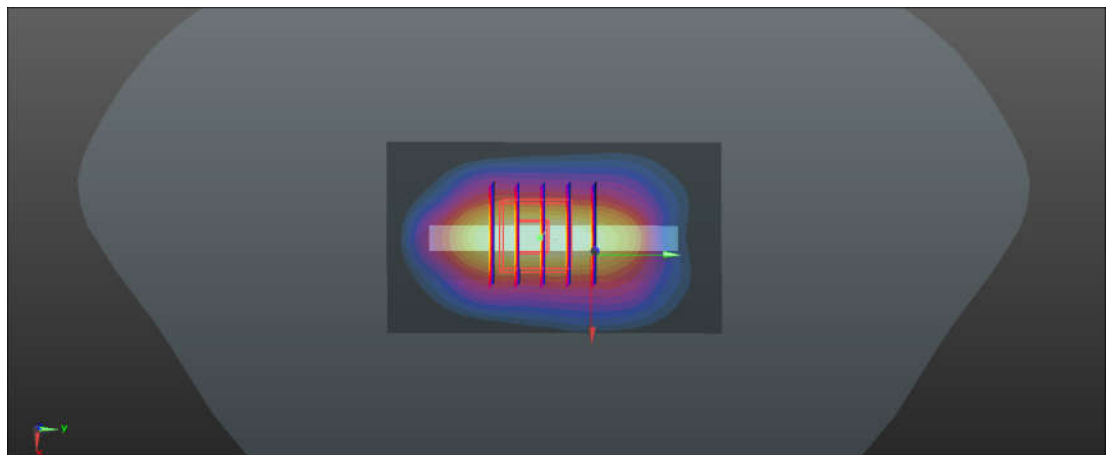

0 dB = 9.70 W/kg

62_LTE Band 30_10M_QPSK_1RB_0Offset_Back_0mm_Ch27710

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: HSL_2300_231019 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.697$ S/m; $\epsilon_r = 40.432$;
 $\rho = 1000$ kg/m³


Ambient Temperature: 22.5 °C ; **Liquid Temperature:** 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.91, 7.91, 7.91); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch27710/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 13.1 W/kg

Ch27710/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.545 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 19.4 W/kg
SAR(1 g) = 6.37 W/kg; SAR(10 g) = 2.67 W/kg
Maximum value of SAR (measured) = 13.5 W/kg

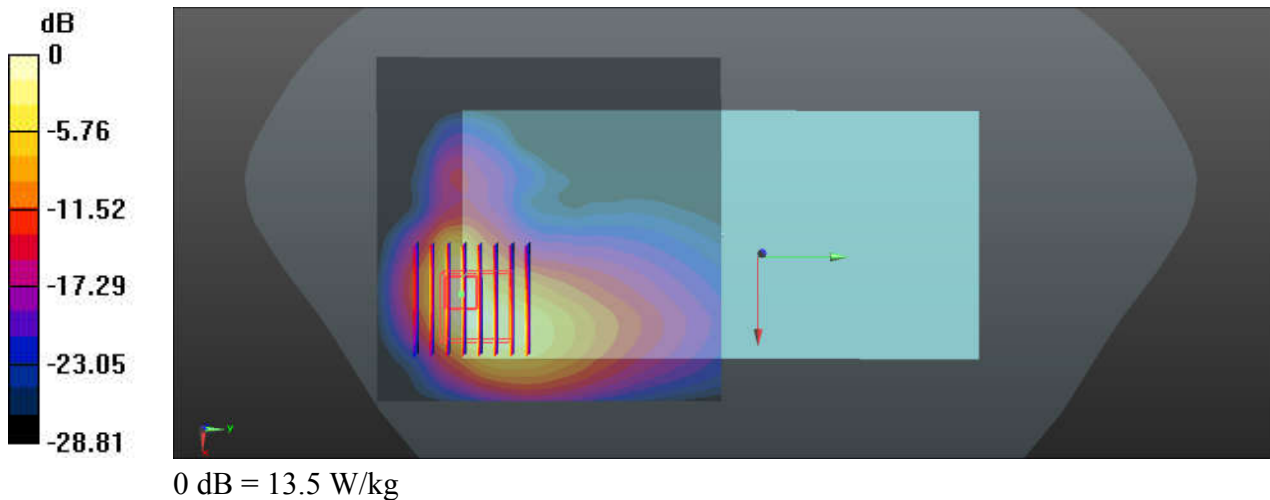

63_LTE Band 7_20M_QPSK_1RB_49Offset_Back_0mm_Ch20850

Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231021 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 40.166$;
 $\rho = 1000$ kg/m³


Ambient Temperature: 22.2 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20850/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 6.29 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.884 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 14.7 W/kg
SAR(1 g) = 4.23 W/kg; SAR(10 g) = 1.52 W/kg
Maximum value of SAR (measured) = 9.91 W/kg

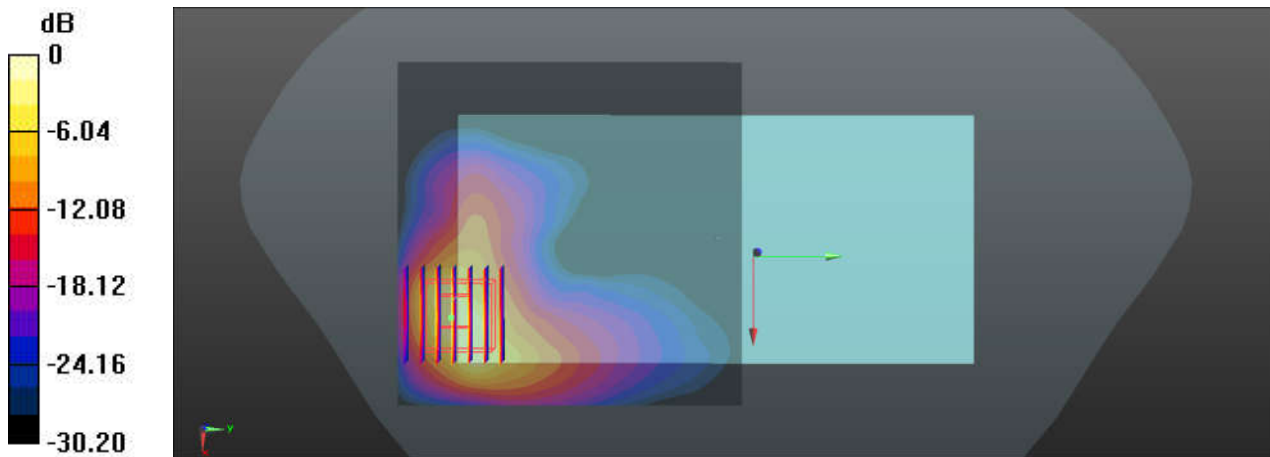

0 dB = 9.91 W/kg

64_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.018
Medium: HSL_2450_231020 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.799$ S/m; $\epsilon_r = 40.332$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.2 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.64, 7.64, 7.64); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.58 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.488 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 6.02 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 0.877 W/kg

Maximum value of SAR (measured) = 4.00 W/kg

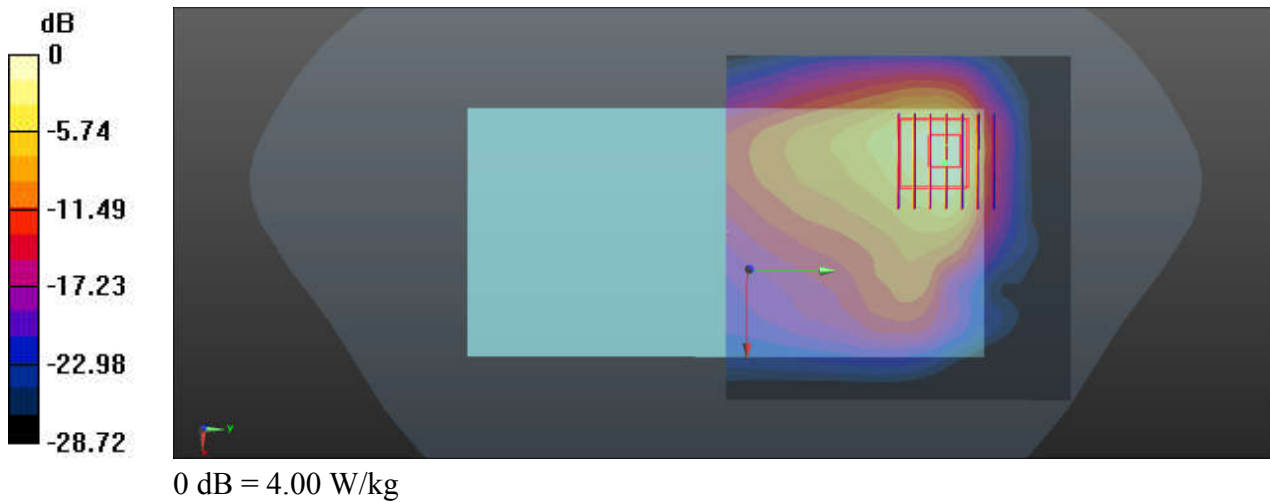

65_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch44

Communication System: UID 0, WIFI (0); Frequency: 5220 MHz; Duty Cycle: 1:1.018
Medium: HSL_5250_231022 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.501$ S/m; $\epsilon_r = 35.87$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch44/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 9.89 W/kg


Ch44/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.518 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 22.9 W/kg

SAR(1 g) = 4.31 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

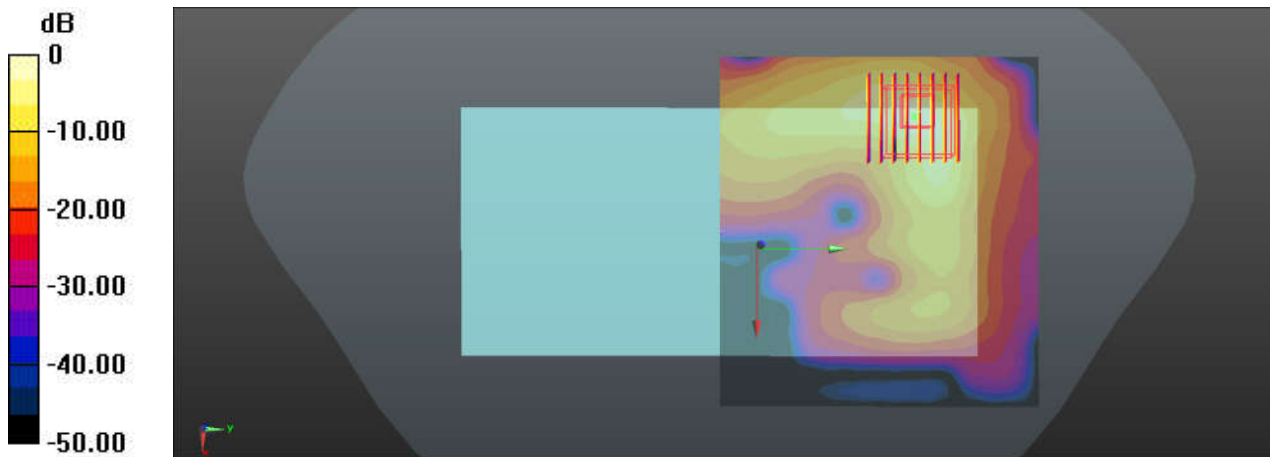

0 dB = 12.7 W/kg

66_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz; Duty Cycle: 1:1.018
Medium: HSL_5250_231022 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 35.79$; $\rho = 1000$ kg/m³


Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch52/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 8.15 W/kg

Ch52/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.167 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 18.8 W/kg
SAR(1 g) = 3.44 W/kg; SAR(10 g) = 1.01 W/kg
Maximum value of SAR (measured) = 9.40 W/kg

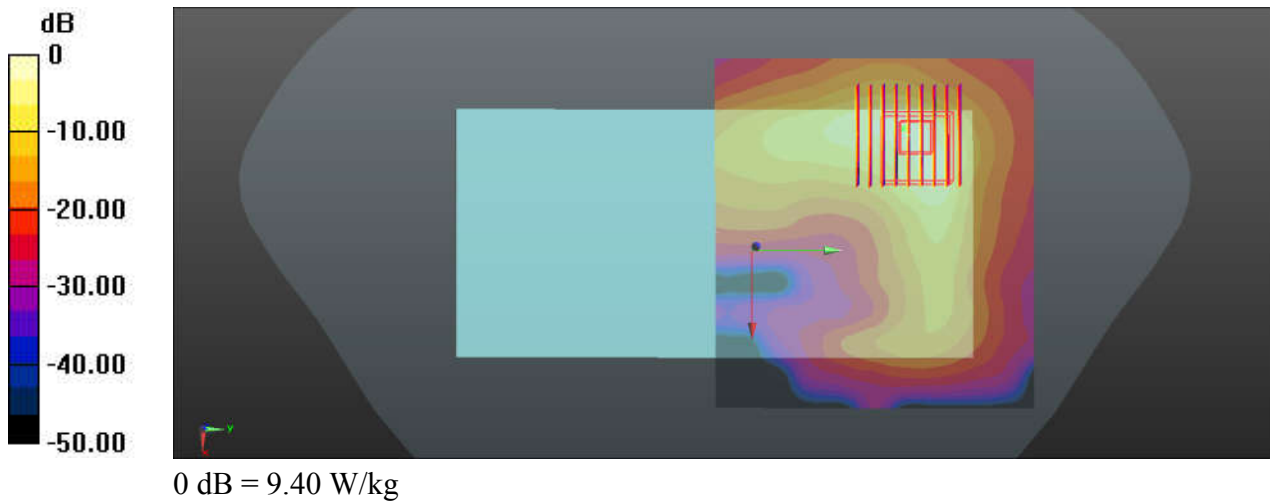

67_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch100

Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.018
Medium: HSL_5600_231023 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 35.282$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.54, 4.54, 4.54); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch100/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.97 W/kg


Ch100/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.100 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 13.9 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 0.583 W/kg

Maximum value of SAR (measured) = 7.03 W/kg

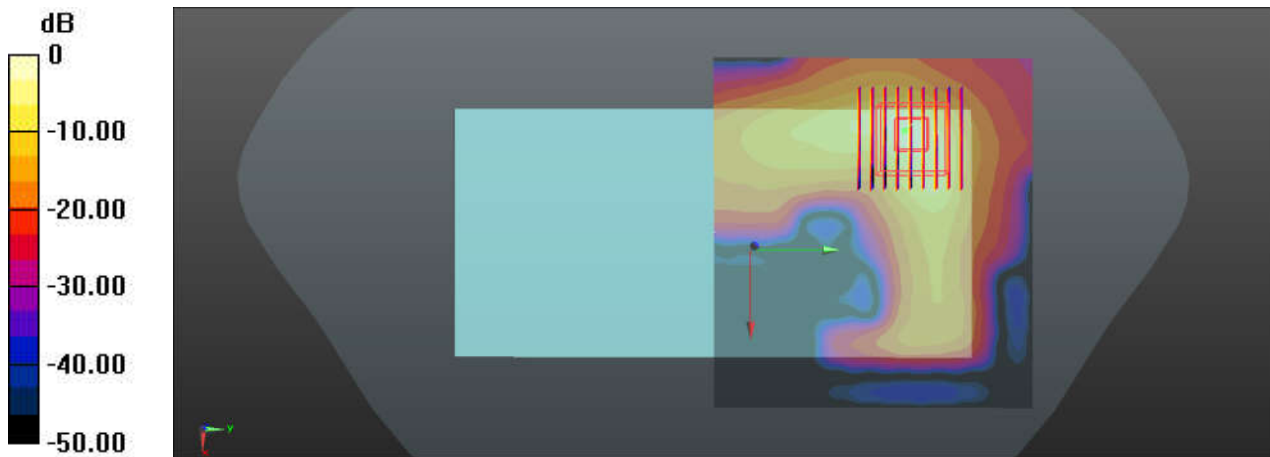

0 dB = 7.03 W/kg

68_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch157

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.018
Medium: HSL_5750_231024 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.148$ S/m; $\epsilon_r = 34.866$;
 $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C ; **Liquid Temperature:** 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.65, 4.65, 4.65); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2022/11/23
- Phantom: SAM (30deg probe tilt) with CRP v4.0; Type: QD000P40CB; Serial: TP:1500
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch157/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 9.05 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.4680 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 18.5 W/kg
SAR(1 g) = 4.26 W/kg; SAR(10 g) = 1.01 W/kg
Maximum value of SAR (measured) = 10.0 W/kg

