







Mode	28																																																									
	Band Edge - L																																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHZ																																																									
ANT	3																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5399.82 51.87 74.00 -22.13</td> <td>38.23</td> <td>34.82</td> <td>10.91</td> <td>32.09</td> <td>226</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2 5464.82 52.14 68.30 -16.16</td> <td>38.36</td> <td>34.81</td> <td>11.14</td> <td>32.17</td> <td>226</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5399.82 51.87 74.00 -22.13	38.23	34.82	10.91	32.09	226	292	PEAK	2 5464.82 52.14 68.30 -16.16	38.36	34.81	11.14	32.17	226	292	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5610.00 91.21 -----</td> <td>76.84</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>226</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5610.00 91.21 -----	76.84	34.95	11.71	32.29	226	292	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5399.82 51.87 74.00 -22.13	38.23	34.82	10.91	32.09	226	292	PEAK																																																			
2 5464.82 52.14 68.30 -16.16	38.36	34.81	11.14	32.17	226	292	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5610.00 91.21 -----	76.84	34.95	11.71	32.29	226	292	PEAK																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.28 42.44 54.00 -11.56</td> <td>28.68</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>226</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5457.28 42.44 54.00 -11.56	28.68	34.81	11.11	32.16	226	292	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5610.00 84.40 -----</td> <td>70.05</td> <td>34.94</td> <td>11.70</td> <td>32.29</td> <td>226</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5610.00 84.40 -----	70.05	34.94	11.70	32.29	226	292	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5457.28 42.44 54.00 -11.56	28.68	34.81	11.11	32.16	226	292	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5610.00 84.40 -----	70.05	34.94	11.70	32.29	226	292	AVERAGE																																																			



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																					
ANT	3																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5737.49</td> <td>52.50</td> <td>68.30</td> <td>-15.80</td> <td>38.12</td> <td>35.13</td> <td>11.65</td> <td>32.40</td> <td>226 292 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5737.49	52.50	68.30	-15.80	38.12	35.13	11.65	32.40	226 292 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5737.49	52.50	68.30	-15.80	38.12	35.13	11.65	32.40	226 292 PEAK																														

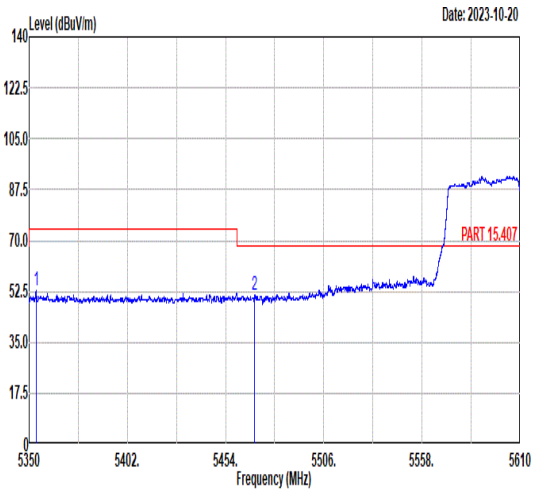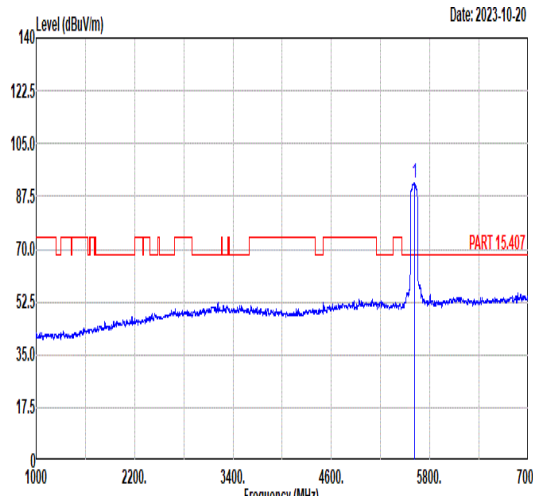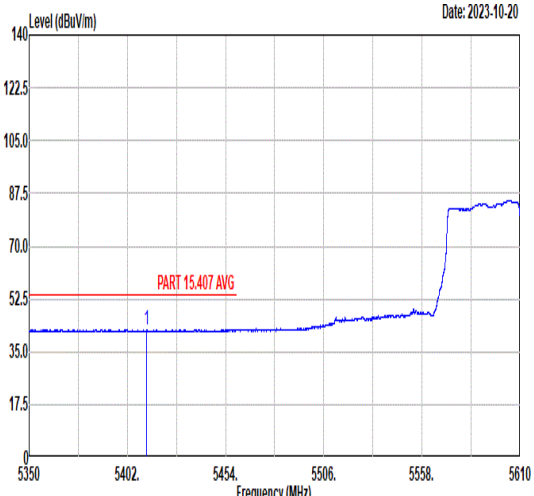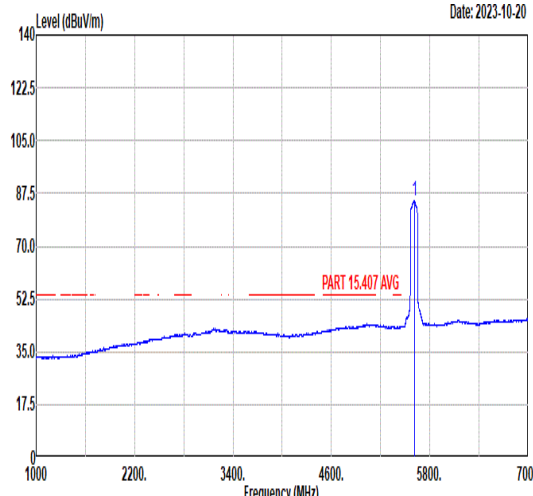

	28																																																																																											
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH122_5610MHz																																																																																											
ANT	3																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 <p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.77</td> <td>52.75</td> <td>74.00</td> <td>-21.25</td> <td>39.01</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>223</td> <td>271</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.47</td> <td>51.29</td> <td>68.30</td> <td>-17.01</td> <td>37.50</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>223</td> <td>271</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.77	52.75	74.00	-21.25	39.01	34.83	10.94	32.03	223	271	PEAK	2	5469.47	51.29	68.30	-17.01	37.50	34.81	11.16	32.18	223	271	PEAK	 <p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>92.01</td> <td>-----</td> <td>-----</td> <td>77.64</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>223</td> <td>271</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	92.01	-----	-----	77.64	34.96	11.71	32.30	223	271	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5353.77	52.75	74.00	-21.25	39.01	34.83	10.94	32.03	223	271	PEAK																																																																																	
2	5469.47	51.29	68.30	-17.01	37.50	34.81	11.16	32.18	223	271	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	92.01	-----	-----	77.64	34.96	11.71	32.30	223	271	PEAK																																																																																	
Avg	 <p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.27</td> <td>42.39</td> <td>54.00</td> <td>-11.61</td> <td>28.76</td> <td>34.82</td> <td>10.92</td> <td>32.11</td> <td>223</td> <td>271</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5412.27	42.39	54.00	-11.61	28.76	34.82	10.92	32.11	223	271	AVERAGE	 <p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>85.12</td> <td>-----</td> <td>-----</td> <td>70.75</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>223</td> <td>271</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	85.12	-----	-----	70.75	34.96	11.71	32.30	223	271	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5412.27	42.39	54.00	-11.61	28.76	34.82	10.92	32.11	223	271	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	85.12	-----	-----	70.75	34.96	11.71	32.30	223	271	AVERAGE																																																																																	



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																					
ANT	3																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-10-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5748.96</td> <td>52.73</td> <td>68.30</td> <td>-15.57</td> <td>38.34</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>223 271 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5748.96	52.73	68.30	-15.57	38.34	35.15	11.64	32.40	223 271 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5748.96	52.73	68.30	-15.57	38.34	35.15	11.64	32.40	223 271 PEAK																														



Mode	29																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHZ																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<p>Data: 1 Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos2</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.000</td> <td>60.92</td> <td>-13.08</td> <td>74.00</td> <td>56.99</td> <td>39.79</td> <td>14.84</td> <td>50.70</td> <td>182</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.000</td> <td>50.26</td> <td>-3.74</td> <td>54.00</td> <td>46.33</td> <td>39.79</td> <td>14.84</td> <td>50.70</td> <td>182</td> <td>0</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.000</td> <td>50.37</td> <td>-17.93</td> <td>68.30</td> <td>42.33</td> <td>42.41</td> <td>17.56</td> <td>51.93</td> <td>---</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos2	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	11490.000	60.92	-13.08	74.00	56.99	39.79	14.84	50.70	182	0	Peak	2	11490.000	50.26	-3.74	54.00	46.33	39.79	14.84	50.70	182	0	Average	3	17235.000	50.37	-17.93	68.30	42.33	42.41	17.56	51.93	---	0	Peak	<p>Data: 2 Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos2</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.000</td> <td>61.57</td> <td>-12.43</td> <td>74.00</td> <td>57.64</td> <td>39.79</td> <td>14.84</td> <td>50.70</td> <td>388</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.000</td> <td>50.79</td> <td>-3.21</td> <td>54.00</td> <td>46.86</td> <td>39.79</td> <td>14.84</td> <td>50.70</td> <td>388</td> <td>0</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.000</td> <td>51.84</td> <td>-16.46</td> <td>68.30</td> <td>43.80</td> <td>42.41</td> <td>17.56</td> <td>51.93</td> <td>---</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos2	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1	11490.000	61.57	-12.43	74.00	57.64	39.79	14.84	50.70	388	0	Peak	2	11490.000	50.79	-3.21	54.00	46.86	39.79	14.84	50.70	388	0	Average	3	17235.000	51.84	-16.46	68.30	43.80	42.41	17.56	51.93	---	0	Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos2	Remark																																																																																																																		
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																			
1	11490.000	60.92	-13.08	74.00	56.99	39.79	14.84	50.70	182	0	Peak																																																																																																															
2	11490.000	50.26	-3.74	54.00	46.33	39.79	14.84	50.70	182	0	Average																																																																																																															
3	17235.000	50.37	-17.93	68.30	42.33	42.41	17.56	51.93	---	0	Peak																																																																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos2	Remark																																																																																																																			
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																																																																																			
1	11490.000	61.57	-12.43	74.00	57.64	39.79	14.84	50.70	388	0	Peak																																																																																																															
2	11490.000	50.79	-3.21	54.00	46.86	39.79	14.84	50.70	388	0	Average																																																																																																															
3	17235.000	51.84	-16.46	68.30	43.80	42.41	17.56	51.93	---	0	Peak																																																																																																															



Mode	30																																																																																																									
	Harmonic																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																									
ANT	3																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>60.33</td> <td>74.00</td> <td>-13.67</td> <td>57.85</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>184</td> <td>67</td> <td>Peak</td> </tr> <tr> <td>2 11570.00</td> <td>50.37</td> <td>54.00</td> <td>-3.63</td> <td>47.89</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>184</td> <td>67</td> <td>Average</td> </tr> <tr> <td>3 17355.00</td> <td>49.79</td> <td>68.30</td> <td>-18.51</td> <td>42.50</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	60.33	74.00	-13.67	57.85	38.26	14.88	50.66	184	67	Peak	2 11570.00	50.37	54.00	-3.63	47.89	38.26	14.88	50.66	184	67	Average	3 17355.00	49.79	68.30	-18.51	42.50	41.74	17.60	52.05	--	--	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>59.00</td> <td>74.00</td> <td>-15.00</td> <td>56.52</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>392</td> <td>327</td> <td>Peak</td> </tr> <tr> <td>2 11570.00</td> <td>48.85</td> <td>54.00</td> <td>-5.15</td> <td>46.37</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>392</td> <td>327</td> <td>Average</td> </tr> <tr> <td>3 17355.00</td> <td>50.33</td> <td>68.30</td> <td>-17.97</td> <td>43.04</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	59.00	74.00	-15.00	56.52	38.26	14.88	50.66	392	327	Peak	2 11570.00	48.85	54.00	-5.15	46.37	38.26	14.88	50.66	392	327	Average	3 17355.00	50.33	68.30	-17.97	43.04	41.74	17.60	52.05	--	--	Peak
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11570.00	60.33	74.00	-13.67	57.85	38.26	14.88	50.66	184	67	Peak																																																																																																
2 11570.00	50.37	54.00	-3.63	47.89	38.26	14.88	50.66	184	67	Average																																																																																																
3 17355.00	49.79	68.30	-18.51	42.50	41.74	17.60	52.05	--	--	Peak																																																																																																
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11570.00	59.00	74.00	-15.00	56.52	38.26	14.88	50.66	392	327	Peak																																																																																																
2 11570.00	48.85	54.00	-5.15	46.37	38.26	14.88	50.66	392	327	Average																																																																																																
3 17355.00	50.33	68.30	-17.97	43.04	41.74	17.60	52.05	--	--	Peak																																																																																																



Mode	31																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<p>Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>59.02</td> <td>74.00</td> <td>-14.98</td> <td>56.38</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>184</td> <td>64</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>48.30</td> <td>54.00</td> <td>-5.70</td> <td>45.66</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>184</td> <td>64</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>50.21</td> <td>68.30</td> <td>-18.09</td> <td>43.13</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	59.02	74.00	-14.98	56.38	38.32	14.93	50.61	184	64	Peak	2	11650.00	48.30	54.00	-5.70	45.66	38.32	14.93	50.61	184	64	Average	3	17475.00	50.21	68.30	-18.09	43.13	41.62	17.63	52.17	--	--	Peak	<p>Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>56.23</td> <td>74.00</td> <td>-17.77</td> <td>53.59</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>359</td> <td>327</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>45.44</td> <td>54.00</td> <td>-8.56</td> <td>42.80</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>359</td> <td>327</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>43.24</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	56.23	74.00	-17.77	53.59	38.32	14.93	50.61	359	327	Peak	2	11650.00	45.44	54.00	-8.56	42.80	38.32	14.93	50.61	359	327	Average	3	17475.00	50.32	68.30	-17.98	43.24	41.62	17.63	52.17	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11650.00	59.02	74.00	-14.98	56.38	38.32	14.93	50.61	184	64	Peak																																																																																																															
2	11650.00	48.30	54.00	-5.70	45.66	38.32	14.93	50.61	184	64	Average																																																																																																															
3	17475.00	50.21	68.30	-18.09	43.13	41.62	17.63	52.17	--	--	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11650.00	56.23	74.00	-17.77	53.59	38.32	14.93	50.61	359	327	Peak																																																																																																															
2	11650.00	45.44	54.00	-8.56	42.80	38.32	14.93	50.61	359	327	Average																																																																																																															
3	17475.00	50.32	68.30	-17.98	43.24	41.62	17.63	52.17	--	--	Peak																																																																																																															



	32																																																																																																																					
Mode	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																					
ANT	3																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	<p style="text-align: right;">Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5625.32</td> <td>53.79</td> <td>68.30</td> <td>-14.51</td> <td>39.42</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.01</td> <td>51.76</td> <td>68.31</td> <td>-16.55</td> <td>37.39</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.32</td> <td>58.68</td> <td>108.65</td> <td>-49.97</td> <td>44.30</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.57</td> <td>60.41</td> <td>112.10</td> <td>-51.69</td> <td>46.02</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5625.32	53.79	68.30	-14.51	39.42	34.98	11.70	32.31	100	306	PEAK	2	5650.01	51.76	68.31	-16.55	37.39	35.01	11.69	32.33	100	306	PEAK	3	5712.32	58.68	108.65	-49.97	44.30	35.10	11.66	32.38	100	306	PEAK	4	5720.57	60.41	112.10	-51.69	46.02	35.11	11.66	32.38	100	306	PEAK	<p style="text-align: right;">Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.43</td> <td>-----</td> <td>-----</td> <td>82.05</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>306</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5745.00	96.43	-----	-----	82.05	35.14	11.64	32.40	100	306	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																													
1	5625.32	53.79	68.30	-14.51	39.42	34.98	11.70	32.31	100	306	PEAK																																																																																																											
2	5650.01	51.76	68.31	-16.55	37.39	35.01	11.69	32.33	100	306	PEAK																																																																																																											
3	5712.32	58.68	108.65	-49.97	44.30	35.10	11.66	32.38	100	306	PEAK																																																																																																											
4	5720.57	60.41	112.10	-51.69	46.02	35.11	11.66	32.38	100	306	PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	96.43	-----	-----	82.05	35.14	11.64	32.40	100	306	PEAK																																																																																																											
Avg	Blank	<p style="text-align: right;">Date: 2023-10-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>89.16</td> <td>-----</td> <td>-----</td> <td>74.78</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5745.00	89.16	-----	-----	74.78	35.14	11.64	32.40	100	306	AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	89.16	-----	-----	74.78	35.14	11.64	32.40	100	306	AVERAGE																																																																																																											





	32																																																																																																																			
Mode	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																			
ANT	3																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5635.74</td> <td>52.80</td> <td>68.30</td> <td>-15.50</td> <td>38.44</td> <td>34.99</td> <td>11.69</td> <td>32.32</td> <td>200</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.24</td> <td>52.11</td> <td>68.48</td> <td>-16.37</td> <td>37.74</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>200</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5712.03</td> <td>56.63</td> <td>108.57</td> <td>-51.94</td> <td>42.25</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>200</td> <td>337</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.31</td> <td>61.71</td> <td>113.78</td> <td>-52.07</td> <td>47.33</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>200</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5635.74	52.80	68.30	-15.50	38.44	34.99	11.69	32.32	200	337	PEAK	2	5650.24	52.11	68.48	-16.37	37.74	35.01	11.69	32.33	200	337	PEAK	3	5712.03	56.63	108.57	-51.94	42.25	35.10	11.66	32.38	200	337	PEAK	4	5721.31	61.71	113.78	-52.07	47.33	35.11	11.65	32.38	200	337	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>94.44</td> <td>-----</td> <td>-----</td> <td>80.05</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>200</td> <td>337</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5745.00	94.44	-----	-----	80.05	35.15	11.64	32.40	200	337	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5635.74	52.80	68.30	-15.50	38.44	34.99	11.69	32.32	200	337	PEAK																																																																																																									
2	5650.24	52.11	68.48	-16.37	37.74	35.01	11.69	32.33	200	337	PEAK																																																																																																									
3	5712.03	56.63	108.57	-51.94	42.25	35.10	11.66	32.38	200	337	PEAK																																																																																																									
4	5721.31	61.71	113.78	-52.07	47.33	35.11	11.65	32.38	200	337	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	94.44	-----	-----	80.05	35.15	11.64	32.40	200	337	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>87.67</td> <td>-----</td> <td>-----</td> <td>73.29</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>200</td> <td>337</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5745.00	87.67	-----	-----	73.29	35.14	11.64	32.40	200	337	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	87.67	-----	-----	73.29	35.14	11.64	32.40	200	337	AVERAGE																																																																																																									



Mode	32																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																	
ANT	3																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>61.57</td> <td>74.00</td> <td>-12.43</td> <td>59.25</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>183</td> <td>68 Peak</td> </tr> <tr> <td>2 11490.00</td> <td>49.49</td> <td>54.00</td> <td>-4.51</td> <td>47.17</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>183</td> <td>68 Average</td> </tr> <tr> <td>3 17235.00</td> <td>49.30</td> <td>68.30</td> <td>-19.00</td> <td>41.80</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11490.00	61.57	74.00	-12.43	59.25	38.19	14.83	50.70	183	68 Peak	2 11490.00	49.49	54.00	-4.51	47.17	38.19	14.83	50.70	183	68 Average	3 17235.00	49.30	68.30	-19.00	41.80	41.86	17.57	51.93	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>61.30</td> <td>74.00</td> <td>-12.70</td> <td>58.98</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>388</td> <td>326 Peak</td> </tr> <tr> <td>2 11490.00</td> <td>49.87</td> <td>54.00</td> <td>-4.13</td> <td>47.55</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>388</td> <td>326 Average</td> </tr> <tr> <td>3 17235.00</td> <td>49.38</td> <td>68.30</td> <td>-18.92</td> <td>41.88</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11490.00	61.30	74.00	-12.70	58.98	38.19	14.83	50.70	388	326 Peak	2 11490.00	49.87	54.00	-4.13	47.55	38.19	14.83	50.70	388	326 Average	3 17235.00	49.38	68.30	-18.92	41.88	41.86	17.57	51.93	--	-- Peak
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1 11490.00	61.57	74.00	-12.43	59.25	38.19	14.83	50.70	183	68 Peak																																																																																									
2 11490.00	49.49	54.00	-4.51	47.17	38.19	14.83	50.70	183	68 Average																																																																																									
3 17235.00	49.30	68.30	-19.00	41.80	41.86	17.57	51.93	--	-- Peak																																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1 11490.00	61.30	74.00	-12.70	58.98	38.19	14.83	50.70	388	326 Peak																																																																																									
2 11490.00	49.87	54.00	-4.13	47.55	38.19	14.83	50.70	388	326 Average																																																																																									
3 17235.00	49.38	68.30	-18.92	41.88	41.86	17.57	51.93	--	-- Peak																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>61.57</td> <td>74.00</td> <td>-12.43</td> <td>59.25</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>183</td> <td>68 Peak</td> </tr> <tr> <td>2 11490.00</td> <td>49.49</td> <td>54.00</td> <td>-4.51</td> <td>47.17</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>183</td> <td>68 Average</td> </tr> <tr> <td>3 17235.00</td> <td>49.30</td> <td>68.30</td> <td>-19.00</td> <td>41.80</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11490.00	61.57	74.00	-12.43	59.25	38.19	14.83	50.70	183	68 Peak	2 11490.00	49.49	54.00	-4.51	47.17	38.19	14.83	50.70	183	68 Average	3 17235.00	49.30	68.30	-19.00	41.80	41.86	17.57	51.93	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>61.30</td> <td>74.00</td> <td>-12.70</td> <td>58.98</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>388</td> <td>326 Peak</td> </tr> <tr> <td>2 11490.00</td> <td>49.87</td> <td>54.00</td> <td>-4.13</td> <td>47.55</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>388</td> <td>326 Average</td> </tr> <tr> <td>3 17235.00</td> <td>49.38</td> <td>68.30</td> <td>-18.92</td> <td>41.88</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11490.00	61.30	74.00	-12.70	58.98	38.19	14.83	50.70	388	326 Peak	2 11490.00	49.87	54.00	-4.13	47.55	38.19	14.83	50.70	388	326 Average	3 17235.00	49.38	68.30	-18.92	41.88	41.86	17.57	51.93	--	-- Peak
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1 11490.00	61.57	74.00	-12.43	59.25	38.19	14.83	50.70	183	68 Peak																																																																																									
2 11490.00	49.49	54.00	-4.51	47.17	38.19	14.83	50.70	183	68 Average																																																																																									
3 17235.00	49.30	68.30	-19.00	41.80	41.86	17.57	51.93	--	-- Peak																																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1 11490.00	61.30	74.00	-12.70	58.98	38.19	14.83	50.70	388	326 Peak																																																																																									
2 11490.00	49.87	54.00	-4.13	47.55	38.19	14.83	50.70	388	326 Average																																																																																									
3 17235.00	49.38	68.30	-18.92	41.88	41.86	17.57	51.93	--	-- Peak																																																																																									



Mode	33																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>61.33</td> <td>74.00</td> <td>-12.67</td> <td>58.85</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>183</td> <td>66</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>50.55</td> <td>54.00</td> <td>-3.45</td> <td>48.07</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>183</td> <td>66</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>50.00</td> <td>68.30</td> <td>-18.30</td> <td>42.71</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	61.33	74.00	-12.67	58.85	38.26	14.88	50.66	183	66	Peak	2	11570.00	50.55	54.00	-3.45	48.07	38.26	14.88	50.66	183	66	Average	3	17355.00	50.00	68.30	-18.30	42.71	41.74	17.60	52.05	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>58.22</td> <td>74.00</td> <td>-15.78</td> <td>55.74</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>392</td> <td>326</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>48.40</td> <td>54.00</td> <td>-5.60</td> <td>45.92</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>392</td> <td>326</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>50.11</td> <td>68.30</td> <td>-18.19</td> <td>42.82</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	58.22	74.00	-15.78	55.74	38.26	14.88	50.66	392	326	Peak	2	11570.00	48.40	54.00	-5.60	45.92	38.26	14.88	50.66	392	326	Average	3	17355.00	50.11	68.30	-18.19	42.82	41.74	17.60	52.05	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11570.00	61.33	74.00	-12.67	58.85	38.26	14.88	50.66	183	66	Peak																																																																																																															
2	11570.00	50.55	54.00	-3.45	48.07	38.26	14.88	50.66	183	66	Average																																																																																																															
3	17355.00	50.00	68.30	-18.30	42.71	41.74	17.60	52.05	--	--	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11570.00	58.22	74.00	-15.78	55.74	38.26	14.88	50.66	392	326	Peak																																																																																																															
2	11570.00	48.40	54.00	-5.60	45.92	38.26	14.88	50.66	392	326	Average																																																																																																															
3	17355.00	50.11	68.30	-18.19	42.82	41.74	17.60	52.05	--	--	Peak																																																																																																															



	34																																																																																																														
Mode	Band Edge																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																														
ANT	3																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>58.77</td> <td>110.80</td> <td>-52.03</td> <td>44.44</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>222</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>5859.08</td> <td>60.20</td> <td>109.66</td> <td>-49.46</td> <td>45.88</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>222</td> <td>54 PEAK</td> </tr> <tr> <td>3</td> <td>5924.83</td> <td>53.13</td> <td>68.33</td> <td>-15.20</td> <td>38.88</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>222</td> <td>54 PEAK</td> </tr> <tr> <td>4</td> <td>5946.19</td> <td>52.71</td> <td>68.30</td> <td>-15.59</td> <td>38.48</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>222</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	58.77	110.80	-52.03	44.44	35.30	11.52	32.49	222	54 PEAK	2	5859.08	60.20	109.66	-49.46	45.88	35.30	11.51	32.49	222	54 PEAK	3	5924.83	53.13	68.33	-15.20	38.88	35.39	11.40	32.54	222	54 PEAK	4	5946.19	52.71	68.30	-15.59	38.48	35.42	11.37	32.56	222	54 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.35</td> <td>-----</td> <td>-----</td> <td>88.98</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>222</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	103.35	-----	-----	88.98	35.25	11.58	32.46	222	54 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5855.00	58.77	110.80	-52.03	44.44	35.30	11.52	32.49	222	54 PEAK																																																																																																					
2	5859.08	60.20	109.66	-49.46	45.88	35.30	11.51	32.49	222	54 PEAK																																																																																																					
3	5924.83	53.13	68.33	-15.20	38.88	35.39	11.40	32.54	222	54 PEAK																																																																																																					
4	5946.19	52.71	68.30	-15.59	38.48	35.42	11.37	32.56	222	54 PEAK																																																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5825.00	103.35	-----	-----	88.98	35.25	11.58	32.46	222	54 PEAK																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>96.20</td> <td>-----</td> <td>-----</td> <td>81.83</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>222</td> <td>54 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	96.20	-----	-----	81.83	35.25	11.58	32.46	222	54 AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5825.00	96.20	-----	-----	81.83	35.25	11.58	32.46	222	54 AVERAGE																																																																																																					



	34																																																																																									
Mode	Band Edge																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																									
ANT	3																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.83 59.45 111.20 -51.75</td> <td>45.12</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>328</td> <td>256</td> <td>PEAK</td> </tr> <tr> <td>2 5859.19 60.14 109.63 -49.49</td> <td>45.82</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>328</td> <td>256</td> <td>PEAK</td> </tr> <tr> <td>3 5924.81 50.92 68.34 -17.42</td> <td>36.67</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>328</td> <td>256</td> <td>PEAK</td> </tr> <tr> <td>4 5939.69 52.90 68.30 -15.40</td> <td>38.65</td> <td>35.42</td> <td>11.38</td> <td>32.55</td> <td>328</td> <td>256</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5854.83 59.45 111.20 -51.75	45.12	35.30	11.52	32.49	328	256	PEAK	2 5859.19 60.14 109.63 -49.49	45.82	35.30	11.51	32.49	328	256	PEAK	3 5924.81 50.92 68.34 -17.42	36.67	35.39	11.40	32.54	328	256	PEAK	4 5939.69 52.90 68.30 -15.40	38.65	35.42	11.38	32.55	328	256	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 103.76</td> <td>89.39</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>328</td> <td>256</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5825.00 103.76	89.39	35.25	11.58	32.46	328	256	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 5854.83 59.45 111.20 -51.75	45.12	35.30	11.52	32.49	328	256	PEAK																																																																																			
2 5859.19 60.14 109.63 -49.49	45.82	35.30	11.51	32.49	328	256	PEAK																																																																																			
3 5924.81 50.92 68.34 -17.42	36.67	35.39	11.40	32.54	328	256	PEAK																																																																																			
4 5939.69 52.90 68.30 -15.40	38.65	35.42	11.38	32.55	328	256	PEAK																																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 5825.00 103.76	89.39	35.25	11.58	32.46	328	256	PEAK																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 96.57</td> <td>82.20</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>328</td> <td>256</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5825.00 96.57	82.20	35.25	11.58	32.46	328	256	AVERAGE																																																								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 5825.00 96.57	82.20	35.25	11.58	32.46	328	256	AVERAGE																																																																																			



Mode	34																																																																																																																												
	Harmonic																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																												
ANT	3																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																											
Peak Avg	<p>Date: 2023-10-22</p>	<p>Date: 2023-10-22</p>																																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>59.38</td> <td>74.00</td> <td>-14.62</td> <td>56.74</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>182</td> <td>64</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>49.46</td> <td>54.00</td> <td>-4.54</td> <td>46.82</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>182</td> <td>64</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>50.34</td> <td>68.30</td> <td>-17.96</td> <td>43.26</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	59.38	74.00	-14.62	56.74	38.32	14.93	50.61	182	64	Peak	2	11650.00	49.46	54.00	-4.54	46.82	38.32	14.93	50.61	182	64	Average	3	17475.00	50.34	68.30	-17.96	43.26	41.62	17.63	52.17	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>55.90</td> <td>74.00</td> <td>-18.10</td> <td>53.26</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>386</td> <td>329</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>45.90</td> <td>54.00</td> <td>-8.10</td> <td>43.26</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>386</td> <td>329</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>51.26</td> <td>68.30</td> <td>-17.04</td> <td>44.18</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	55.90	74.00	-18.10	53.26	38.32	14.93	50.61	386	329	Peak	2	11650.00	45.90	54.00	-8.10	43.26	38.32	14.93	50.61	386	329	Average	3	17475.00	51.26	68.30	-17.04	44.18	41.62	17.63	52.17	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	11650.00	59.38	74.00	-14.62	56.74	38.32	14.93	50.61	182	64	Peak																																																																																																																		
2	11650.00	49.46	54.00	-4.54	46.82	38.32	14.93	50.61	182	64	Average																																																																																																																		
3	17475.00	50.34	68.30	-17.96	43.26	41.62	17.63	52.17	--	--	Peak																																																																																																																		
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	11650.00	55.90	74.00	-18.10	53.26	38.32	14.93	50.61	386	329	Peak																																																																																																																		
2	11650.00	45.90	54.00	-8.10	43.26	38.32	14.93	50.61	386	329	Average																																																																																																																		
3	17475.00	51.26	68.30	-17.04	44.18	41.62	17.63	52.17	--	--	Peak																																																																																																																		



	35																																																																																																																			
Mode	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																			
ANT	3																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5603.81</td> <td>52.99</td> <td>68.30</td> <td>-15.31</td> <td>38.62</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.93</td> <td>52.84</td> <td>68.99</td> <td>-16.15</td> <td>38.47</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.48</td> <td>77.70</td> <td>109.82</td> <td>-32.12</td> <td>63.32</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>76.55</td> <td>110.80</td> <td>-34.25</td> <td>62.16</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5603.81	52.99	68.30	-15.31	38.62	34.95	11.71	32.29	356	16	PEAK	2	5650.93	52.84	68.99	-16.15	38.47	35.01	11.69	32.33	356	16	PEAK	3	5716.48	77.70	109.82	-32.12	63.32	35.10	11.66	32.38	356	16	PEAK	4	5720.00	76.55	110.80	-34.25	62.16	35.11	11.66	32.38	356	16	PEAK	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>100.88</td> <td>-----</td> <td>-----</td> <td>86.49</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	100.88	-----	-----	86.49	35.16	11.64	32.41	356	16	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5603.81	52.99	68.30	-15.31	38.62	34.95	11.71	32.29	356	16	PEAK																																																																																																									
2	5650.93	52.84	68.99	-16.15	38.47	35.01	11.69	32.33	356	16	PEAK																																																																																																									
3	5716.48	77.70	109.82	-32.12	63.32	35.10	11.66	32.38	356	16	PEAK																																																																																																									
4	5720.00	76.55	110.80	-34.25	62.16	35.11	11.66	32.38	356	16	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	100.88	-----	-----	86.49	35.16	11.64	32.41	356	16	PEAK																																																																																																									
Avg	Blank	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.24</td> <td>-----</td> <td>-----</td> <td>79.85</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>356</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	94.24	-----	-----	79.85	35.16	11.64	32.41	356	16	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	94.24	-----	-----	79.85	35.16	11.64	32.41	356	16	AVERAGE																																																																																																									



Mode	35																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																			
ANT	3																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>55.19</td> <td>110.81</td> <td>-55.62</td> <td>40.86</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.65</td> <td>52.23</td> <td>105.30</td> <td>-53.07</td> <td>37.92</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>51.79</td> <td>68.39</td> <td>-16.60</td> <td>37.54</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5946.78</td> <td>52.88</td> <td>68.30</td> <td>-15.42</td> <td>38.64</td> <td>35.43</td> <td>11.37</td> <td>32.56</td> <td>356</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5855.00	55.19	110.81	-55.62	40.86	35.30	11.52	32.49	356	16	PEAK	2	5874.65	52.23	105.30	-53.07	37.92	35.32	11.49	32.50	356	16	PEAK	3	5924.75	51.79	68.39	-16.60	37.54	35.39	11.40	32.54	356	16	PEAK	4	5946.78	52.88	68.30	-15.42	38.64	35.43	11.37	32.56	356	16	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																												
1	5855.00	55.19	110.81	-55.62	40.86	35.30	11.52	32.49	356	16	PEAK																																																									
2	5874.65	52.23	105.30	-53.07	37.92	35.32	11.49	32.50	356	16	PEAK																																																									
3	5924.75	51.79	68.39	-16.60	37.54	35.39	11.40	32.54	356	16	PEAK																																																									
4	5946.78	52.88	68.30	-15.42	38.64	35.43	11.37	32.56	356	16	PEAK																																																									





	35																																																																																																																			
Mode	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																			
ANT	3																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.37</td> <td>53.47</td> <td>68.30</td> <td>-14.83</td> <td>39.10</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.40</td> <td>54.71</td> <td>69.34</td> <td>-14.63</td> <td>40.34</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.12</td> <td>77.64</td> <td>110.55</td> <td>-32.91</td> <td>63.25</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.20</td> <td>76.84</td> <td>111.26</td> <td>-34.42</td> <td>62.45</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5649.37	53.47	68.30	-14.83	39.10	35.01	11.69	32.33	293	265	PEAK	2	5651.40	54.71	69.34	-14.63	40.34	35.01	11.69	32.33	293	265	PEAK	3	5719.12	77.64	110.55	-32.91	63.25	35.11	11.66	32.38	293	265	PEAK	4	5720.20	76.84	111.26	-34.42	62.45	35.11	11.66	32.38	293	265	PEAK	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>100.33</td> <td>-----</td> <td>-----</td> <td>85.94</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	100.33	-----	-----	85.94	35.15	11.64	32.40	293	265	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5649.37	53.47	68.30	-14.83	39.10	35.01	11.69	32.33	293	265	PEAK																																																																																																									
2	5651.40	54.71	69.34	-14.63	40.34	35.01	11.69	32.33	293	265	PEAK																																																																																																									
3	5719.12	77.64	110.55	-32.91	63.25	35.11	11.66	32.38	293	265	PEAK																																																																																																									
4	5720.20	76.84	111.26	-34.42	62.45	35.11	11.66	32.38	293	265	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	100.33	-----	-----	85.94	35.15	11.64	32.40	293	265	PEAK																																																																																																									
Avg	Blank	<p style="text-align: right;">Date: 2023-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>93.28</td> <td>-----</td> <td>-----</td> <td>78.89</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>293</td> <td>265</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	93.28	-----	-----	78.89	35.15	11.64	32.40	293	265	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	93.28	-----	-----	78.89	35.15	11.64	32.40	293	265	AVERAGE																																																																																																									



Mode	35																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																			
ANT	3																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>52.83</td> <td>110.81</td> <td>-57.98</td> <td>38.50</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.29</td> <td>52.24</td> <td>105.68</td> <td>-53.44</td> <td>37.93</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.99</td> <td>51.28</td> <td>68.95</td> <td>-17.67</td> <td>37.02</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.91</td> <td>52.83</td> <td>68.30</td> <td>-15.47</td> <td>38.60</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>293</td> <td>265</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5855.00	52.83	110.81	-57.98	38.50	35.30	11.52	32.49	293	265	PEAK	2	5873.29	52.24	105.68	-53.44	37.93	35.32	11.49	32.50	293	265	PEAK	3	5923.99	51.28	68.95	-17.67	37.02	35.39	11.41	32.54	293	265	PEAK	4	5941.91	52.83	68.30	-15.47	38.60	35.42	11.37	32.56	293	265	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																												
1	5855.00	52.83	110.81	-57.98	38.50	35.30	11.52	32.49	293	265	PEAK																																																									
2	5873.29	52.24	105.68	-53.44	37.93	35.32	11.49	32.50	293	265	PEAK																																																									
3	5923.99	51.28	68.95	-17.67	37.02	35.39	11.41	32.54	293	265	PEAK																																																									
4	5941.91	52.83	68.30	-15.47	38.60	35.42	11.37	32.56	293	265	PEAK																																																									



Mode	36																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																					
ANT	3																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.54</td> <td>52.78</td> <td>68.30</td> <td>-15.52</td> <td>38.42</td> <td>34.99</td> <td>11.69</td> <td>32.32</td> <td>224</td> <td>55</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.02</td> <td>51.25</td> <td>68.31</td> <td>-17.06</td> <td>36.88</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>224</td> <td>55</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.49</td> <td>52.65</td> <td>105.90</td> <td>-53.25</td> <td>38.28</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>224</td> <td>55</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>51.46</td> <td>110.81</td> <td>-59.35</td> <td>37.07</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>224</td> <td>55</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark	1	5637.54	52.78	68.30	-15.52	38.42	34.99	11.69	32.32	224	55	PEAK	2	5650.02	51.25	68.31	-17.06	36.88	35.01	11.69	32.33	224	55	PEAK	3	5702.49	52.65	105.90	-53.25	38.28	35.08	11.66	32.37	224	55	PEAK	4	5720.00	51.46	110.81	-59.35	37.07	35.11	11.66	32.38	224	55	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.83</td> <td>-----</td> <td>-----</td> <td>83.44</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>224</td> <td>55</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark	1	5795.00	97.83	-----	-----	83.44	35.21	11.62	32.44	224	55	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark																																																																											
1	5637.54	52.78	68.30	-15.52	38.42	34.99	11.69	32.32	224	55	PEAK																																																																											
2	5650.02	51.25	68.31	-17.06	36.88	35.01	11.69	32.33	224	55	PEAK																																																																											
3	5702.49	52.65	105.90	-53.25	38.28	35.08	11.66	32.37	224	55	PEAK																																																																											
4	5720.00	51.46	110.81	-59.35	37.07	35.11	11.66	32.38	224	55	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark																																																																											
1	5795.00	97.83	-----	-----	83.44	35.21	11.62	32.44	224	55	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>91.03</td> <td>-----</td> <td>-----</td> <td>76.64</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>224</td> <td>55</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark	1	5795.00	91.03	-----	-----	76.64	35.21	11.62	32.44	224	55	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (deg)	Remark																																																																											
1	5795.00	91.03	-----	-----	76.64	35.21	11.62	32.44	224	55	AVERAGE																																																																											



Mode	36																																																									
	Band Edge - R																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																									
ANT	3																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<p>Date: 2023-10-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.91</td> <td>55.53</td> <td>111.01</td> <td>-55.48</td> <td>41.20</td> <td>35.30</td> <td>11.52 32.49 224 55 PEAK</td> </tr> <tr> <td>2</td> <td>5867.00</td> <td>54.37</td> <td>107.44</td> <td>-53.07</td> <td>40.06</td> <td>35.31</td> <td>11.50 32.50 224 55 PEAK</td> </tr> <tr> <td>3</td> <td>5924.36</td> <td>51.51</td> <td>68.67</td> <td>-17.16</td> <td>37.26</td> <td>35.39</td> <td>11.40 32.54 224 55 PEAK</td> </tr> <tr> <td>4</td> <td>5947.91</td> <td>53.54</td> <td>68.30</td> <td>-14.76</td> <td>39.31</td> <td>35.43</td> <td>11.36 32.56 224 55 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	5854.91	55.53	111.01	-55.48	41.20	35.30	11.52 32.49 224 55 PEAK	2	5867.00	54.37	107.44	-53.07	40.06	35.31	11.50 32.50 224 55 PEAK	3	5924.36	51.51	68.67	-17.16	37.26	35.39	11.40 32.54 224 55 PEAK	4	5947.91	53.54	68.30	-14.76	39.31	35.43	11.36 32.56 224 55 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	Level	Factor	Loss	Factor	Remark																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																			
1	5854.91	55.53	111.01	-55.48	41.20	35.30	11.52 32.49 224 55 PEAK																																																			
2	5867.00	54.37	107.44	-53.07	40.06	35.31	11.50 32.50 224 55 PEAK																																																			
3	5924.36	51.51	68.67	-17.16	37.26	35.39	11.40 32.54 224 55 PEAK																																																			
4	5947.91	53.54	68.30	-14.76	39.31	35.43	11.36 32.56 224 55 PEAK																																																			



Mode	36																																																																																																																			
	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																			
ANT	3																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.32</td> <td>52.73</td> <td>68.30</td> <td>-15.57</td> <td>38.36</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.04</td> <td>51.96</td> <td>68.33</td> <td>-16.37</td> <td>37.59</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.15</td> <td>51.89</td> <td>105.24</td> <td>-53.35</td> <td>37.52</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>53.11</td> <td>110.81</td> <td>-57.70</td> <td>38.72</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5631.32	52.73	68.30	-15.57	38.36	34.98	11.70	32.31	320	257	PEAK	2	5650.04	51.96	68.33	-16.37	37.59	35.01	11.69	32.33	320	257	PEAK	3	5700.15	51.89	105.24	-53.35	37.52	35.08	11.66	32.37	320	257	PEAK	4	5720.00	53.11	110.81	-57.70	38.72	35.11	11.66	32.38	320	257	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>100.00</td> <td>-----</td> <td>-----</td> <td>85.61</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	100.00	-----	-----	85.61	35.21	11.62	32.44	320	257	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5631.32	52.73	68.30	-15.57	38.36	34.98	11.70	32.31	320	257	PEAK																																																																																																									
2	5650.04	51.96	68.33	-16.37	37.59	35.01	11.69	32.33	320	257	PEAK																																																																																																									
3	5700.15	51.89	105.24	-53.35	37.52	35.08	11.66	32.37	320	257	PEAK																																																																																																									
4	5720.00	53.11	110.81	-57.70	38.72	35.11	11.66	32.38	320	257	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	100.00	-----	-----	85.61	35.21	11.62	32.44	320	257	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>92.98</td> <td>-----</td> <td>-----</td> <td>78.58</td> <td>35.20</td> <td>11.63</td> <td>32.43</td> <td>320</td> <td>257</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	92.98	-----	-----	78.58	35.20	11.63	32.43	320	257	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	92.98	-----	-----	78.58	35.20	11.63	32.43	320	257	AVERAGE																																																																																																									



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																												
ANT	3																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>56.66</td> <td>110.83</td> <td>-54.17</td> <td>42.33</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.99</td> <td>53.80</td> <td>105.48</td> <td>-51.68</td> <td>39.49</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>50.65</td> <td>68.21</td> <td>-17.56</td> <td>36.40</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.61</td> <td>52.22</td> <td>68.30</td> <td>-16.08</td> <td>37.98</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>320</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	56.66	110.83	-54.17	42.33	35.30	11.52	32.49	320	257	PEAK	2	5873.99	53.80	105.48	-51.68	39.49	35.32	11.49	32.50	320	257	PEAK	3	5924.98	50.65	68.21	-17.56	36.40	35.39	11.40	32.54	320	257	PEAK	4	5938.61	52.22	68.30	-16.08	37.98	35.41	11.38	32.55	320	257	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.99	56.66	110.83	-54.17	42.33	35.30	11.52	32.49	320	257	PEAK																																																																		
2	5873.99	53.80	105.48	-51.68	39.49	35.32	11.49	32.50	320	257	PEAK																																																																		
3	5924.98	50.65	68.21	-17.56	36.40	35.39	11.40	32.54	320	257	PEAK																																																																		
4	5938.61	52.22	68.30	-16.08	37.98	35.41	11.38	32.55	320	257	PEAK																																																																		



		<b>37</b>																																																																																																													
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																														
	<b>U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz</b>																																																																																																														
<b>ANT</b>	<b>3</b>																																																																																																														
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																													
<b>Peak</b>	<p style="text-align: right;">Date: 2023-10-25</p>		<p style="text-align: right;">Date: 2023-10-25</p>																																																																																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5639.99</td> <td>53.27</td> <td>68.30</td> <td>-15.03</td> <td>38.90</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>223</td> <td>56 PEAK</td> </tr> <tr> <td>2</td> <td>5651.03</td> <td>52.48</td> <td>69.06</td> <td>-16.58</td> <td>38.11</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>223</td> <td>56 PEAK</td> </tr> <tr> <td>3</td> <td>5705.61</td> <td>64.23</td> <td>106.77</td> <td>-42.54</td> <td>49.85</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>223</td> <td>56 PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>67.30</td> <td>110.83</td> <td>-43.53</td> <td>52.91</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>223</td> <td>56 PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5639.99	53.27	68.30	-15.03	38.90	35.00	11.69	32.32	223	56 PEAK	2	5651.03	52.48	69.06	-16.58	38.11	35.01	11.69	32.33	223	56 PEAK	3	5705.61	64.23	106.77	-42.54	49.85	35.09	11.66	32.37	223	56 PEAK	4	5720.02	67.30	110.83	-43.53	52.91	35.11	11.66	32.38	223	56 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>94.50</td> <td>-----</td> <td>-----</td> <td>80.11</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>223</td> <td>56 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	94.50	-----	-----	80.11	35.19	11.63	32.43	223
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5639.99	53.27	68.30	-15.03	38.90	35.00	11.69	32.32	223	56 PEAK																																																																																																					
2	5651.03	52.48	69.06	-16.58	38.11	35.01	11.69	32.33	223	56 PEAK																																																																																																					
3	5705.61	64.23	106.77	-42.54	49.85	35.09	11.66	32.37	223	56 PEAK																																																																																																					
4	5720.02	67.30	110.83	-43.53	52.91	35.11	11.66	32.38	223	56 PEAK																																																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5775.00	94.50	-----	-----	80.11	35.19	11.63	32.43	223	56 PEAK																																																																																																					
<b>Avg</b>	<b>Blank</b>		<p style="text-align: right;">Date: 2023-10-25</p>																																																																																																												
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>87.25</td> <td>-----</td> <td>-----</td> <td>72.86</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>223</td> <td>56 AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	87.25	-----	-----	72.86	35.19	11.63	32.43	223	56 AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5775.00	87.25	-----	-----	72.86	35.19	11.63	32.43	223	56 AVERAGE																																																																																																					



Mode	37																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																												
ANT	3																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Date: 2023-10-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>57.93</td> <td>110.82</td> <td>-52.89</td> <td>43.60</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>223</td> <td>56</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.73</td> <td>58.70</td> <td>106.95</td> <td>-48.25</td> <td>44.38</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>223</td> <td>56</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.36</td> <td>51.47</td> <td>68.67</td> <td>-17.20</td> <td>37.22</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>223</td> <td>56</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.16</td> <td>52.75</td> <td>68.30</td> <td>-15.55</td> <td>38.51</td> <td>35.42</td> <td>11.38</td> <td>32.56</td> <td>223</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	57.93	110.82	-52.89	43.60	35.30	11.52	32.49	223	56	PEAK	2	5868.73	58.70	106.95	-48.25	44.38	35.32	11.50	32.50	223	56	PEAK	3	5924.36	51.47	68.67	-17.20	37.22	35.39	11.40	32.54	223	56	PEAK	4	5941.16	52.75	68.30	-15.55	38.51	35.42	11.38	32.56	223	56	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.99	57.93	110.82	-52.89	43.60	35.30	11.52	32.49	223	56	PEAK																																																																		
2	5868.73	58.70	106.95	-48.25	44.38	35.32	11.50	32.50	223	56	PEAK																																																																		
3	5924.36	51.47	68.67	-17.20	37.22	35.39	11.40	32.54	223	56	PEAK																																																																		
4	5941.16	52.75	68.30	-15.55	38.51	35.42	11.38	32.56	223	56	PEAK																																																																		





	<b>37</b>																																																																																																																			
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																																			
	<b>U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz</b>																																																																																																																			
<b>ANT</b>	<b>3</b>																																																																																																																			
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																																		
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5632.29</td> <td>53.09</td> <td>68.30</td> <td>-15.21</td> <td>38.71</td> <td>34.99</td> <td>11.70</td> <td>32.31</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.49</td> <td>52.29</td> <td>68.66</td> <td>-16.37</td> <td>37.92</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5705.79</td> <td>68.16</td> <td>106.82</td> <td>-38.66</td> <td>53.78</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>71.16</td> <td>110.83</td> <td>-39.67</td> <td>56.77</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5632.29	53.09	68.30	-15.21	38.71	34.99	11.70	32.31	312	255	PEAK	2	5650.49	52.29	68.66	-16.37	37.92	35.01	11.69	32.33	312	255	PEAK	3	5705.79	68.16	106.82	-38.66	53.78	35.09	11.66	32.37	312	255	PEAK	4	5720.02	71.16	110.83	-39.67	56.77	35.11	11.66	32.38	312	255	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>96.93</td> <td>-----</td> <td>-----</td> <td>82.55</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.93	-----	-----	82.55	35.17	11.63	32.42	312	255	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5632.29	53.09	68.30	-15.21	38.71	34.99	11.70	32.31	312	255	PEAK																																																																																																									
2	5650.49	52.29	68.66	-16.37	37.92	35.01	11.69	32.33	312	255	PEAK																																																																																																									
3	5705.79	68.16	106.82	-38.66	53.78	35.09	11.66	32.37	312	255	PEAK																																																																																																									
4	5720.02	71.16	110.83	-39.67	56.77	35.11	11.66	32.38	312	255	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5775.00	96.93	-----	-----	82.55	35.17	11.63	32.42	312	255	PEAK																																																																																																									
<b>Avg</b>	<b>Blank</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>89.67</td> <td>-----</td> <td>-----</td> <td>75.29</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>312</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	89.67	-----	-----	75.29	35.17	11.63	32.42	312	255	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5775.00	89.67	-----	-----	75.29	35.17	11.63	32.42	312	255	AVERAGE																																																																																																									



Mode	37																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																												
ANT	3																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.91</td> <td>60.44</td> <td>111.02</td> <td>-50.58</td> <td>46.11</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5858.56</td> <td>62.66</td> <td>109.80</td> <td>-47.14</td> <td>48.33</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.73</td> <td>51.43</td> <td>68.40</td> <td>-16.97</td> <td>37.18</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5947.48</td> <td>52.55</td> <td>68.30</td> <td>-15.75</td> <td>38.31</td> <td>35.43</td> <td>11.37</td> <td>32.56</td> <td>312</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.91	60.44	111.02	-50.58	46.11	35.30	11.52	32.49	312	255	PEAK	2	5858.56	62.66	109.80	-47.14	48.33	35.30	11.52	32.49	312	255	PEAK	3	5924.73	51.43	68.40	-16.97	37.18	35.39	11.40	32.54	312	255	PEAK	4	5947.48	52.55	68.30	-15.75	38.31	35.43	11.37	32.56	312	255	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.91	60.44	111.02	-50.58	46.11	35.30	11.52	32.49	312	255	PEAK																																																																		
2	5858.56	62.66	109.80	-47.14	48.33	35.30	11.52	32.49	312	255	PEAK																																																																		
3	5924.73	51.43	68.40	-16.97	37.18	35.39	11.40	32.54	312	255	PEAK																																																																		
4	5947.48	52.55	68.30	-15.75	38.31	35.43	11.37	32.56	312	255	PEAK																																																																		





Mode	38																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																																									
ANT	3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>60.22</td> <td>74.00</td> <td>-13.78</td> <td>57.98</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>185</td> <td>68</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>49.69</td> <td>54.00</td> <td>-4.31</td> <td>47.45</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>185</td> <td>68</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>50.90</td> <td>68.30</td> <td>-17.40</td> <td>43.27</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	60.22	74.00	-13.78	57.98	38.15	14.80	50.71	185	68	Peak	2	11440.00	49.69	54.00	-4.31	47.45	38.15	14.80	50.71	185	68	Average	3	17160.00	50.90	68.30	-17.40	43.27	41.94	17.55	51.86	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>61.56</td> <td>74.00</td> <td>-12.44</td> <td>59.32</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>382</td> <td>326</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>50.87</td> <td>54.00</td> <td>-3.13</td> <td>48.63</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>382</td> <td>326</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>51.19</td> <td>68.30</td> <td>-17.11</td> <td>43.56</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	61.56	74.00	-12.44	59.32	38.15	14.80	50.71	382	326	Peak	2	11440.00	50.87	54.00	-3.13	48.63	38.15	14.80	50.71	382	326	Average	3	17160.00	51.19	68.30	-17.11	43.56	41.94	17.55	51.86	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11440.00	60.22	74.00	-13.78	57.98	38.15	14.80	50.71	185	68	Peak																																																																																																															
2	11440.00	49.69	54.00	-4.31	47.45	38.15	14.80	50.71	185	68	Average																																																																																																															
3	17160.00	50.90	68.30	-17.40	43.27	41.94	17.55	51.86	--	--	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	11440.00	61.56	74.00	-12.44	59.32	38.15	14.80	50.71	382	326	Peak																																																																																																															
2	11440.00	50.87	54.00	-3.13	48.63	38.15	14.80	50.71	382	326	Average																																																																																																															
3	17160.00	51.19	68.30	-17.11	43.56	41.94	17.55	51.86	--	--	Peak																																																																																																															



	<b>39</b>																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																								
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT20_CH144_5720MHz</b>																																																																								
<b>ANT</b>	<b>3</b>																																																																								
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																							
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5385.75</td> <td>51.89</td> <td>74.00</td> <td>-22.11</td> <td>38.64</td> <td>34.40</td> <td>10.92</td> <td>32.07</td> <td>400</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.05</td> <td>51.15</td> <td>68.30</td> <td>-17.15</td> <td>37.77</td> <td>34.40</td> <td>11.15</td> <td>32.17</td> <td>400</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>100.47</td> <td>-----</td> <td>86.74</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>400</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5887.90</td> <td>51.38</td> <td>68.30</td> <td>-16.92</td> <td>37.45</td> <td>34.97</td> <td>11.47</td> <td>32.51</td> <td>400</td> <td>13</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5385.75	51.89	74.00	-22.11	38.64	34.40	10.92	32.07	400	13	Peak	2	5466.05	51.15	68.30	-17.15	37.77	34.40	11.15	32.17	400	13	Peak	3	5720.00	100.47	-----	86.74	34.45	11.66	32.38	400	13	Peak	4	5887.90	51.38	68.30	-16.92	37.45	34.97	11.47	32.51	400	13	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5385.75	51.89	74.00	-22.11	38.64	34.40	10.92	32.07	400	13	Peak																																																														
2	5466.05	51.15	68.30	-17.15	37.77	34.40	11.15	32.17	400	13	Peak																																																														
3	5720.00	100.47	-----	86.74	34.45	11.66	32.38	400	13	Peak																																																															
4	5887.90	51.38	68.30	-16.92	37.45	34.97	11.47	32.51	400	13	Peak																																																														
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.15</td> <td>41.47</td> <td>54.00</td> <td>-12.53</td> <td>28.13</td> <td>34.40</td> <td>11.10</td> <td>32.16</td> <td>400</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>94.38</td> <td>-----</td> <td>80.65</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>400</td> <td>13</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5456.15	41.47	54.00	-12.53	28.13	34.40	11.10	32.16	400	13	Peak	2	5720.00	94.38	-----	80.65	34.45	11.66	32.38	400	13	Average	<b>Blank</b>																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5456.15	41.47	54.00	-12.53	28.13	34.40	11.10	32.16	400	13	Peak																																																														
2	5720.00	94.38	-----	80.65	34.45	11.66	32.38	400	13	Average																																																															

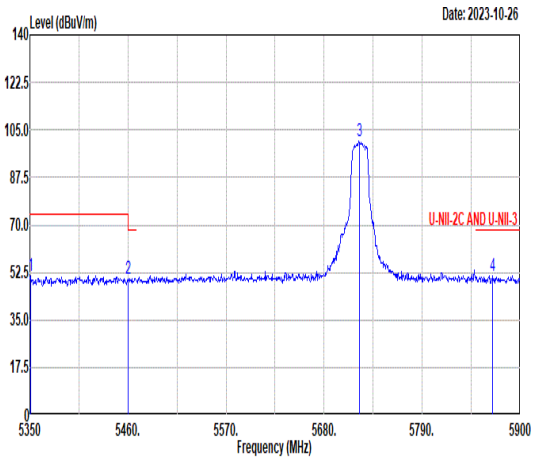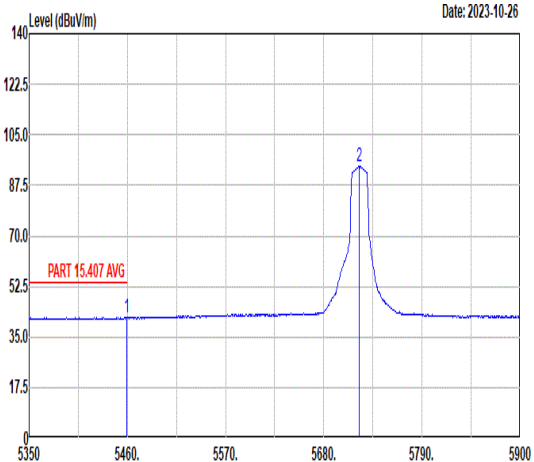

	<b>39</b>																																																																
Mode	<b>Band Edge</b>																																																																
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT20_CH144_5720MHz</b>																																																																
ANT	<b>3</b>																																																																
Pol.	<b>Vertical</b>	<b>Fundamental</b>																																																															
Peak	 <table border="1" data-bbox="263 1064 734 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.55</td> <td>51.31</td> <td>74.00</td> <td>-22.69</td> <td>38.00</td> <td>34.40</td> <td>10.94</td> <td>32.03</td> <td>343</td> </tr> <tr> <td>2 5460.55</td> <td>50.35</td> <td>68.30</td> <td>-17.95</td> <td>37.00</td> <td>34.40</td> <td>11.12</td> <td>32.17</td> <td>343</td> </tr> <tr> <td>3 5720.00</td> <td>100.73</td> <td>-----</td> <td>-----</td> <td>87.00</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>343</td> </tr> <tr> <td>4 5869.20</td> <td>51.09</td> <td>68.30</td> <td>-17.21</td> <td>37.20</td> <td>34.89</td> <td>11.50</td> <td>32.50</td> <td>343</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5350.55	51.31	74.00	-22.69	38.00	34.40	10.94	32.03	343	2 5460.55	50.35	68.30	-17.95	37.00	34.40	11.12	32.17	343	3 5720.00	100.73	-----	-----	87.00	34.45	11.66	32.38	343	4 5869.20	51.09	68.30	-17.21	37.20	34.89	11.50	32.50	343	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																									
1 5350.55	51.31	74.00	-22.69	38.00	34.40	10.94	32.03	343																																																									
2 5460.55	50.35	68.30	-17.95	37.00	34.40	11.12	32.17	343																																																									
3 5720.00	100.73	-----	-----	87.00	34.45	11.66	32.38	343																																																									
4 5869.20	51.09	68.30	-17.21	37.20	34.89	11.50	32.50	343																																																									
Avg	 <table border="1" data-bbox="263 1758 734 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5458.90</td> <td>41.75</td> <td>54.00</td> <td>-12.25</td> <td>28.39</td> <td>34.40</td> <td>11.12</td> <td>32.16</td> <td>343</td> </tr> <tr> <td>2 5720.00</td> <td>94.30</td> <td>-----</td> <td>-----</td> <td>80.57</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>343</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5458.90	41.75	54.00	-12.25	28.39	34.40	11.12	32.16	343	2 5720.00	94.30	-----	-----	80.57	34.45	11.66	32.38	343	<b>Blank</b>																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																									
1 5458.90	41.75	54.00	-12.25	28.39	34.40	11.12	32.16	343																																																									
2 5720.00	94.30	-----	-----	80.57	34.45	11.66	32.38	343																																																									



Mode	39																																																																																																									
	Harmonic																																																																																																									
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH144_5720MHz																																																																																																									
ANT	3																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>60.95</td> <td>74.00</td> <td>-13.05</td> <td>58.71</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>187</td> <td>68</td> <td>Peak</td> </tr> <tr> <td>2 11440.00</td> <td>50.32</td> <td>54.00</td> <td>-3.68</td> <td>48.08</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>187</td> <td>68</td> <td>Average</td> </tr> <tr> <td>3 17160.00</td> <td>49.76</td> <td>68.30</td> <td>-18.54</td> <td>42.13</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	60.95	74.00	-13.05	58.71	38.15	14.80	50.71	187	68	Peak	2 11440.00	50.32	54.00	-3.68	48.08	38.15	14.80	50.71	187	68	Average	3 17160.00	49.76	68.30	-18.54	42.13	41.94	17.55	51.86	--	--	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>63.49</td> <td>74.00</td> <td>-10.51</td> <td>61.25</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>384</td> <td>326</td> <td>Peak</td> </tr> <tr> <td>2 11440.00</td> <td>50.39</td> <td>54.00</td> <td>-3.61</td> <td>48.15</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>384</td> <td>326</td> <td>Average</td> </tr> <tr> <td>3 17160.00</td> <td>49.42</td> <td>68.30</td> <td>-18.88</td> <td>41.79</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	63.49	74.00	-10.51	61.25	38.15	14.80	50.71	384	326	Peak	2 11440.00	50.39	54.00	-3.61	48.15	38.15	14.80	50.71	384	326	Average	3 17160.00	49.42	68.30	-18.88	41.79	41.94	17.55	51.86	--	--	Peak
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11440.00	60.95	74.00	-13.05	58.71	38.15	14.80	50.71	187	68	Peak																																																																																																
2 11440.00	50.32	54.00	-3.68	48.08	38.15	14.80	50.71	187	68	Average																																																																																																
3 17160.00	49.76	68.30	-18.54	42.13	41.94	17.55	51.86	--	--	Peak																																																																																																
Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 11440.00	63.49	74.00	-10.51	61.25	38.15	14.80	50.71	384	326	Peak																																																																																																
2 11440.00	50.39	54.00	-3.61	48.15	38.15	14.80	50.71	384	326	Average																																																																																																
3 17160.00	49.42	68.30	-18.88	41.79	41.94	17.55	51.86	--	--	Peak																																																																																																



Mode	40																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH142_5710MHz																																																																									
ANT	3																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.30</td> <td>50.97</td> <td>74.00</td> <td>-23.03</td> <td>37.73</td> <td>34.40</td> <td>10.95</td> <td>32.11</td> <td>400</td> <td>15</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5468.25</td> <td>50.84</td> <td>68.30</td> <td>-17.46</td> <td>37.47</td> <td>34.40</td> <td>11.15</td> <td>32.18</td> <td>400</td> <td>15</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>95.62</td> <td>-----</td> <td>-----</td> <td>81.89</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>400</td> <td>15</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5889.55</td> <td>51.18</td> <td>68.30</td> <td>-17.12</td> <td>37.26</td> <td>34.97</td> <td>11.46</td> <td>32.51</td> <td>400</td> <td>15</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5419.30	50.97	74.00	-23.03	37.73	34.40	10.95	32.11	400	15	Peak	2	5468.25	50.84	68.30	-17.46	37.47	34.40	11.15	32.18	400	15	Peak	3	5710.00	95.62	-----	-----	81.89	34.44	11.66	32.37	400	15	Peak	4	5889.55	51.18	68.30	-17.12	37.26	34.97	11.46	32.51	400	15	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5419.30	50.97	74.00	-23.03	37.73	34.40	10.95	32.11	400	15	Peak																																																															
2	5468.25	50.84	68.30	-17.46	37.47	34.40	11.15	32.18	400	15	Peak																																																															
3	5710.00	95.62	-----	-----	81.89	34.44	11.66	32.37	400	15	Peak																																																															
4	5889.55	51.18	68.30	-17.12	37.26	34.97	11.46	32.51	400	15	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.60</td> <td>42.00</td> <td>54.00</td> <td>-12.00</td> <td>28.66</td> <td>34.40</td> <td>11.10</td> <td>32.16</td> <td>400</td> <td>15</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>89.65</td> <td>-----</td> <td>-----</td> <td>75.92</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>400</td> <td>15</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5455.60	42.00	54.00	-12.00	28.66	34.40	11.10	32.16	400	15	Peak	2	5710.00	89.65	-----	-----	75.92	34.44	11.66	32.37	400	15	Average	Blank																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5455.60	42.00	54.00	-12.00	28.66	34.40	11.10	32.16	400	15	Peak																																																															
2	5710.00	89.65	-----	-----	75.92	34.44	11.66	32.37	400	15	Average																																																															



Mode	40																																																																					
	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH142_5710MHz																																																																					
ANT	3																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5414.35</td> <td>50.95</td> <td>74.00</td> <td>-23.05</td> <td>37.73</td> <td>34.40</td> <td>10.93</td> <td>32.11</td> <td>400</td> <td>92 Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>50.52</td> <td>68.30</td> <td>-17.78</td> <td>37.17</td> <td>34.40</td> <td>11.12</td> <td>32.17</td> <td>400</td> <td>92 Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>93.55</td> <td>-----</td> <td>-----</td> <td>79.82</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>400</td> <td>92 Peak</td> </tr> <tr> <td>4</td> <td>5885.70</td> <td>52.26</td> <td>68.30</td> <td>-16.04</td> <td>38.34</td> <td>34.96</td> <td>11.47</td> <td>32.51</td> <td>400</td> <td>92 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5414.35	50.95	74.00	-23.05	37.73	34.40	10.93	32.11	400	92 Peak	2	5460.00	50.52	68.30	-17.78	37.17	34.40	11.12	32.17	400	92 Peak	3	5710.00	93.55	-----	-----	79.82	34.44	11.66	32.37	400	92 Peak	4	5885.70	52.26	68.30	-16.04	38.34	34.96	11.47	32.51	400	92 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5414.35	50.95	74.00	-23.05	37.73	34.40	10.93	32.11	400	92 Peak																																																												
2	5460.00	50.52	68.30	-17.78	37.17	34.40	11.12	32.17	400	92 Peak																																																												
3	5710.00	93.55	-----	-----	79.82	34.44	11.66	32.37	400	92 Peak																																																												
4	5885.70	52.26	68.30	-16.04	38.34	34.96	11.47	32.51	400	92 Peak																																																												
Avg	<p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5418.75</td> <td>42.17</td> <td>54.00</td> <td>-11.83</td> <td>28.93</td> <td>34.40</td> <td>10.95</td> <td>32.11</td> <td>400</td> <td>92 Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>87.39</td> <td>-----</td> <td>-----</td> <td>73.66</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>400</td> <td>92 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5418.75	42.17	54.00	-11.83	28.93	34.40	10.95	32.11	400	92 Peak	2	5710.00	87.39	-----	-----	73.66	34.44	11.66	32.37	400	92 Average	Blank																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5418.75	42.17	54.00	-11.83	28.93	34.40	10.95	32.11	400	92 Peak																																																												
2	5710.00	87.39	-----	-----	73.66	34.44	11.66	32.37	400	92 Average																																																												





	<b>41</b>																																																																									
<b>Mode</b>	<b>Band Edge</b>																																																																									
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH138_5690MHz</b>																																																																									
<b>ANT</b>	<b>3</b>																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5411.60</td> <td>50.70</td> <td>74.00</td> <td>-23.30</td> <td>37.49</td> <td>34.40</td> <td>10.92</td> <td>32.11</td> <td>400</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.60</td> <td>50.18</td> <td>68.30</td> <td>-18.12</td> <td>36.80</td> <td>34.40</td> <td>11.15</td> <td>32.17</td> <td>400</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>90.84</td> <td>-----</td> <td>-----</td> <td>77.13</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>400</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5891.20</td> <td>51.45</td> <td>68.30</td> <td>-16.85</td> <td>37.53</td> <td>34.98</td> <td>11.46</td> <td>32.52</td> <td>400</td> <td>53</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5411.60	50.70	74.00	-23.30	37.49	34.40	10.92	32.11	400	53	Peak	2	5466.60	50.18	68.30	-18.12	36.80	34.40	11.15	32.17	400	53	Peak	3	5690.00	90.84	-----	-----	77.13	34.40	11.67	32.36	400	53	Peak	4	5891.20	51.45	68.30	-16.85	37.53	34.98	11.46	32.52	400	53	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5411.60	50.70	74.00	-23.30	37.49	34.40	10.92	32.11	400	53	Peak																																																															
2	5466.60	50.18	68.30	-18.12	36.80	34.40	11.15	32.17	400	53	Peak																																																															
3	5690.00	90.84	-----	-----	77.13	34.40	11.67	32.36	400	53	Peak																																																															
4	5891.20	51.45	68.30	-16.85	37.53	34.98	11.46	32.52	400	53	Peak																																																															
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5393.45</td> <td>42.24</td> <td>54.00</td> <td>-11.76</td> <td>29.01</td> <td>34.40</td> <td>10.91</td> <td>32.08</td> <td>400</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>83.86</td> <td>-----</td> <td>-----</td> <td>70.15</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>400</td> <td>53</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5393.45	42.24	54.00	-11.76	29.01	34.40	10.91	32.08	400	53	Peak	2	5690.00	83.86	-----	-----	70.15	34.40	11.67	32.36	400	53	Average	<b>Blank</b>																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5393.45	42.24	54.00	-11.76	29.01	34.40	10.91	32.08	400	53	Peak																																																															
2	5690.00	83.86	-----	-----	70.15	34.40	11.67	32.36	400	53	Average																																																															



	<b>41</b>																																																																							
<b>Mode</b>	<b>Band Edge</b>																																																																							
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH138_5690MHz</b>																																																																							
<b>ANT</b>	<b>3</b>																																																																							
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																						
<b>Peak</b>																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.15</td> <td>51.14</td> <td>74.00</td> <td>-22.86</td> <td>37.93</td> <td>34.40</td> <td>10.92</td> <td>32.11</td> <td>359</td> <td>276 Peak</td> </tr> <tr> <td>2</td> <td>5467.15</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>36.94</td> <td>34.40</td> <td>11.15</td> <td>32.17</td> <td>359</td> <td>276 Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>91.71</td> <td>-----</td> <td>-----</td> <td>78.00</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>359</td> <td>276 Peak</td> </tr> <tr> <td>4</td> <td>5870.30</td> <td>52.11</td> <td>68.30</td> <td>-16.19</td> <td>38.21</td> <td>34.90</td> <td>11.50</td> <td>32.50</td> <td>359</td> <td>276 Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5412.15	51.14	74.00	-22.86	37.93	34.40	10.92	32.11	359	276 Peak	2	5467.15	50.32	68.30	-17.98	36.94	34.40	11.15	32.17	359	276 Peak	3	5690.00	91.71	-----	-----	78.00	34.40	11.67	32.36	359	276 Peak	4	5870.30	52.11	68.30	-16.19	38.21	34.90	11.50	32.50	359
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																
1	5412.15	51.14	74.00	-22.86	37.93	34.40	10.92	32.11	359	276 Peak																																																														
2	5467.15	50.32	68.30	-17.98	36.94	34.40	11.15	32.17	359	276 Peak																																																														
3	5690.00	91.71	-----	-----	78.00	34.40	11.67	32.36	359	276 Peak																																																														
4	5870.30	52.11	68.30	-16.19	38.21	34.90	11.50	32.50	359	276 Peak																																																														
<b>Avg</b>																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.40</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>29.03</td> <td>34.40</td> <td>11.09</td> <td>32.16</td> <td>359</td> <td>276 Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>84.62</td> <td>-----</td> <td>-----</td> <td>70.91</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>359</td> <td>276 Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5453.40	42.36	54.00	-11.64	29.03	34.40	11.09	32.16	359	276 Peak	2	5690.00	84.62	-----	-----	70.91	34.40	11.67	32.36	359	276 Average																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																
1	5453.40	42.36	54.00	-11.64	29.03	34.40	11.09	32.16	359	276 Peak																																																														
2	5690.00	84.62	-----	-----	70.91	34.40	11.67	32.36	359	276 Average																																																														



Mode	42																																																																																																																																																																														
	LF																																																																																																																																																																														
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHZ																																																																																																																																																																														
ANT	3																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																													
QP/ Peak																																																																																																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>54.25</td> <td>18.00</td> <td>40.00</td> <td>-22.00</td> <td>34.15</td> <td>13.58</td> <td>1.50</td> <td>31.23</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>162.89</td> <td>24.11</td> <td>43.50</td> <td>-19.39</td> <td>36.75</td> <td>16.15</td> <td>2.26</td> <td>31.05</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>197.81</td> <td>25.31</td> <td>43.50</td> <td>-18.19</td> <td>38.50</td> <td>15.44</td> <td>2.28</td> <td>30.91</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>288.99</td> <td>23.60</td> <td>46.00</td> <td>-22.40</td> <td>32.54</td> <td>19.29</td> <td>2.67</td> <td>30.90</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>696.39</td> <td>27.37</td> <td>46.00</td> <td>-18.63</td> <td>28.98</td> <td>25.20</td> <td>4.00</td> <td>30.81</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>803.09</td> <td>28.73</td> <td>46.00</td> <td>-17.27</td> <td>29.45</td> <td>26.12</td> <td>4.26</td> <td>31.10</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	54.25	18.00	40.00	-22.00	34.15	13.58	1.50	31.23	-- -- Peak	2	162.89	24.11	43.50	-19.39	36.75	16.15	2.26	31.05	-- -- Peak	3	197.81	25.31	43.50	-18.19	38.50	15.44	2.28	30.91	-- -- Peak	4	288.99	23.60	46.00	-22.40	32.54	19.29	2.67	30.90	-- -- Peak	5	696.39	27.37	46.00	-18.63	28.98	25.20	4.00	30.81	-- -- Peak	6	803.09	28.73	46.00	-17.27	29.45	26.12	4.26	31.10	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>23.66</td> <td>40.00</td> <td>-16.34</td> <td>28.47</td> <td>25.20</td> <td>1.19</td> <td>31.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>53.28</td> <td>24.21</td> <td>40.00</td> <td>-15.79</td> <td>40.19</td> <td>13.76</td> <td>1.48</td> <td>31.22</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>194.90</td> <td>27.82</td> <td>43.50</td> <td>-15.68</td> <td>41.10</td> <td>15.35</td> <td>2.29</td> <td>30.92</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>469.41</td> <td>23.04</td> <td>46.00</td> <td>-22.96</td> <td>27.09</td> <td>23.27</td> <td>3.38</td> <td>30.70</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>622.67</td> <td>26.65</td> <td>46.00</td> <td>-19.35</td> <td>28.76</td> <td>25.04</td> <td>3.80</td> <td>30.95</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>781.75</td> <td>29.91</td> <td>46.00</td> <td>-16.09</td> <td>30.70</td> <td>26.03</td> <td>4.23</td> <td>31.05</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	30.00	23.66	40.00	-16.34	28.47	25.20	1.19	31.20	-- -- Peak	2	53.28	24.21	40.00	-15.79	40.19	13.76	1.48	31.22	-- -- Peak	3	194.90	27.82	43.50	-15.68	41.10	15.35	2.29	30.92	-- -- Peak	4	469.41	23.04	46.00	-22.96	27.09	23.27	3.38	30.70	-- -- Peak	5	622.67	26.65	46.00	-19.35	28.76	25.04	3.80	30.95	-- -- Peak	6	781.75	29.91	46.00	-16.09	30.70	26.03	4.23	31.05
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																							
1	54.25	18.00	40.00	-22.00	34.15	13.58	1.50	31.23	-- -- Peak																																																																																																																																																																						
2	162.89	24.11	43.50	-19.39	36.75	16.15	2.26	31.05	-- -- Peak																																																																																																																																																																						
3	197.81	25.31	43.50	-18.19	38.50	15.44	2.28	30.91	-- -- Peak																																																																																																																																																																						
4	288.99	23.60	46.00	-22.40	32.54	19.29	2.67	30.90	-- -- Peak																																																																																																																																																																						
5	696.39	27.37	46.00	-18.63	28.98	25.20	4.00	30.81	-- -- Peak																																																																																																																																																																						
6	803.09	28.73	46.00	-17.27	29.45	26.12	4.26	31.10	-- -- Peak																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																							
1	30.00	23.66	40.00	-16.34	28.47	25.20	1.19	31.20	-- -- Peak																																																																																																																																																																						
2	53.28	24.21	40.00	-15.79	40.19	13.76	1.48	31.22	-- -- Peak																																																																																																																																																																						
3	194.90	27.82	43.50	-15.68	41.10	15.35	2.29	30.92	-- -- Peak																																																																																																																																																																						
4	469.41	23.04	46.00	-22.96	27.09	23.27	3.38	30.70	-- -- Peak																																																																																																																																																																						
5	622.67	26.65	46.00	-19.35	28.76	25.04	3.80	30.95	-- -- Peak																																																																																																																																																																						
6	781.75	29.91	46.00	-16.09	30.70	26.03	4.23	31.05	-- -- Peak																																																																																																																																																																						



Mode	43																																																																																																																																																																															
	LF																																																																																																																																																																															
	U-NII-3_5.47-5.85_802.11a_CH149_5745MHz																																																																																																																																																																															
ANT	3																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																														
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>74.62</td> <td>18.46</td> <td>40.00</td> <td>-21.54</td> <td>35.23</td> <td>12.86</td> <td>1.73</td> <td>31.36</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>197.81</td> <td>26.31</td> <td>43.50</td> <td>-17.19</td> <td>39.50</td> <td>15.44</td> <td>2.28</td> <td>30.91</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>290.93</td> <td>22.80</td> <td>46.00</td> <td>-23.20</td> <td>31.71</td> <td>19.31</td> <td>2.68</td> <td>30.90</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>490.75</td> <td>23.14</td> <td>46.00</td> <td>-22.86</td> <td>26.82</td> <td>23.57</td> <td>3.45</td> <td>30.70</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>681.84</td> <td>26.91</td> <td>46.00</td> <td>-19.09</td> <td>28.60</td> <td>25.20</td> <td>3.95</td> <td>30.84</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>871.96</td> <td>29.11</td> <td>46.00</td> <td>-16.89</td> <td>29.08</td> <td>26.63</td> <td>4.43</td> <td>31.03</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	74.62	18.46	40.00	-21.54	35.23	12.86	1.73	31.36	-- Peak	2	197.81	26.31	43.50	-17.19	39.50	15.44	2.28	30.91	-- Peak	3	290.93	22.80	46.00	-23.20	31.71	19.31	2.68	30.90	-- Peak	4	490.75	23.14	46.00	-22.86	26.82	23.57	3.45	30.70	-- Peak	5	681.84	26.91	46.00	-19.09	28.60	25.20	3.95	30.84	-- Peak	6	871.96	29.11	46.00	-16.89	29.08	26.63	4.43	31.03	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>23.58</td> <td>40.00</td> <td>-16.42</td> <td>28.39</td> <td>25.20</td> <td>1.19</td> <td>31.20</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>53.28</td> <td>23.34</td> <td>40.00</td> <td>-16.66</td> <td>39.32</td> <td>13.76</td> <td>1.48</td> <td>31.22</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>194.90</td> <td>26.64</td> <td>43.50</td> <td>-16.86</td> <td>39.92</td> <td>15.35</td> <td>2.29</td> <td>30.92</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>443.22</td> <td>22.79</td> <td>46.00</td> <td>-23.21</td> <td>27.36</td> <td>22.85</td> <td>3.28</td> <td>30.70</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>603.27</td> <td>24.99</td> <td>46.00</td> <td>-21.01</td> <td>27.30</td> <td>24.92</td> <td>3.76</td> <td>30.99</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>858.38</td> <td>28.59</td> <td>46.00</td> <td>-17.41</td> <td>28.67</td> <td>26.55</td> <td>4.41</td> <td>31.04</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	30.00	23.58	40.00	-16.42	28.39	25.20	1.19	31.20	-- Peak	2	53.28	23.34	40.00	-16.66	39.32	13.76	1.48	31.22	-- Peak	3	194.90	26.64	43.50	-16.86	39.92	15.35	2.29	30.92	-- Peak	4	443.22	22.79	46.00	-23.21	27.36	22.85	3.28	30.70	-- Peak	5	603.27	24.99	46.00	-21.01	27.30	24.92	3.76	30.99	-- Peak	6	858.38	28.59	46.00	-17.41	28.67	26.55	4.41	31.04	-- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																								
1	74.62	18.46	40.00	-21.54	35.23	12.86	1.73	31.36	-- Peak																																																																																																																																																																							
2	197.81	26.31	43.50	-17.19	39.50	15.44	2.28	30.91	-- Peak																																																																																																																																																																							
3	290.93	22.80	46.00	-23.20	31.71	19.31	2.68	30.90	-- Peak																																																																																																																																																																							
4	490.75	23.14	46.00	-22.86	26.82	23.57	3.45	30.70	-- Peak																																																																																																																																																																							
5	681.84	26.91	46.00	-19.09	28.60	25.20	3.95	30.84	-- Peak																																																																																																																																																																							
6	871.96	29.11	46.00	-16.89	29.08	26.63	4.43	31.03	-- Peak																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																																																								
1	30.00	23.58	40.00	-16.42	28.39	25.20	1.19	31.20	-- Peak																																																																																																																																																																							
2	53.28	23.34	40.00	-16.66	39.32	13.76	1.48	31.22	-- Peak																																																																																																																																																																							
3	194.90	26.64	43.50	-16.86	39.92	15.35	2.29	30.92	-- Peak																																																																																																																																																																							
4	443.22	22.79	46.00	-23.21	27.36	22.85	3.28	30.70	-- Peak																																																																																																																																																																							
5	603.27	24.99	46.00	-21.01	27.30	24.92	3.76	30.99	-- Peak																																																																																																																																																																							
6	858.38	28.59	46.00	-17.41	28.67	26.55	4.41	31.04	-- Peak																																																																																																																																																																							



Mode	44																																																																																		
	Band Edge																																																																																		
	802.11ac VHT20_CH140_5700MHz+BT normal Link+Band30 BW10M-Co-location																																																																																		
ANT	3+0																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.04</td> <td>57.88</td> <td>68.30</td> <td>-10.42</td> <td>44.15</td> <td>34.47</td> <td>11.65</td> <td>32.39</td> <td>233</td> <td>5 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5726.04	57.88	68.30	-10.42	44.15	34.47	11.65	32.39	233	5 Peak	<p>Data: 1</p> <p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.000</td> <td>99.97</td> <td>31.67</td> <td>68.30</td> <td>85.59</td> <td>35.08</td> <td>11.66</td> <td>32.36</td> <td>233</td> <td>5 Peak</td> </tr> <tr> <td>2</td> <td>5700.000</td> <td>93.05</td> <td>-----</td> <td>-----</td> <td>78.67</td> <td>35.08</td> <td>11.66</td> <td>32.36</td> <td>233</td> <td>5 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5700.000	99.97	31.67	68.30	85.59	35.08	11.66	32.36	233	5 Peak	2	5700.000	93.05	-----	-----	78.67	35.08	11.66	32.36	233	5 Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5726.04	57.88	68.30	-10.42	44.15	34.47	11.65	32.39	233	5 Peak																																																																									
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																												
1	5700.000	99.97	31.67	68.30	85.59	35.08	11.66	32.36	233	5 Peak																																																																									
2	5700.000	93.05	-----	-----	78.67	35.08	11.66	32.36	233	5 Average																																																																									



Mode	44																																																																																									
	Band Edge																																																																																									
	802.11ac VHT20_CH140_5700MHz+BT normal Link+Band30 BW10M-Co-location																																																																																									
ANT	3+0																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.08</td> <td>58.20</td> <td>68.30</td> <td>-10.10</td> <td>44.48</td> <td>34.46</td> <td>11.65</td> <td>32.39</td> <td>288</td> <td>265</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.08	58.20	68.30	-10.10	44.48	34.46	11.65	32.39	288	265	Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.000</td> <td>98.98</td> <td>30.68</td> <td>68.30</td> <td>84.60</td> <td>35.08</td> <td>11.66</td> <td>32.36</td> <td>288</td> <td>265</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.000</td> <td>92.75</td> <td>-----</td> <td>-----</td> <td>78.37</td> <td>35.08</td> <td>11.66</td> <td>32.36</td> <td>288</td> <td>265</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.000	98.98	30.68	68.30	84.60	35.08	11.66	32.36	288	265	Peak	2	5700.000	92.75	-----	-----	78.37	35.08	11.66	32.36	288	265	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
1	5725.08	58.20	68.30	-10.10	44.48	34.46	11.65	32.39	288	265	Peak																																																																															
Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5700.000	98.98	30.68	68.30	84.60	35.08	11.66	32.36	288	265	Peak																																																																															
2	5700.000	92.75	-----	-----	78.37	35.08	11.66	32.36	288	265	Average																																																																															



Mode	44																																																																																																																											
	Harmonic																																																																																																																											
	802.11ac VHT20_CH140_5700MHz+BT normal Link+Band30 BW10M-Co-location																																																																																																																											
ANT	3+0																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>61.26</td> <td>74.00</td> <td>-12.74</td> <td>40.83</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>185</td> <td>72</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>50.92</td> <td>54.00</td> <td>-3.08</td> <td>30.49</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>185</td> <td>72</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>52.02</td> <td>68.30</td> <td>-16.28</td> <td>26.39</td> <td>42.00</td> <td>17.53</td> <td>33.90</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	61.26	74.00	-12.74	40.83	38.12	14.78	32.47	185	72	Peak	2	11400.00	50.92	54.00	-3.08	30.49	38.12	14.78	32.47	185	72	Average	3	17100.00	52.02	68.30	-16.28	26.39	42.00	17.53	33.90	--	--	Peak	<p>Date: 2023-10-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>60.64</td> <td>74.00</td> <td>-13.36</td> <td>40.21</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>396</td> <td>334</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>50.60</td> <td>54.00</td> <td>-3.40</td> <td>30.17</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>396</td> <td>334</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>50.49</td> <td>68.30</td> <td>-17.81</td> <td>24.86</td> <td>42.00</td> <td>17.53</td> <td>33.90</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	60.64	74.00	-13.36	40.21	38.12	14.78	32.47	396	334	Peak	2	11400.00	50.60	54.00	-3.40	30.17	38.12	14.78	32.47	396	334	Average	3	17100.00	50.49	68.30	-17.81	24.86	42.00	17.53	33.90	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11400.00	61.26	74.00	-12.74	40.83	38.12	14.78	32.47	185	72	Peak																																																																																																																	
2	11400.00	50.92	54.00	-3.08	30.49	38.12	14.78	32.47	185	72	Average																																																																																																																	
3	17100.00	52.02	68.30	-16.28	26.39	42.00	17.53	33.90	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11400.00	60.64	74.00	-13.36	40.21	38.12	14.78	32.47	396	334	Peak																																																																																																																	
2	11400.00	50.60	54.00	-3.40	30.17	38.12	14.78	32.47	396	334	Average																																																																																																																	
3	17100.00	50.49	68.30	-17.81	24.86	42.00	17.53	33.90	--	--	Peak																																																																																																																	



### Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
2.4GHz 802.11b	98.27	-	-	10Hz
2.4GHz 802.11g	98.26	-	-	10Hz
2.4GHz 802.11n HT20	98.13	-	-	10Hz
2.4GHz 802.11n HT40	94.74	0.941	1.063	3kHz
5GHz 802.11a	98.33	-	-	10Hz
5GHz 802.11ac VHT20	97.86	1.922	0.520	1kHz
5GHz 802.11ac VHT40	96.46	0.948	1.055	3kHz
5GHz 802.11ac VHT80	92.44	0.461	2.170	3kHz






<WLAN 2.4G>

802.11b

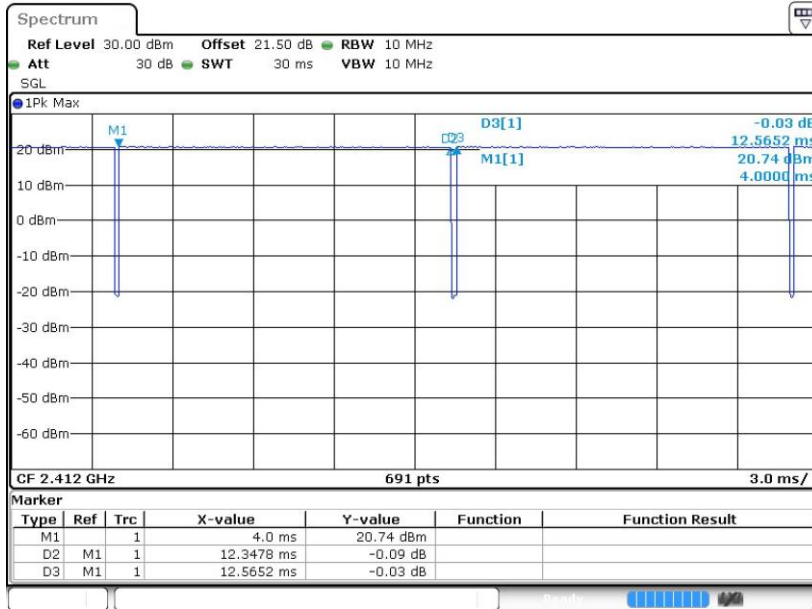

Date: 18.OCT.2023 17:00:01


802.11g

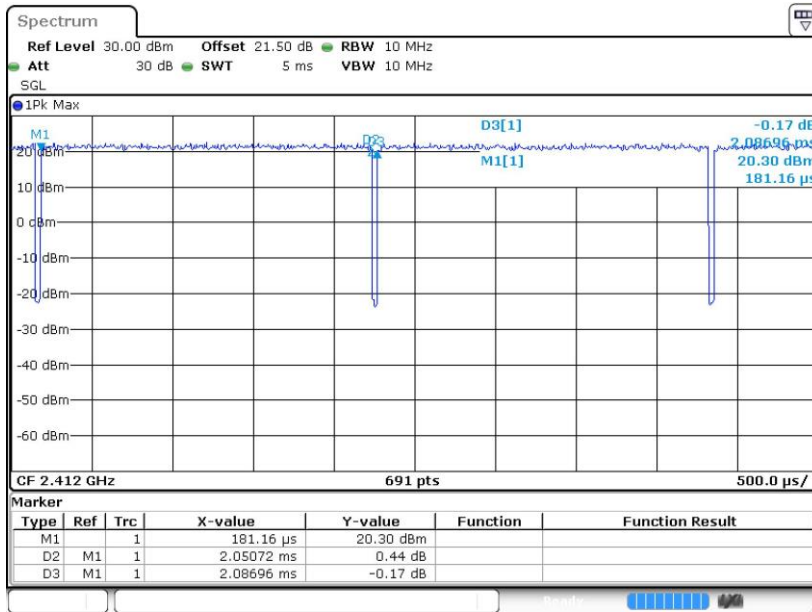

Date: 18.OCT.2023 17:07:32




802.11n HT20

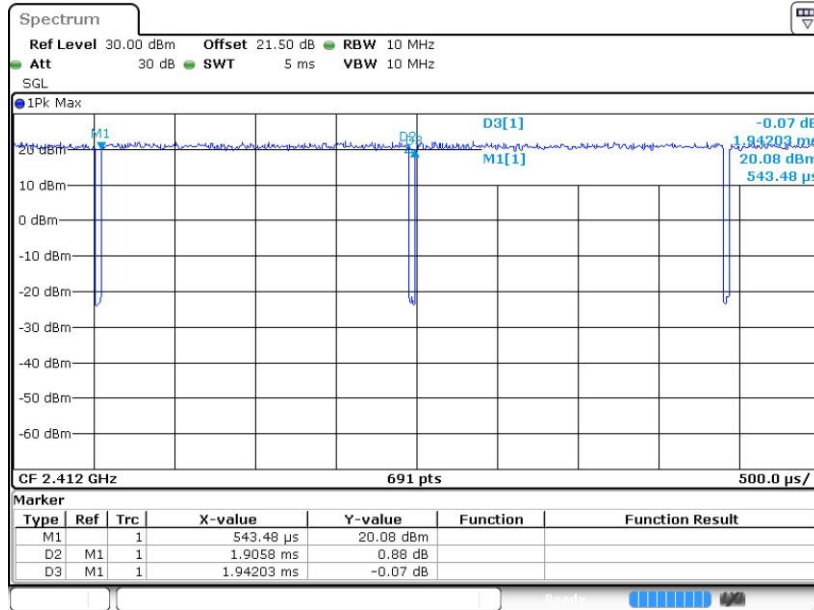

Date: 18.OCT.2023 17:06:06

802.11n HT40

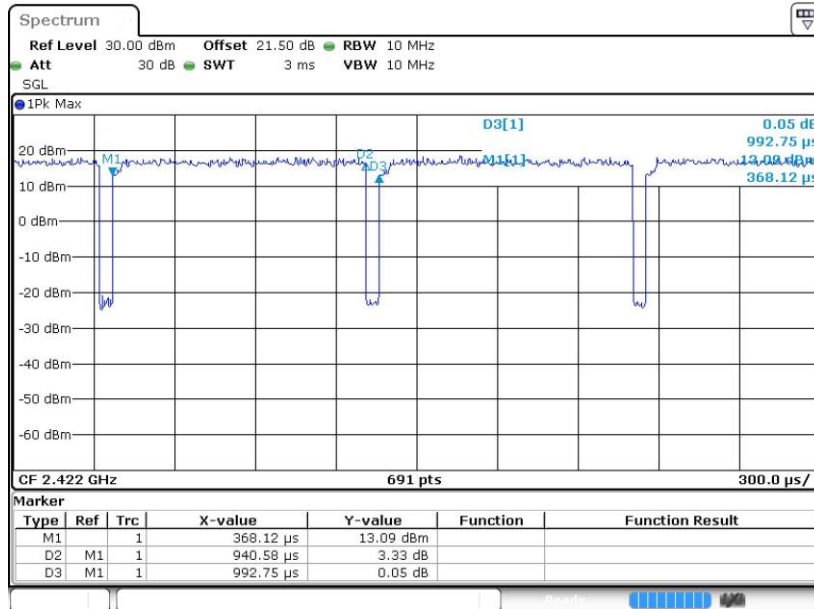


Date: 18.OCT.2023 17:11:17




<WLAN 5G>

802.11a

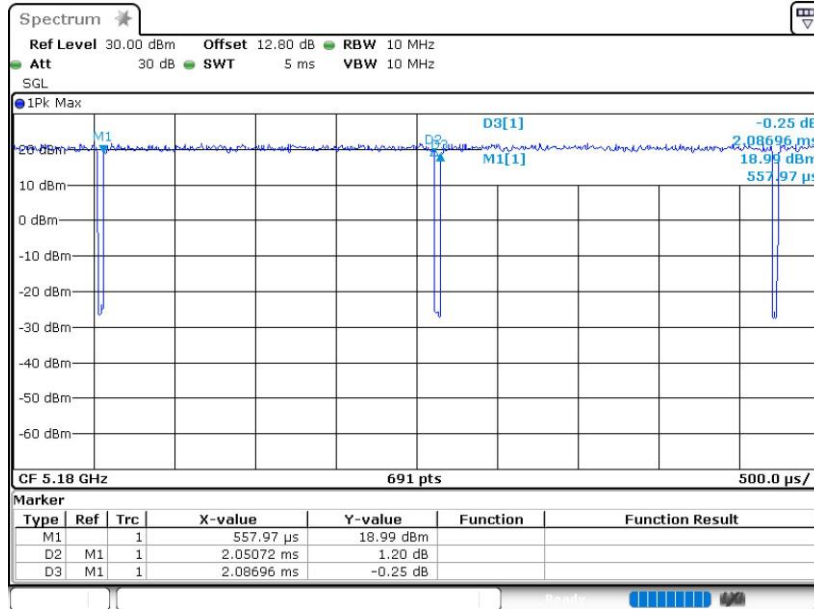

Date: 7.OCT.2023 11:50:01


802.11ac VHT20

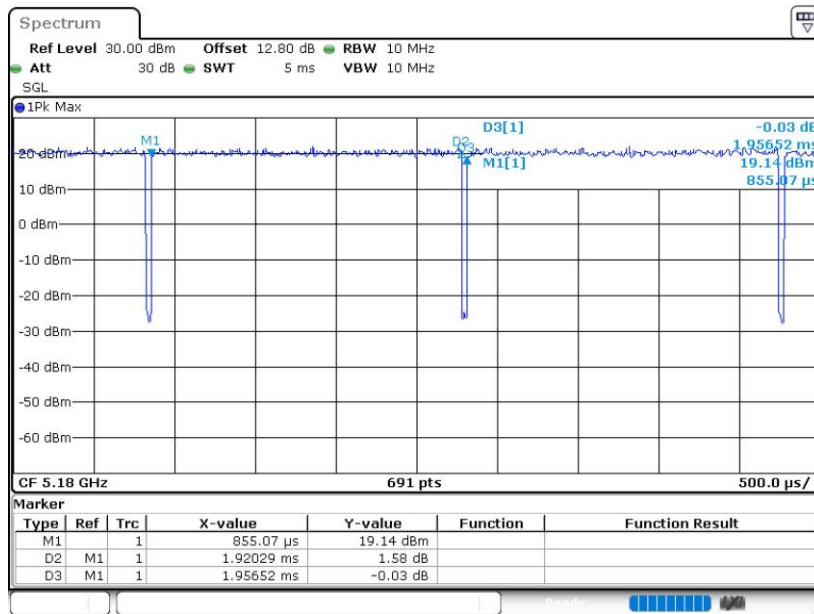

Date: 7.OCT.2023 11:52:56




802.11ac VHT40

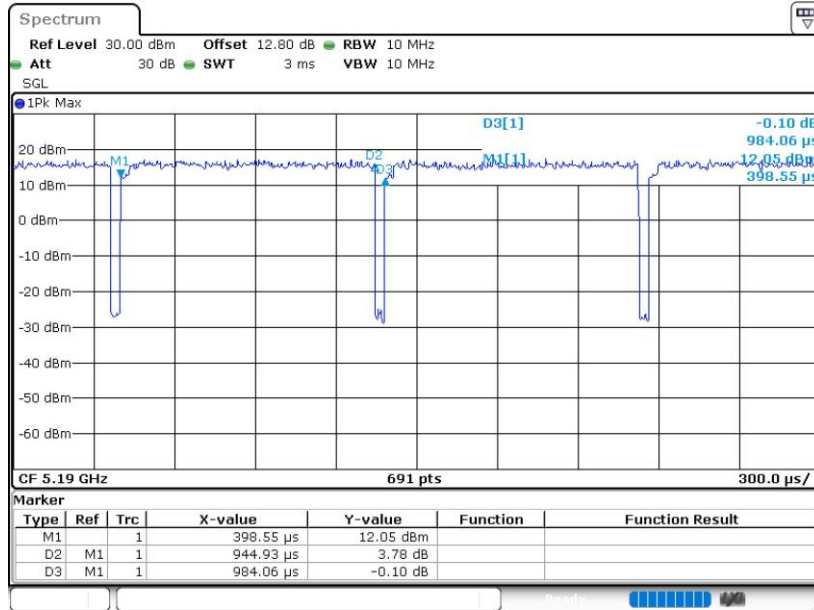

Date: 7.OCT.2023 11:59:04

802.11ac VHT80

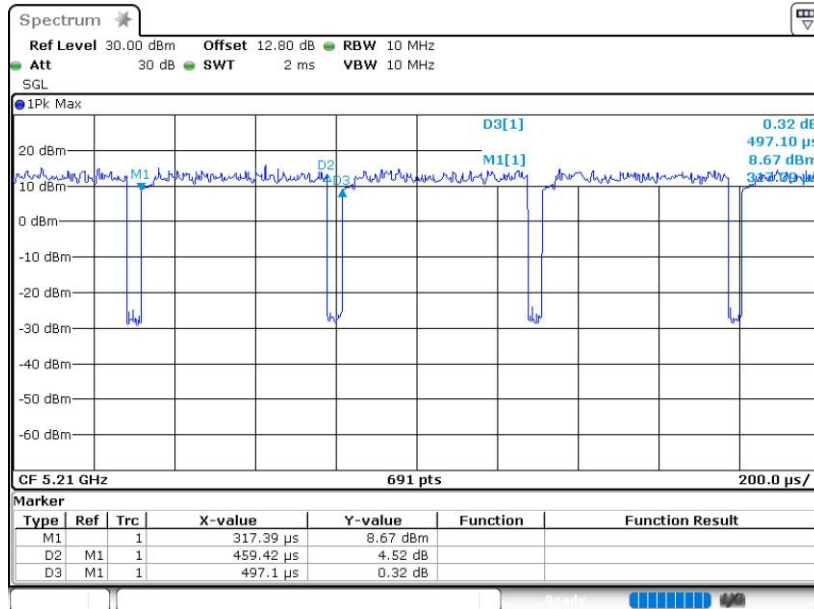

Date: 7.OCT.2023 13:06:32