



Mode	29																																																																																										
	Harmonic																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>49.31</td> <td>74.00</td> <td>-24.69</td> <td>46.99</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17235.00</td> <td>50.29</td> <td>68.30</td> <td>-18.01</td> <td>42.79</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1 11490.00	49.31	74.00	-24.69	46.99	38.19	14.83	50.70	-- -- Peak	2 17235.00	50.29	68.30	-18.01	42.79	41.86	17.57	51.93	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>49.84</td> <td>74.00</td> <td>-24.16</td> <td>47.52</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17235.00</td> <td>50.11</td> <td>68.30</td> <td>-18.19</td> <td>42.61</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1 11490.00	49.84	74.00	-24.16	47.52	38.19	14.83	50.70	-- -- Peak	2 17235.00	50.11	68.30	-18.19	42.61	41.86	17.57	51.93
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 11490.00	49.31	74.00	-24.69	46.99	38.19	14.83	50.70	-- -- Peak																																																																																			
2 17235.00	50.29	68.30	-18.01	42.79	41.86	17.57	51.93	-- -- Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 11490.00	49.84	74.00	-24.16	47.52	38.19	14.83	50.70	-- -- Peak																																																																																			
2 17235.00	50.11	68.30	-18.19	42.61	41.86	17.57	51.93	-- -- Peak																																																																																			



Mode	30																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>48.88</td> <td>74.00</td> <td>-25.12</td> <td>46.40</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>49.04</td> <td>68.30</td> <td>-19.26</td> <td>41.75</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	48.88	74.00	-25.12	46.40	38.26	14.88	50.66	--	--	Peak	2	17355.00	49.04	68.30	-19.26	41.75	41.74	17.60	52.05	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>49.59</td> <td>74.00</td> <td>-24.41</td> <td>47.11</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.98</td> <td>68.30</td> <td>-19.32</td> <td>41.69</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	49.59	74.00	-24.41	47.11	38.26	14.88	50.66	--	--	Peak	2	17355.00	48.98	68.30	-19.32	41.69	41.74	17.60	52.05	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11570.00	48.88	74.00	-25.12	46.40	38.26	14.88	50.66	--	--	Peak																																																																																					
2	17355.00	49.04	68.30	-19.26	41.75	41.74	17.60	52.05	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11570.00	49.59	74.00	-24.41	47.11	38.26	14.88	50.66	--	--	Peak																																																																																					
2	17355.00	48.98	68.30	-19.32	41.69	41.74	17.60	52.05	--	--	Peak																																																																																					






Mode	31																																																																																														
	Harmonic																																																																																														
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																														
ANT	5																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>45.61</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.33</td> <td>68.30</td> <td>-17.97</td> <td>43.25</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11650.00	48.25	74.00	-25.75	45.61	38.32	14.93	50.61	-- -- Peak	2	17475.00	50.33	68.30	-17.97	43.25	41.62	17.63	52.17	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.63</td> <td>74.00</td> <td>-24.37</td> <td>46.99</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.35</td> <td>68.30</td> <td>-17.95</td> <td>43.27</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11650.00	49.63	74.00	-24.37	46.99	38.32	14.93	50.61	-- -- Peak	2	17475.00	50.35	68.30	-17.95	43.27	41.62	17.63	52.17
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11650.00	48.25	74.00	-25.75	45.61	38.32	14.93	50.61	-- -- Peak																																																																																						
2	17475.00	50.33	68.30	-17.97	43.25	41.62	17.63	52.17	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11650.00	49.63	74.00	-24.37	46.99	38.32	14.93	50.61	-- -- Peak																																																																																						
2	17475.00	50.35	68.30	-17.95	43.27	41.62	17.63	52.17	-- -- Peak																																																																																						



Mode	32																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																			
ANT	5																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5607.61</td> <td>53.15</td> <td>68.30</td> <td>-15.15</td> <td>38.78</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>200</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.24</td> <td>52.10</td> <td>68.48</td> <td>-16.38</td> <td>37.73</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>200</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.12</td> <td>66.23</td> <td>110.27</td> <td>-44.04</td> <td>51.84</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>200</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.15</td> <td>65.70</td> <td>111.14</td> <td>-45.44</td> <td>51.31</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>200</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5607.61	53.15	68.30	-15.15	38.78	34.95	11.71	32.29	200	76	PEAK	2	5650.24	52.10	68.48	-16.38	37.73	35.01	11.69	32.33	200	76	PEAK	3	5718.12	66.23	110.27	-44.04	51.84	35.11	11.66	32.38	200	76	PEAK	4	5720.15	65.70	111.14	-45.44	51.31	35.11	11.66	32.38	200	76	PEAK	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.33</td> <td>-----</td> <td>-----</td> <td>83.95</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>200</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	98.33	-----	-----	83.95	35.14	11.64	32.40	200	76	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5607.61	53.15	68.30	-15.15	38.78	34.95	11.71	32.29	200	76	PEAK																																																																																																									
2	5650.24	52.10	68.48	-16.38	37.73	35.01	11.69	32.33	200	76	PEAK																																																																																																									
3	5718.12	66.23	110.27	-44.04	51.84	35.11	11.66	32.38	200	76	PEAK																																																																																																									
4	5720.15	65.70	111.14	-45.44	51.31	35.11	11.66	32.38	200	76	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	98.33	-----	-----	83.95	35.14	11.64	32.40	200	76	PEAK																																																																																																									
Avg	Blank	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>91.84</td> <td>-----</td> <td>-----</td> <td>77.46</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>200</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	91.84	-----	-----	77.46	35.14	11.64	32.40	200	76	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	91.84	-----	-----	77.46	35.14	11.64	32.40	200	76	AVERAGE																																																																																																									

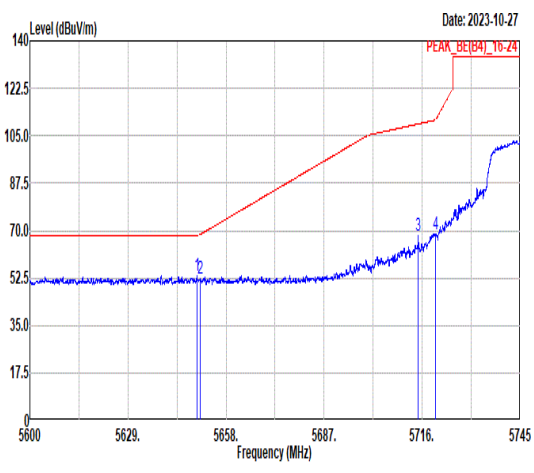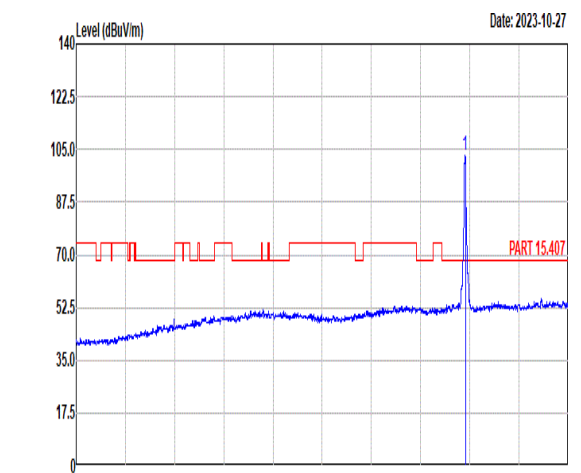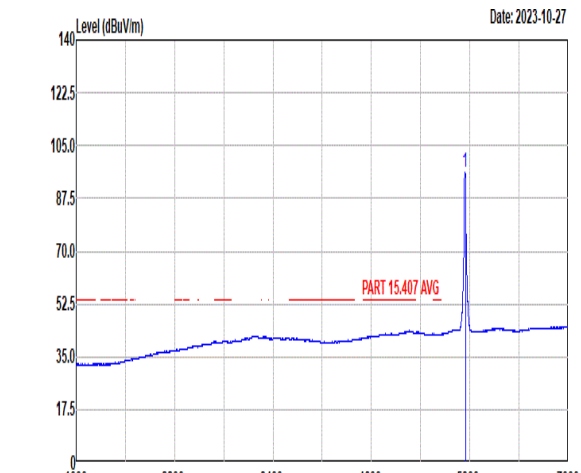

Mode	32																																																																																																																					
	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																					
ANT	5																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.37</td> <td>53.24</td> <td>68.30</td> <td>-15.06</td> <td>38.87</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>256</td> <td>51</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>52.34</td> <td>68.60</td> <td>-16.26</td> <td>37.97</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>256</td> <td>51</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.78</td> <td>67.89</td> <td>109.34</td> <td>-41.45</td> <td>53.51</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>256</td> <td>51</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>68.72</td> <td>110.80</td> <td>-42.08</td> <td>54.33</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>256</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.37	53.24	68.30	-15.06	38.87	35.01	11.69	32.33	256	51	PEAK	2	5650.40	52.34	68.60	-16.26	37.97	35.01	11.69	32.33	256	51	PEAK	3	5714.78	67.89	109.34	-41.45	53.51	35.10	11.66	32.38	256	51	PEAK	4	5720.00	68.72	110.80	-42.08	54.33	35.11	11.66	32.38	256	51	PEAK	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.82</td> <td>-----</td> <td>-----</td> <td>88.44</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>256</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.82	-----	-----	88.44	35.14	11.64	32.40	256	51	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5649.37	53.24	68.30	-15.06	38.87	35.01	11.69	32.33	256	51	PEAK																																																																																																											
2	5650.40	52.34	68.60	-16.26	37.97	35.01	11.69	32.33	256	51	PEAK																																																																																																											
3	5714.78	67.89	109.34	-41.45	53.51	35.10	11.66	32.38	256	51	PEAK																																																																																																											
4	5720.00	68.72	110.80	-42.08	54.33	35.11	11.66	32.38	256	51	PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	102.82	-----	-----	88.44	35.14	11.64	32.40	256	51	PEAK																																																																																																											
Avg	Blank	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.16</td> <td>-----</td> <td>-----</td> <td>81.78</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>256</td> <td>51</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	96.16	-----	-----	81.78	35.14	11.64	32.40	256	51	AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	96.16	-----	-----	81.78	35.14	11.64	32.40	256	51	AVERAGE																																																																																																											



Mode	32																																																																																																						
	Harmonic																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																						
ANT	5																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>49.21</td> <td>74.00</td> <td>-24.79</td> <td>46.89</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>49.35</td> <td>68.30</td> <td>-18.95</td> <td>41.85</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11490.00	49.21	74.00	-24.79	46.89	38.19	14.83	50.70	--	--	Peak	2	17235.00	49.35	68.30	-18.95	41.85	41.86	17.57	51.93	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>50.76</td> <td>74.00</td> <td>-23.24</td> <td>48.44</td> <td>38.19</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>49.78</td> <td>68.30</td> <td>-18.52</td> <td>42.28</td> <td>41.86</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11490.00	50.76	74.00	-23.24	48.44	38.19	14.83	50.70	--	--	Peak	2	17235.00	49.78	68.30	-18.52	42.28	41.86	17.57	51.93	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																															
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	11490.00	49.21	74.00	-24.79	46.89	38.19	14.83	50.70	--	--	Peak																																																																																												
2	17235.00	49.35	68.30	-18.95	41.85	41.86	17.57	51.93	--	--	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																															
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	11490.00	50.76	74.00	-23.24	48.44	38.19	14.83	50.70	--	--	Peak																																																																																												
2	17235.00	49.78	68.30	-18.52	42.28	41.86	17.57	51.93	--	--	Peak																																																																																												



Mode	33																																																																																										
	Harmonic																																																																																										
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>50.21</td> <td>74.00 -23.79</td> <td>47.73</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 17355.00</td> <td>49.70</td> <td>68.30 -18.60</td> <td>42.41</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1 11570.00	50.21	74.00 -23.79	47.73	38.26	14.88	50.66	--	-- Peak	2 17355.00	49.70	68.30 -18.60	42.41	41.74	17.60	52.05	--	-- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>49.53</td> <td>74.00 -24.47</td> <td>47.05</td> <td>38.26</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 17355.00</td> <td>49.65</td> <td>68.30 -18.65</td> <td>42.36</td> <td>41.74</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1 11570.00	49.53	74.00 -24.47	47.05	38.26	14.88	50.66	--	-- Peak	2 17355.00	49.65	68.30 -18.65	42.36	41.74	17.60	52.05	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 11570.00	50.21	74.00 -23.79	47.73	38.26	14.88	50.66	--	-- Peak																																																																																			
2 17355.00	49.70	68.30 -18.60	42.41	41.74	17.60	52.05	--	-- Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1 11570.00	49.53	74.00 -24.47	47.05	38.26	14.88	50.66	--	-- Peak																																																																																			
2 17355.00	49.65	68.30 -18.65	42.36	41.74	17.60	52.05	--	-- Peak																																																																																			



Mode	34																																																																									
	Band Edge																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.69 65.75 111.51 -45.76</td> <td>51.42</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>231</td> <td>121</td> <td>PEAK</td> </tr> <tr> <td>2 5859.94 64.64 109.42 -44.78</td> <td>50.32</td> <td>35.30</td> <td>11.51</td> <td>32.49</td> <td>231</td> <td>121</td> <td>PEAK</td> </tr> <tr> <td>3 5924.58 50.81 68.51 -17.70</td> <td>36.56</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>231</td> <td>121</td> <td>PEAK</td> </tr> <tr> <td>4 5942.58 52.41 68.30 -15.89</td> <td>38.18</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>231</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5854.69 65.75 111.51 -45.76	51.42	35.30	11.52	32.49	231	121	PEAK	2 5859.94 64.64 109.42 -44.78	50.32	35.30	11.51	32.49	231	121	PEAK	3 5924.58 50.81 68.51 -17.70	36.56	35.39	11.40	32.54	231	121	PEAK	4 5942.58 52.41 68.30 -15.89	38.18	35.42	11.37	32.56	231	121	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 100.28</td> <td>85.91</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>231</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5825.00 100.28	85.91	35.25	11.58	32.46	231	121	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5854.69 65.75 111.51 -45.76	51.42	35.30	11.52	32.49	231	121	PEAK																																																																			
2 5859.94 64.64 109.42 -44.78	50.32	35.30	11.51	32.49	231	121	PEAK																																																																			
3 5924.58 50.81 68.51 -17.70	36.56	35.39	11.40	32.54	231	121	PEAK																																																																			
4 5942.58 52.41 68.30 -15.89	38.18	35.42	11.37	32.56	231	121	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5825.00 100.28	85.91	35.25	11.58	32.46	231	121	PEAK																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 93.70</td> <td>79.33</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>231</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5825.00 93.70	79.33	35.25	11.58	32.46	231	121	AVERAGE																																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5825.00 93.70	79.33	35.25	11.58	32.46	231	121	AVERAGE																																																																			



Mode	34																																																																									
	Band Edge																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.94 67.70 110.94 -43.24</td> <td>53.37</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>200</td> <td>77</td> <td>PEAK</td> </tr> <tr> <td>2 5857.33 67.35 110.15 -42.80</td> <td>53.02</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>200</td> <td>77</td> <td>PEAK</td> </tr> <tr> <td>3 5924.44 51.43 68.61 -17.18</td> <td>37.18</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>200</td> <td>77</td> <td>PEAK</td> </tr> <tr> <td>4 5930.94 51.97 68.30 -16.33</td> <td>37.73</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>200</td> <td>77</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5854.94 67.70 110.94 -43.24	53.37	35.30	11.52	32.49	200	77	PEAK	2 5857.33 67.35 110.15 -42.80	53.02	35.30	11.52	32.49	200	77	PEAK	3 5924.44 51.43 68.61 -17.18	37.18	35.39	11.40	32.54	200	77	PEAK	4 5930.94 51.97 68.30 -16.33	37.73	35.40	11.39	32.55	200	77	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 103.37 -----</td> <td>89.00</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>200</td> <td>77</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5825.00 103.37 -----	89.00	35.25	11.58	32.46	200	77	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5854.94 67.70 110.94 -43.24	53.37	35.30	11.52	32.49	200	77	PEAK																																																																			
2 5857.33 67.35 110.15 -42.80	53.02	35.30	11.52	32.49	200	77	PEAK																																																																			
3 5924.44 51.43 68.61 -17.18	37.18	35.39	11.40	32.54	200	77	PEAK																																																																			
4 5930.94 51.97 68.30 -16.33	37.73	35.40	11.39	32.55	200	77	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5825.00 103.37 -----	89.00	35.25	11.58	32.46	200	77	PEAK																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 96.73 -----</td> <td>82.36</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>200</td> <td>77</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5825.00 96.73 -----	82.36	35.25	11.58	32.46	200	77	AVERAGE																																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5825.00 96.73 -----	82.36	35.25	11.58	32.46	200	77	AVERAGE																																																																			



Mode	34																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.50</td> <td>74.00</td> <td>-24.50</td> <td>46.86</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.76</td> <td>68.30</td> <td>-17.54</td> <td>43.68</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11650.00	49.50	74.00	-24.50	46.86	38.32	14.93	50.61	--	--	Peak	2	17475.00	50.76	68.30	-17.54	43.68	41.62	17.63	52.17	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.89</td> <td>74.00</td> <td>-24.11</td> <td>47.25</td> <td>38.32</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.70</td> <td>68.30</td> <td>-17.60</td> <td>43.62</td> <td>41.62</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11650.00	49.89	74.00	-24.11	47.25	38.32	14.93	50.61	--	--	Peak	2	17475.00	50.70	68.30	-17.60	43.62	41.62	17.63	52.17	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11650.00	49.50	74.00	-24.50	46.86	38.32	14.93	50.61	--	--	Peak																																																																																						
2	17475.00	50.76	68.30	-17.54	43.68	41.62	17.63	52.17	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11650.00	49.89	74.00	-24.11	47.25	38.32	14.93	50.61	--	--	Peak																																																																																						
2	17475.00	50.70	68.30	-17.60	43.62	41.62	17.63	52.17	--	--	Peak																																																																																						






Mode	35																																																																																																																			
	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																			
ANT	5																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5605.19</td> <td>52.70</td> <td>68.30</td> <td>-15.60</td> <td>38.33</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>100</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.31</td> <td>52.20</td> <td>68.53</td> <td>-16.33</td> <td>37.83</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.74</td> <td>70.79</td> <td>110.73</td> <td>-39.94</td> <td>56.40</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.06</td> <td>69.08</td> <td>110.94</td> <td>-41.86</td> <td>54.69</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5605.19	52.70	68.30	-15.60	38.33	34.95	11.71	32.29	100	85	PEAK	2	5650.31	52.20	68.53	-16.33	37.83	35.01	11.69	32.33	100	85	PEAK	3	5719.74	70.79	110.73	-39.94	56.40	35.11	11.66	32.38	100	85	PEAK	4	5720.06	69.08	110.94	-41.86	54.69	35.11	11.66	32.38	100	85	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.41</td> <td>-----</td> <td>-----</td> <td>82.02</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	96.41	-----	-----	82.02	35.15	11.64	32.40	100	85	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5605.19	52.70	68.30	-15.60	38.33	34.95	11.71	32.29	100	85	PEAK																																																																																																									
2	5650.31	52.20	68.53	-16.33	37.83	35.01	11.69	32.33	100	85	PEAK																																																																																																									
3	5719.74	70.79	110.73	-39.94	56.40	35.11	11.66	32.38	100	85	PEAK																																																																																																									
4	5720.06	69.08	110.94	-41.86	54.69	35.11	11.66	32.38	100	85	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5755.00	96.41	-----	-----	82.02	35.15	11.64	32.40	100	85	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>88.80</td> <td>-----</td> <td>-----</td> <td>74.41</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.00	88.80	-----	-----	74.41	35.15	11.64	32.40	100	85	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5755.00	88.80	-----	-----	74.41	35.15	11.64	32.40	100	85	AVERAGE																																																																																																									



Mode	35																																																																								
	Band Edge - R																																																																								
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																								
ANT	5																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>50.57</td> <td>110.81</td> <td>-60.24</td> <td>36.24</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>85 PEAK</td> </tr> <tr> <td>2</td> <td>5874.81</td> <td>51.87</td> <td>105.25</td> <td>-53.38</td> <td>37.56</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>100</td> <td>85 PEAK</td> </tr> <tr> <td>3</td> <td>5923.99</td> <td>51.90</td> <td>68.95</td> <td>-17.05</td> <td>37.64</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>100</td> <td>85 PEAK</td> </tr> <tr> <td>4</td> <td>5933.33</td> <td>52.40</td> <td>68.30</td> <td>-15.90</td> <td>38.15</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>100</td> <td>85 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	50.57	110.81	-60.24	36.24	35.30	11.52	32.49	100	85 PEAK	2	5874.81	51.87	105.25	-53.38	37.56	35.32	11.49	32.50	100	85 PEAK	3	5923.99	51.90	68.95	-17.05	37.64	35.39	11.41	32.54	100	85 PEAK	4	5933.33	52.40	68.30	-15.90	38.15	35.41	11.39	32.55	100	85 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5855.00	50.57	110.81	-60.24	36.24	35.30	11.52	32.49	100	85 PEAK																																																															
2	5874.81	51.87	105.25	-53.38	37.56	35.32	11.49	32.50	100	85 PEAK																																																															
3	5923.99	51.90	68.95	-17.05	37.64	35.39	11.41	32.54	100	85 PEAK																																																															
4	5933.33	52.40	68.30	-15.90	38.15	35.41	11.39	32.55	100	85 PEAK																																																															

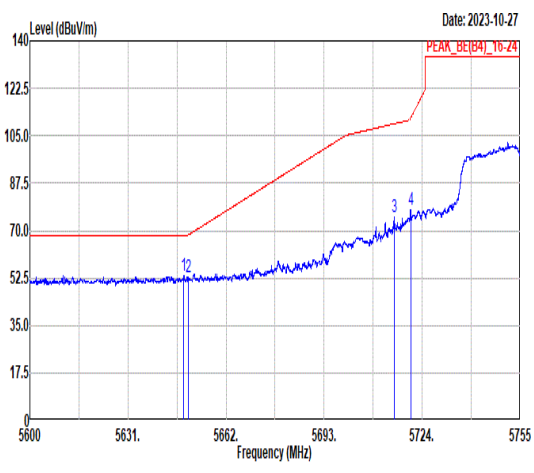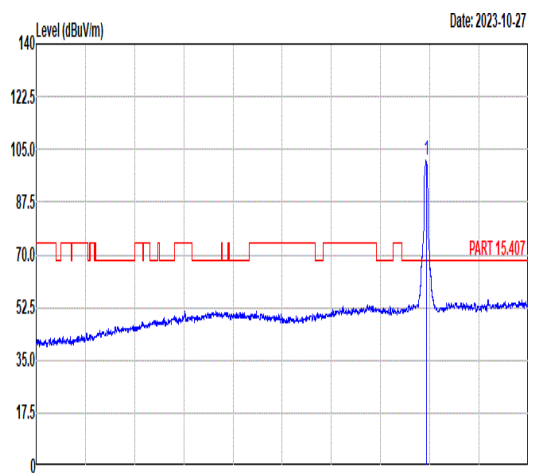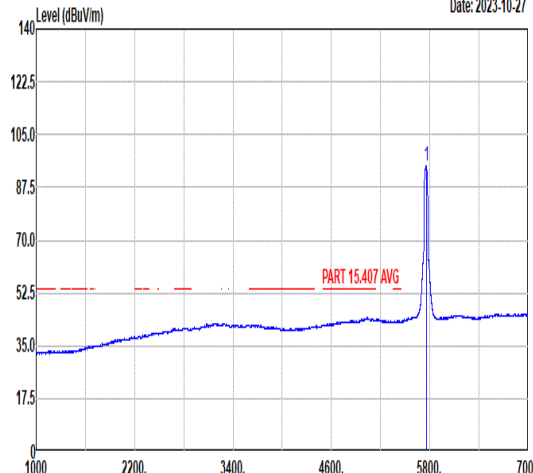

Mode	35																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																					
ANT	5																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.61</td> <td>53.23</td> <td>68.30</td> <td>-15.07</td> <td>38.86</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.16</td> <td>52.59</td> <td>68.42</td> <td>-15.83</td> <td>38.22</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.10</td> <td>74.85</td> <td>109.43</td> <td>-34.58</td> <td>60.47</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.36</td> <td>77.71</td> <td>111.62</td> <td>-33.91</td> <td>63.32</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.61	53.23	68.30	-15.07	38.86	35.01	11.69	32.33	100	43	PEAK	2	5650.16	52.59	68.42	-15.83	38.22	35.01	11.69	32.33	100	43	PEAK	3	5715.10	74.85	109.43	-34.58	60.47	35.10	11.66	32.38	100	43	PEAK	4	5720.36	77.71	111.62	-33.91	63.32	35.11	11.66	32.38	100	43	PEAK	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>101.42</td> <td>-----</td> <td>-----</td> <td>87.03</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	101.42	-----	-----	87.03	35.15	11.64	32.40	100	43	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5648.61	53.23	68.30	-15.07	38.86	35.01	11.69	32.33	100	43	PEAK																																																																																																											
2	5650.16	52.59	68.42	-15.83	38.22	35.01	11.69	32.33	100	43	PEAK																																																																																																											
3	5715.10	74.85	109.43	-34.58	60.47	35.10	11.66	32.38	100	43	PEAK																																																																																																											
4	5720.36	77.71	111.62	-33.91	63.32	35.11	11.66	32.38	100	43	PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5755.00	101.42	-----	-----	87.03	35.15	11.64	32.40	100	43	PEAK																																																																																																											
Avg	Blank	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.73</td> <td>-----</td> <td>-----</td> <td>80.34</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>100</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	94.73	-----	-----	80.34	35.16	11.64	32.41	100	43	AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5755.00	94.73	-----	-----	80.34	35.16	11.64	32.41	100	43	AVERAGE																																																																																																											



Mode	35																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																												
ANT	5																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.96</td> <td>52.99</td> <td>110.90</td> <td>-57.91</td> <td>38.66</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.66</td> <td>51.43</td> <td>105.58</td> <td>-54.15</td> <td>37.12</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>50.81</td> <td>68.21</td> <td>-17.40</td> <td>36.56</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5947.56</td> <td>52.55</td> <td>68.30</td> <td>-15.75</td> <td>38.31</td> <td>35.43</td> <td>11.37</td> <td>32.56</td> <td>100</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.96	52.99	110.90	-57.91	38.66	35.30	11.52	32.49	100	43	PEAK	2	5873.66	51.43	105.58	-54.15	37.12	35.32	11.49	32.50	100	43	PEAK	3	5924.98	50.81	68.21	-17.40	36.56	35.39	11.40	32.54	100	43	PEAK	4	5947.56	52.55	68.30	-15.75	38.31	35.43	11.37	32.56	100	43	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.96	52.99	110.90	-57.91	38.66	35.30	11.52	32.49	100	43	PEAK																																																																		
2	5873.66	51.43	105.58	-54.15	37.12	35.32	11.49	32.50	100	43	PEAK																																																																		
3	5924.98	50.81	68.21	-17.40	36.56	35.39	11.40	32.54	100	43	PEAK																																																																		
4	5947.56	52.55	68.30	-15.75	38.31	35.43	11.37	32.56	100	43	PEAK																																																																		






Mode	36																																																																									
	Band Edge - L																																																																									
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5634.83 52.80 68.30 -15.50</td> <td>38.44</td> <td>34.99</td> <td>11.69</td> <td>32.32</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>2 5650.04 52.01 68.33 -16.32</td> <td>37.64</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>3 5700.91 53.89 105.46 -51.57</td> <td>39.52</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>4 5720.24 54.13 111.34 -57.21</td> <td>39.74</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5634.83 52.80 68.30 -15.50	38.44	34.99	11.69	32.32	100	22	PEAK	2 5650.04 52.01 68.33 -16.32	37.64	35.01	11.69	32.33	100	22	PEAK	3 5700.91 53.89 105.46 -51.57	39.52	35.08	11.66	32.37	100	22	PEAK	4 5720.24 54.13 111.34 -57.21	39.74	35.11	11.66	32.38	100	22	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5795.00 94.90</td> <td>80.51</td> <td>35.23</td> <td>11.61</td> <td>32.45</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5795.00 94.90	80.51	35.23	11.61	32.45	100	22	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5634.83 52.80 68.30 -15.50	38.44	34.99	11.69	32.32	100	22	PEAK																																																																			
2 5650.04 52.01 68.33 -16.32	37.64	35.01	11.69	32.33	100	22	PEAK																																																																			
3 5700.91 53.89 105.46 -51.57	39.52	35.08	11.66	32.37	100	22	PEAK																																																																			
4 5720.24 54.13 111.34 -57.21	39.74	35.11	11.66	32.38	100	22	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5795.00 94.90	80.51	35.23	11.61	32.45	100	22	PEAK																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5795.00 88.05</td> <td>73.66</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>100</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5795.00 88.05	73.66	35.21	11.62	32.44	100	22	AVERAGE																																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																				
1 5795.00 88.05	73.66	35.21	11.62	32.44	100	22	AVERAGE																																																																			



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																												
ANT	5																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.91</td> <td>57.21</td> <td>111.01</td> <td>-53.80</td> <td>42.88</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.27</td> <td>55.51</td> <td>106.52</td> <td>-51.01</td> <td>41.19</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.19</td> <td>51.83</td> <td>68.79</td> <td>-16.96</td> <td>37.58</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5945.74</td> <td>52.10</td> <td>68.30</td> <td>-16.20</td> <td>37.87</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>100</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.91	57.21	111.01	-53.80	42.88	35.30	11.52	32.49	100	22	PEAK	2	5870.27	55.51	106.52	-51.01	41.19	35.32	11.50	32.50	100	22	PEAK	3	5924.19	51.83	68.79	-16.96	37.58	35.39	11.40	32.54	100	22	PEAK	4	5945.74	52.10	68.30	-16.20	37.87	35.42	11.37	32.56	100	22	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.91	57.21	111.01	-53.80	42.88	35.30	11.52	32.49	100	22	PEAK																																																																		
2	5870.27	55.51	106.52	-51.01	41.19	35.32	11.50	32.50	100	22	PEAK																																																																		
3	5924.19	51.83	68.79	-16.96	37.58	35.39	11.40	32.54	100	22	PEAK																																																																		
4	5945.74	52.10	68.30	-16.20	37.87	35.42	11.37	32.56	100	22	PEAK																																																																		

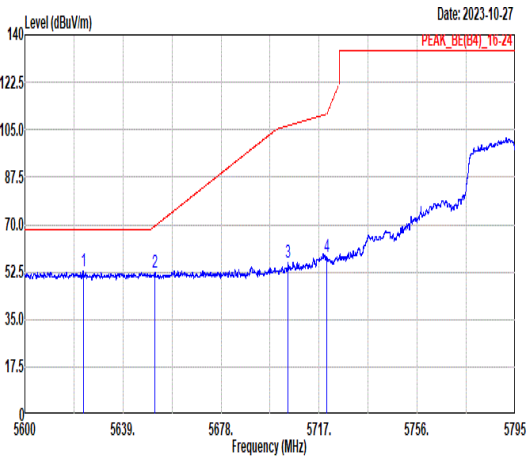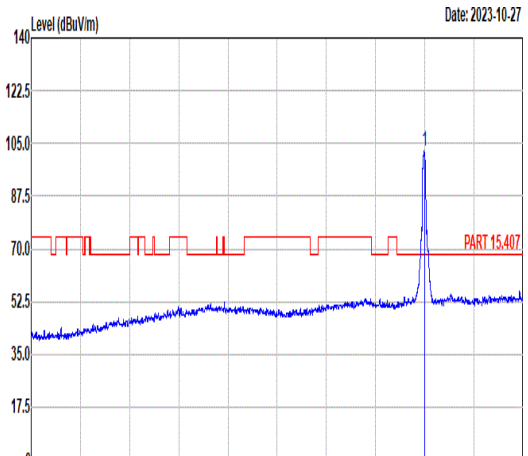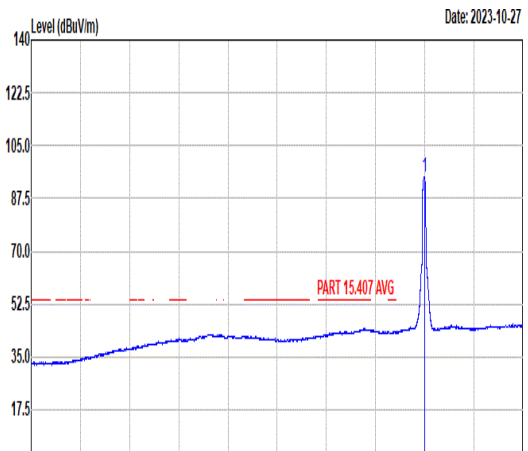

Mode	36																																																																																																																			
	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																																			
ANT	5																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.32</td> <td>52.96</td> <td>68.30</td> <td>-15.34</td> <td>38.60</td> <td>34.97</td> <td>11.70</td> <td>32.31</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.58</td> <td>52.50</td> <td>69.47</td> <td>-16.97</td> <td>38.13</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.62</td> <td>55.93</td> <td>106.49</td> <td>-50.56</td> <td>41.55</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>58.22</td> <td>110.85</td> <td>-52.63</td> <td>43.83</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5623.32	52.96	68.30	-15.34	38.60	34.97	11.70	32.31	100	44	PEAK	2	5651.58	52.50	69.47	-16.97	38.13	35.01	11.69	32.33	100	44	PEAK	3	5704.62	55.93	106.49	-50.56	41.55	35.09	11.66	32.37	100	44	PEAK	4	5720.02	58.22	110.85	-52.63	43.83	35.11	11.66	32.38	100	44	PEAK	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>102.44</td> <td>-----</td> <td>-----</td> <td>88.05</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	102.44	-----	-----	88.05	35.21	11.62	32.44	100	44	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5623.32	52.96	68.30	-15.34	38.60	34.97	11.70	32.31	100	44	PEAK																																																																																																									
2	5651.58	52.50	69.47	-16.97	38.13	35.01	11.69	32.33	100	44	PEAK																																																																																																									
3	5704.62	55.93	106.49	-50.56	41.55	35.09	11.66	32.37	100	44	PEAK																																																																																																									
4	5720.02	58.22	110.85	-52.63	43.83	35.11	11.66	32.38	100	44	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	102.44	-----	-----	88.05	35.21	11.62	32.44	100	44	PEAK																																																																																																									
Avg	Blank	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>94.82</td> <td>-----</td> <td>-----</td> <td>80.43</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>100</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	94.82	-----	-----	80.43	35.21	11.62	32.44	100	44	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	94.82	-----	-----	80.43	35.21	11.62	32.44	100	44	AVERAGE																																																																																																									



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																												
ANT	5																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.91</td> <td>62.15</td> <td>111.01</td> <td>-48.86</td> <td>47.82</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.28</td> <td>58.33</td> <td>105.40</td> <td>-47.07</td> <td>44.02</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>53.37</td> <td>68.21</td> <td>-14.84</td> <td>39.12</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.01</td> <td>52.74</td> <td>68.30</td> <td>-15.56</td> <td>38.48</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.91	62.15	111.01	-48.86	47.82	35.30	11.52	32.49	100	44	PEAK	2	5874.28	58.33	105.40	-47.07	44.02	35.32	11.49	32.50	100	44	PEAK	3	5924.98	53.37	68.21	-14.84	39.12	35.39	11.40	32.54	100	44	PEAK	4	5925.01	52.74	68.30	-15.56	38.48	35.40	11.40	32.54	100	44	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.91	62.15	111.01	-48.86	47.82	35.30	11.52	32.49	100	44	PEAK																																																																		
2	5874.28	58.33	105.40	-47.07	44.02	35.32	11.49	32.50	100	44	PEAK																																																																		
3	5924.98	53.37	68.21	-14.84	39.12	35.39	11.40	32.54	100	44	PEAK																																																																		
4	5925.01	52.74	68.30	-15.56	38.48	35.40	11.40	32.54	100	44	PEAK																																																																		






	37																																																																																																																			
Mode	Band Edge - L																																																																																																																			
ANT	5																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<p style="text-align: right;">Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.11</td> <td>53.92</td> <td>68.30</td> <td>-14.38</td> <td>39.55</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.00</td> <td>53.77</td> <td>69.04</td> <td>-15.27</td> <td>39.40</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.48</td> <td>64.57</td> <td>105.90</td> <td>-41.33</td> <td>50.20</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.02</td> <td>63.83</td> <td>110.83</td> <td>-47.00</td> <td>49.44</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5642.11	53.92	68.30	-14.38	39.55	35.00	11.69	32.32	100	45	PEAK	2	5651.00	53.77	69.04	-15.27	39.40	35.01	11.69	32.33	100	45	PEAK	3	5702.48	64.57	105.90	-41.33	50.20	35.08	11.66	32.37	100	45	PEAK	4	5720.02	63.83	110.83	-47.00	49.44	35.11	11.66	32.38	100	45	PEAK	<p style="text-align: right;">Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>91.58</td> <td>-----</td> <td>-----</td> <td>77.20</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	91.58	-----	-----	77.20	35.17	11.63	32.42	100	45	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5642.11	53.92	68.30	-14.38	39.55	35.00	11.69	32.32	100	45	PEAK																																																																																																									
2	5651.00	53.77	69.04	-15.27	39.40	35.01	11.69	32.33	100	45	PEAK																																																																																																									
3	5702.48	64.57	105.90	-41.33	50.20	35.08	11.66	32.37	100	45	PEAK																																																																																																									
4	5720.02	63.83	110.83	-47.00	49.44	35.11	11.66	32.38	100	45	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5775.00	91.58	-----	-----	77.20	35.17	11.63	32.42	100	45	PEAK																																																																																																									
Avg	Blank	<p style="text-align: right;">Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>84.58</td> <td>-----</td> <td>-----</td> <td>70.20</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	84.58	-----	-----	70.20	35.17	11.63	32.42	100	45	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5775.00	84.58	-----	-----	70.20	35.17	11.63	32.42	100	45	AVERAGE																																																																																																									



Mode	37																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																												
ANT	5																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.73</td> <td>60.10</td> <td>111.42</td> <td>-51.32</td> <td>45.77</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.06</td> <td>59.62</td> <td>106.86</td> <td>-47.24</td> <td>45.30</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.99</td> <td>50.81</td> <td>68.21</td> <td>-17.40</td> <td>36.56</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.23</td> <td>52.08</td> <td>68.30</td> <td>-16.22</td> <td>37.85</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>100</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.73	60.10	111.42	-51.32	45.77	35.30	11.52	32.49	100	45	PEAK	2	5869.06	59.62	106.86	-47.24	45.30	35.32	11.50	32.50	100	45	PEAK	3	5924.99	50.81	68.21	-17.40	36.56	35.39	11.40	32.54	100	45	PEAK	4	5942.23	52.08	68.30	-16.22	37.85	35.42	11.37	32.56	100	45	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.73	60.10	111.42	-51.32	45.77	35.30	11.52	32.49	100	45	PEAK																																																																		
2	5869.06	59.62	106.86	-47.24	45.30	35.32	11.50	32.50	100	45	PEAK																																																																		
3	5924.99	50.81	68.21	-17.40	36.56	35.39	11.40	32.54	100	45	PEAK																																																																		
4	5942.23	52.08	68.30	-16.22	37.85	35.42	11.37	32.56	100	45	PEAK																																																																		

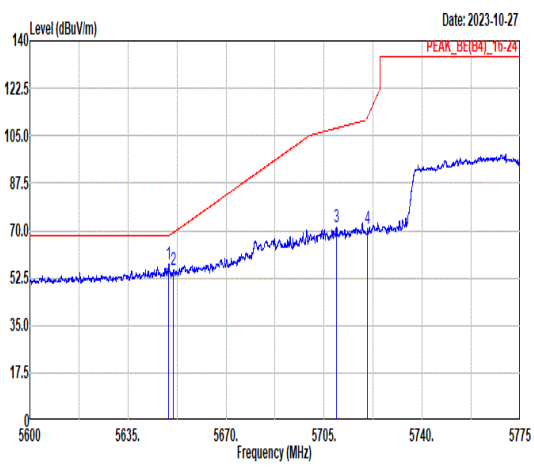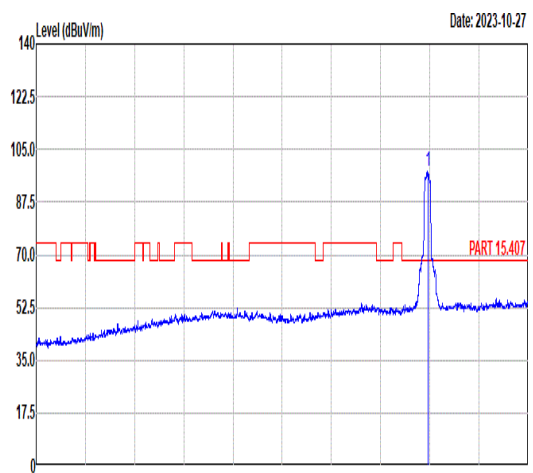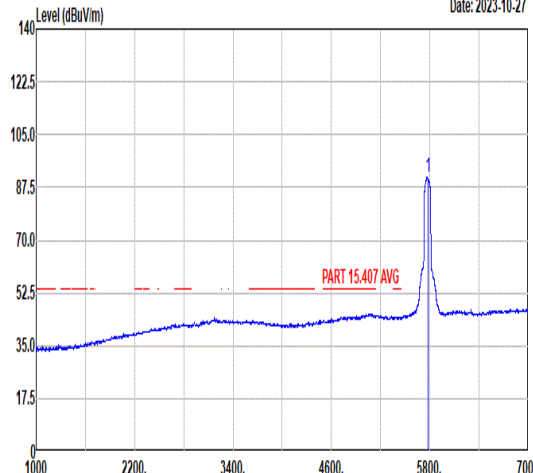

Mode	37																																																																																																																			
	Band Edge - L																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																			
ANT	5																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.61</td> <td>57.52</td> <td>68.30</td> <td>-10.78</td> <td>43.15</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.29</td> <td>55.24</td> <td>69.26</td> <td>-14.02</td> <td>40.87</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5709.29</td> <td>71.58</td> <td>107.80</td> <td>-36.22</td> <td>57.20</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.49</td> <td>70.55</td> <td>111.91</td> <td>-41.36</td> <td>56.16</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5649.61	57.52	68.30	-10.78	43.15	35.01	11.69	32.33	100	44	PEAK	2	5651.29	55.24	69.26	-14.02	40.87	35.01	11.69	32.33	100	44	PEAK	3	5709.29	71.58	107.80	-36.22	57.20	35.09	11.66	32.37	100	44	PEAK	4	5720.49	70.55	111.91	-41.36	56.16	35.11	11.66	32.38	100	44	PEAK	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.95</td> <td>-----</td> <td>-----</td> <td>83.57</td> <td>35.17</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	97.95	-----	-----	83.57	35.17	11.63	32.42	100	44	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5649.61	57.52	68.30	-10.78	43.15	35.01	11.69	32.33	100	44	PEAK																																																																																																									
2	5651.29	55.24	69.26	-14.02	40.87	35.01	11.69	32.33	100	44	PEAK																																																																																																									
3	5709.29	71.58	107.80	-36.22	57.20	35.09	11.66	32.37	100	44	PEAK																																																																																																									
4	5720.49	70.55	111.91	-41.36	56.16	35.11	11.66	32.38	100	44	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5775.00	97.95	-----	-----	83.57	35.17	11.63	32.42	100	44	PEAK																																																																																																									
Avg	Blank	 <p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>90.96</td> <td>-----</td> <td>-----</td> <td>76.56</td> <td>35.17</td> <td>11.64</td> <td>32.41</td> <td>100</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	90.96	-----	-----	76.56	35.17	11.64	32.41	100	44	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	5775.00	90.96	-----	-----	76.56	35.17	11.64	32.41	100	44	AVERAGE																																																																																																									



Mode	37																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																												
ANT	5																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>The plot shows a blue signal line and a red limit line. The y-axis is Level (dBuV/m) from 0 to 140. The x-axis is Frequency (MHz) from 5775 to 5950. A red line labeled 'PEAK_BE(B4)_16.24' starts at 140 dBuV/m and drops to 70 dBuV/m at 5880 MHz. Four peaks are marked with blue vertical lines and numbered 1, 2, 3, and 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.36</td> <td>66.39</td> <td>112.25</td> <td>-45.86</td> <td>52.06</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.06</td> <td>65.86</td> <td>106.86</td> <td>-41.00</td> <td>51.54</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.36</td> <td>54.32</td> <td>68.67</td> <td>-14.35</td> <td>40.07</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.86</td> <td>53.41</td> <td>68.30</td> <td>-14.89</td> <td>39.15</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.36	66.39	112.25	-45.86	52.06	35.30	11.52	32.49	100	44	PEAK	2	5869.06	65.86	106.86	-41.00	51.54	35.32	11.50	32.50	100	44	PEAK	3	5924.36	54.32	68.67	-14.35	40.07	35.39	11.40	32.54	100	44	PEAK	4	5927.86	53.41	68.30	-14.89	39.15	35.40	11.40	32.54	100	44	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.36	66.39	112.25	-45.86	52.06	35.30	11.52	32.49	100	44	PEAK																																																																		
2	5869.06	65.86	106.86	-41.00	51.54	35.32	11.50	32.50	100	44	PEAK																																																																		
3	5924.36	54.32	68.67	-14.35	40.07	35.39	11.40	32.54	100	44	PEAK																																																																		
4	5927.86	53.41	68.30	-14.89	39.15	35.40	11.40	32.54	100	44	PEAK																																																																		



Mode	37																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>50.39</td> <td>74.00</td> <td>-23.61</td> <td>47.95</td> <td>38.24</td> <td>14.87</td> <td>50.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>50.50</td> <td>68.30</td> <td>-17.80</td> <td>43.16</td> <td>41.77</td> <td>17.59</td> <td>52.02</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	50.39	74.00	-23.61	47.95	38.24	14.87	50.67	-- -- Peak	2	17325.00	50.50	68.30	-17.80	43.16	41.77	17.59	52.02	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>49.70</td> <td>74.00</td> <td>-24.30</td> <td>47.26</td> <td>38.24</td> <td>14.87</td> <td>50.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>50.01</td> <td>68.30</td> <td>-18.29</td> <td>42.67</td> <td>41.77</td> <td>17.59</td> <td>52.02</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.70	74.00	-24.30	47.26	38.24	14.87	50.67	-- -- Peak	2	17325.00	50.01	68.30	-18.29	42.67	41.77	17.59	52.02
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11550.00	50.39	74.00	-23.61	47.95	38.24	14.87	50.67	-- -- Peak																																																																																								
2	17325.00	50.50	68.30	-17.80	43.16	41.77	17.59	52.02	-- -- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11550.00	49.70	74.00	-24.30	47.26	38.24	14.87	50.67	-- -- Peak																																																																																								
2	17325.00	50.01	68.30	-18.29	42.67	41.77	17.59	52.02	-- -- Peak																																																																																								



Mode	38																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>45.67</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>50.52</td> <td>68.30</td> <td>-17.78</td> <td>42.89</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11440.00	47.91	74.00	-26.09	45.67	38.15	14.80	50.71	--	--	Peak	2	17160.00	50.52	68.30	-17.78	42.89	41.94	17.55	51.86	--	--	Peak	<p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>49.35</td> <td>74.00</td> <td>-24.65</td> <td>47.11</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>51.11</td> <td>68.30</td> <td>-17.19</td> <td>43.48</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11440.00	49.35	74.00	-24.65	47.11	38.15	14.80	50.71	--	--	Peak	2	17160.00	51.11	68.30	-17.19	43.48	41.94	17.55	51.86	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11440.00	47.91	74.00	-26.09	45.67	38.15	14.80	50.71	--	--	Peak																																																																																					
2	17160.00	50.52	68.30	-17.78	42.89	41.94	17.55	51.86	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11440.00	49.35	74.00	-24.65	47.11	38.15	14.80	50.71	--	--	Peak																																																																																					
2	17160.00	51.11	68.30	-17.19	43.48	41.94	17.55	51.86	--	--	Peak																																																																																					



Mode	39																																																																		
	Band Edge																																																																		
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																		
ANT	5																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5443.50</td> <td>51.21</td> <td>74.00</td> <td>-22.79</td> <td>37.90</td> <td>34.40</td> <td>11.05</td> <td>32.14</td> <td>100</td> <td>83</td> </tr> <tr> <td>2</td> <td>5467.70</td> <td>50.56</td> <td>68.30</td> <td>-17.74</td> <td>37.18</td> <td>34.40</td> <td>11.15</td> <td>32.17</td> <td>100</td> <td>83</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>104.45</td> <td>-----</td> <td>-----</td> <td>90.72</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>83</td> </tr> <tr> <td>4</td> <td>5880.75</td> <td>51.91</td> <td>68.30</td> <td>-16.39</td> <td>38.00</td> <td>34.94</td> <td>11.48</td> <td>32.51</td> <td>100</td> <td>83</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5443.50	51.21	74.00	-22.79	37.90	34.40	11.05	32.14	100	83	2	5467.70	50.56	68.30	-17.74	37.18	34.40	11.15	32.17	100	83	3	5720.00	104.45	-----	-----	90.72	34.45	11.66	32.38	100	83	4	5880.75	51.91	68.30	-16.39	38.00	34.94	11.48	32.51	100	83	Blank
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	5443.50	51.21	74.00	-22.79	37.90	34.40	11.05	32.14	100	83																																																									
2	5467.70	50.56	68.30	-17.74	37.18	34.40	11.15	32.17	100	83																																																									
3	5720.00	104.45	-----	-----	90.72	34.45	11.66	32.38	100	83																																																									
4	5880.75	51.91	68.30	-16.39	38.00	34.94	11.48	32.51	100	83																																																									
Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.95</td> <td>41.50</td> <td>54.00</td> <td>-12.50</td> <td>28.23</td> <td>34.40</td> <td>11.00</td> <td>32.13</td> <td>100</td> <td>83</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>98.56</td> <td>-----</td> <td>-----</td> <td>84.83</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>83</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5431.95	41.50	54.00	-12.50	28.23	34.40	11.00	32.13	100	83	2	5720.00	98.56	-----	-----	84.83	34.45	11.66	32.38	100	83	Blank																						
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	5431.95	41.50	54.00	-12.50	28.23	34.40	11.00	32.13	100	83																																																									
2	5720.00	98.56	-----	-----	84.83	34.45	11.66	32.38	100	83																																																									



Mode	39																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.05</td> <td>51.26</td> <td>74.00</td> <td>-22.74</td> <td>37.92</td> <td>34.40</td> <td>11.10</td> <td>32.16</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5467.70</td> <td>49.88</td> <td>68.30</td> <td>-18.42</td> <td>36.50</td> <td>34.40</td> <td>11.15</td> <td>32.17</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>99.77</td> <td>-----</td> <td>-----</td> <td>86.04</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5857.65</td> <td>51.22</td> <td>68.30</td> <td>-17.08</td> <td>37.34</td> <td>34.85</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5455.05	51.26	74.00	-22.74	37.92	34.40	11.10	32.16	100	199	Peak	2	5467.70	49.88	68.30	-18.42	36.50	34.40	11.15	32.17	100	199	Peak	3	5720.00	99.77	-----	-----	86.04	34.45	11.66	32.38	100	199	Peak	4	5857.65	51.22	68.30	-17.08	37.34	34.85	11.52	32.49	100	199	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5455.05	51.26	74.00	-22.74	37.92	34.40	11.10	32.16	100	199	Peak																																																															
2	5467.70	49.88	68.30	-18.42	36.50	34.40	11.15	32.17	100	199	Peak																																																															
3	5720.00	99.77	-----	-----	86.04	34.45	11.66	32.38	100	199	Peak																																																															
4	5857.65	51.22	68.30	-17.08	37.34	34.85	11.52	32.49	100	199	Peak																																																															
Avg	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.95</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>28.15</td> <td>34.40</td> <td>11.05</td> <td>32.14</td> <td>100</td> <td>199</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>93.55</td> <td>-----</td> <td>-----</td> <td>79.82</td> <td>34.45</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>199</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5442.95	41.46	54.00	-12.54	28.15	34.40	11.05	32.14	100	199	Peak	2	5720.00	93.55	-----	-----	79.82	34.45	11.66	32.38	100	199	Average	Blank																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5442.95	41.46	54.00	-12.54	28.15	34.40	11.05	32.14	100	199	Peak																																																															
2	5720.00	93.55	-----	-----	79.82	34.45	11.66	32.38	100	199	Average																																																															



Mode	39																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																																														
ANT	5																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>48.02</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>50.74</td> <td>68.30</td> <td>-17.56</td> <td>43.11</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11440.00	50.26	74.00	-23.74	48.02	38.15	14.80	50.71	-- -- Peak	2	17160.00	50.74	68.30	-17.56	43.11	41.94	17.55	51.86	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>50.57</td> <td>74.00</td> <td>-23.43</td> <td>48.33</td> <td>38.15</td> <td>14.80</td> <td>50.71</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>52.11</td> <td>68.30</td> <td>-16.19</td> <td>44.48</td> <td>41.94</td> <td>17.55</td> <td>51.86</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11440.00	50.57	74.00	-23.43	48.33	38.15	14.80	50.71	-- -- Peak	2	17160.00	52.11	68.30	-16.19	44.48	41.94	17.55	51.86
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11440.00	50.26	74.00	-23.74	48.02	38.15	14.80	50.71	-- -- Peak																																																																																						
2	17160.00	50.74	68.30	-17.56	43.11	41.94	17.55	51.86	-- -- Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11440.00	50.57	74.00	-23.43	48.33	38.15	14.80	50.71	-- -- Peak																																																																																						
2	17160.00	52.11	68.30	-16.19	44.48	41.94	17.55	51.86	-- -- Peak																																																																																						



Mode	40																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5414.35</td> <td>51.03</td> <td>74.00</td> <td>-22.97</td> <td>37.81</td> <td>34.40</td> <td>10.93</td> <td>32.11</td> <td>100</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5462.75</td> <td>51.41</td> <td>68.30</td> <td>-16.89</td> <td>38.05</td> <td>34.40</td> <td>11.13</td> <td>32.17</td> <td>100</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>101.85</td> <td>-----</td> <td>-----</td> <td>88.12</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5892.30</td> <td>51.83</td> <td>68.30</td> <td>-16.47</td> <td>37.90</td> <td>34.99</td> <td>11.46</td> <td>32.52</td> <td>100</td> <td>88</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5414.35	51.03	74.00	-22.97	37.81	34.40	10.93	32.11	100	88	Peak	2	5462.75	51.41	68.30	-16.89	38.05	34.40	11.13	32.17	100	88	Peak	3	5710.00	101.85	-----	-----	88.12	34.44	11.66	32.37	100	88	Peak	4	5892.30	51.83	68.30	-16.47	37.90	34.99	11.46	32.52	100	88	Peak	Blank
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5414.35	51.03	74.00	-22.97	37.81	34.40	10.93	32.11	100	88	Peak																																																															
2	5462.75	51.41	68.30	-16.89	38.05	34.40	11.13	32.17	100	88	Peak																																																															
3	5710.00	101.85	-----	-----	88.12	34.44	11.66	32.37	100	88	Peak																																																															
4	5892.30	51.83	68.30	-16.47	37.90	34.99	11.46	32.52	100	88	Peak																																																															
Avg	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.30</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>29.14</td> <td>34.40</td> <td>11.04</td> <td>32.14</td> <td>100</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>95.71</td> <td>-----</td> <td>-----</td> <td>81.98</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>88</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5441.30	42.44	54.00	-11.56	29.14	34.40	11.04	32.14	100	88	Peak	2	5710.00	95.71	-----	-----	81.98	34.44	11.66	32.37	100	88	Average	Blank																								
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5441.30	42.44	54.00	-11.56	29.14	34.40	11.04	32.14	100	88	Peak																																																															
2	5710.00	95.71	-----	-----	81.98	34.44	11.66	32.37	100	88	Average																																																															



Mode	40																																																													
	Band Edge																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																																													
ANT	5																																																													
Pol.	Vertical	Fundamental																																																												
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Level (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5390.15</td> <td>51.39</td> <td>74.00</td> <td>-22.61</td> <td>38.16</td> <td>34.40</td> <td>10.91</td> <td>32.08</td> <td>100</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5464.40</td> <td>51.20</td> <td>68.30</td> <td>-17.10</td> <td>37.83</td> <td>34.40</td> <td>11.14</td> <td>32.17</td> <td>100</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>98.01</td> <td>-----</td> <td>-----</td> <td>84.28</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5852.70</td> <td>51.67</td> <td>68.30</td> <td>-16.63</td> <td>37.80</td> <td>34.83</td> <td>11.53</td> <td>32.49</td> <td>100</td> <td>181</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5390.15	51.39	74.00	-22.61	38.16	34.40	10.91	32.08	100	181	Peak	2	5464.40	51.20	68.30	-17.10	37.83	34.40	11.14	32.17	100	181	Peak	3	5710.00	98.01	-----	-----	84.28	34.44	11.66	32.37	100	181	Peak	4	5852.70	51.67	68.30	-16.63	37.80	34.83	11.53	32.49	100	181	Peak	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5390.15	51.39	74.00	-22.61	38.16	34.40	10.91	32.08	100	181	Peak																																																			
2	5464.40	51.20	68.30	-17.10	37.83	34.40	11.14	32.17	100	181	Peak																																																			
3	5710.00	98.01	-----	-----	84.28	34.44	11.66	32.37	100	181	Peak																																																			
4	5852.70	51.67	68.30	-16.63	37.80	34.83	11.53	32.49	100	181	Peak																																																			
Avg	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Level (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.55</td> <td>42.57</td> <td>54.00</td> <td>-11.43</td> <td>29.28</td> <td>34.40</td> <td>11.03</td> <td>32.14</td> <td>100</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>91.13</td> <td>-----</td> <td>-----</td> <td>77.40</td> <td>34.44</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>181</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5438.55	42.57	54.00	-11.43	29.28	34.40	11.03	32.14	100	181	Peak	2	5710.00	91.13	-----	-----	77.40	34.44	11.66	32.37	100	181	Average	Blank																								
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5438.55	42.57	54.00	-11.43	29.28	34.40	11.03	32.14	100	181	Peak																																																			
2	5710.00	91.13	-----	-----	77.40	34.44	11.66	32.37	100	181	Average																																																			



Mode	41																																																																		
	Band Edge																																																																		
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																																																		
ANT	5																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>51.10</td> <td>74.00</td> <td>-22.90</td> <td>37.74</td> <td>34.40</td> <td>11.12</td> <td>32.16</td> <td>100</td> <td>95 Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>50.41</td> <td>68.30</td> <td>-17.89</td> <td>37.06</td> <td>34.40</td> <td>11.12</td> <td>32.17</td> <td>100</td> <td>95 Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>98.44</td> <td>-----</td> <td>-----</td> <td>84.73</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>95 Peak</td> </tr> <tr> <td>4</td> <td>5853.80</td> <td>53.00</td> <td>68.30</td> <td>-15.30</td> <td>39.14</td> <td>34.83</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>95 Peak</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.45	51.10	74.00	-22.90	37.74	34.40	11.12	32.16	100	95 Peak	2	5460.00	50.41	68.30	-17.89	37.06	34.40	11.12	32.17	100	95 Peak	3	5690.00	98.44	-----	-----	84.73	34.40	11.67	32.36	100	95 Peak	4	5853.80	53.00	68.30	-15.30	39.14	34.83	11.52	32.49	100	95 Peak	Blank
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	5459.45	51.10	74.00	-22.90	37.74	34.40	11.12	32.16	100	95 Peak																																																									
2	5460.00	50.41	68.30	-17.89	37.06	34.40	11.12	32.17	100	95 Peak																																																									
3	5690.00	98.44	-----	-----	84.73	34.40	11.67	32.36	100	95 Peak																																																									
4	5853.80	53.00	68.30	-15.30	39.14	34.83	11.52	32.49	100	95 Peak																																																									
Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.25</td> <td>43.84</td> <td>54.00</td> <td>-10.16</td> <td>30.62</td> <td>34.40</td> <td>10.93</td> <td>32.11</td> <td>100</td> <td>95 Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>92.83</td> <td>-----</td> <td>-----</td> <td>79.12</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>95 Average</td> </tr> </tbody> </table>	Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5413.25	43.84	54.00	-10.16	30.62	34.40	10.93	32.11	100	95 Peak	2	5690.00	92.83	-----	-----	79.12	34.40	11.67	32.36	100	95 Average	Blank																						
Peak	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	5413.25	43.84	54.00	-10.16	30.62	34.40	10.93	32.11	100	95 Peak																																																									
2	5690.00	92.83	-----	-----	79.12	34.40	11.67	32.36	100	95 Average																																																									



Mode	41																																																													
	Band Edge																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																																													
ANT	5																																																													
Pol.	Vertical	Fundamental																																																												
Peak	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Level (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.80</td> <td>51.86</td> <td>74.00</td> <td>-22.14</td> <td>38.64</td> <td>34.40</td> <td>10.93</td> <td>32.11</td> <td>100</td> <td>201</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>37.18</td> <td>34.40</td> <td>11.12</td> <td>32.17</td> <td>100</td> <td>201</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>94.06</td> <td>-----</td> <td>-----</td> <td>80.35</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>201</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5891.75</td> <td>51.74</td> <td>68.30</td> <td>-16.56</td> <td>37.82</td> <td>34.98</td> <td>11.46</td> <td>32.52</td> <td>100</td> <td>201</td> <td>Peak</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5413.80	51.86	74.00	-22.14	38.64	34.40	10.93	32.11	100	201	Peak	2	5460.00	50.53	68.30	-17.77	37.18	34.40	11.12	32.17	100	201	Peak	3	5690.00	94.06	-----	-----	80.35	34.40	11.67	32.36	100	201	Peak	4	5891.75	51.74	68.30	-16.56	37.82	34.98	11.46	32.52	100	201	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																		
1	5413.80	51.86	74.00	-22.14	38.64	34.40	10.93	32.11	100	201	Peak																																																			
2	5460.00	50.53	68.30	-17.77	37.18	34.40	11.12	32.17	100	201	Peak																																																			
3	5690.00	94.06	-----	-----	80.35	34.40	11.67	32.36	100	201	Peak																																																			
4	5891.75	51.74	68.30	-16.56	37.82	34.98	11.46	32.52	100	201	Peak																																																			
Avg	<p>Date: 2023-10-27</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Level (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.25</td> <td>44.02</td> <td>54.00</td> <td>-9.98</td> <td>30.72</td> <td>34.40</td> <td>10.94</td> <td>32.04</td> <td>100</td> <td>201</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>87.63</td> <td>-----</td> <td>-----</td> <td>73.92</td> <td>34.40</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>201</td> <td>Average</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5358.25	44.02	54.00	-9.98	30.72	34.40	10.94	32.04	100	201	Peak	2	5690.00	87.63	-----	-----	73.92	34.40	11.67	32.36	100	201	Average																								
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Level (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5358.25	44.02	54.00	-9.98	30.72	34.40	10.94	32.04	100	201	Peak																																																			
2	5690.00	87.63	-----	-----	73.92	34.40	11.67	32.36	100	201	Average																																																			



Mode	42																																																																																																																																																																														
	LF																																																																																																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																																																																														
ANT	5																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																													
QP/ Peak	<p>Date: 2023-10-27</p>	<p>Date: 2023-10-27</p>																																																																																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>24.11</td> <td>40.00</td> <td>-15.89</td> <td>28.92</td> <td>25.20</td> <td>1.19</td> <td>31.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>106.63</td> <td>19.55</td> <td>43.50</td> <td>-23.95</td> <td>31.28</td> <td>17.53</td> <td>1.93</td> <td>31.19</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>325.85</td> <td>22.71</td> <td>46.00</td> <td>-23.29</td> <td>30.78</td> <td>19.97</td> <td>2.81</td> <td>30.85</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>581.93</td> <td>26.33</td> <td>46.00</td> <td>-19.67</td> <td>28.68</td> <td>24.94</td> <td>3.71</td> <td>31.00</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>831.22</td> <td>29.51</td> <td>46.00</td> <td>-16.49</td> <td>29.89</td> <td>26.35</td> <td>4.34</td> <td>31.07</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>929.19</td> <td>32.07</td> <td>46.00</td> <td>-13.93</td> <td>31.51</td> <td>26.98</td> <td>4.58</td> <td>31.00</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	30.00	24.11	40.00	-15.89	28.92	25.20	1.19	31.20	-- -- Peak	2	106.63	19.55	43.50	-23.95	31.28	17.53	1.93	31.19	-- -- Peak	3	325.85	22.71	46.00	-23.29	30.78	19.97	2.81	30.85	-- -- Peak	4	581.93	26.33	46.00	-19.67	28.68	24.94	3.71	31.00	-- -- Peak	5	831.22	29.51	46.00	-16.49	29.89	26.35	4.34	31.07	-- -- Peak	6	929.19	32.07	46.00	-13.93	31.51	26.98	4.58	31.00	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>43.58</td> <td>31.79</td> <td>40.00</td> <td>-8.21</td> <td>44.58</td> <td>17.04</td> <td>1.37</td> <td>31.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>107.60</td> <td>21.34</td> <td>43.50</td> <td>-22.16</td> <td>32.96</td> <td>17.62</td> <td>1.94</td> <td>31.18</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>152.22</td> <td>21.45</td> <td>43.50</td> <td>-22.05</td> <td>33.87</td> <td>16.46</td> <td>2.21</td> <td>31.09</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>328.76</td> <td>22.59</td> <td>46.00</td> <td>-23.41</td> <td>30.58</td> <td>20.03</td> <td>2.82</td> <td>30.84</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>593.57</td> <td>27.83</td> <td>46.00</td> <td>-18.17</td> <td>30.18</td> <td>24.91</td> <td>3.74</td> <td>31.00</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>888.45</td> <td>30.82</td> <td>46.00</td> <td>-15.18</td> <td>30.63</td> <td>26.73</td> <td>4.47</td> <td>31.01</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	43.58	31.79	40.00	-8.21	44.58	17.04	1.37	31.20	-- -- Peak	2	107.60	21.34	43.50	-22.16	32.96	17.62	1.94	31.18	-- -- Peak	3	152.22	21.45	43.50	-22.05	33.87	16.46	2.21	31.09	-- -- Peak	4	328.76	22.59	46.00	-23.41	30.58	20.03	2.82	30.84	-- -- Peak	5	593.57	27.83	46.00	-18.17	30.18	24.91	3.74	31.00	-- -- Peak	6	888.45	30.82	46.00	-15.18	30.63	26.73	4.47	31.01
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																							
1	30.00	24.11	40.00	-15.89	28.92	25.20	1.19	31.20	-- -- Peak																																																																																																																																																																						
2	106.63	19.55	43.50	-23.95	31.28	17.53	1.93	31.19	-- -- Peak																																																																																																																																																																						
3	325.85	22.71	46.00	-23.29	30.78	19.97	2.81	30.85	-- -- Peak																																																																																																																																																																						
4	581.93	26.33	46.00	-19.67	28.68	24.94	3.71	31.00	-- -- Peak																																																																																																																																																																						
5	831.22	29.51	46.00	-16.49	29.89	26.35	4.34	31.07	-- -- Peak																																																																																																																																																																						
6	929.19	32.07	46.00	-13.93	31.51	26.98	4.58	31.00	-- -- Peak																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																							
1	43.58	31.79	40.00	-8.21	44.58	17.04	1.37	31.20	-- -- Peak																																																																																																																																																																						
2	107.60	21.34	43.50	-22.16	32.96	17.62	1.94	31.18	-- -- Peak																																																																																																																																																																						
3	152.22	21.45	43.50	-22.05	33.87	16.46	2.21	31.09	-- -- Peak																																																																																																																																																																						
4	328.76	22.59	46.00	-23.41	30.58	20.03	2.82	30.84	-- -- Peak																																																																																																																																																																						
5	593.57	27.83	46.00	-18.17	30.18	24.91	3.74	31.00	-- -- Peak																																																																																																																																																																						
6	888.45	30.82	46.00	-15.18	30.63	26.73	4.47	31.01	-- -- Peak																																																																																																																																																																						






Mode	43																																																																																																																																																																															
	LF																																																																																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																															
ANT	5																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																														
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>23.19</td> <td>40.00</td> <td>-16.81</td> <td>28.00</td> <td>25.20</td> <td>1.19</td> <td>31.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>107.60</td> <td>19.70</td> <td>43.50</td> <td>-23.80</td> <td>31.32</td> <td>17.62</td> <td>1.94</td> <td>31.18</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>331.67</td> <td>22.74</td> <td>46.00</td> <td>-23.26</td> <td>30.65</td> <td>20.10</td> <td>2.83</td> <td>30.84</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>424.79</td> <td>23.07</td> <td>46.00</td> <td>-22.93</td> <td>28.12</td> <td>22.45</td> <td>3.20</td> <td>30.70</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>781.75</td> <td>28.84</td> <td>46.00</td> <td>-17.16</td> <td>29.63</td> <td>26.03</td> <td>4.23</td> <td>31.05</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>926.28</td> <td>31.18</td> <td>46.00</td> <td>-14.82</td> <td>30.65</td> <td>26.96</td> <td>4.57</td> <td>31.00</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	30.00	23.19	40.00	-16.81	28.00	25.20	1.19	31.20	-- -- Peak	2	107.60	19.70	43.50	-23.80	31.32	17.62	1.94	31.18	-- -- Peak	3	331.67	22.74	46.00	-23.26	30.65	20.10	2.83	30.84	-- -- Peak	4	424.79	23.07	46.00	-22.93	28.12	22.45	3.20	30.70	-- -- Peak	5	781.75	28.84	46.00	-17.16	29.63	26.03	4.23	31.05	-- -- Peak	6	926.28	31.18	46.00	-14.82	30.65	26.96	4.57	31.00	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>41.64</td> <td>31.60</td> <td>40.00</td> <td>-8.40</td> <td>43.34</td> <td>18.12</td> <td>1.34</td> <td>31.20</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>108.57</td> <td>22.45</td> <td>43.50</td> <td>-21.05</td> <td>33.97</td> <td>17.71</td> <td>1.95</td> <td>31.18</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>482.99</td> <td>25.13</td> <td>46.00</td> <td>-20.87</td> <td>28.95</td> <td>23.46</td> <td>3.42</td> <td>30.70</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>586.78</td> <td>27.64</td> <td>46.00</td> <td>-18.36</td> <td>29.99</td> <td>24.93</td> <td>3.72</td> <td>31.00</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>841.89</td> <td>29.67</td> <td>46.00</td> <td>-16.33</td> <td>29.92</td> <td>26.44</td> <td>4.37</td> <td>31.06</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>991.27</td> <td>33.08</td> <td>54.00</td> <td>-20.92</td> <td>31.84</td> <td>27.51</td> <td>4.73</td> <td>31.00</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	41.64	31.60	40.00	-8.40	43.34	18.12	1.34	31.20	-- -- Peak	2	108.57	22.45	43.50	-21.05	33.97	17.71	1.95	31.18	-- -- Peak	3	482.99	25.13	46.00	-20.87	28.95	23.46	3.42	30.70	-- -- Peak	4	586.78	27.64	46.00	-18.36	29.99	24.93	3.72	31.00	-- -- Peak	5	841.89	29.67	46.00	-16.33	29.92	26.44	4.37	31.06	-- -- Peak	6	991.27	33.08	54.00	-20.92	31.84	27.51	4.73	31.00	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																								
1	30.00	23.19	40.00	-16.81	28.00	25.20	1.19	31.20	-- -- Peak																																																																																																																																																																							
2	107.60	19.70	43.50	-23.80	31.32	17.62	1.94	31.18	-- -- Peak																																																																																																																																																																							
3	331.67	22.74	46.00	-23.26	30.65	20.10	2.83	30.84	-- -- Peak																																																																																																																																																																							
4	424.79	23.07	46.00	-22.93	28.12	22.45	3.20	30.70	-- -- Peak																																																																																																																																																																							
5	781.75	28.84	46.00	-17.16	29.63	26.03	4.23	31.05	-- -- Peak																																																																																																																																																																							
6	926.28	31.18	46.00	-14.82	30.65	26.96	4.57	31.00	-- -- Peak																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																																								
1	41.64	31.60	40.00	-8.40	43.34	18.12	1.34	31.20	-- -- Peak																																																																																																																																																																							
2	108.57	22.45	43.50	-21.05	33.97	17.71	1.95	31.18	-- -- Peak																																																																																																																																																																							
3	482.99	25.13	46.00	-20.87	28.95	23.46	3.42	30.70	-- -- Peak																																																																																																																																																																							
4	586.78	27.64	46.00	-18.36	29.99	24.93	3.72	31.00	-- -- Peak																																																																																																																																																																							
5	841.89	29.67	46.00	-16.33	29.92	26.44	4.37	31.06	-- -- Peak																																																																																																																																																																							
6	991.27	33.08	54.00	-20.92	31.84	27.51	4.73	31.00	-- -- Peak																																																																																																																																																																							



	44																																																																													
Mode	Band Edge																																																																													
	802.1nc HT20_CH140_5700MHz+ Band13 BW5M-Co-location																																																																													
ANT	5																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p style="text-align: right;">Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.42</td> <td>64.00</td> <td>68.30</td> <td>-4.30</td> <td>49.62</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>96 Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.42	64.00	68.30	-4.30	49.62	35.12	11.65	32.39	100	96 Peak	<p style="text-align: right;">Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.53</td> <td>-----</td> <td>-----</td> <td>85.15</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>96 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.53	-----	-----	85.15	35.07	11.67	32.36	100	96 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5725.42	64.00	68.30	-4.30	49.62	35.12	11.65	32.39	100	96 Peak																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5700.00	99.53	-----	-----	85.15	35.07	11.67	32.36	100	96 PEAK																																																																				
Avg	Blank	<p style="text-align: right;">Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>92.09</td> <td>-----</td> <td>-----</td> <td>77.71</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>96 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	92.09	-----	-----	77.71	35.07	11.67	32.36	100	96 AVERAGE																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5700.00	92.09	-----	-----	77.71	35.07	11.67	32.36	100	96 AVERAGE																																																																				

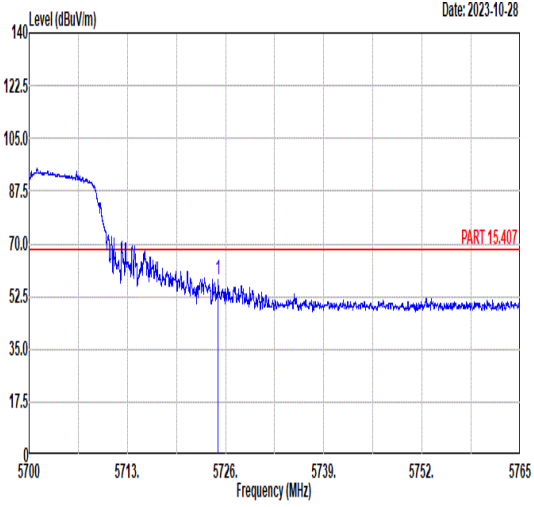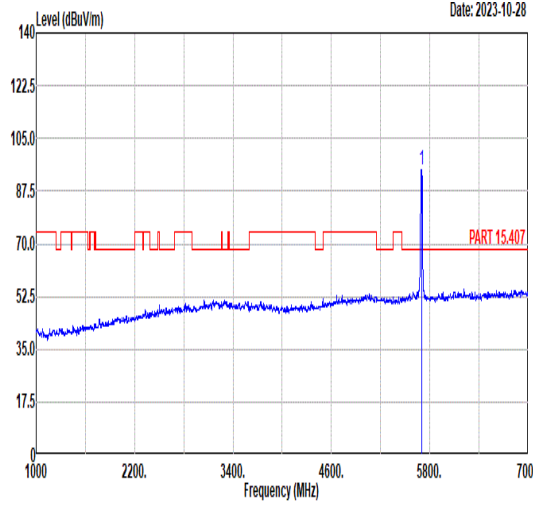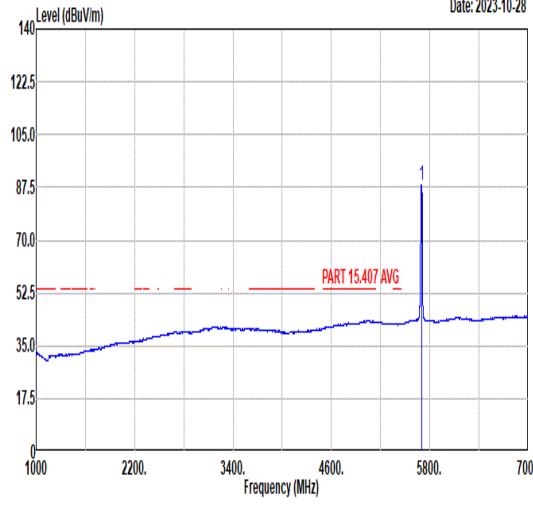

Mode	44																																																																															
	Band Edge																																																																															
	802.1nc HT20_CH140_5700MHz+ Band13 BW5M-Co-location																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level starting at approximately 87.5 dBuV/m at 5700 MHz and decreasing to about 52.5 dBuV/m at 5765 MHz. A red limit line is at 70.0 dBuV/m. A peak is observed at 5725.01 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.01</td> <td>58.35</td> <td>68.30</td> <td>-9.95</td> <td>43.97</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.01	58.35	68.30	-9.95	43.97	35.12	11.65	32.39	100	202	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to about 52.5 dBuV/m at 7000 MHz. A red limit line is at 70.0 dBuV/m. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>94.58</td> <td>-----</td> <td>-----</td> <td>80.21</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	94.58	-----	-----	80.21	35.08	11.66	32.37	100	202	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5725.01	58.35	68.30	-9.95	43.97	35.12	11.65	32.39	100	202	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5700.00	94.58	-----	-----	80.21	35.08	11.66	32.37	100	202	PEAK																																																																					
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization showing the average signal. The plot shows a signal level starting at approximately 35 dBuV/m at 1000 MHz and increasing to about 45 dBuV/m at 7000 MHz. A red limit line is at 52.5 dBuV/m. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>88.06</td> <td>-----</td> <td>-----</td> <td>73.68</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	88.06	-----	-----	73.68	35.07	11.67	32.36	100	202	AVERAGE																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5700.00	88.06	-----	-----	73.68	35.07	11.67	32.36	100	202	AVERAGE																																																																					






Mode	44																																																																								
	Harmonic																																																																								
	802.1nc HT20_CH140_5700MHz+ Band13 BW5M-Co-location																																																																								
ANT	5																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2023-10-28</p>	<p>Date: 2023-10-28</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>50.47</td> <td>74.00</td> <td>-23.53</td> <td>30.04</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>50.81</td> <td>68.30</td> <td>-17.49</td> <td>25.18</td> <td>42.00</td> <td>17.53</td> <td>33.90</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11400.00	50.47	74.00	-23.53	30.04	38.12	14.78	32.47	-- -- Peak	2 17100.00	50.81	68.30	-17.49	25.18	42.00	17.53	33.90	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>49.77</td> <td>74.00</td> <td>-24.23</td> <td>29.34</td> <td>38.12</td> <td>14.78</td> <td>32.47</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>51.77</td> <td>68.30</td> <td>-16.53</td> <td>26.14</td> <td>42.00</td> <td>17.53</td> <td>33.90</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11400.00	49.77	74.00	-24.23	29.34	38.12	14.78	32.47	-- -- Peak	2 17100.00	51.77	68.30	-16.53	26.14	42.00	17.53	33.90
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																	
1 11400.00	50.47	74.00	-23.53	30.04	38.12	14.78	32.47	-- -- Peak																																																																	
2 17100.00	50.81	68.30	-17.49	25.18	42.00	17.53	33.90	-- -- Peak																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																	
1 11400.00	49.77	74.00	-24.23	29.34	38.12	14.78	32.47	-- -- Peak																																																																	
2 17100.00	51.77	68.30	-16.53	26.14	42.00	17.53	33.90	-- -- Peak																																																																	



Mode	45																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH136_5680MHz																																																																													
ANT	5																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.57</td> <td>64.29</td> <td>68.30</td> <td>-4.01</td> <td>49.91</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>110</td> <td>84 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5727.57	64.29	68.30	-4.01	49.91	35.12	11.65	32.39	110	84 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>105.37</td> <td>-----</td> <td>-----</td> <td>90.99</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>110</td> <td>84 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	105.37	-----	-----	90.99	35.05	11.68	32.35	110	84 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5727.57	64.29	68.30	-4.01	49.91	35.12	11.65	32.39	110	84 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	105.37	-----	-----	90.99	35.05	11.68	32.35	110	84 PEAK																																																																				
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>97.79</td> <td>-----</td> <td>-----</td> <td>83.41</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>110</td> <td>84 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	97.79	-----	-----	83.41	35.05	11.68	32.35	110	84 AVERAGE																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	97.79	-----	-----	83.41	35.05	11.68	32.35	110	84 AVERAGE																																																																				

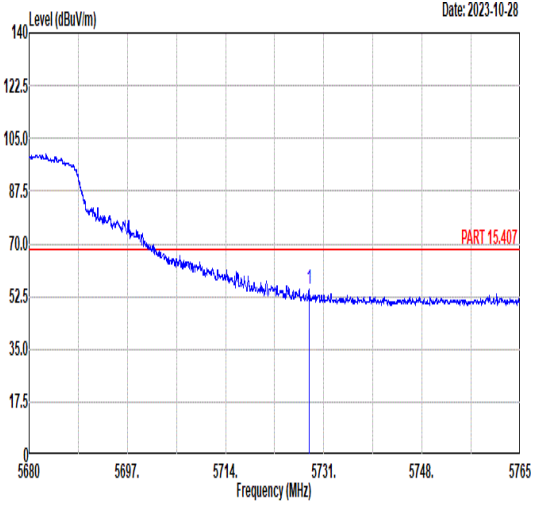
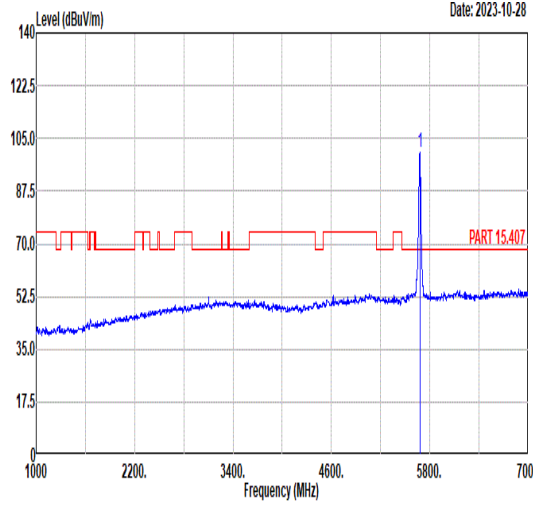
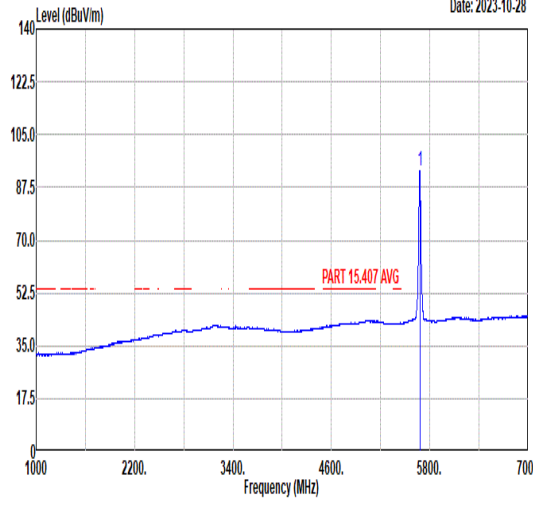


Mode	45																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH136_5680MHz																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5680 to 5765 MHz. A red horizontal line at 70.0 dBuV/m is labeled 'PART 15.407'. A blue peak is visible at approximately 5731 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.49</td> <td>54.92</td> <td>68.30</td> <td>-13.38</td> <td>40.54</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>207</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5728.49	54.92	68.30	-13.38	40.54	35.12	11.65	32.39	100	207	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line at 70.0 dBuV/m is labeled 'PART 15.407'. A blue peak is visible at approximately 5680 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>100.12</td> <td>-----</td> <td>-----</td> <td>85.74</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>207</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	100.12	-----	-----	85.74	35.05	11.68	32.35	100	207	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5728.49	54.92	68.30	-13.38	40.54	35.12	11.65	32.39	100	207	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5680.00	100.12	-----	-----	85.74	35.05	11.68	32.35	100	207	PEAK																																																																					
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line at 52.5 dBuV/m is labeled 'PART 15.407 AVG'. A blue peak is visible at approximately 5680 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>93.11</td> <td>-----</td> <td>-----</td> <td>78.73</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>207</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	93.11	-----	-----	78.73	35.05	11.68	32.35	100	207	AVERAGE																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5680.00	93.11	-----	-----	78.73	35.05	11.68	32.35	100	207	AVERAGE																																																																					



Mode	46																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH136_5680MHz																																																																													
ANT	5																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.53</td> <td>61.37</td> <td>68.30</td> <td>-6.93</td> <td>46.99</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>83 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.53	61.37	68.30	-6.93	46.99	35.12	11.65	32.39	100	83 PEAK	<p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>103.59</td> <td>-----</td> <td>-----</td> <td>89.21</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>83 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	103.59	-----	-----	89.21	35.05	11.68	32.35	100	83 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5725.53	61.37	68.30	-6.93	46.99	35.12	11.65	32.39	100	83 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	103.59	-----	-----	89.21	35.05	11.68	32.35	100	83 PEAK																																																																				
Avg	Blank	<p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>96.82</td> <td>-----</td> <td>-----</td> <td>82.44</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>83 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	96.82	-----	-----	82.44	35.05	11.68	32.35	100	83 AVERAGE																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	96.82	-----	-----	82.44	35.05	11.68	32.35	100	83 AVERAGE																																																																				

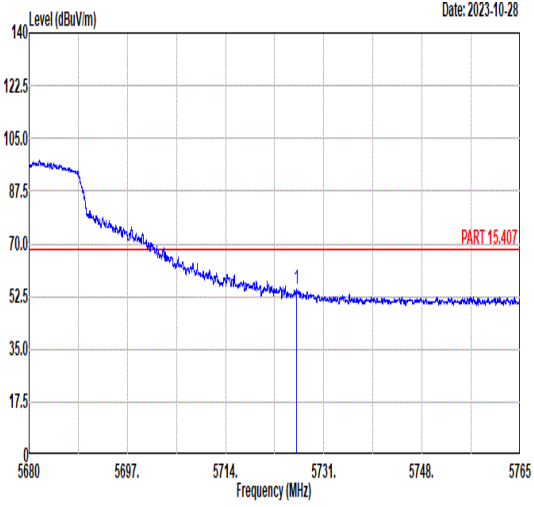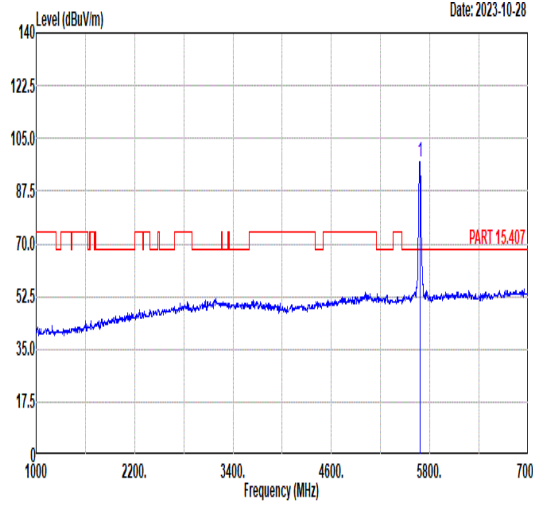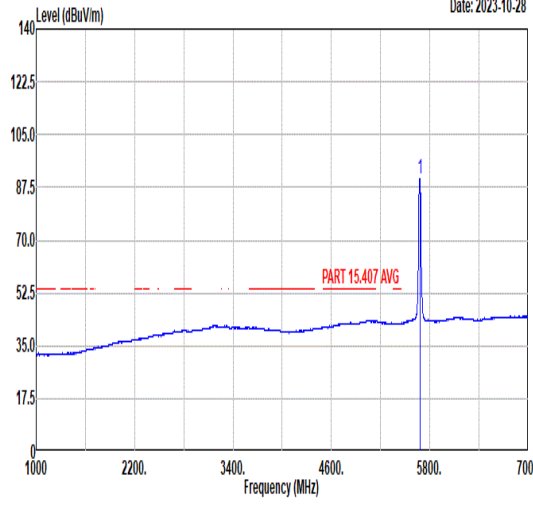

Mode	46																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH136_5680MHz																																																																													
ANT	5																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.28</td> <td>55.14</td> <td>68.30</td> <td>-13.16</td> <td>40.76</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.28	55.14	68.30	-13.16	40.76	35.12	11.65	32.39	100	95 PEAK	 <p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>97.20</td> <td>-----</td> <td>-----</td> <td>82.82</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	97.20	-----	-----	82.82	35.05	11.68	32.35	100	95 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5726.28	55.14	68.30	-13.16	40.76	35.12	11.65	32.39	100	95 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	97.20	-----	-----	82.82	35.05	11.68	32.35	100	95 PEAK																																																																				
Avg	Blank	 <p>Date: 2023-10-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>90.59</td> <td>-----</td> <td>-----</td> <td>76.21</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>100</td> <td>95 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	90.59	-----	-----	76.21	35.05	11.68	32.35	100	95 AVERAGE																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5680.00	90.59	-----	-----	76.21	35.05	11.68	32.35	100	95 AVERAGE																																																																				



For Sample 2:

Mode	47																																																																					
Mode	Band Edge																																																																					
Mode	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.09</td> <td>62.43</td> <td>68.30</td> <td>-5.87</td> <td>48.05</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>18 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5725.09	62.43	68.30	-5.87	48.05	35.12	11.65	32.39	100	18 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.12</td> <td>-----</td> <td>-----</td> <td>83.73</td> <td>35.08</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>18 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	98.12	-----	-----	83.73	35.08	11.67	32.36	100	18 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5725.09	62.43	68.30	-5.87	48.05	35.12	11.65	32.39	100	18 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	98.12	-----	-----	83.73	35.08	11.67	32.36	100	18 PEAK																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>91.64</td> <td>-----</td> <td>-----</td> <td>77.25</td> <td>35.08</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>18 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	91.64	-----	-----	77.25	35.08	11.67	32.36	100	18 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	91.64	-----	-----	77.25	35.08	11.67	32.36	100	18 AVERAGE																																																													



	47																																																																							
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2023-11-03</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.24</td> <td>65.10</td> <td>68.30</td> <td>-3.20</td> <td>50.72</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5727.24	65.10	68.30	-3.20	50.72	35.12	11.65	32.39	100	59 PEAK	<p style="text-align: right;">Date: 2023-11-03</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.15</td> <td>-----</td> <td>-----</td> <td>86.77</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	101.15	-----	-----	86.77	35.09	11.66	32.37	100	59 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5727.24	65.10	68.30	-3.20	50.72	35.12	11.65	32.39	100	59 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	101.15	-----	-----	86.77	35.09	11.66	32.37	100	59 PEAK																																																															
Avg	Blank	<p style="text-align: right;">Date: 2023-11-03</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.81</td> <td>-----</td> <td>-----</td> <td>80.42</td> <td>35.08</td> <td>11.67</td> <td>32.36</td> <td>100</td> <td>59 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	94.81	-----	-----	80.42	35.08	11.67	32.36	100	59 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	94.81	-----	-----	80.42	35.08	11.67	32.36	100	59 AVERAGE																																																															



Mode	47																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																														
ANT	5																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-11-03</p>	<p>Date: 2023-11-03</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>49.22</td> <td>74.00</td> <td>-24.78</td> <td>47.04</td> <td>38.12</td> <td>14.78</td> <td>50.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.06</td> <td>68.30</td> <td>-18.24</td> <td>42.33</td> <td>42.00</td> <td>17.53</td> <td>51.80</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11400.00	49.22	74.00	-24.78	47.04	38.12	14.78	50.72	-- -- Peak	2	17100.00	50.06	68.30	-18.24	42.33	42.00	17.53	51.80	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>49.19</td> <td>74.00</td> <td>-24.81</td> <td>47.01</td> <td>38.12</td> <td>14.78</td> <td>50.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>49.76</td> <td>68.30</td> <td>-18.54</td> <td>42.03</td> <td>42.00</td> <td>17.53</td> <td>51.80</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB			1	11400.00	49.19	74.00	-24.81	47.01	38.12	14.78	50.72	-- -- Peak	2	17100.00	49.76	68.30	-18.54	42.03	42.00	17.53	51.80
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11400.00	49.22	74.00	-24.78	47.04	38.12	14.78	50.72	-- -- Peak																																																																																						
2	17100.00	50.06	68.30	-18.24	42.33	42.00	17.53	51.80	-- -- Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																							
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11400.00	49.19	74.00	-24.81	47.01	38.12	14.78	50.72	-- -- Peak																																																																																						
2	17100.00	49.76	68.30	-18.54	42.03	42.00	17.53	51.80	-- -- Peak																																																																																						



Mode	48																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	5																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5638.50</td> <td>54.43</td> <td>68.30</td> <td>-13.87</td> <td>40.07</td> <td>34.99</td> <td>11.69</td> <td>32.32</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>53.27</td> <td>68.34</td> <td>-15.07</td> <td>38.90</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5705.00</td> <td>66.44</td> <td>106.60</td> <td>-40.16</td> <td>52.06</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>67.11</td> <td>110.91</td> <td>-43.80</td> <td>52.72</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5638.50	54.43	68.30	-13.87	40.07	34.99	11.69	32.32	100	42	PEAK	2	5650.05	53.27	68.34	-15.07	38.90	35.01	11.69	32.33	100	42	PEAK	3	5705.00	66.44	106.60	-40.16	52.06	35.09	11.66	32.37	100	42	PEAK	4	5720.05	67.11	110.91	-43.80	52.72	35.11	11.66	32.38	100	42	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.14</td> <td>-----</td> <td>-----</td> <td>78.75</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	93.14	-----	-----	78.75	35.19	11.63	32.43	100	42	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5638.50	54.43	68.30	-13.87	40.07	34.99	11.69	32.32	100	42	PEAK																																																																																																			
2	5650.05	53.27	68.34	-15.07	38.90	35.01	11.69	32.33	100	42	PEAK																																																																																																			
3	5705.00	66.44	106.60	-40.16	52.06	35.09	11.66	32.37	100	42	PEAK																																																																																																			
4	5720.05	67.11	110.91	-43.80	52.72	35.11	11.66	32.38	100	42	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	93.14	-----	-----	78.75	35.19	11.63	32.43	100	42	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>86.81</td> <td>-----</td> <td>-----</td> <td>72.42</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	86.81	-----	-----	72.42	35.18	11.63	32.42	100	42	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	86.81	-----	-----	72.42	35.18	11.63	32.42	100	42	AVERAGE																																																																																																			



Mode	48																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-11-03</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>61.31</td> <td>112.05</td> <td>-50.74</td> <td>46.98</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.50</td> <td>61.20</td> <td>106.74</td> <td>-45.54</td> <td>46.88</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.10</td> <td>52.15</td> <td>68.86</td> <td>-16.71</td> <td>37.90</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5947.03</td> <td>52.90</td> <td>68.30</td> <td>-15.40</td> <td>38.66</td> <td>35.43</td> <td>11.37</td> <td>32.56</td> <td>100</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.45	61.31	112.05	-50.74	46.98	35.30	11.52	32.49	100	42	PEAK	2	5869.50	61.20	106.74	-45.54	46.88	35.32	11.50	32.50	100	42	PEAK	3	5924.10	52.15	68.86	-16.71	37.90	35.39	11.40	32.54	100	42	PEAK	4	5947.03	52.90	68.30	-15.40	38.66	35.43	11.37	32.56	100	42	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.45	61.31	112.05	-50.74	46.98	35.30	11.52	32.49	100	42	PEAK																																																															
2	5869.50	61.20	106.74	-45.54	46.88	35.32	11.50	32.50	100	42	PEAK																																																															
3	5924.10	52.15	68.86	-16.71	37.90	35.39	11.40	32.54	100	42	PEAK																																																															
4	5947.03	52.90	68.30	-15.40	38.66	35.43	11.37	32.56	100	42	PEAK																																																															



Mode	48																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	5																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.95</td> <td>56.50</td> <td>68.30</td> <td>-11.80</td> <td>42.13</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>56.27</td> <td>68.73</td> <td>-12.46</td> <td>41.90</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.75</td> <td>71.31</td> <td>107.09</td> <td>-35.78</td> <td>56.93</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>69.87</td> <td>110.91</td> <td>-41.04</td> <td>55.48</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5647.95	56.50	68.30	-11.80	42.13	35.01	11.69	32.33	100	54	PEAK	2	5650.58	56.27	68.73	-12.46	41.90	35.01	11.69	32.33	100	54	PEAK	3	5706.75	71.31	107.09	-35.78	56.93	35.09	11.66	32.37	100	54	PEAK	4	5720.05	69.87	110.91	-41.04	55.48	35.11	11.66	32.38	100	54	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.84</td> <td>-----</td> <td>-----</td> <td>83.45</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	97.84	-----	-----	83.45	35.18	11.63	32.42	100	54	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5647.95	56.50	68.30	-11.80	42.13	35.01	11.69	32.33	100	54	PEAK																																																																																																			
2	5650.58	56.27	68.73	-12.46	41.90	35.01	11.69	32.33	100	54	PEAK																																																																																																			
3	5706.75	71.31	107.09	-35.78	56.93	35.09	11.66	32.37	100	54	PEAK																																																																																																			
4	5720.05	69.87	110.91	-41.04	55.48	35.11	11.66	32.38	100	54	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5775.00	97.84	-----	-----	83.45	35.18	11.63	32.42	100	54	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>91.22</td> <td>-----</td> <td>-----</td> <td>76.83</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>100</td> <td>54</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5775.00	91.22	-----	-----	76.83	35.18	11.63	32.42	100	54	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	5775.00	91.22	-----	-----	76.83	35.18	11.63	32.42	100	54	AVERAGE																																																																																																			



Mode	48																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-11-03</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>65.02</td> <td>110.86</td> <td>-45.84</td> <td>50.69</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.15</td> <td>66.50</td> <td>106.84</td> <td>-40.34</td> <td>52.18</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.23</td> <td>54.83</td> <td>69.51</td> <td>-14.68</td> <td>40.57</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.85</td> <td>54.90</td> <td>68.30</td> <td>-13.40</td> <td>40.64</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>100</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.98	65.02	110.86	-45.84	50.69	35.30	11.52	32.49	100	54	PEAK	2	5869.15	66.50	106.84	-40.34	52.18	35.32	11.50	32.50	100	54	PEAK	3	5923.23	54.83	69.51	-14.68	40.57	35.39	11.41	32.54	100	54	PEAK	4	5925.85	54.90	68.30	-13.40	40.64	35.40	11.40	32.54	100	54	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.98	65.02	110.86	-45.84	50.69	35.30	11.52	32.49	100	54	PEAK																																																															
2	5869.15	66.50	106.84	-40.34	52.18	35.32	11.50	32.50	100	54	PEAK																																																															
3	5923.23	54.83	69.51	-14.68	40.57	35.39	11.41	32.54	100	54	PEAK																																																															
4	5925.85	54.90	68.30	-13.40	40.64	35.40	11.40	32.54	100	54	PEAK																																																															




Mode	48																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-11-03</p>	<p>Date: 2023-11-03</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>49.39</td> <td>74.00</td> <td>-24.61</td> <td>46.95</td> <td>38.24</td> <td>14.87</td> <td>50.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>49.50</td> <td>68.30</td> <td>-18.80</td> <td>42.16</td> <td>41.77</td> <td>17.59</td> <td>52.02</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.39	74.00	-24.61	46.95	38.24	14.87	50.67	-- -- Peak	2	17325.00	49.50	68.30	-18.80	42.16	41.77	17.59	52.02	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>49.70</td> <td>74.00</td> <td>-24.30</td> <td>47.26</td> <td>38.24</td> <td>14.87</td> <td>50.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>50.01</td> <td>68.30</td> <td>-18.29</td> <td>42.67</td> <td>41.77</td> <td>17.59</td> <td>52.02</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.70	74.00	-24.30	47.26	38.24	14.87	50.67	-- -- Peak	2	17325.00	50.01	68.30	-18.29	42.67	41.77	17.59	52.02
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11550.00	49.39	74.00	-24.61	46.95	38.24	14.87	50.67	-- -- Peak																																																																																								
2	17325.00	49.50	68.30	-18.80	42.16	41.77	17.59	52.02	-- -- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11550.00	49.70	74.00	-24.30	47.26	38.24	14.87	50.67	-- -- Peak																																																																																								
2	17325.00	50.01	68.30	-18.29	42.67	41.77	17.59	52.02	-- -- Peak																																																																																								



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	96.53	1.39	0.719	1KHz
802.11n HT20	97.01	1.3	0.769	1KHz
802.11n HT40	93.53	0.65	1.538	3KHz
802.11ac VHT80	87.80	0.324	3.086	10KHZ


802.11a

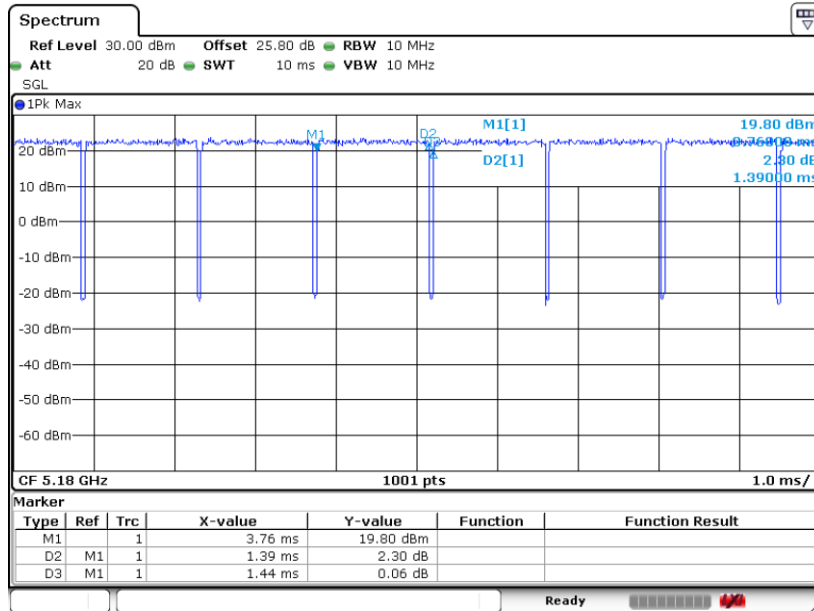

Date: 25.OCT.2023 19:48:42




802.11n HT20

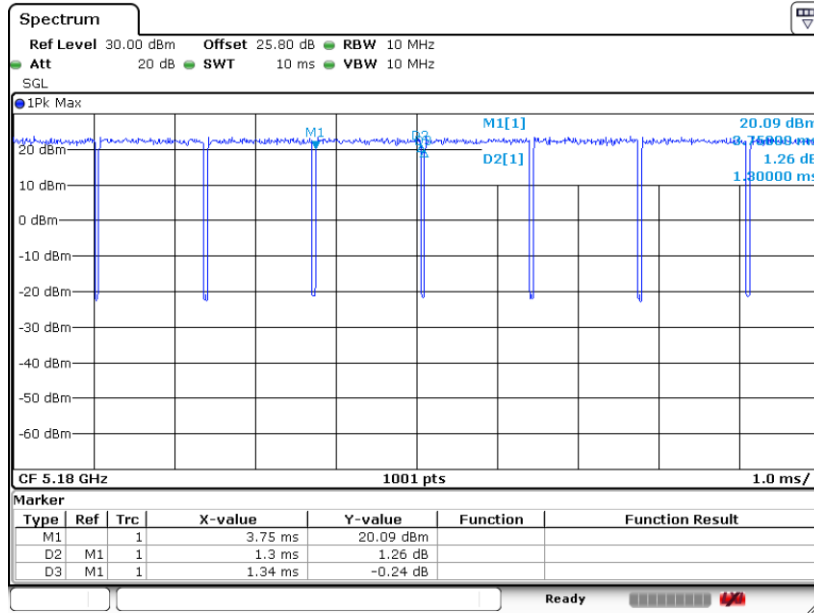

Date: 25.OCT.2023 19:55:21


802.11n HT40

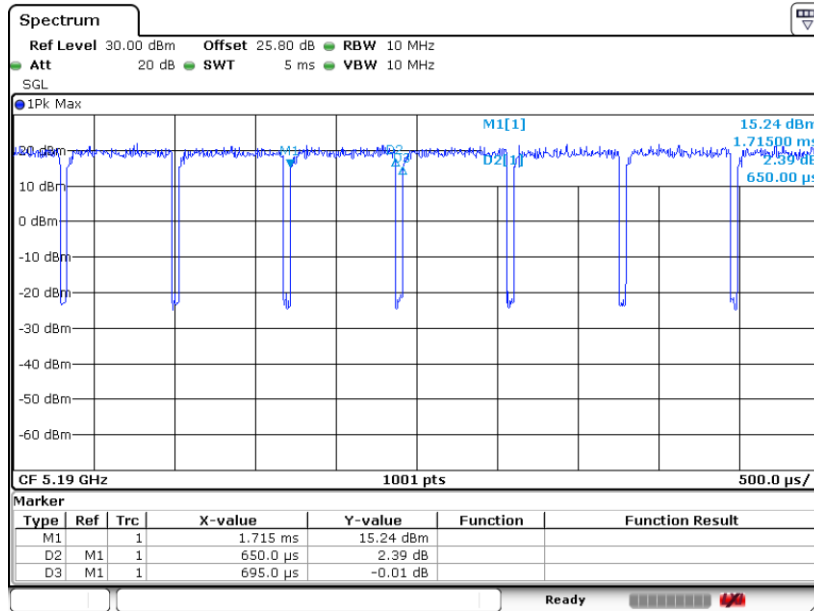

Date: 25.OCT.2023 21:03:13



802.11ac VHT80

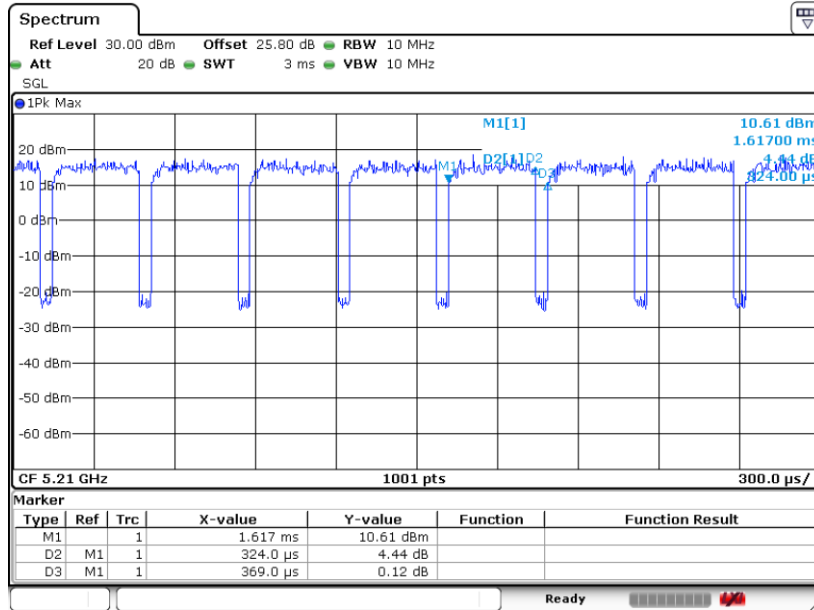

Date: 25.OCT.2023 20:04:59