





Conducted Band Edge

WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

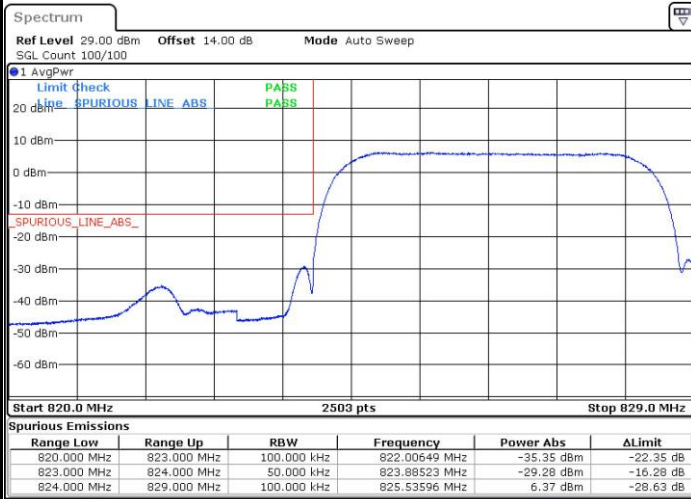


Highest Band Edge

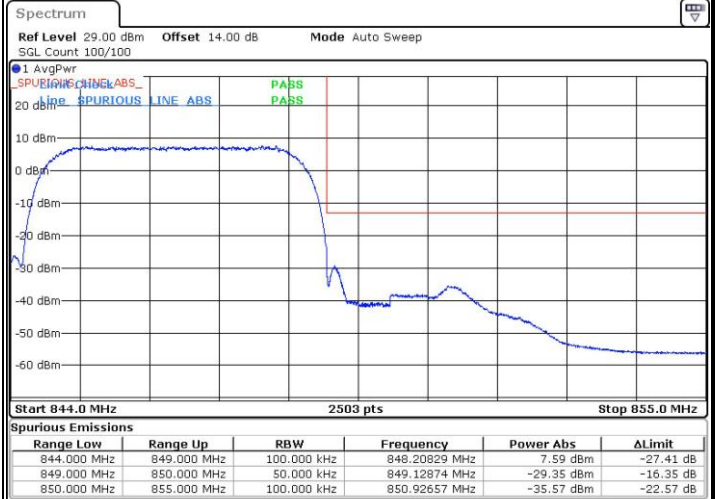



WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

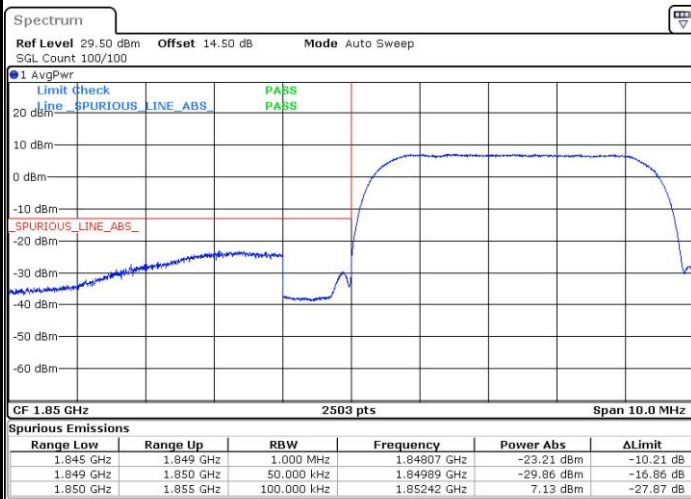


Highest Band Edge

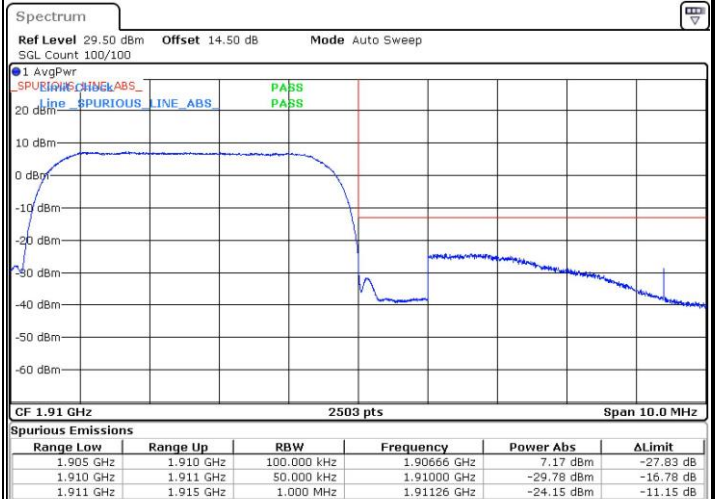


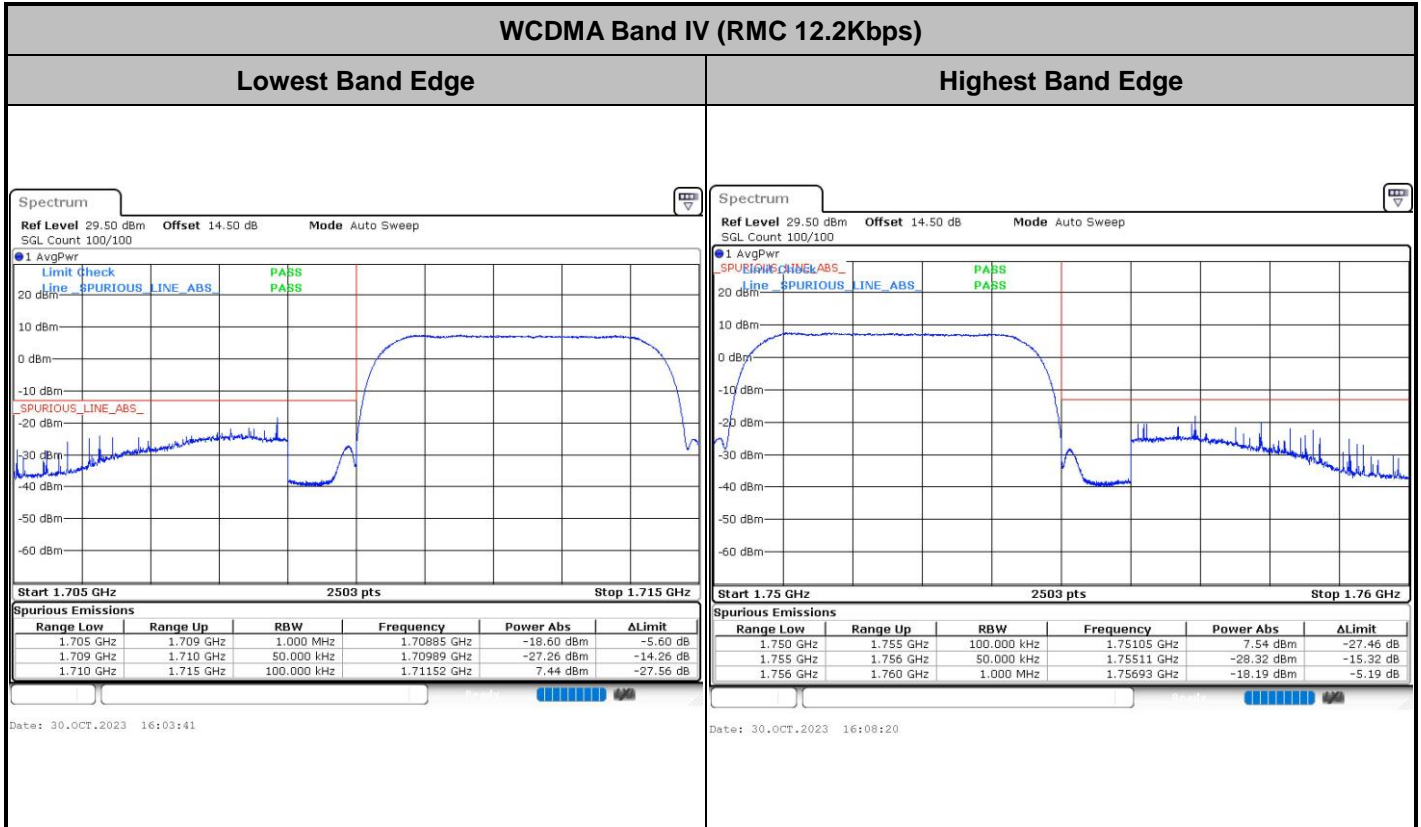



Conducted Spurious Emission

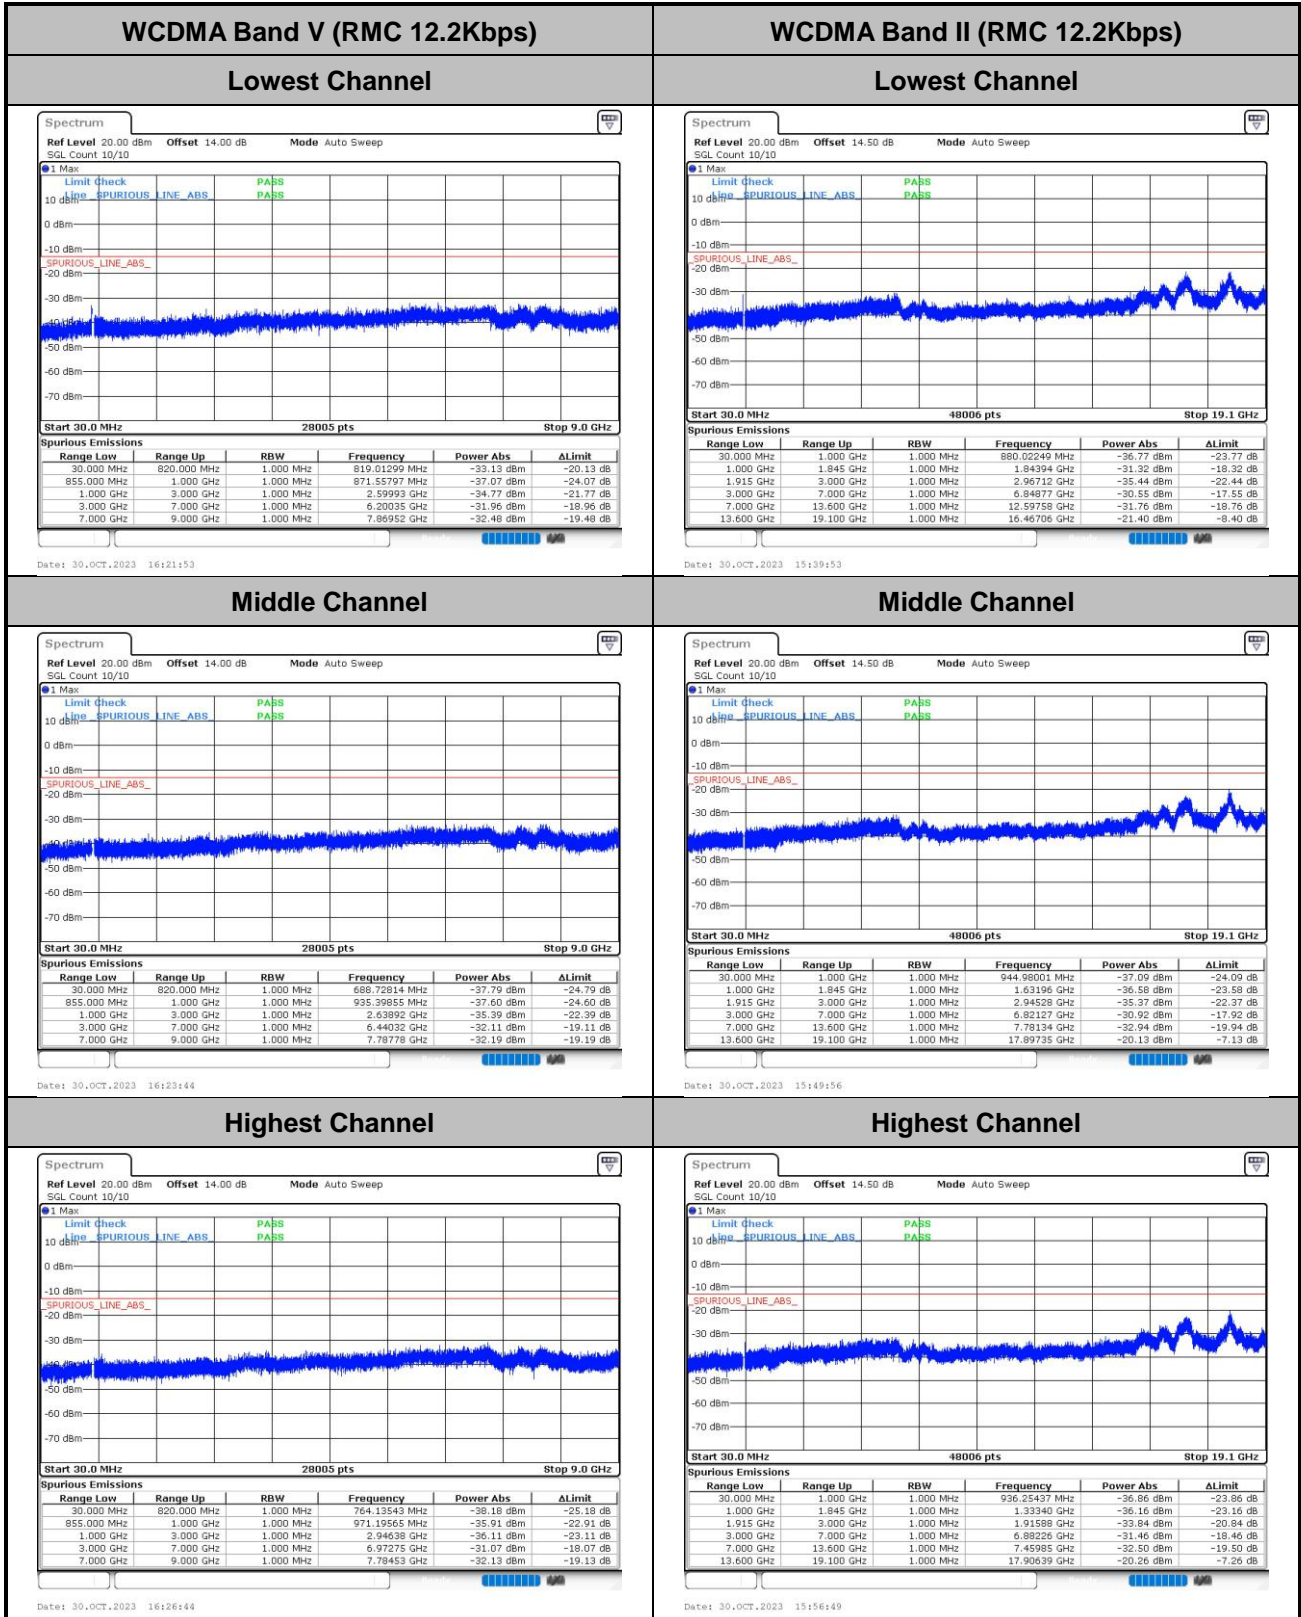

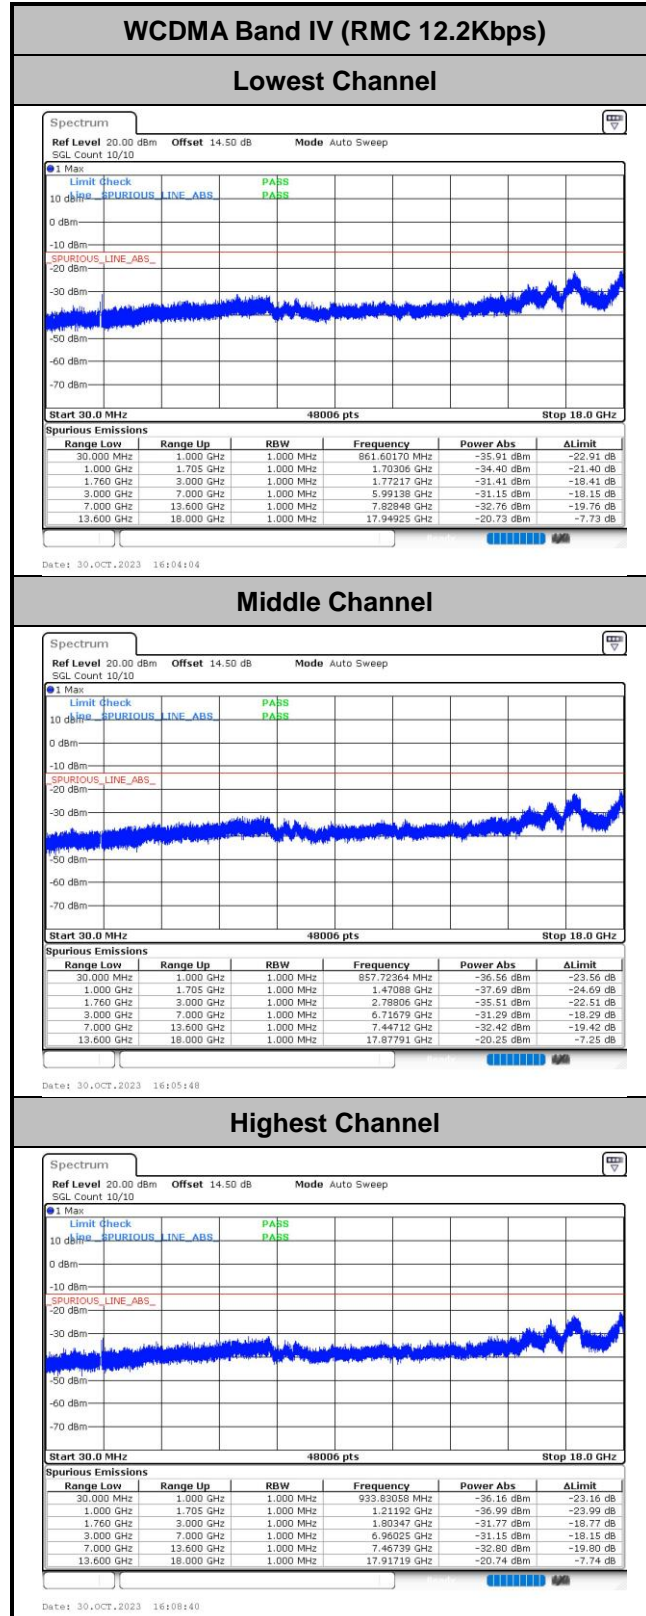



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0024	PASS
40	Normal Voltage	0.0029	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0022	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0023	
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0007	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0044	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0010	
30	Normal Voltage	0.0009	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0013	
0	Normal Voltage	0.0022	
-10	Normal Voltage	0.0002	
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0003	
20	Maximum Voltage	0.0016	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0002	

Note:

1. Normal Voltage = 3.91V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0002	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0026	
0	Normal Voltage	0.0030	
-10	Normal Voltage	0.0034	
-20	Normal Voltage	0.0043	
-30	Normal Voltage	0.0047	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0016	

Note:

1. Normal Voltage = 3.91V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.45 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Wenbo Xiao	Temperature :	22~25°C
		Relative Humidity :	48~52%

<For sample 1>:

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-49.71	-13	-36.71	-56.96	-52.96	4.00	9.40	H
	2509.2	-53.56	-13	-40.56	-65.03	-57.13	4.88	10.60	H
	3345.6	-59.55	-13	-46.55	-73.67	-64.48	5.52	12.60	H
	1672.8	-56.85	-13	-43.85	-64.29	-60.10	4.00	9.40	H
	2509.2	-58.06	-13	-45.06	-69.65	-61.63	4.88	10.60	H
	3345.6	-63.02	-13	-50.02	-77.16	-67.95	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-51.59	-13	-38.59	-58.84	-54.84	4.00	9.40	H
	2509.2	-56.87	-13	-43.87	-68.34	-60.44	4.88	10.60	H
	3345.6	-60.96	-13	-47.96	-75.08	-65.89	5.52	12.60	H
	1672.8	-61.76	-13	-48.76	-69.20	-65.01	4.00	9.40	H
	2509.2	-61.18	-13	-48.18	-72.77	-64.75	4.88	10.60	H
	3345.6	-63.32	-13	-50.32	-77.46	-68.25	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-63.00	-13	-50.00	-78.79	-69.75	5.85	12.60	H
	5640	-60.90	-13	-47.90	-80.36	-66.70	7.30	13.10	H
	7520	-54.39	-13	-41.39	-79.23	-57.54	8.35	11.50	H
	3760	-63.50	-13	-50.50	-78.85	-70.25	5.85	12.60	H
	5640	-62.32	-13	-49.32	-80.57	-68.12	7.30	13.10	H
	7520	-53.71	-13	-40.71	-78.97	-56.86	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-63.05	-13	-50.05	-78.84	-69.80	5.85	12.60	H
	5640	-61.09	-13	-48.09	-80.55	-66.89	7.30	13.10	H
	7520	-54.34	-13	-41.34	-79.18	-57.49	8.35	11.50	H
	3760	-63.25	-13	-50.25	-78.6	-70.00	5.85	12.60	H
	5640	-62.18	-13	-49.18	-80.43	-67.98	7.30	13.10	H
	7520	-53.78	-13	-40.78	-79.04	-56.93	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-66.42	-13	-53.42	-73.67	-69.67	4.00	9.40	H
	2509.2	-64.81	-13	-51.81	-76.28	-68.38	4.88	10.60	H
	3345.6	-63.74	-13	-50.74	-77.86	-68.67	5.52	12.60	H
	1672.8	-66.59	-13	-53.59	-74.03	-69.84	4.00	9.40	H
	2509.2	-64.84	-13	-51.84	-76.43	-68.41	4.88	10.60	H
	3345.6	-63.45	-13	-50.45	-77.59	-68.38	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.10	-13	-48.10	-76.89	-67.85	5.85	12.60	H
	5640	-60.08	-13	-47.08	-79.54	-65.88	7.30	13.10	H
	7520	-54.30	-13	-41.30	-79.14	-57.45	8.35	11.50	H
	3760	-62.86	-13	-49.86	-78.21	-69.61	5.85	12.60	H
	5640	-61.70	-13	-48.70	-79.95	-67.50	7.30	13.10	H
	7520	-53.61	-13	-40.61	-78.87	-56.76	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-57.51	-13	-44.51	-71.91	-64.36	5.65	12.50	H
	5197.8	-61.41	-13	-48.41	-80.63	-67.08	7.13	12.80	H
	6930.4	-57.22	-13	-44.22	-80.18	-60.62	8.40	11.80	H
	3465.2	-60.11	-13	-47.11	-74.54	-66.96	5.65	12.50	H
	5197.8	-62.01	-13	-49.01	-80.85	-67.68	7.13	12.80	H
	6930.4	-56.36	-13	-43.36	-79.61	-59.76	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For sample 2>:

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-49.83	-13	-36.83	-57.08	-53.08	4.00	9.40	H
	2509.2	-54.60	-13	-41.60	-66.07	-58.17	4.88	10.60	H
	3345.6	-61.46	-13	-48.46	-75.58	-66.39	5.52	12.60	H
	1672.8	-53.63	-13	-40.63	-61.07	-56.88	4.00	9.40	H
	2509.2	-55.47	-13	-42.47	-67.06	-59.04	4.88	10.60	H
	3345.6	-62.21	-13	-49.21	-76.35	-67.14	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.99	-13	-48.99	-77.78	-68.74	5.85	12.60	H
	5640	-57.87	-13	-44.87	-77.33	-63.67	7.30	13.10	H
	7520	-54.29	-13	-41.29	-79.13	-57.44	8.35	11.50	H
	3760	-60.86	-13	-47.86	-76.21	-67.61	5.85	12.60	H
	5640	-61.47	-13	-48.47	-79.72	-67.27	7.30	13.10	H
	7520	-54.12	-13	-41.12	-79.38	-57.27	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.