

01_LTE Band 71_20M_QPSK_1RB_0Offset_Left Cheek_Ch133297


Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.835$ S/m; $\epsilon_r = 42.057$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch133297/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.162 W/kg

Ch133297/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.196 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.184 W/kg
SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.112 W/kg
Maximum value of SAR (measured) = 0.157 W/kg

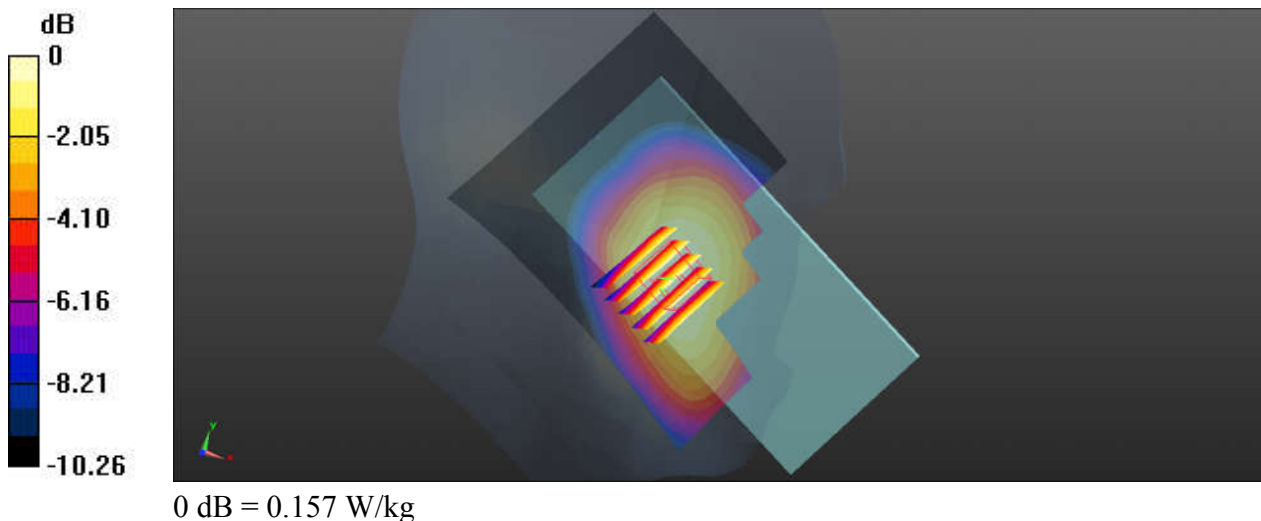

02_LTE Band 12_10M_QPSK_1RB_0Offset_Left Cheek_Ch23095


Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 41.609$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23095/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.149 W/kg

Ch23095/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.486 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.212 W/kg
SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.129 W/kg
Maximum value of SAR (measured) = 0.183 W/kg

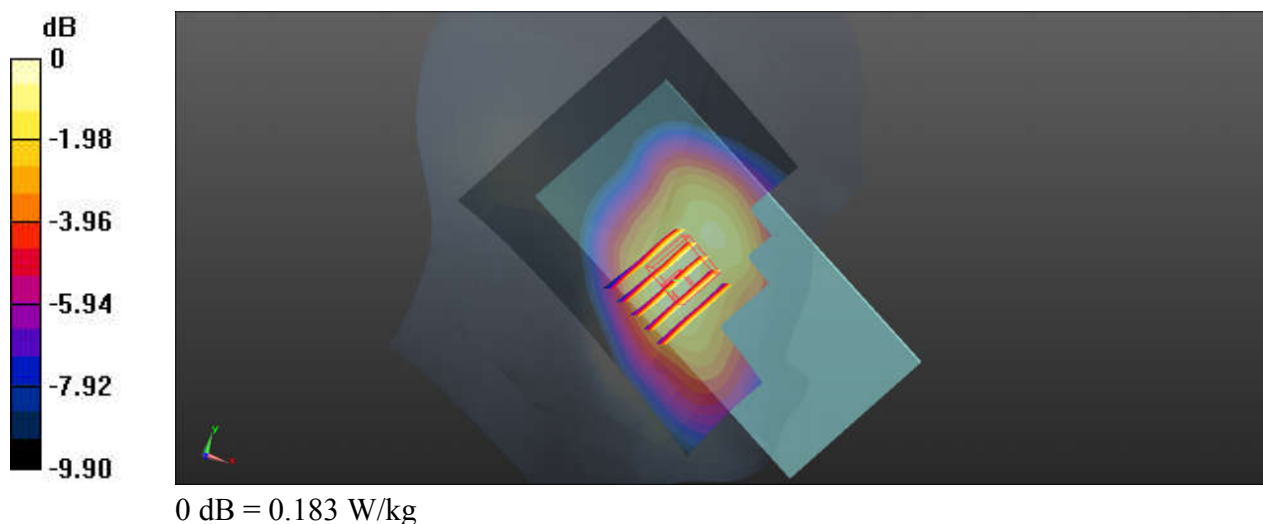

03_LTE Band 13_10M_QPSK_1RB_49Offset_Left Cheek_Ch23230


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 43.347$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23230/Area Scan (81x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.231 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.597 V/m ; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.208 W/kg ; SAR(10 g) = 0.158 W/kg
Maximum value of SAR (measured) = 0.229 W/kg

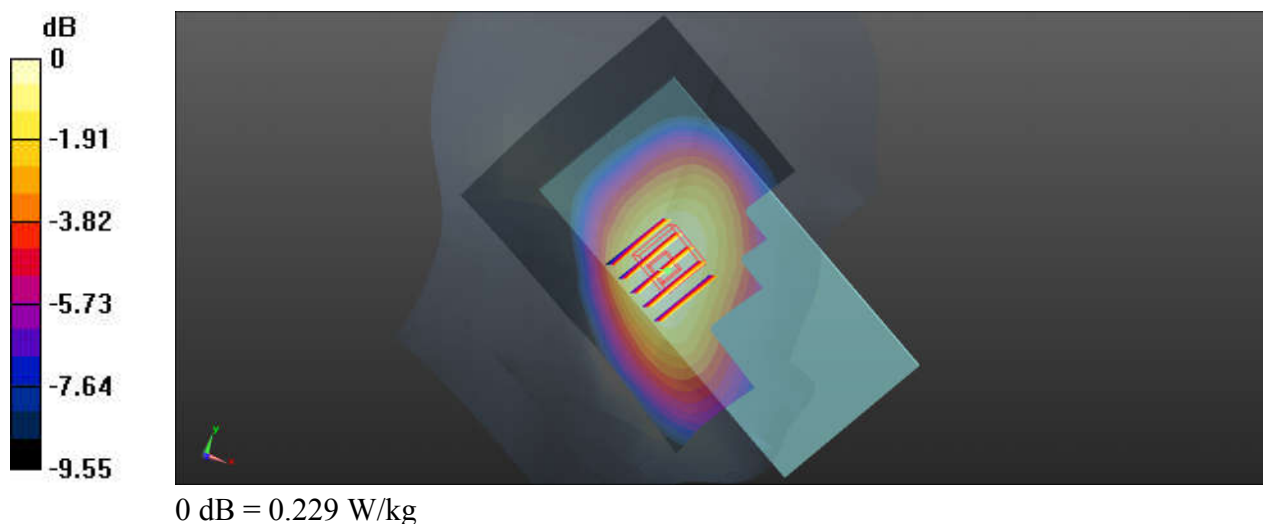

04_FR1 n71_20M_QPSK_50RB_28Offset_DFT-15_Left Cheek_Ch136100


Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.835$ S/m; $\epsilon_r = 42.057$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch136100/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.183 W/kg

Ch136100/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.804 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.202 W/kg
SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.128 W/kg
Maximum value of SAR (measured) = 0.178 W/kg

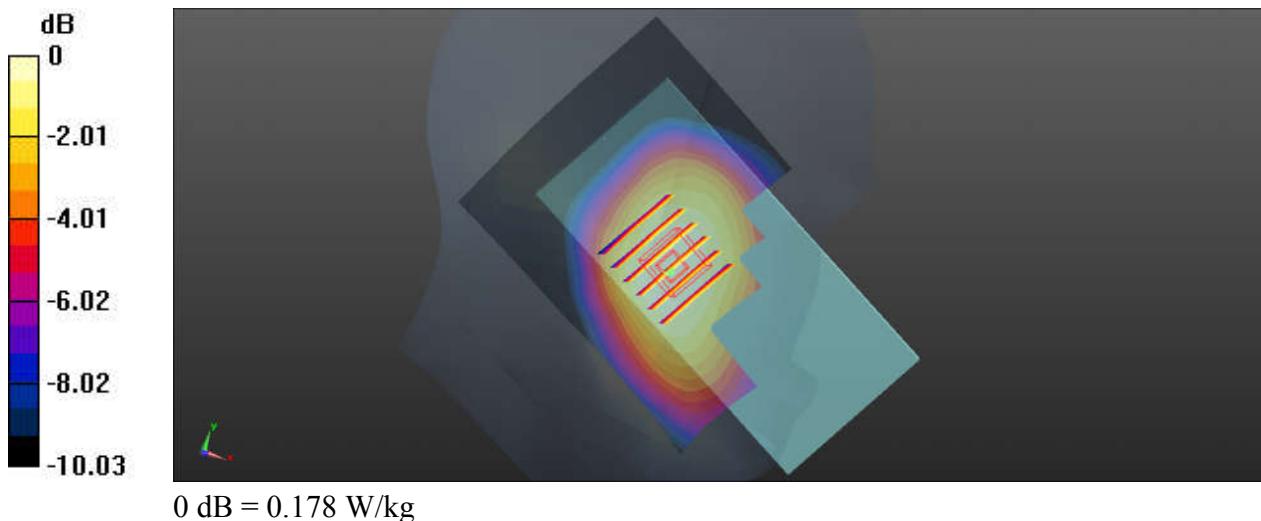

05_CDMA BC0_RC3 SO55_Left Cheek_Ch1013


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 825$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.18$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1013/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.228 W/kg

Ch1013/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.491 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.261 W/kg
SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.154 W/kg
Maximum value of SAR (measured) = 0.222 W/kg

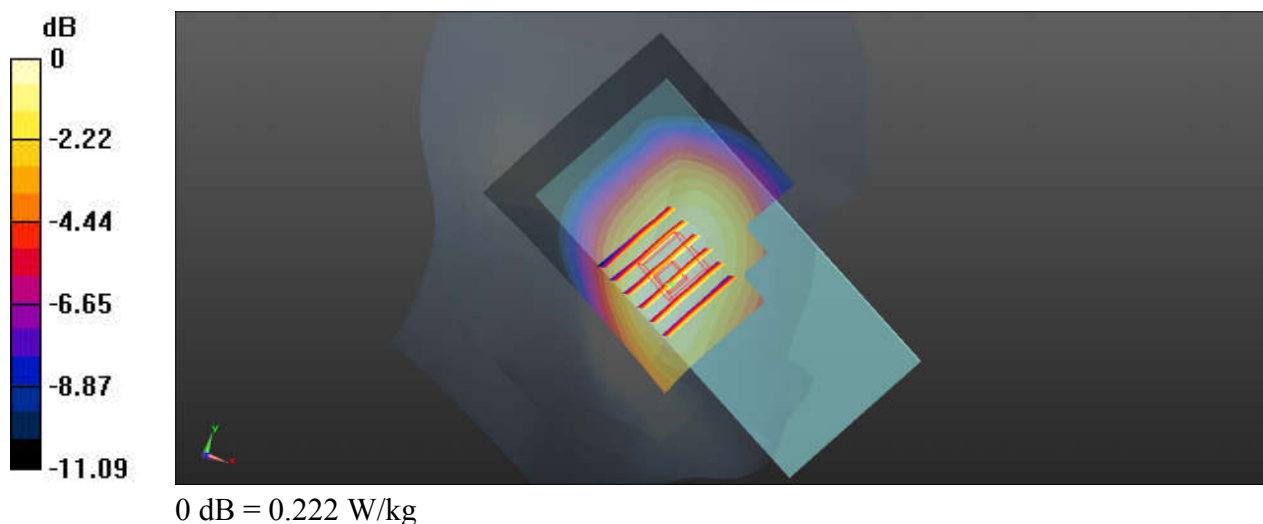

06_GSM850_GPRS (3 Tx slots)_Left Cheek_Ch128


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77
Medium: HSL_835_240409 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.177$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch128/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0670 W/kg

Ch128/Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.343 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.0810 W/kg
SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.069 W/kg
Maximum value of SAR (measured) = 0.0744 W/kg

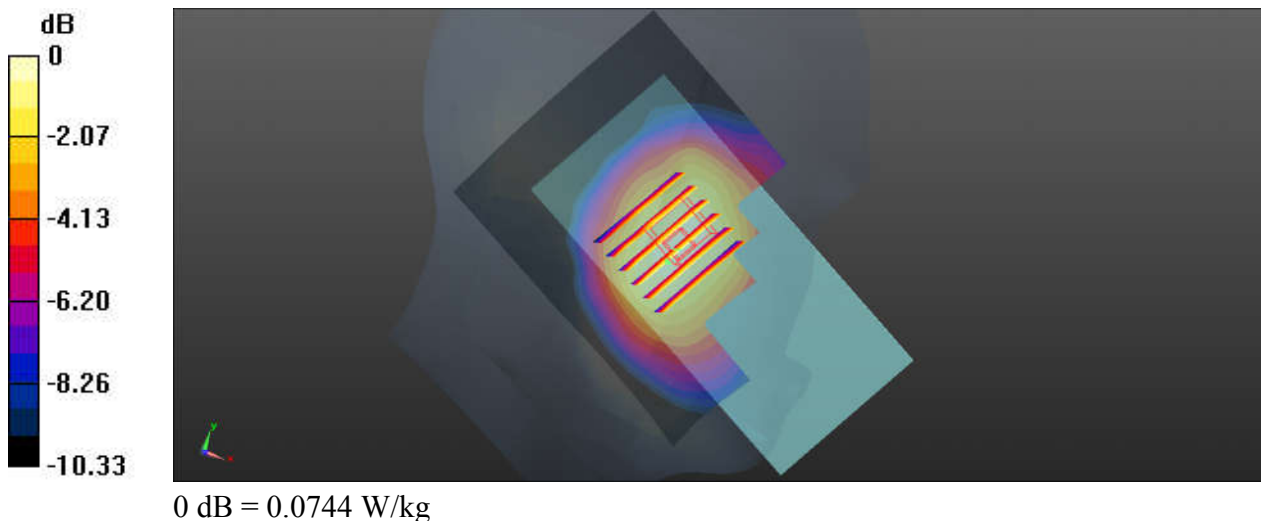

07_WCDMA V_RMC 12.2Kbps_Left Cheek_Ch4132


Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 43.178$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4132/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.276 W/kg

Ch4132/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.817 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.323 W/kg
SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.190 W/kg
Maximum value of SAR (measured) = 0.273 W/kg

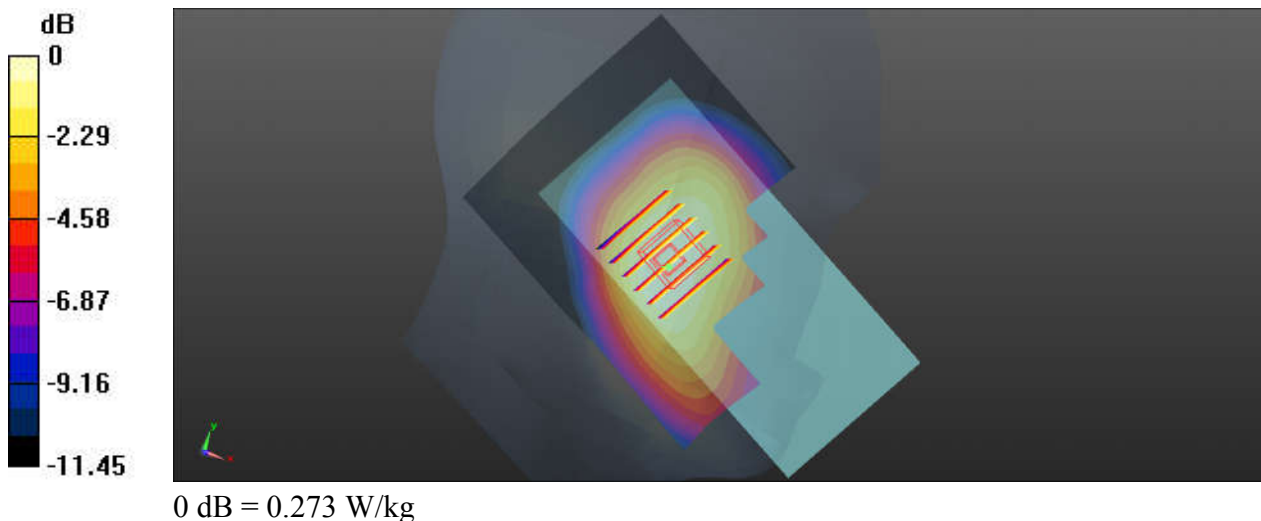

08_LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_Ch26865


Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 43.162$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26865/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.237 W/kg

Ch26865/Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.196 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.277 W/kg
SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.165 W/kg
Maximum value of SAR (measured) = 0.236 W/kg

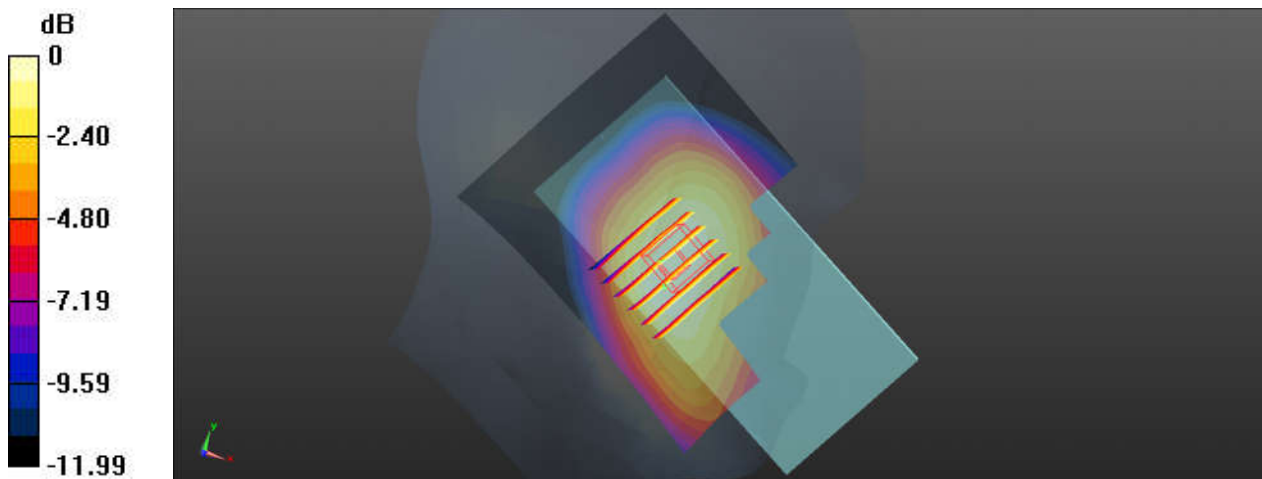

0 dB = 0.236 W/kg

09_FR1 n26_20M_QPSK_1RB_1Offset_DFT-15_Left Cheek_Ch166300


Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 43.162$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch166300/Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.192 W/kg

Ch166300/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.329 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.125 W/kg
Maximum value of SAR (measured) = 0.182 W/kg

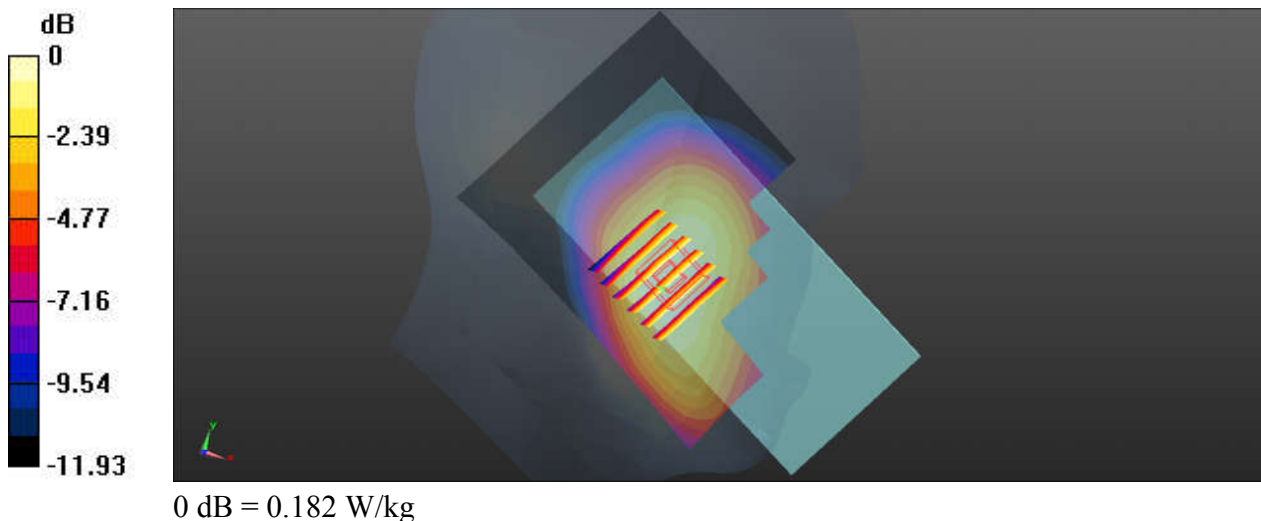

10_WCDMA IV_RMC 12.2Kbps_Right Cheek_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.528$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1513/Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.27 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.517 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 2.04 W/kg
SAR(1 g) = 0.942 W/kg ; SAR(10 g) = 0.432 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

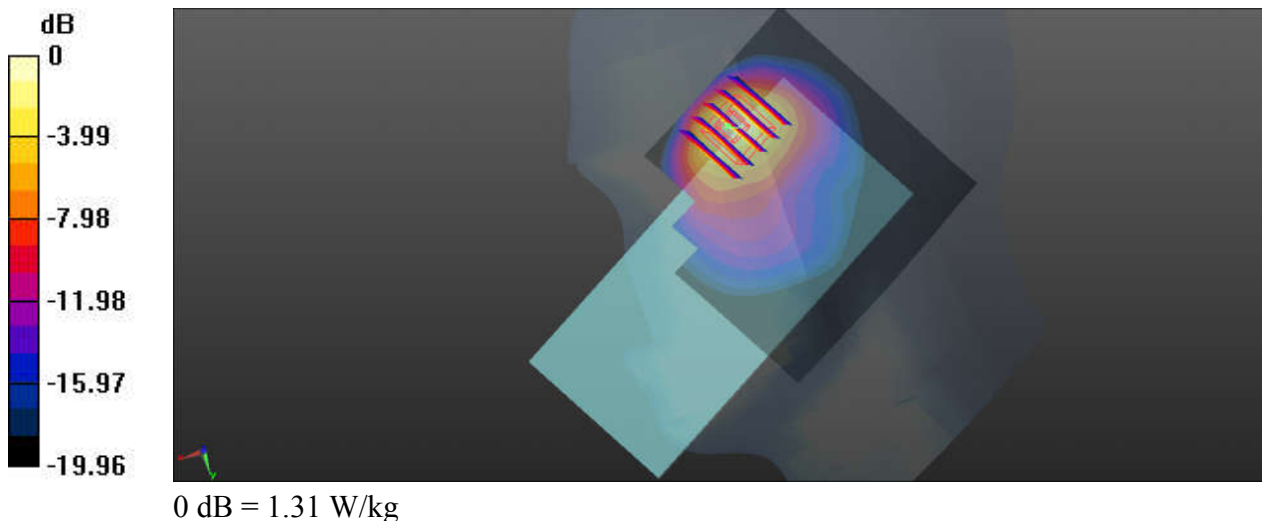

11_LTE Band 66_20M_QPSK_1RB_0Offset_Right Cheek_Ch132572


Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.494$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132572/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.13 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.76 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.428 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

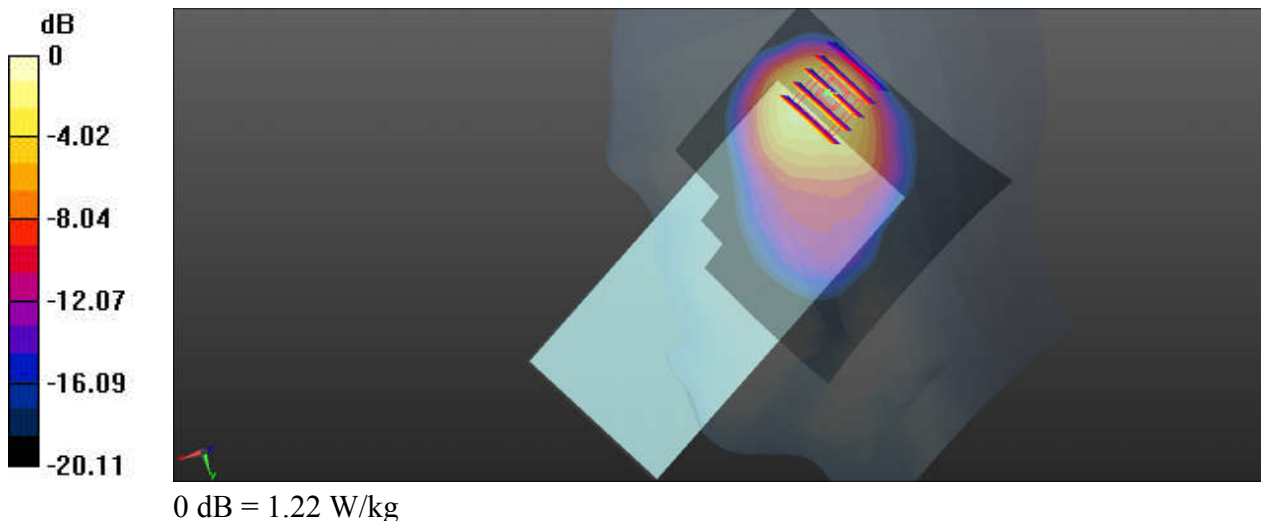

12_FR1 n66_40M_QPSK_1RB_1Offset_DFT-15_Right Cheek_Ch349000


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.544$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch349000/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.33 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.349 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.20 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.454 W/kg
Maximum value of SAR (measured) = 1.42 W/kg

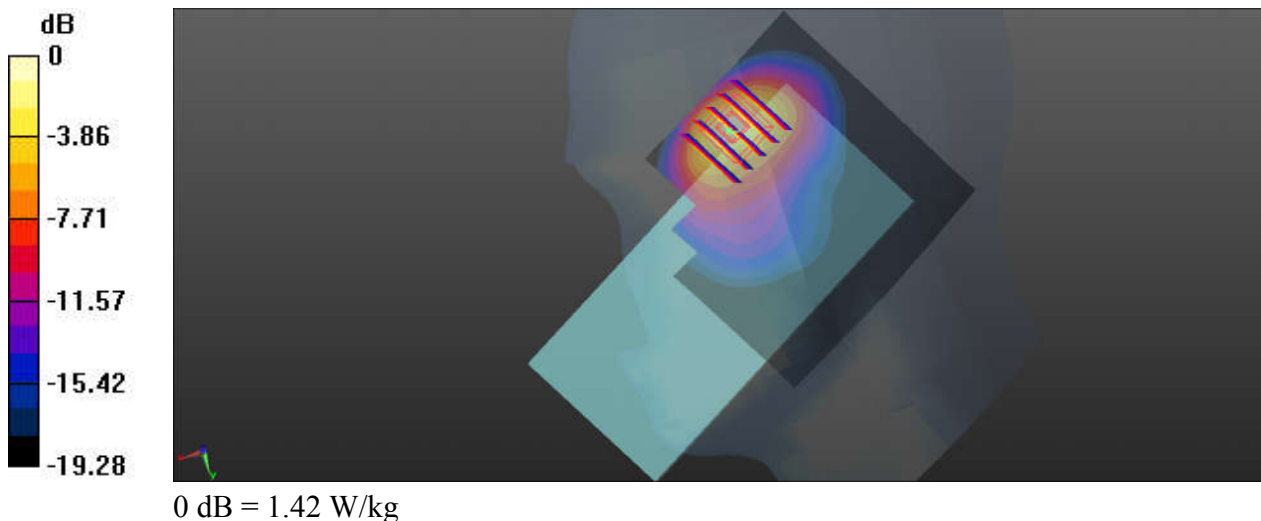

13_GSM1900_GPRS (3 Tx slots)_Right Cheek_Ch512


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_240407 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 39.509$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch512/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.27 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.947 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.450 W/kg
Maximum value of SAR (measured) = 1.42 W/kg

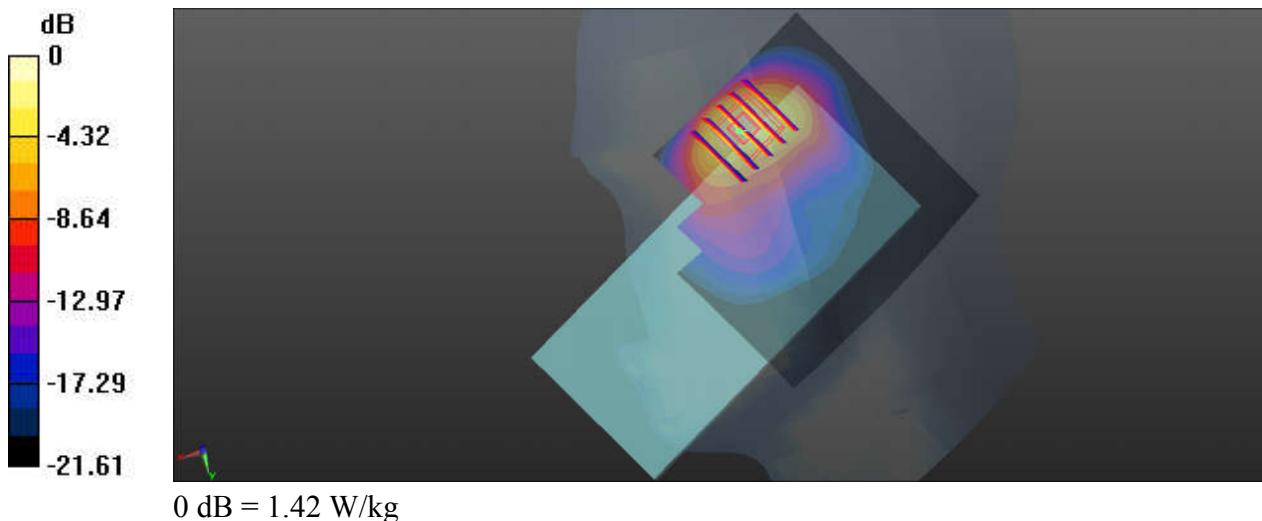

14_WCDMA II_RMC 12.2Kbps_Right Cheek_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9262/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.710 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.429 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

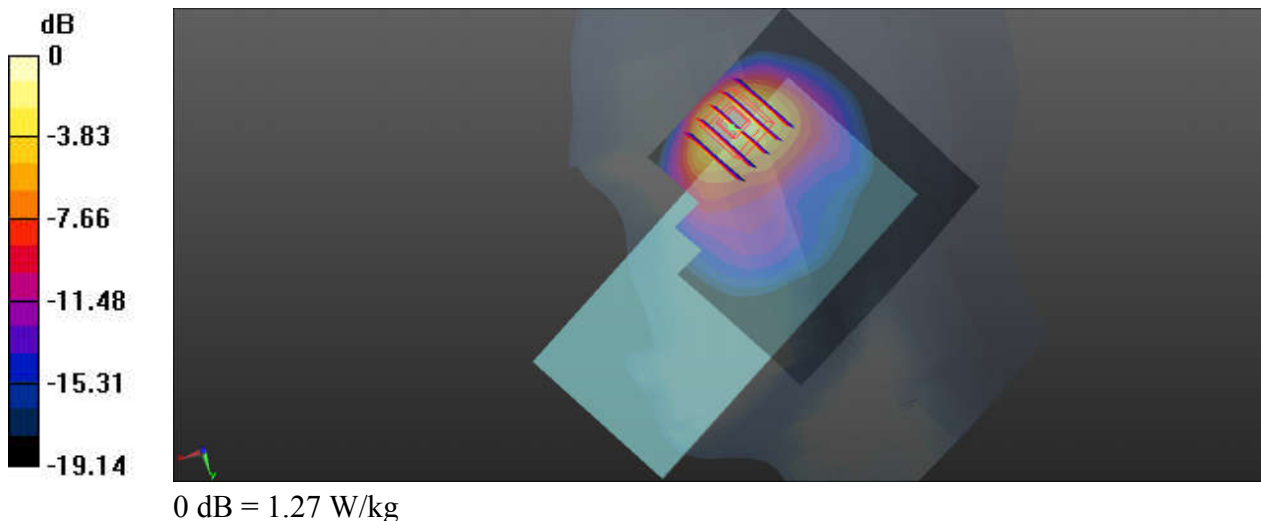

15_LTE Band 25_20M_QPSK_1RB_0Offset_Right Cheek_Ch26140


Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.266$ S/m; $\epsilon_r = 39.475$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26140/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.23 W/kg

Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.434 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.428 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

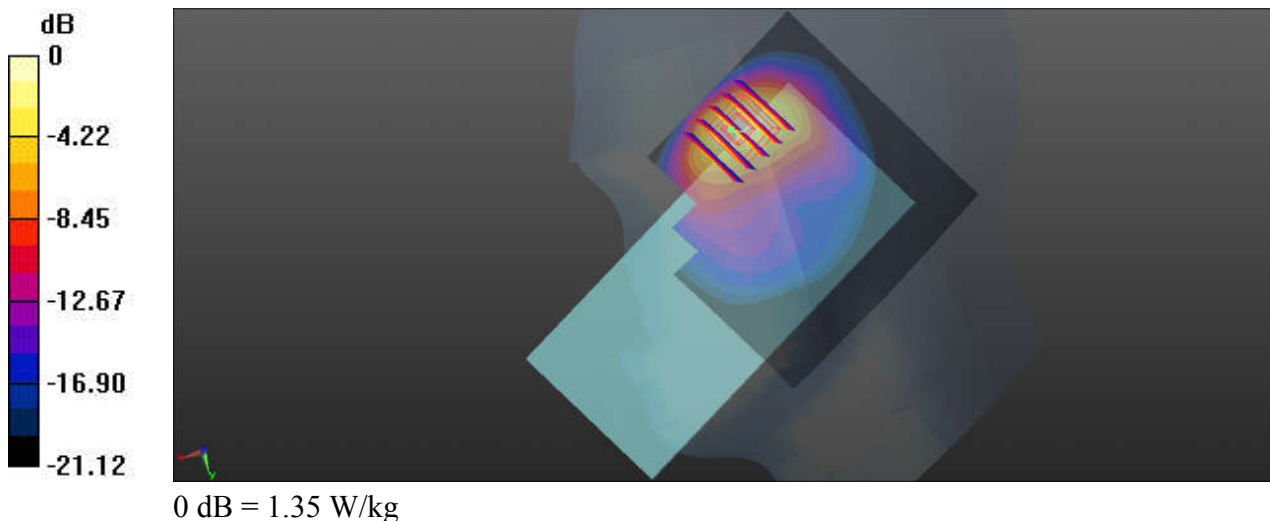

16_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Right Cheek_Ch376000


Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.388$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch376000/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.993 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.467 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

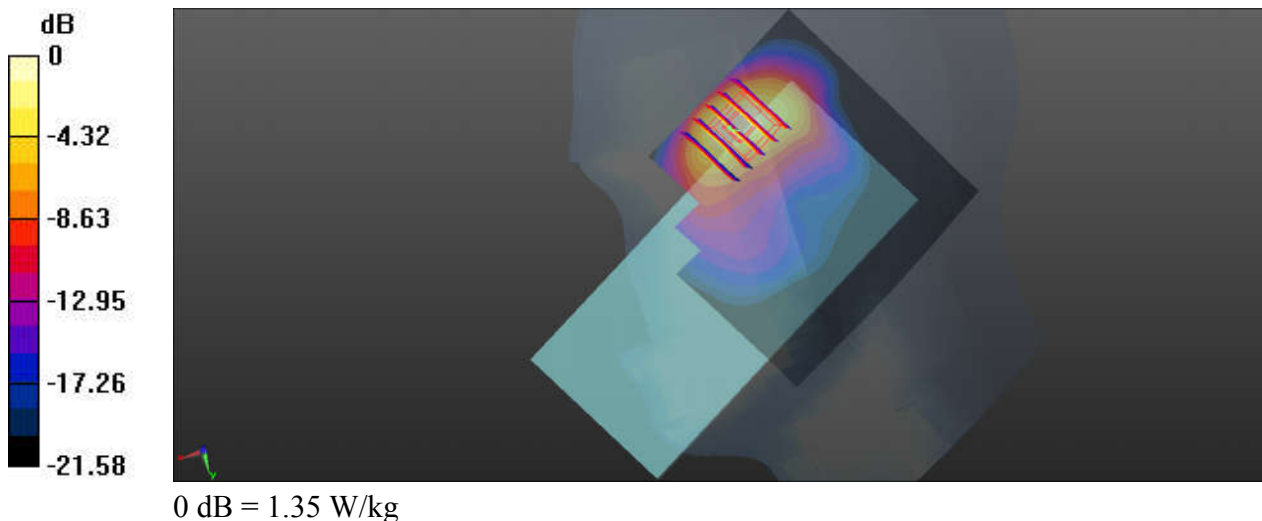

17_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_Ch21350


Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL_2600_240414 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 37.709$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch21350/Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Ch21350/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.071 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 2.36 W/kg
SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.342 W/kg
Maximum value of SAR (measured) = 1.78 W/kg

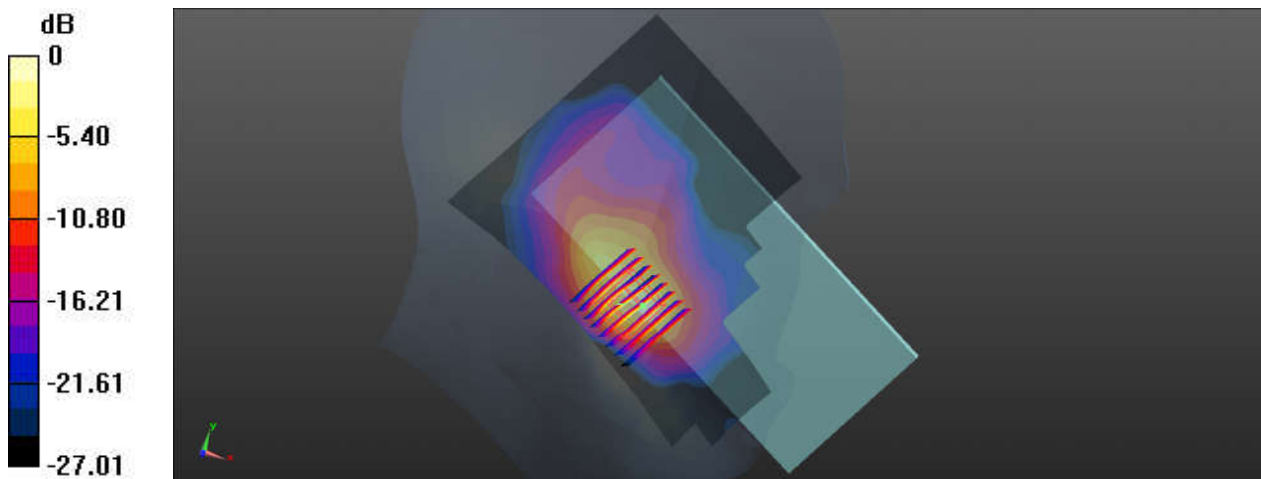

0 dB = 1.78 W/kg

18_LTE Band 41_20M_QPSK_1RB_0Offset_Right Cheek_Ch41490


Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:2.331
Medium: HSL_2600_240414 Medium parameters used: $f = 2680$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.516$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.69 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.14 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.70 W/kg
SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.352 W/kg
Maximum value of SAR (measured) = 1.97 W/kg

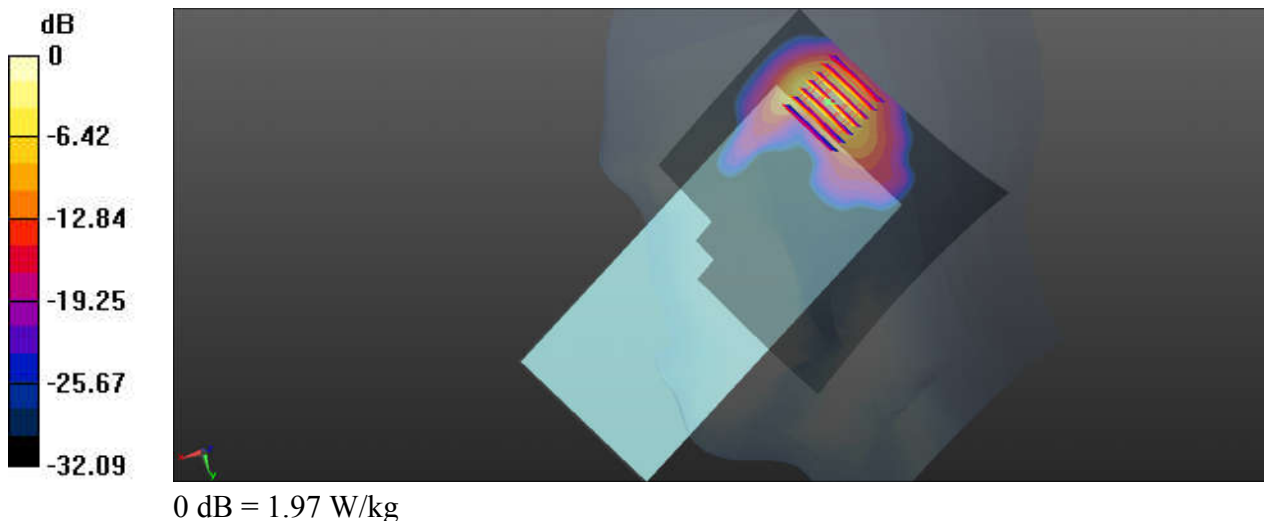

19_FR1 n7_40M_QPSK_1RB_1Offset_DFT-15_Right Tilted_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600_240414 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 37.753$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch507000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.88 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.64 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 2.58 W/kg
SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.399 W/kg
Maximum value of SAR (measured) = 1.93 W/kg

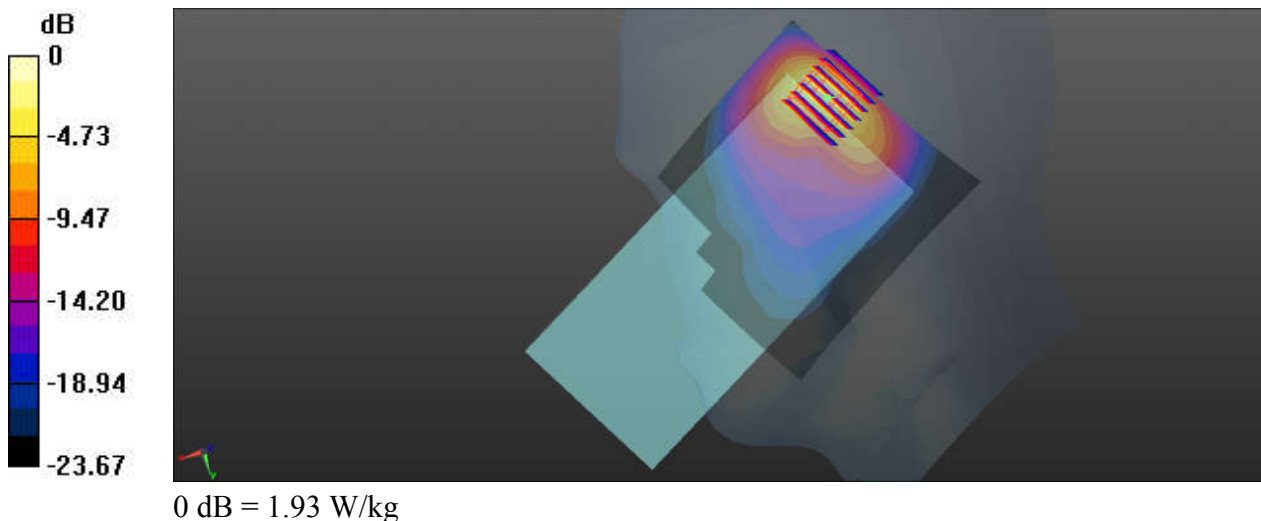

20_FR1 n41_100M_QPSK_1RB_1Offset_DFT-30_Left Cheek_Ch518598


Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:2
Medium: HSL_2600_240414 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 37.673$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch518598/Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Ch518598/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.884 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 2.71 W/kg
SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.398 W/kg
Maximum value of SAR (measured) = 2.03 W/kg

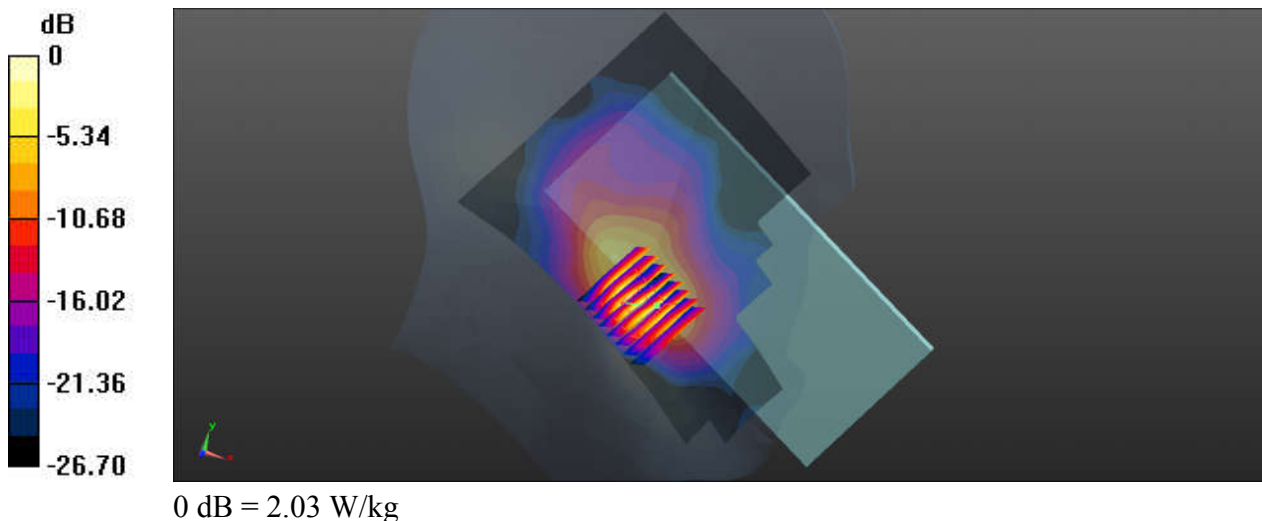

21_LTE Band 42_20M_QPSK_1RB_0Offset_Left Cheek_Ch42990


Communication System: UID 0, LTE (0); Frequency: 3540 MHz; Duty Cycle: 1:1.59
Medium: HSL_3500_240404 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.886$ S/m; $\epsilon_r = 38.376$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42990/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.51 W/kg

Ch42990/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 3.916 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 3.11 W/kg
SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.338 W/kg
Maximum value of SAR (measured) = 2.04 W/kg

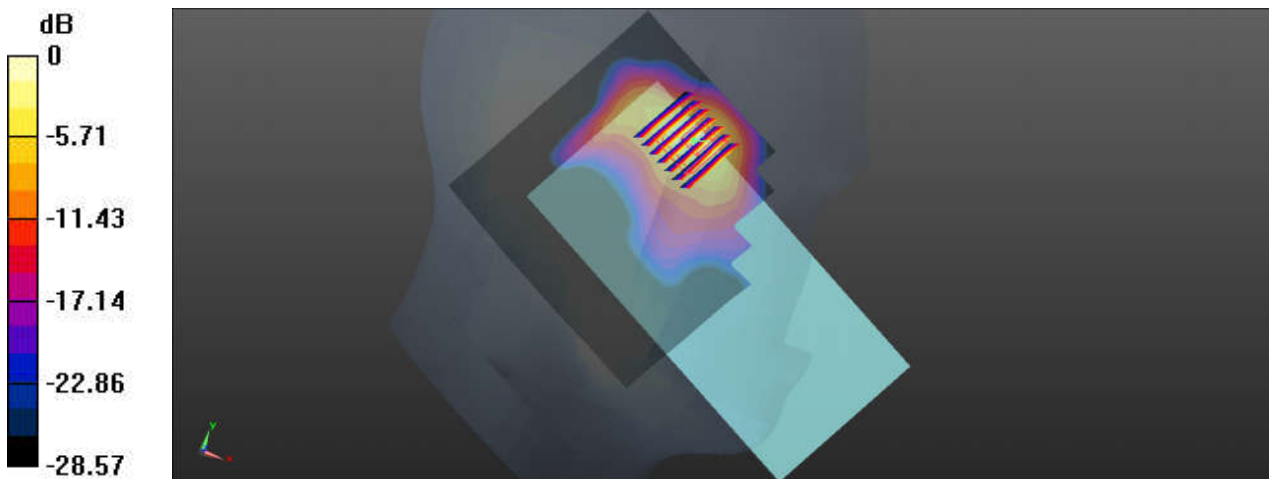

0 dB = 2.04 W/kg

22_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Left Cheek_Ch656000


Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:2
Medium: HSL_3900_240403 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 38.054$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.53, 6.53, 6.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch656000/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.55 W/kg

Ch656000/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 5.075 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 3.34 W/kg
SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.379 W/kg
Maximum value of SAR (measured) = 2.36 W/kg

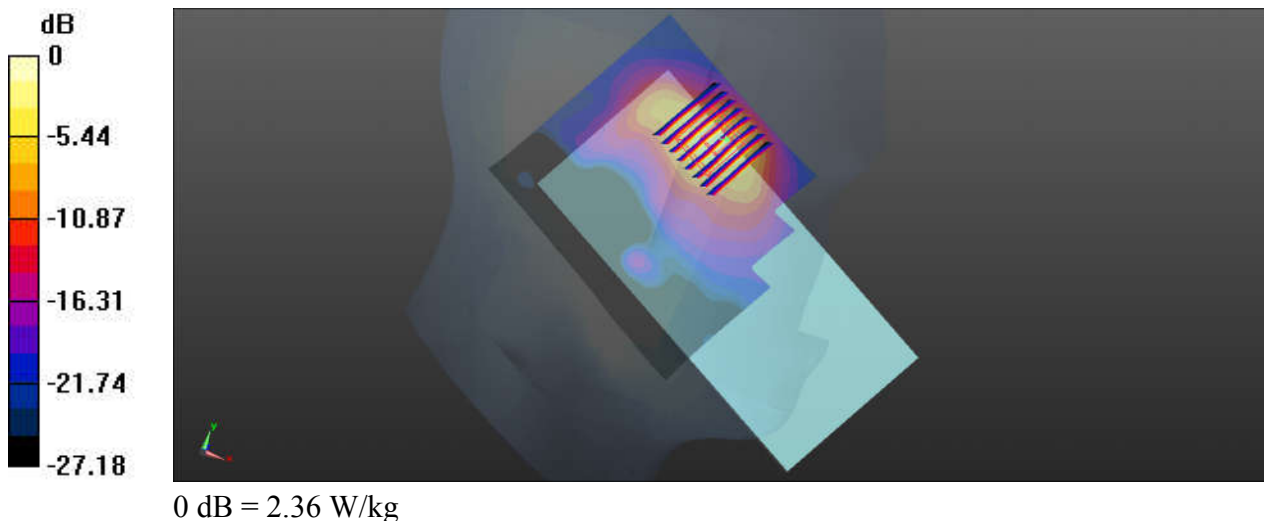

23_Bluetooth_DH5 1Mbps_Left Cheek_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_240405 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.747$ S/m; $\epsilon_r = 37.924$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch0/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.970 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.151 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.204 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

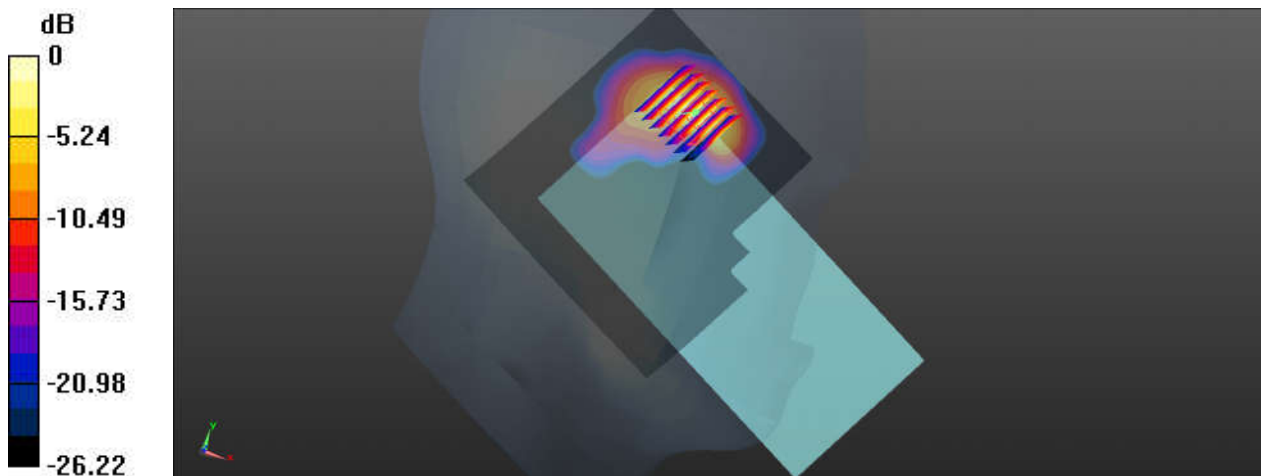

0 dB = 1.01 W/kg

24_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015
Medium: HSL_2450_240405 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 37.585$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.701 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.267 W/kg
Maximum value of SAR (measured) = 1.44 W/kg

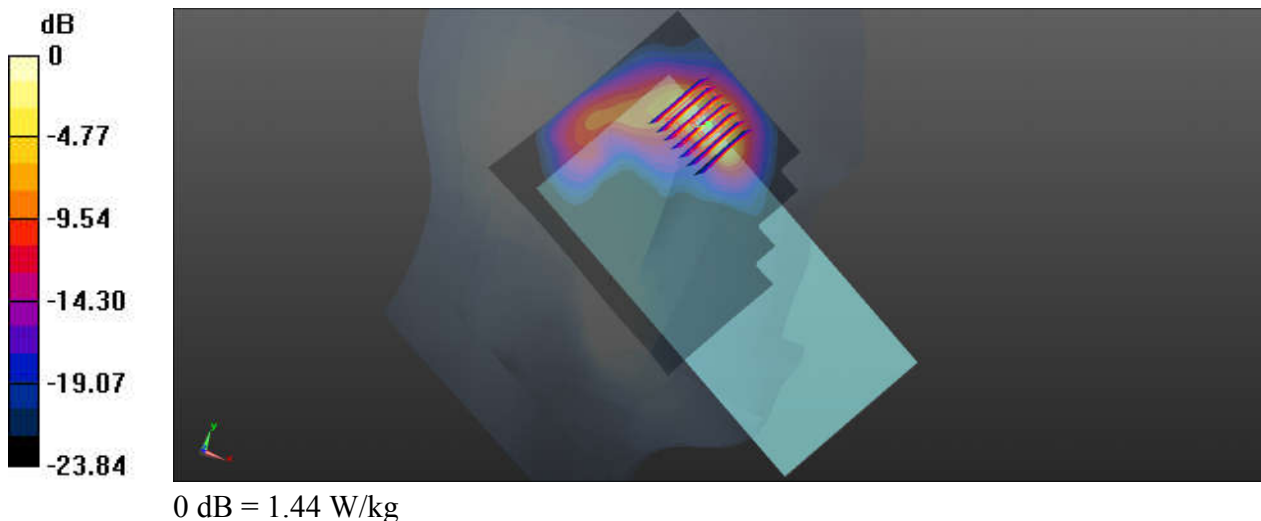

25_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_Ch50


Communication System: UID 0, WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1.013
Medium: HSL_5250_240411 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.597$ S/m; $\epsilon_r = 36.629$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch50/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.85 W/kg

Ch50/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 14.89 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 3.14 W/kg
SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.267 W/kg
Maximum value of SAR (measured) = 1.90 W/kg

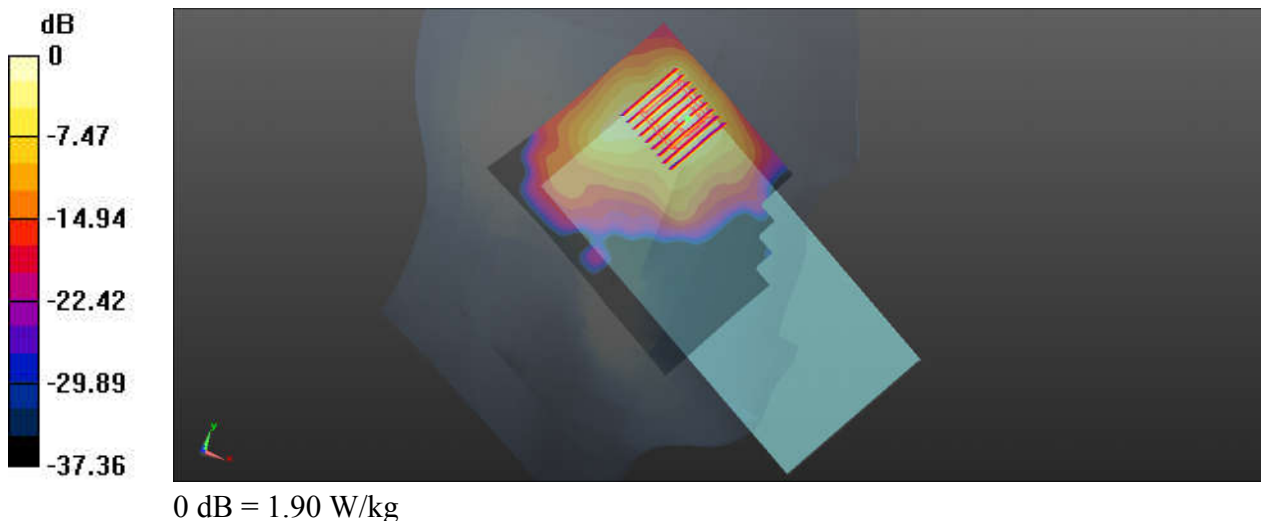

26_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_Ch114


Communication System: UID 0, WIFI (0); Frequency: 5570 MHz; Duty Cycle: 1:1.013
Medium: HSL_5600_240412 Medium parameters used: $f = 5570$ MHz; $\sigma = 4.966$ S/m; $\epsilon_r = 36.144$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch114/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.38 W/kg

Ch114/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 16.28 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 4.03 W/kg
SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.304 W/kg
Maximum value of SAR (measured) = 2.32 W/kg

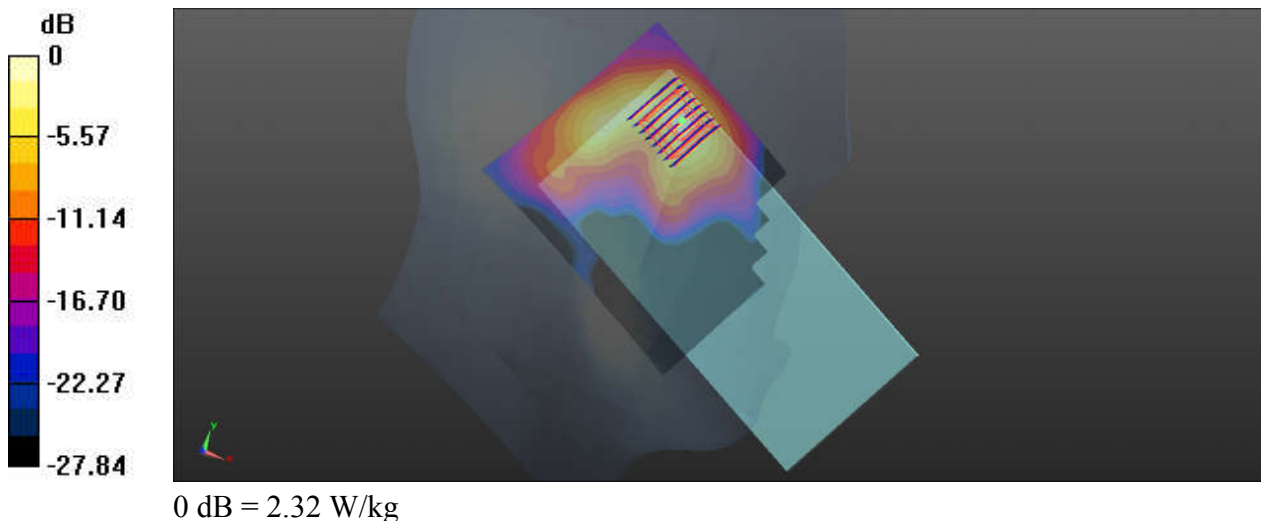

27_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_Ch155

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.007
Medium: HSL_5750_240413 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.202$ S/m; $\epsilon_r = 35.804$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.15 W/kg

Ch155/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 16.03 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 8.40 W/kg
SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.281 W/kg
Maximum value of SAR (measured) = 2.13 W/kg

Ch155/Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 16.03 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.67 W/kg
SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.237 W/kg
Maximum value of SAR (measured) = 1.88 W/kg

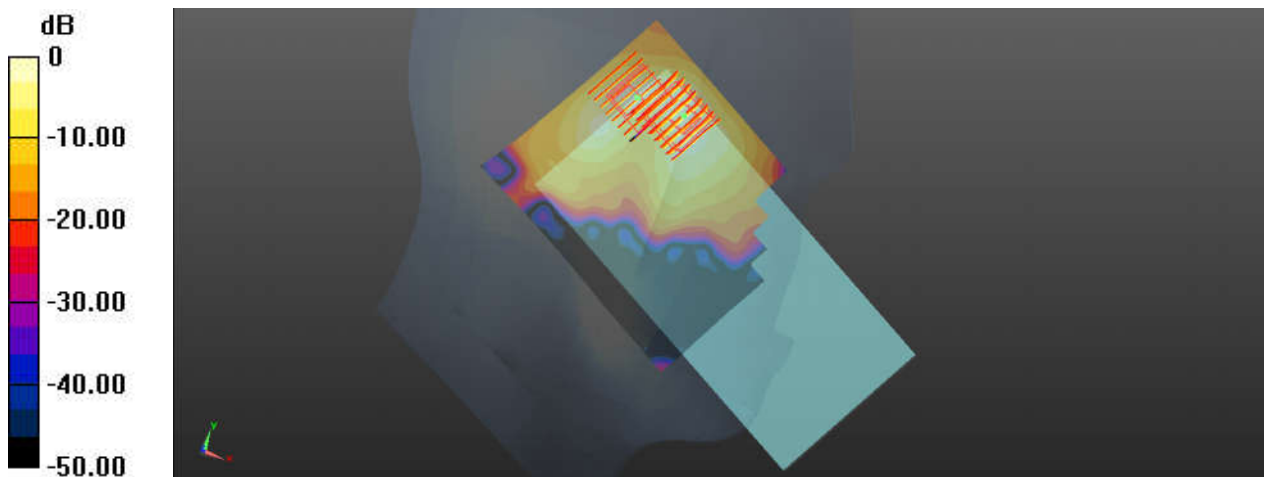

0 dB = 1.88 W/kg

Date: 2024/4/15

28_WLAN6GHz_802.11be-EHT320 MCS0_Left Cheek_Ch191


Communication System: U-NII-8; Frequency: 6905.0MHz; Duty Cycle: 1:1.012
Medium: HSL Medium parameters used: $f = 6905.0$ MHz; $\sigma = 6.69$ S/m; $\epsilon_r = 33.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.19, 5.07, 5.26); Calibrated: 2023-4-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1664; Calibrated: 2023-6-6
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: cDASY6 16.2.2.1588
- UID: WLAN, 10671-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 0.407 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.13 dB
SAR (1g) = 0.440 W/kg; SAR (10g) = 0.114 W/kg
psAPD (4.0cm², sq) = 2.67 [W/m²]

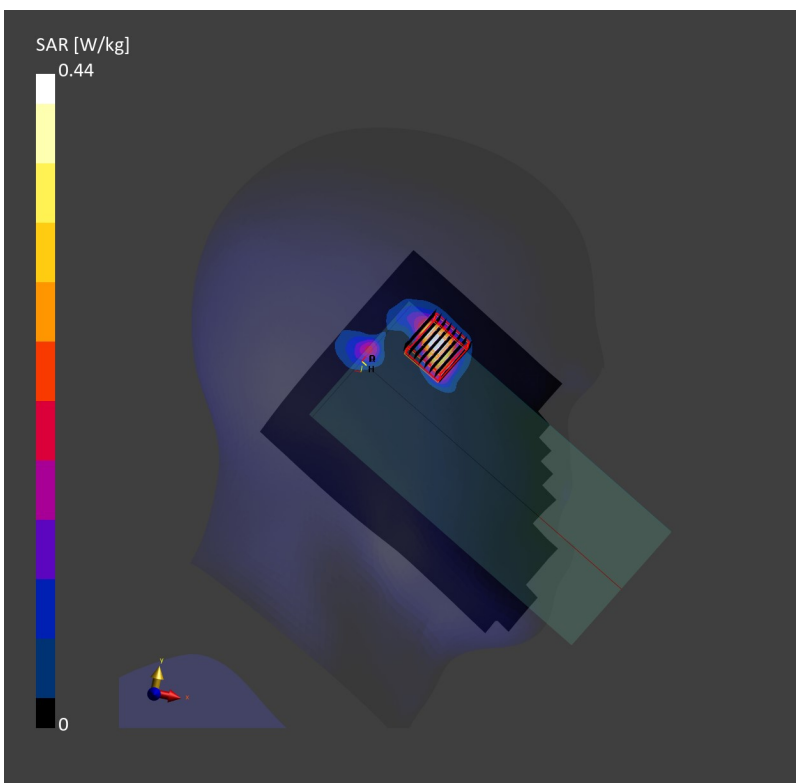

29_LTE Band 71_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch133297


Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.835$ S/m; $\epsilon_r = 42.057$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch133297/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.888 W/kg

Ch133297/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.74 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.416 W/kg
Maximum value of SAR (measured) = 0.882 W/kg

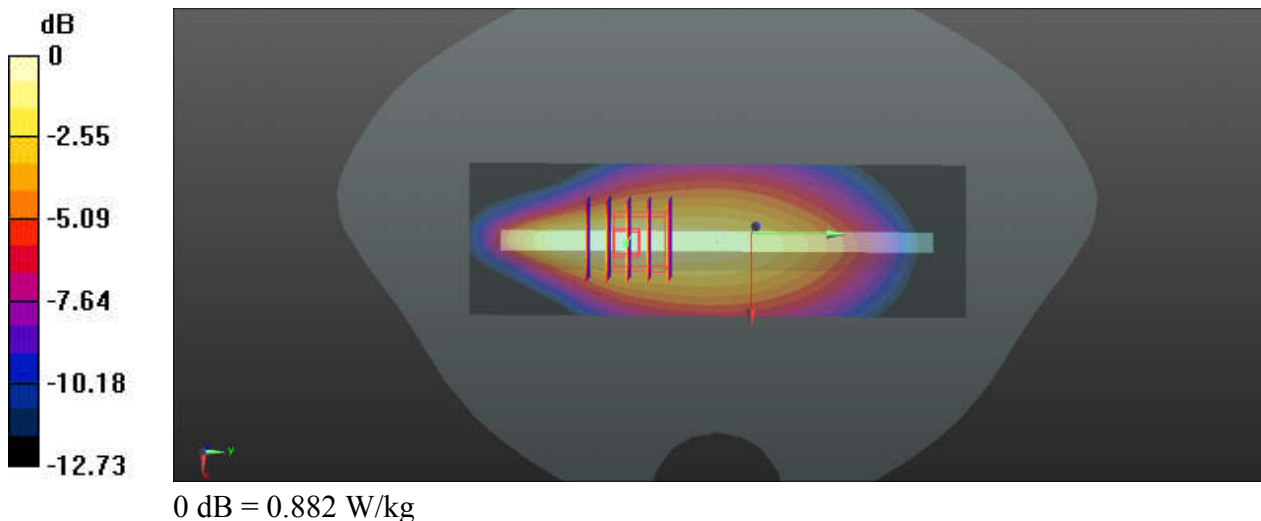

30_LTE Band 12_10M_QPSK_1RB_0Offset_Left Side_5mm_Ch23095


Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 41.609$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23095/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.887 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.89 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.404 W/kg
Maximum value of SAR (measured) = 0.879 W/kg

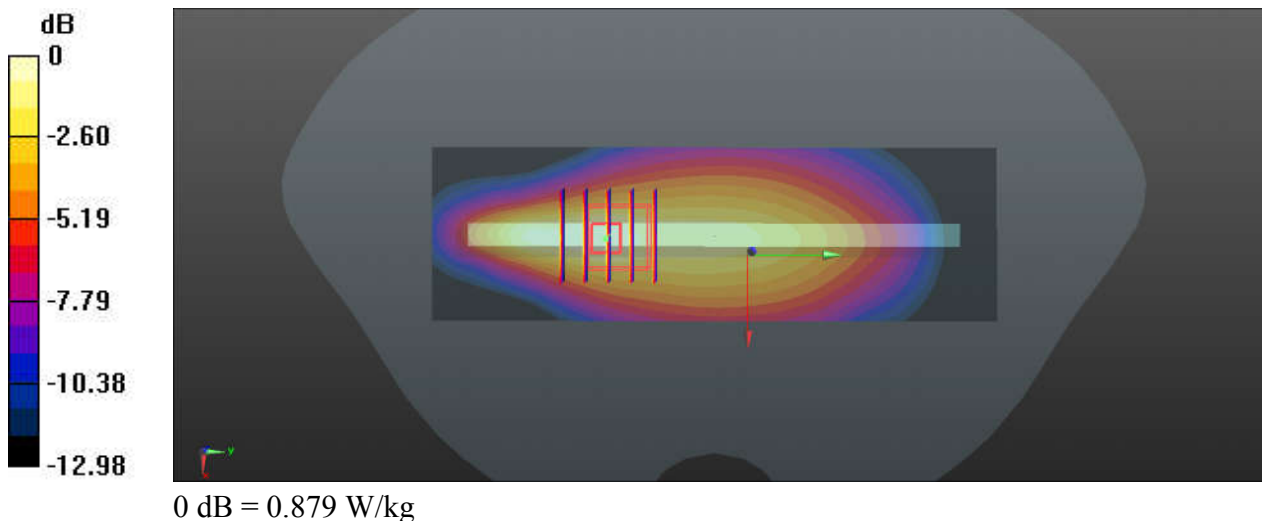

31_LTE Band 13_10M_QPSK_1RB_49Offset_Back_5mm_Ch23230


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 39.943$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23230/Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.787 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.39 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.628 W/kg ; SAR(10 g) = 0.355 W/kg
Maximum value of SAR (measured) = 0.811 W/kg

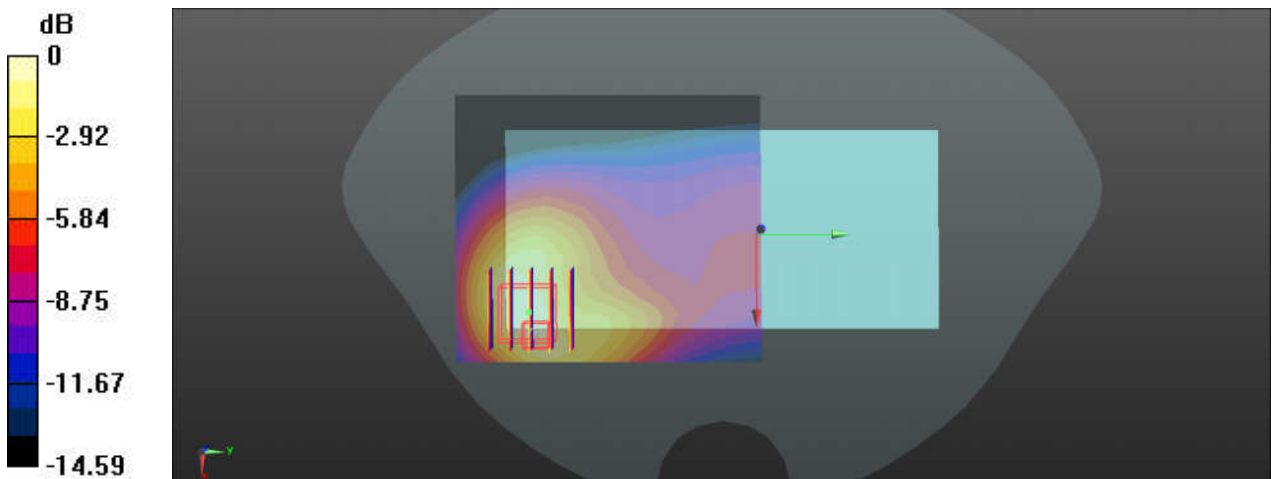

0 dB = 0.811 W/kg

32_FR1 n71_20M_QPSK_50RB_28Offset_DFT-15_Left Side_5mm_Ch136100


Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.835$ S/m; $\epsilon_r = 42.057$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch136100/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.700 W/kg

Ch136100/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.10 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.962 W/kg
SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.336 W/kg
Maximum value of SAR (measured) = 0.699 W/kg

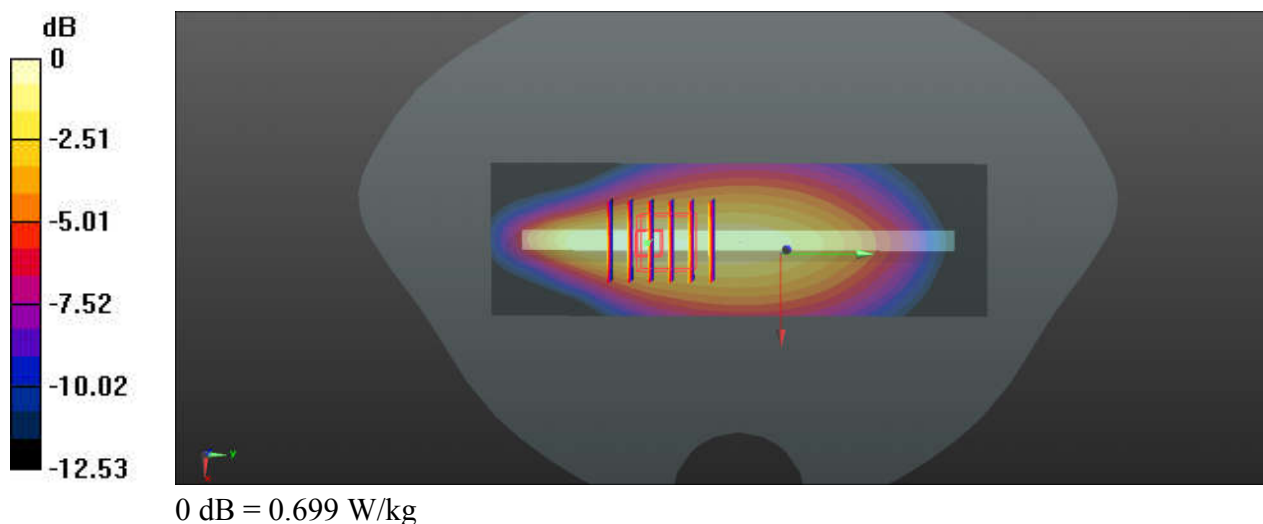

33_CDMA BC0_RC3 S032(+ F-SCH)_Back_5mm_Ch1013


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.942 \text{ S/m}$; $\epsilon_r = 43.18$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1013/Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.935 W/kg

Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.23 V/m ; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.753 W/kg ; SAR(10 g) = 0.440 W/kg
Maximum value of SAR (measured) = 0.956 W/kg

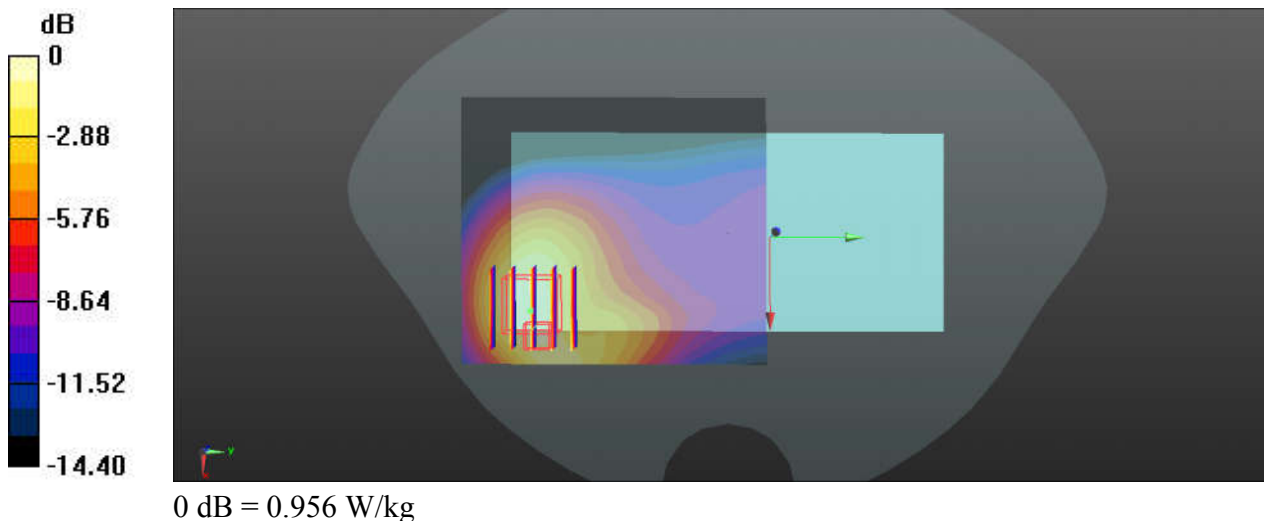

34_GSM850_GPRS (3 Tx slots)_Back_5mm_Ch189


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77
Medium: HSL_835_240409 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 43.15$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch189/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.543 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.091 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.955 W/kg
SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.263 W/kg
Maximum value of SAR (measured) = 0.650 W/kg

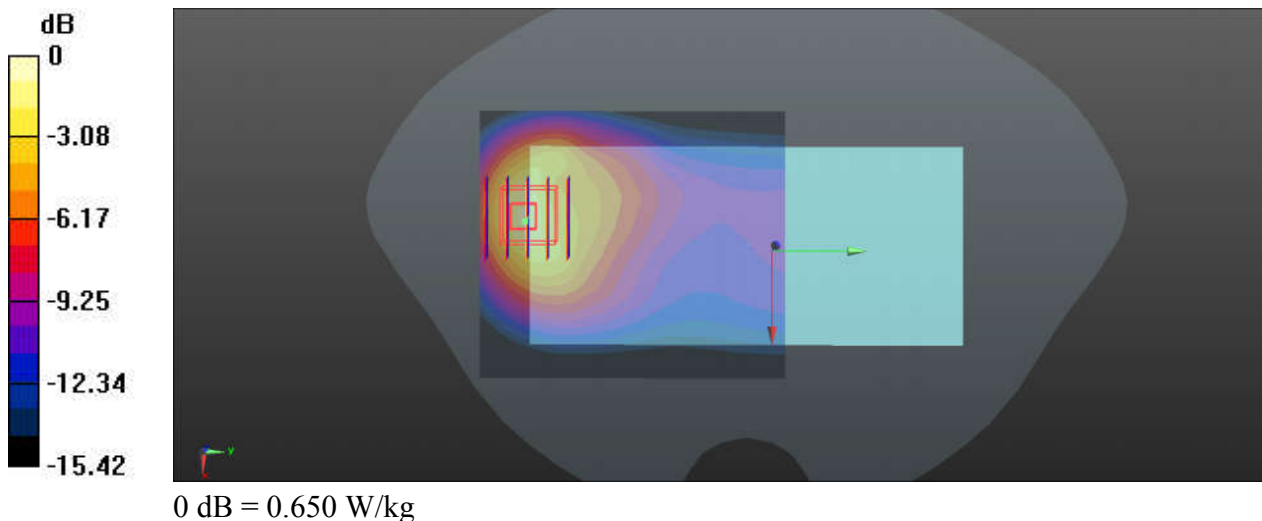

35_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132


Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 43.178$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4132/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.854 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.67 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.377 W/kg
Maximum value of SAR (measured) = 0.832 W/kg

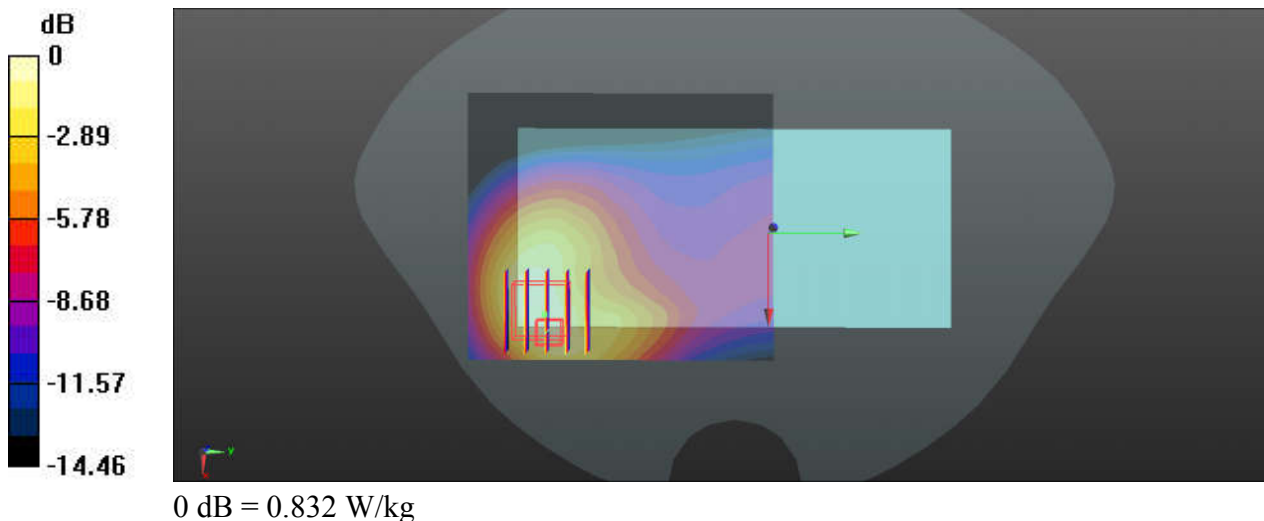

36_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26965


Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 43.137$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch26965/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.916 W/kg

Ch26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.53 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 0.898 W/kg

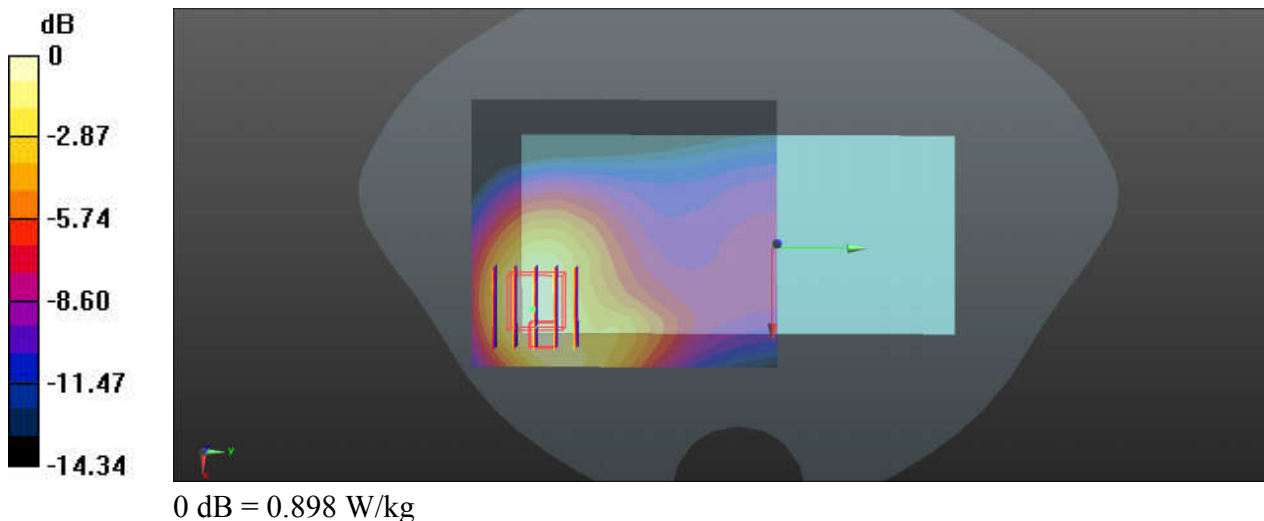

37_FR1 n26_20M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch166300


Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_240409 Medium parameters used: $f = 832$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 41.963$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch166300/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.09 W/kg

Ch166300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.23 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.361 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

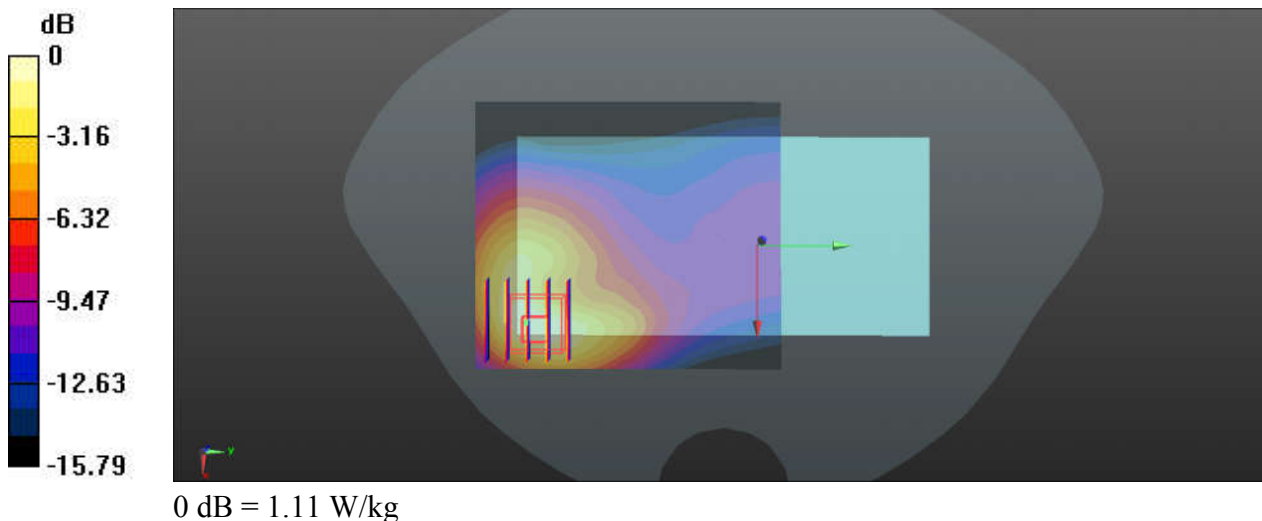

38_WCDMA IV_RMC 12.2Kbps_Left Side_5mm_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 40.528$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1513/Area Scan (51x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.10 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.143 V/m ; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 2.20 W/kg
SAR(1 g) = 0.971 W/kg ; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

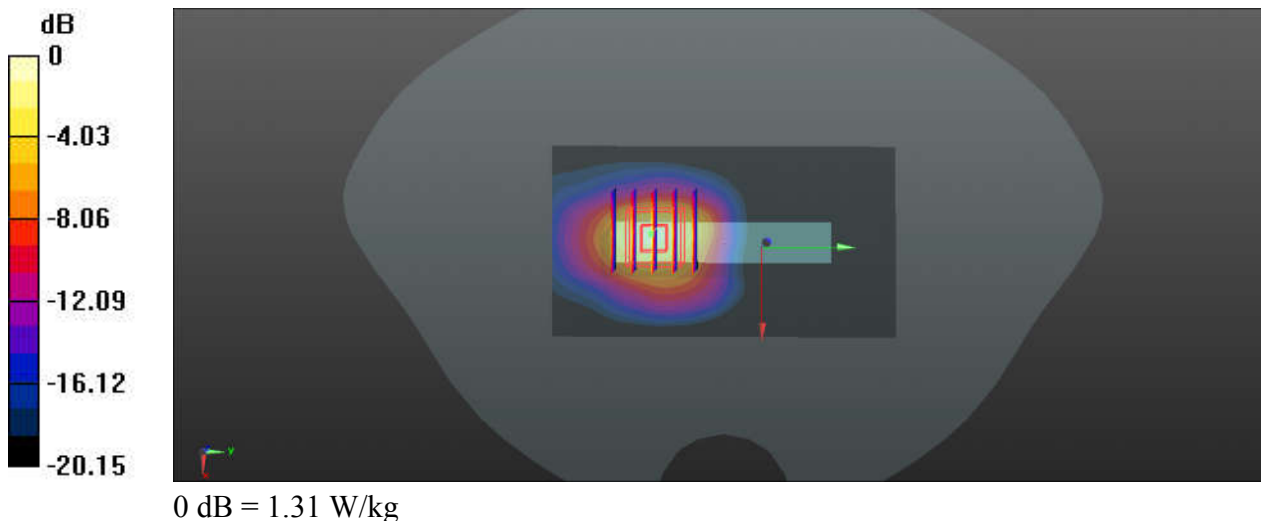

39_LTE Band 66_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch132072


Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 40.593$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch132072/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.50 W/kg

Ch132072/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.132 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.29 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.465 W/kg
Maximum value of SAR (measured) = 1.46 W/kg

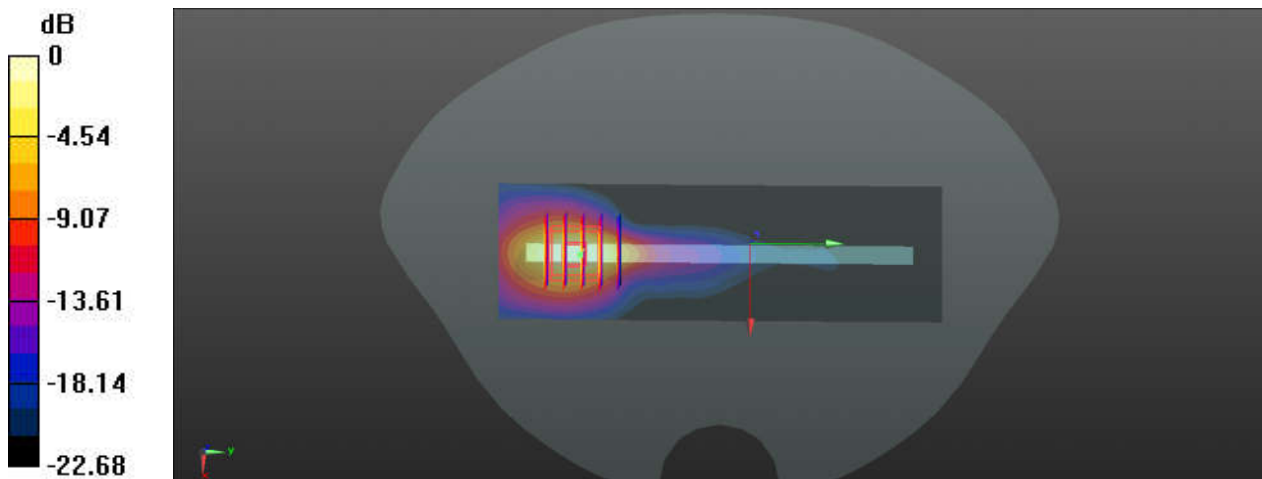

0 dB = 1.46 W/kg

40_FR1 n66_40M_QPSK_1RB_1Offset_DFT-15_Left Side_5mm_Ch349000


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_240406 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.544$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch349000/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.36 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.81 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.93 W/kg
SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.447 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

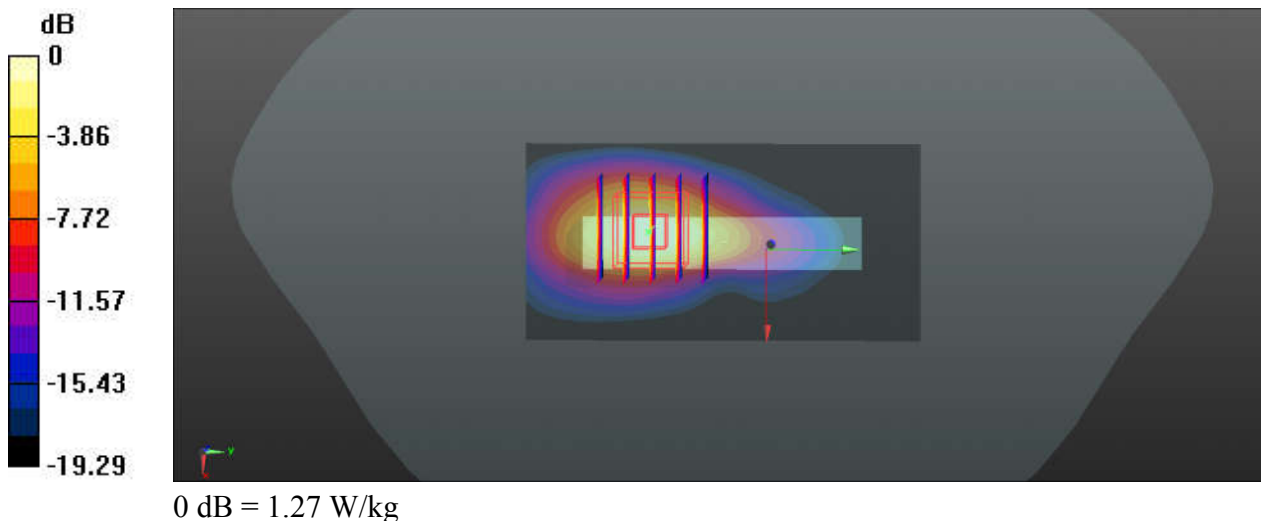

41_GSM1900_GPRS (3 Tx slots)_Left Side_5mm_Ch810


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_240407 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.246$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.890 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.62 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.307 W/kg
Maximum value of SAR (measured) = 0.986 W/kg

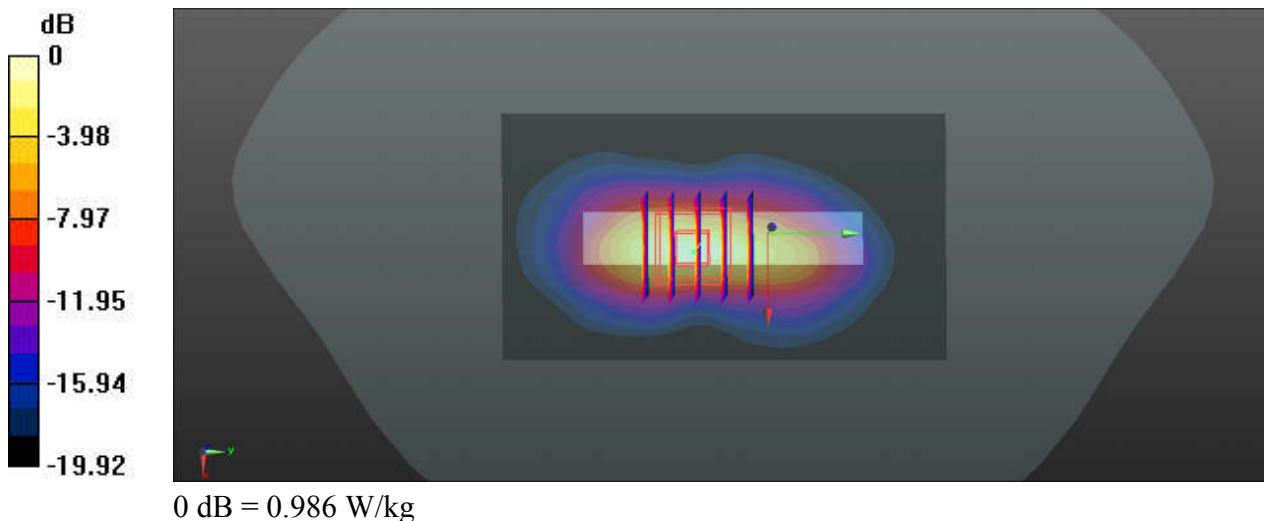

42_WCDMA II_RMC 12.2Kbps_Left Side_5mm_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9262/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.500 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.98 W/kg
SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.432 W/kg
Maximum value of SAR (measured) = 1.26 W/kg

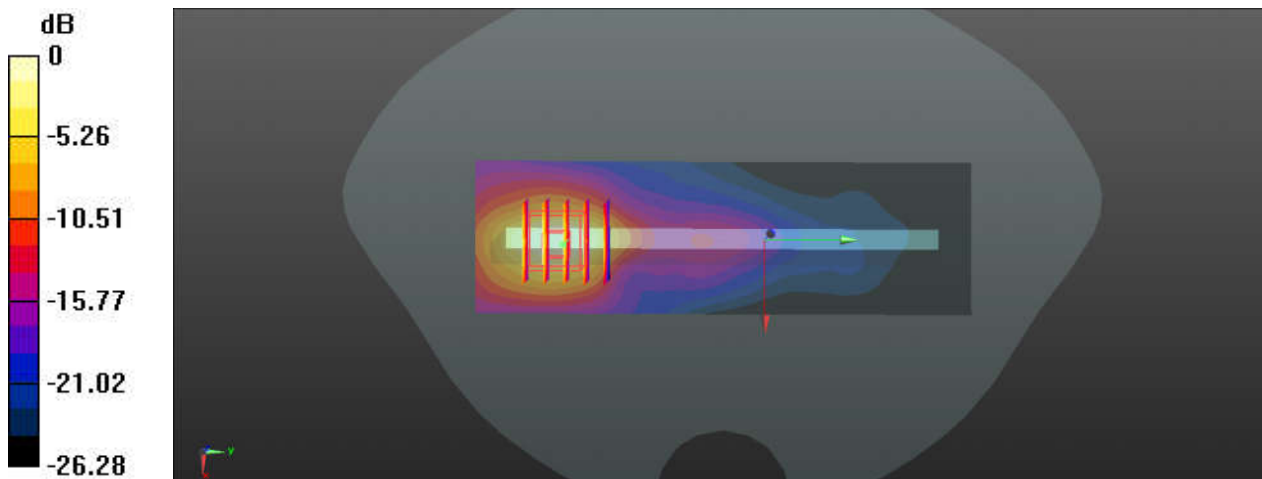

0 dB = 1.26 W/kg

43_LTE Band 2_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch18900


Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.388$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch18900/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.026 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 2.39 W/kg
SAR(1 g) = 1 W/kg; SAR(10 g) = 0.518 W/kg
Maximum value of SAR (measured) = 1.53 W/kg

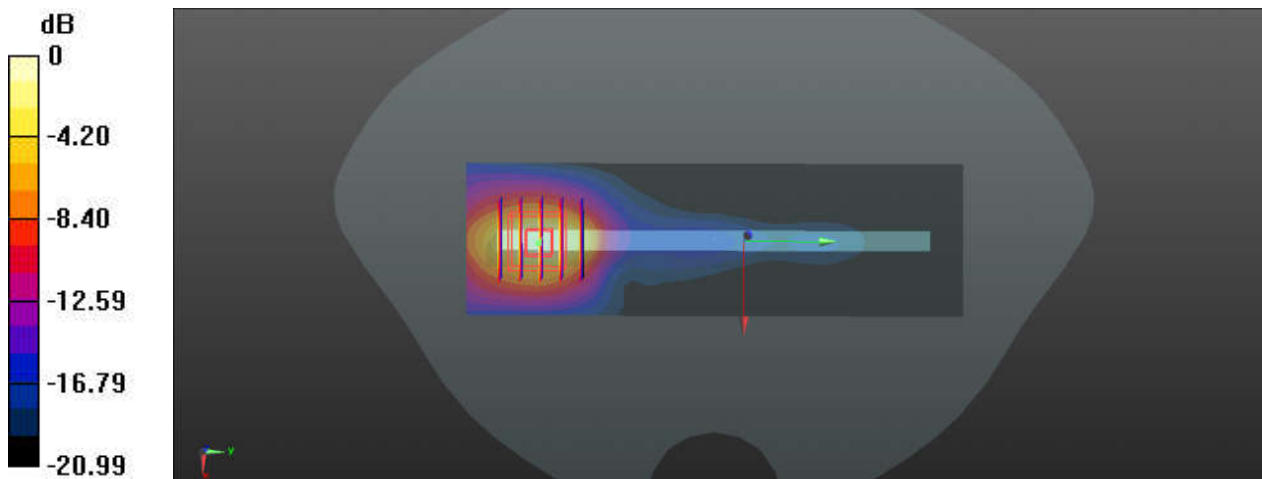

0 dB = 1.53 W/kg

44_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Bottom Side_5mm_Ch376000


Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_240407 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.388$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch376000/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.02 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.45 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.428 W/kg
Maximum value of SAR (measured) = 1.62 W/kg

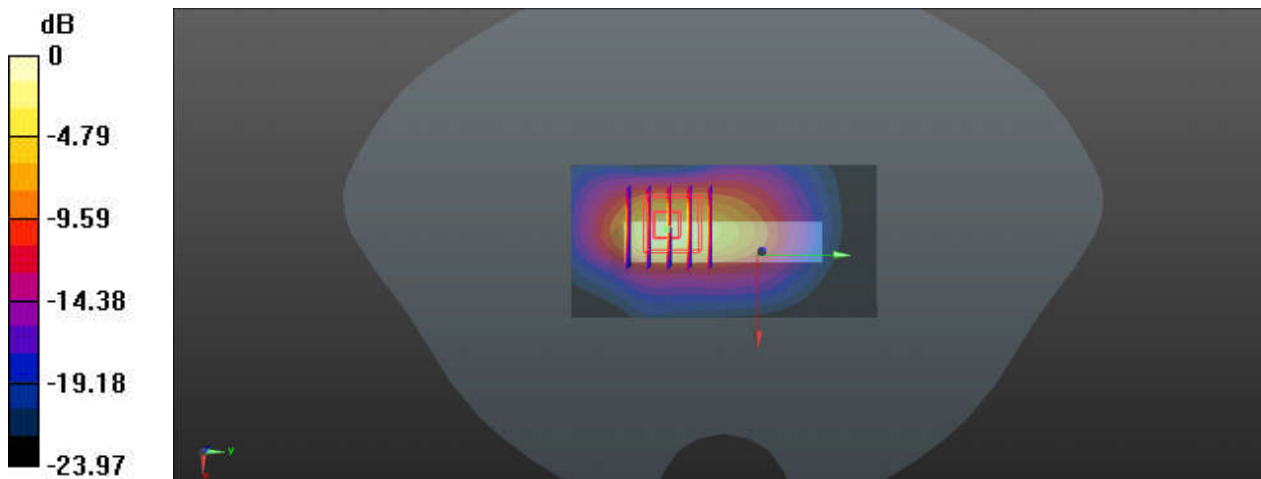

45_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch20850


Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_240414 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 37.799$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20850/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.83 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 20.02 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 2.60 W/kg
SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.376 W/kg
Maximum value of SAR (measured) = 1.93 W/kg

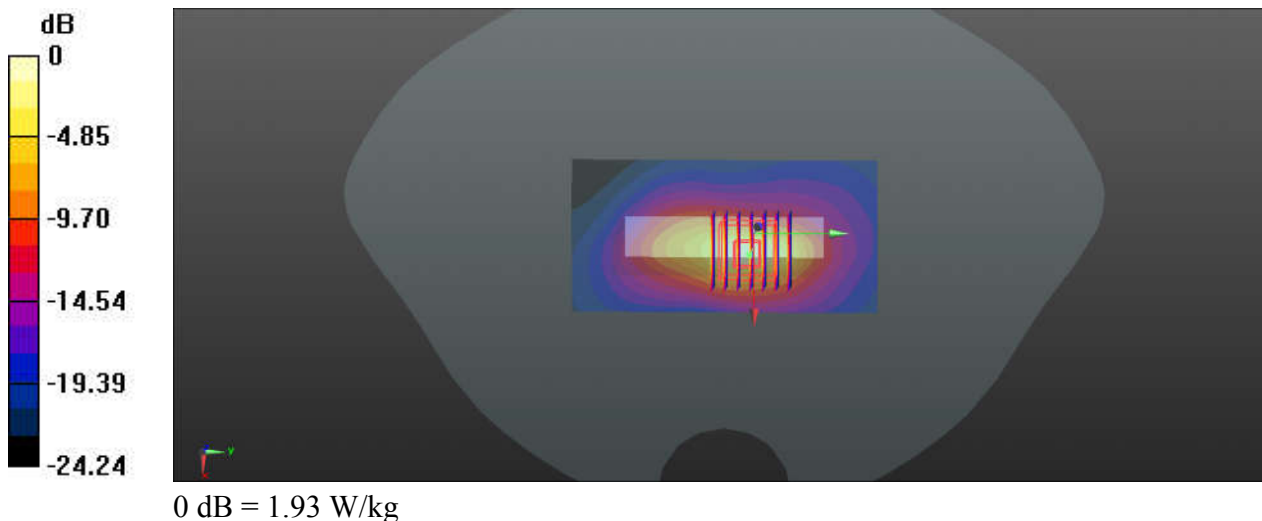

46_LTE Band 41_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch41490


Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:2.331
Medium: HSL_2600_240414 Medium parameters used: $f = 2680$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.516$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.71 W/kg

Ch41490/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.41 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.76 W/kg
SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.362 W/kg
Maximum value of SAR (measured) = 1.96 W/kg

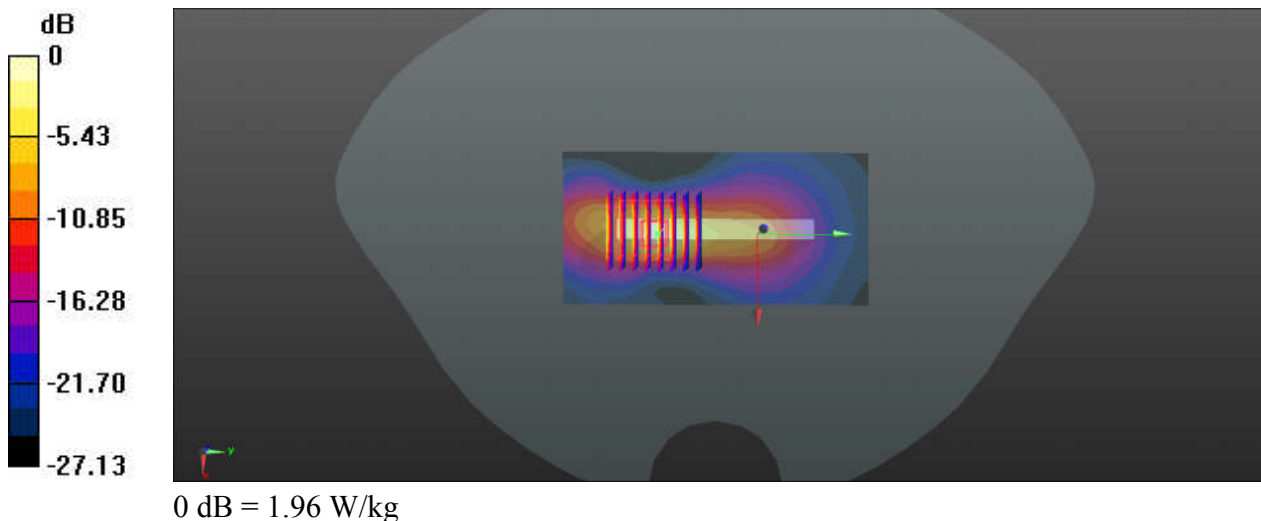

47_FR1 n7_40M_QPSK_108RB_54Offset_DFT-15_Bottom Side_5mm_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600_240414 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 37.753$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch507000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.89 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.71 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.394 W/kg
Maximum value of SAR (measured) = 1.97 W/kg

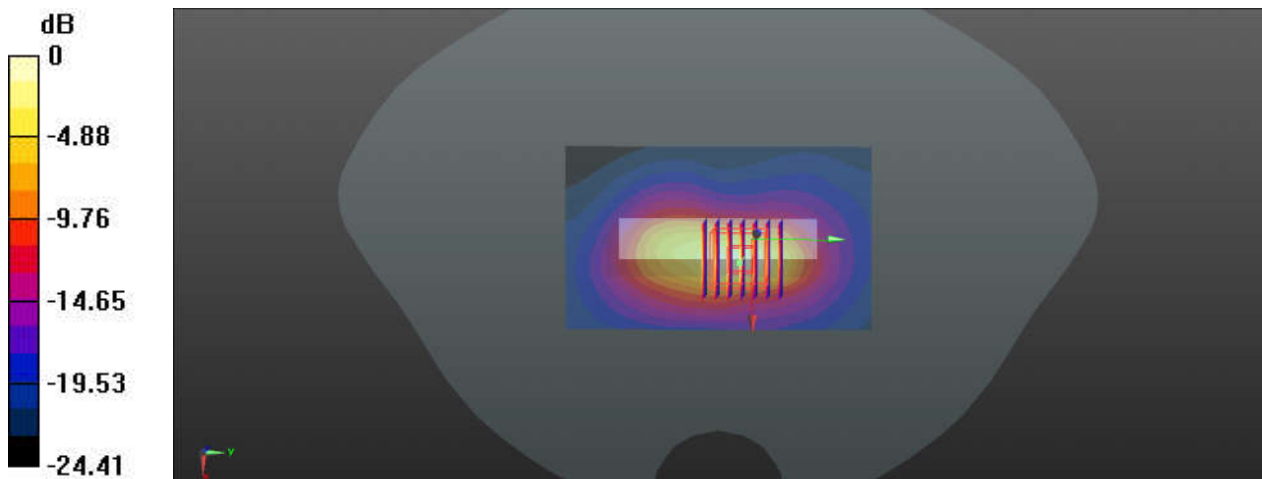

0 dB = 1.97 W/kg

48_FR1 n41_100M_QPSK_135RB_69Offset_DFT-30_Back_5mm_Ch518598


Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium: HSL_2600_240414 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 37.673$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch518598/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.96 W/kg

Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.971 V/m; Power Drift = 0 dB
Peak SAR (extrapolated) = 2.67 W/kg
SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.446 W/kg
Maximum value of SAR (measured) = 2.04 W/kg

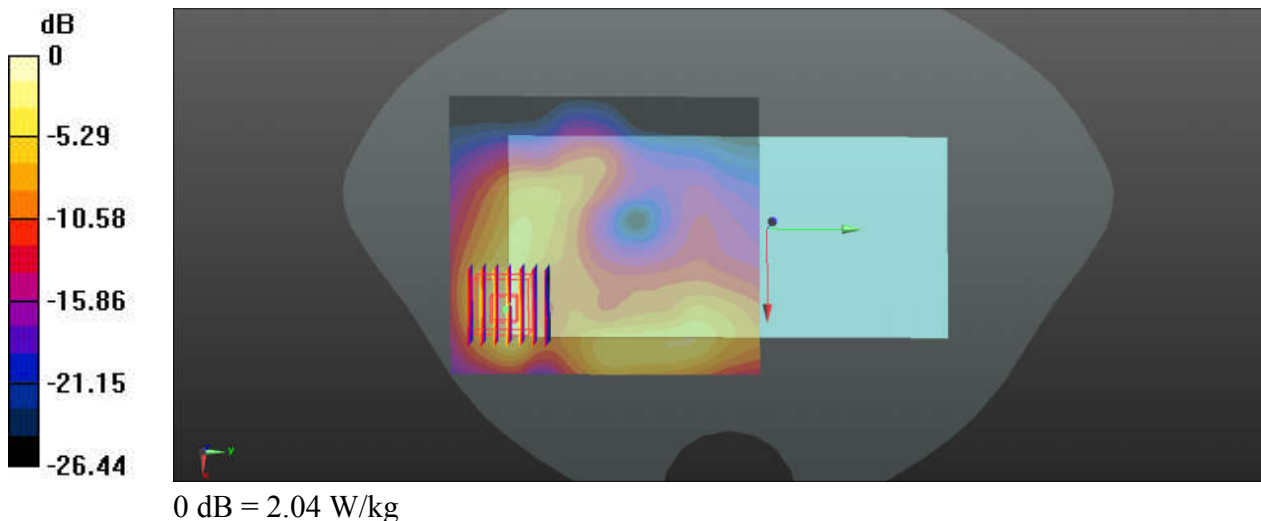

49_ LTE Band 42_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch42190


Communication System: UID 0, LTE (0); Frequency: 3460 MHz; Duty Cycle: 1:1.59
Medium: HSL_3500_240404 Medium parameters used: $f = 3460$ MHz; $\sigma = 2.827$ S/m; $\epsilon_r = 38.471$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42190/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.81 W/kg

Ch42190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 12.40 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 2.99 W/kg
SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.249 W/kg
Maximum value of SAR (measured) = 1.88 W/kg

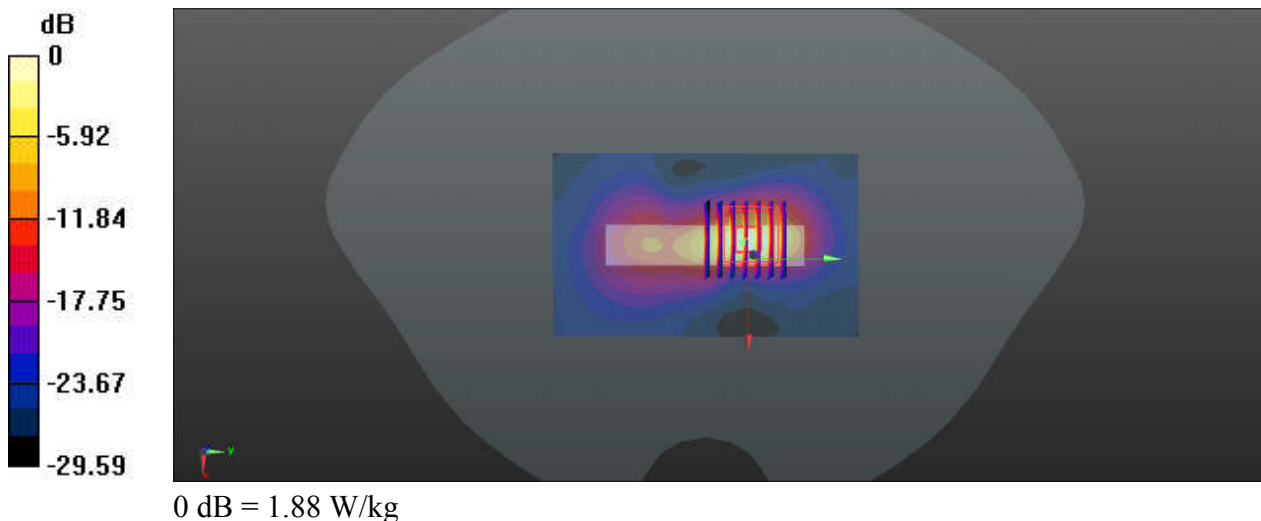

50_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Top Side_5mm_Ch656000


Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1
Medium: HSL_3900_240403 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 38.054$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.53, 6.53, 6.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch656000/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.51 W/kg

Ch656000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm
Reference Value = 8.276 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.59 W/kg
SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.257 W/kg
Maximum value of SAR (measured) = 1.75 W/kg

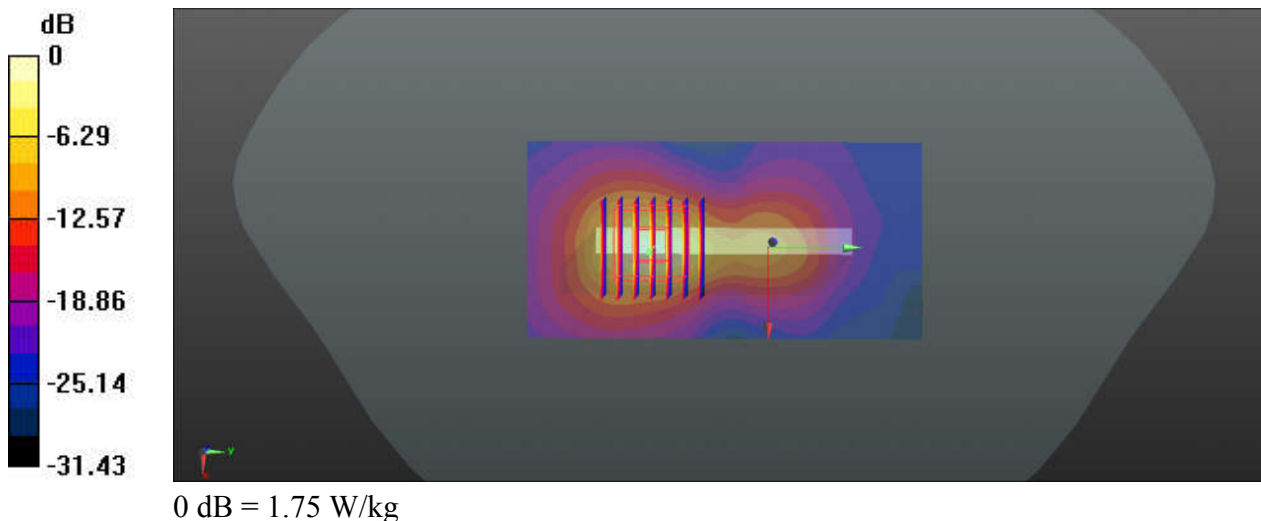

51_Bluetooth_DH5 1Mbps_Right Side_5mm_Ch39


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_240405 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 37.875$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.70 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.60 W/kg
SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.242 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

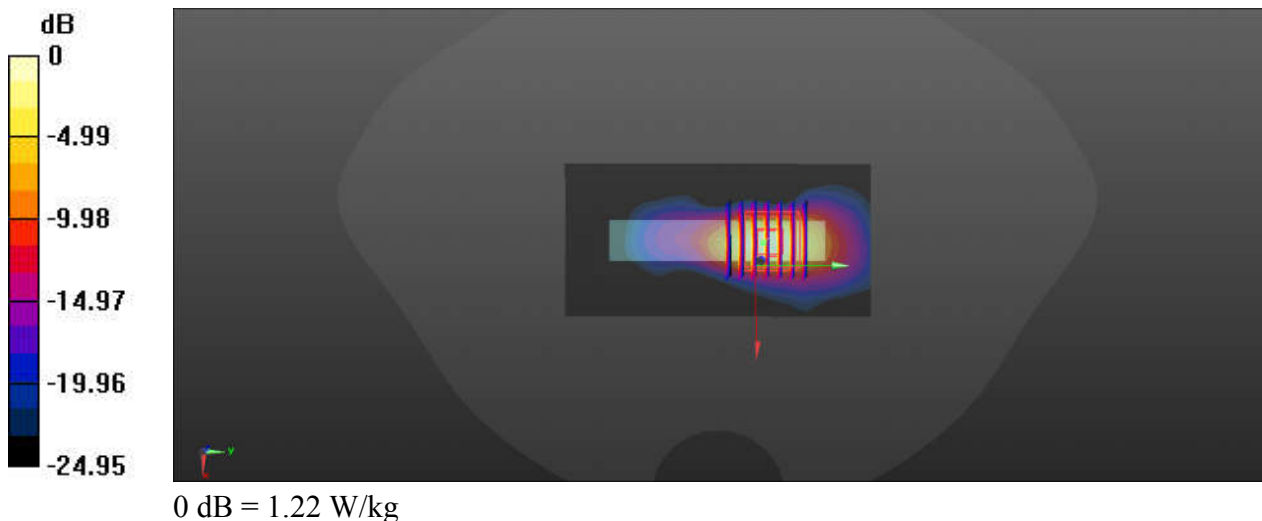

52_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015
Medium: HSL_2450_240405 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 37.585$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.66 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.58 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.330 W/kg
Maximum value of SAR (measured) = 1.58 W/kg

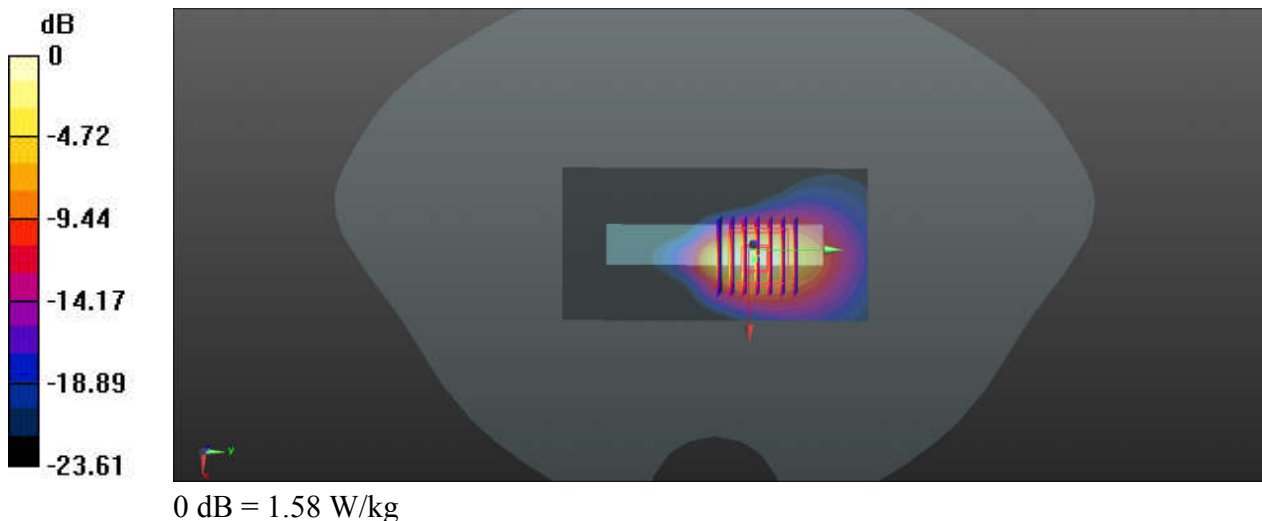

53_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch42


Communication System: UID 0, WIFI (0); Frequency: 5210 MHz; Duty Cycle: 1:1.007
Medium: HSL_5250_240411 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.553$ S/m; $\epsilon_r = 36.681$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42/Area Scan (51x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.92 W/kg

Ch42/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 11.95 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.46 W/kg
SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.257 W/kg
Maximum value of SAR (measured) = 1.87 W/kg

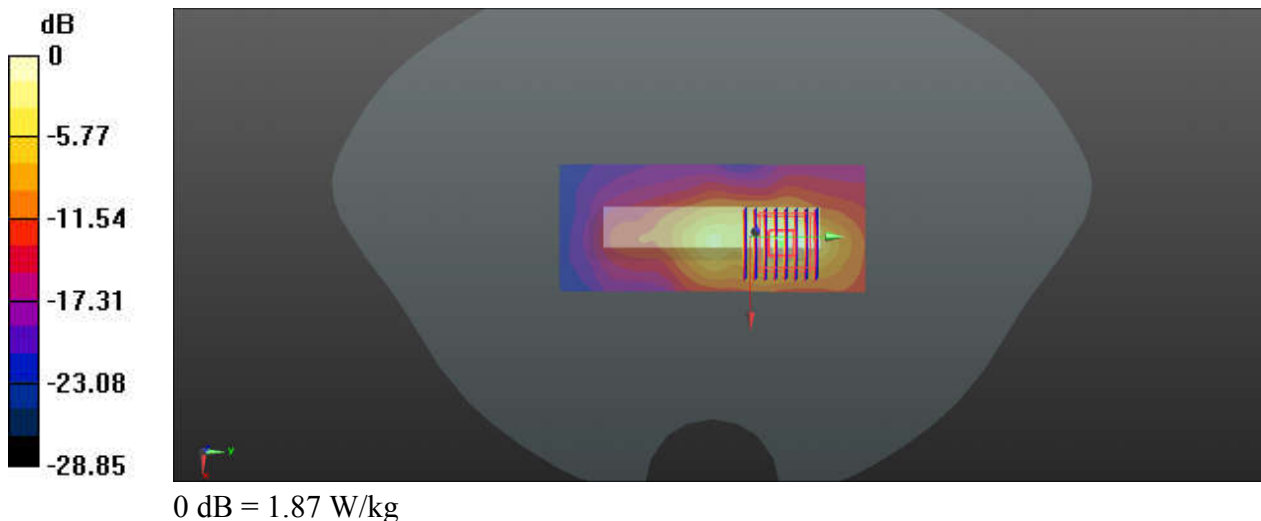

54_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155


Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.007
Medium: HSL_5750_240413 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.202$ S/m; $\epsilon_r = 35.804$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch155/Area Scan (51x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.14 W/kg

Ch155/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 10.35 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 4.56 W/kg
SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.255 W/kg
Maximum value of SAR (measured) = 2.25 W/kg

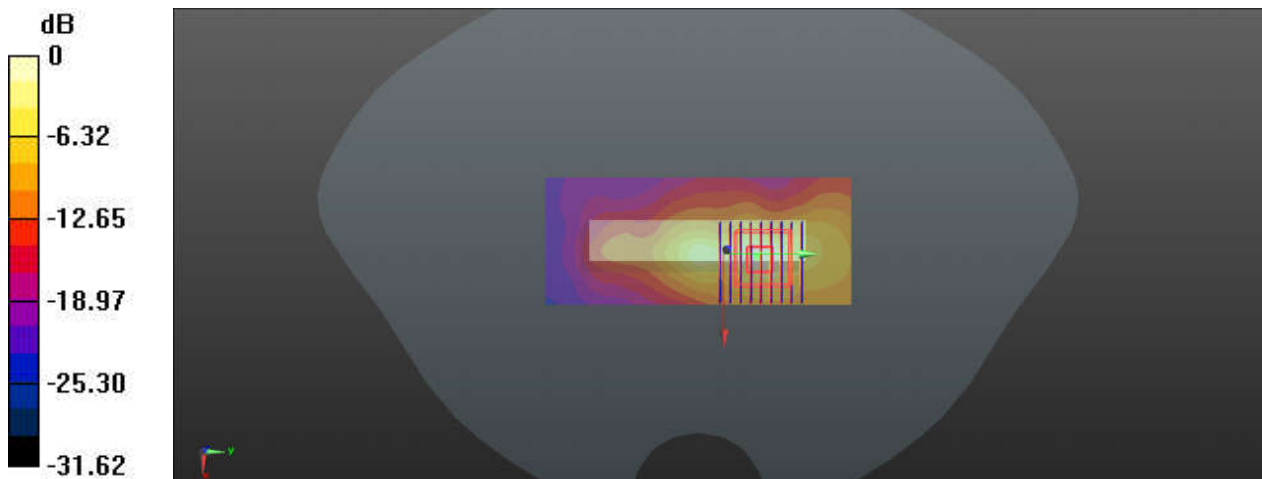

0 dB = 2.25 W/kg

55_LTE Band 71_20M_QPSK_1RB_0Offset_Back_5mm_Ch133297


Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.835$ S/m; $\epsilon_r = 42.057$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch133297/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.556 W/kg

Ch133297/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.495 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.874 W/kg
SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.240 W/kg
Maximum value of SAR (measured) = 0.565 W/kg

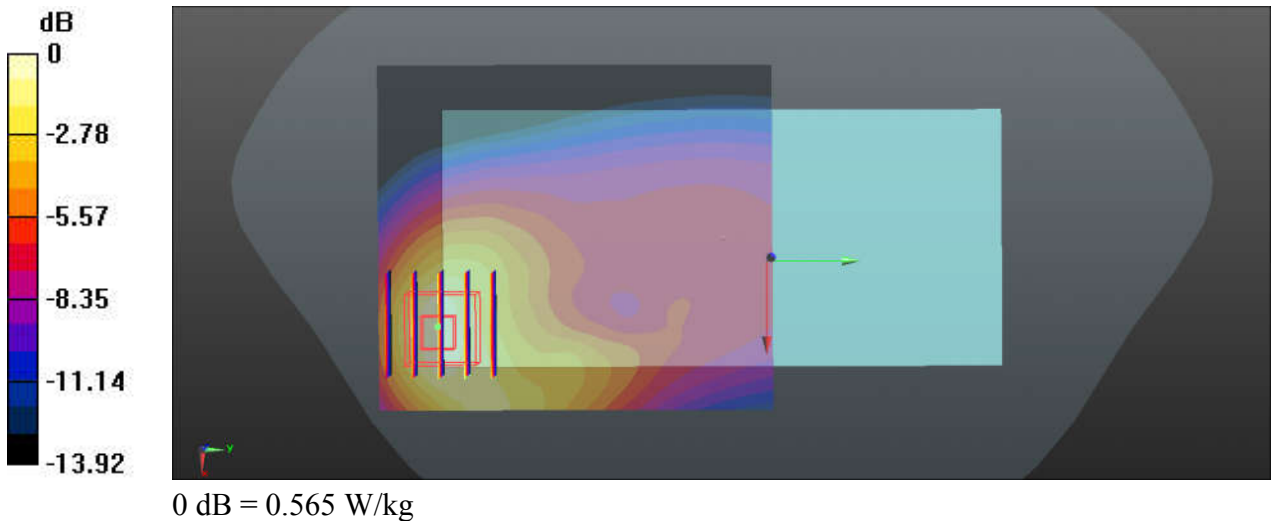

56_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095


Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 41.609$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23095/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.585 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.85 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.870 W/kg
SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.273 W/kg
Maximum value of SAR (measured) = 0.598 W/kg

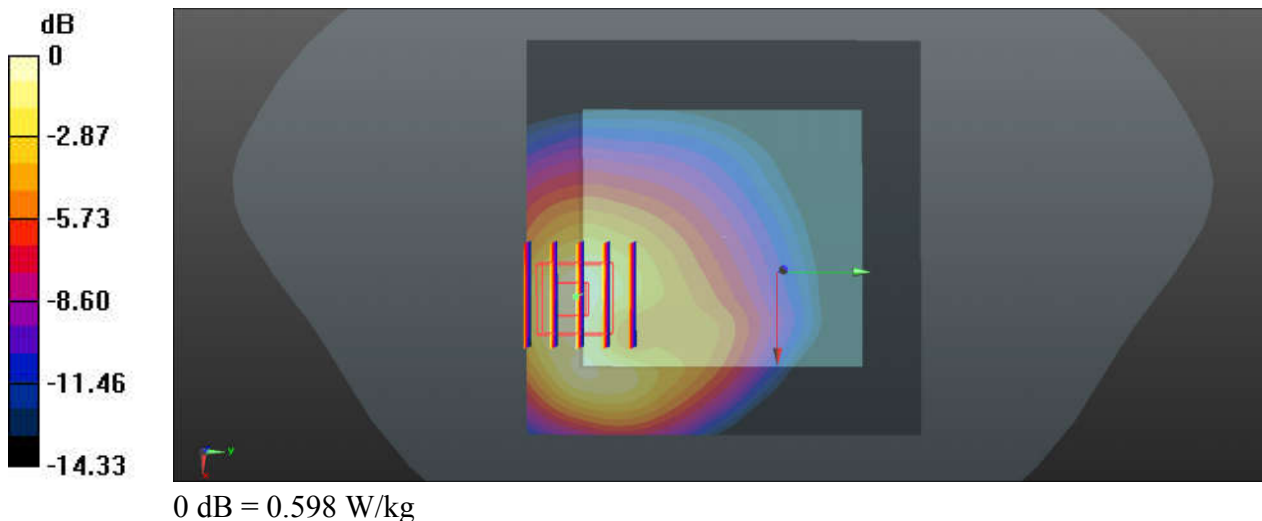

57_LTE Band 13_10M_QPSK_1RB_49Offset_Back_5mm_Ch23230

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_240410 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 39.943$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch23230/Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.787 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.39 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.628 W/kg ; SAR(10 g) = 0.355 W/kg
Maximum value of SAR (measured) = 0.811 W/kg

