

### 83\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Front\_5mm\_Ch26140


Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.411$  S/m;  $\epsilon_r = 39.279$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26140/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.18 W/kg

**Ch26140/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 0.9470 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.94 W/kg  
**SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.492 W/kg**  
Maximum value of SAR (measured) = 1.25 W/kg

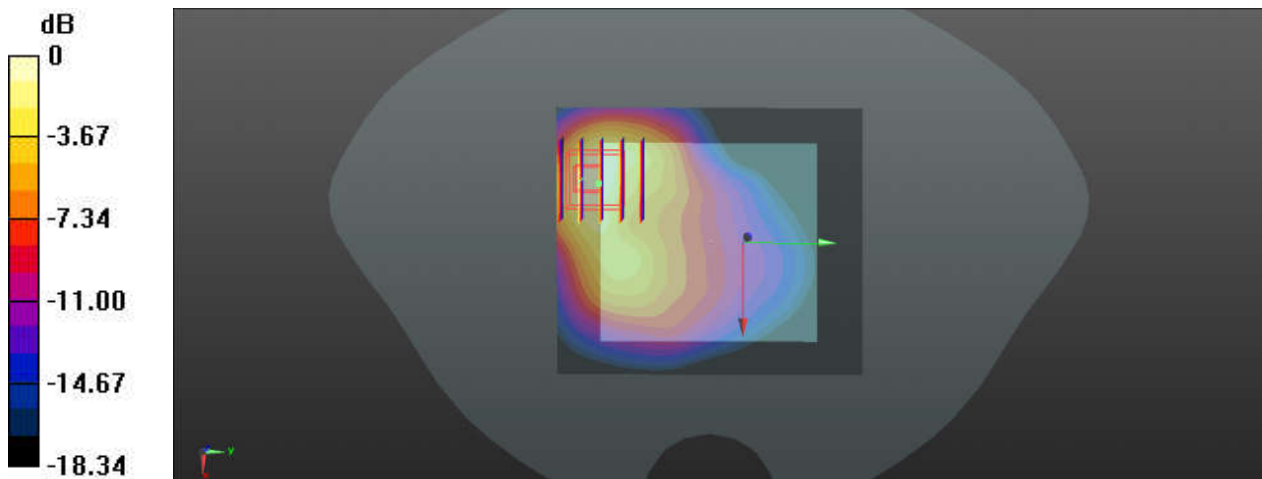

### 84\_FR1 n25\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Back\_5mm\_Ch376500


Communication System: UID 0, 5G NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.435$  S/m;  $\epsilon_r = 39.198$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376500/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.43 W/kg

**Ch376500/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.173 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 2.23 W/kg  
**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.478 W/kg**  
Maximum value of SAR (measured) = 1.46 W/kg

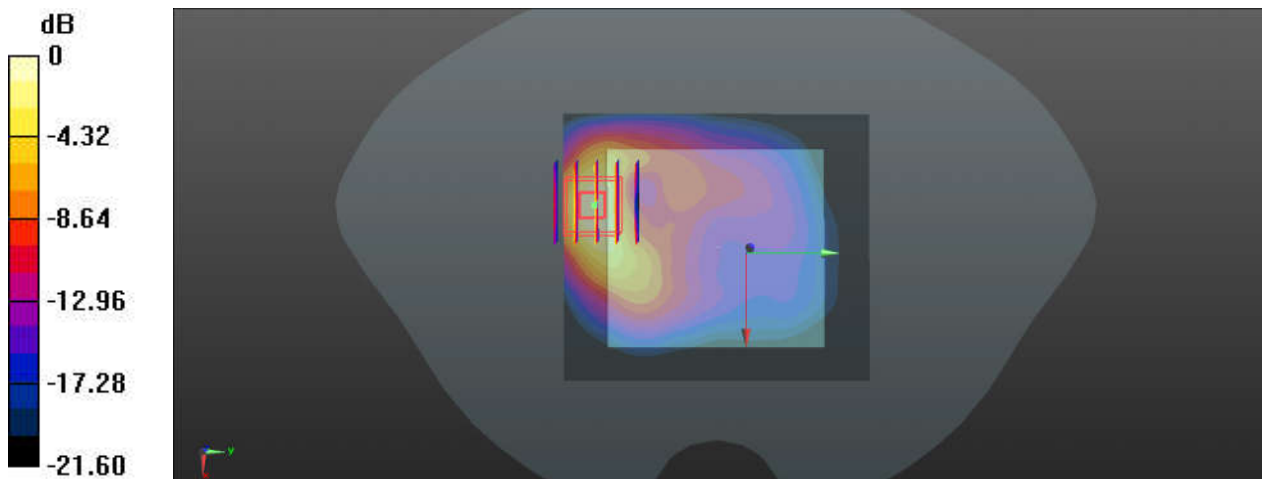

0 dB = 1.46 W/kg

### 85\_LTE Band 30\_10M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch27710


Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_240314 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.708$  S/m;  $\epsilon_r = 38.863$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.27, 8.11, 8.15); Calibrated: 2023/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch27710/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.72 W/kg

**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.448 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 2.17 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.451 W/kg**  
Maximum value of SAR (measured) = 1.75 W/kg

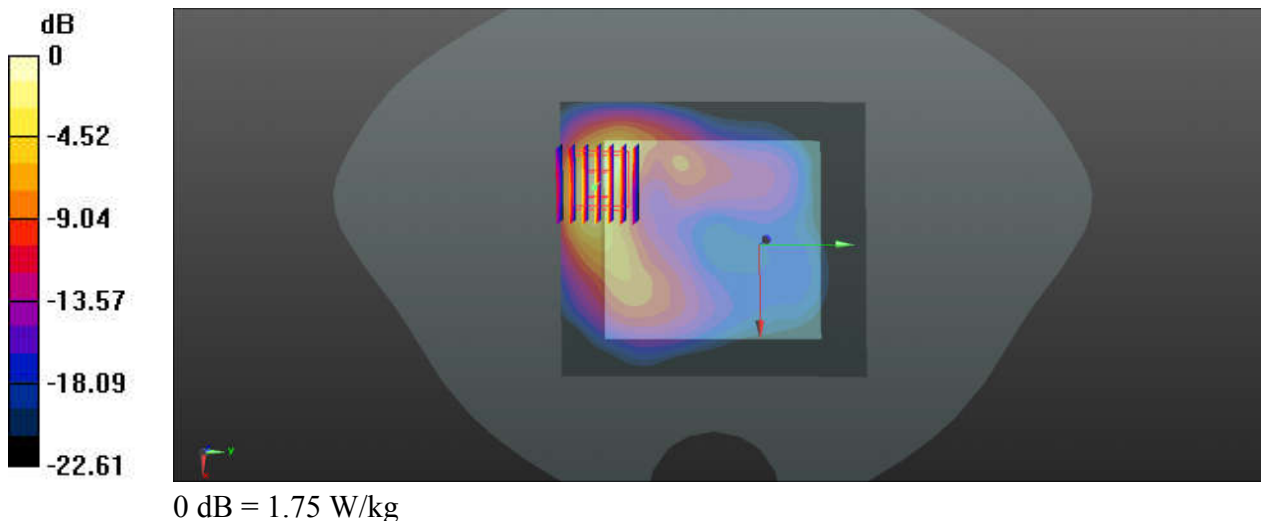

### 86\_FR1 n30\_10M\_QPSK\_1RB\_1Offset\_DFT-15\_Back\_5mm\_Ch462000


Communication System: UID 0, 5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_240314 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.708$  S/m;  $\epsilon_r = 38.863$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.27, 8.11, 8.15); Calibrated: 2023/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch462000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.74 W/kg

**Ch462000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.193 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 2.26 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.495 W/kg**  
Maximum value of SAR (measured) = 1.82 W/kg

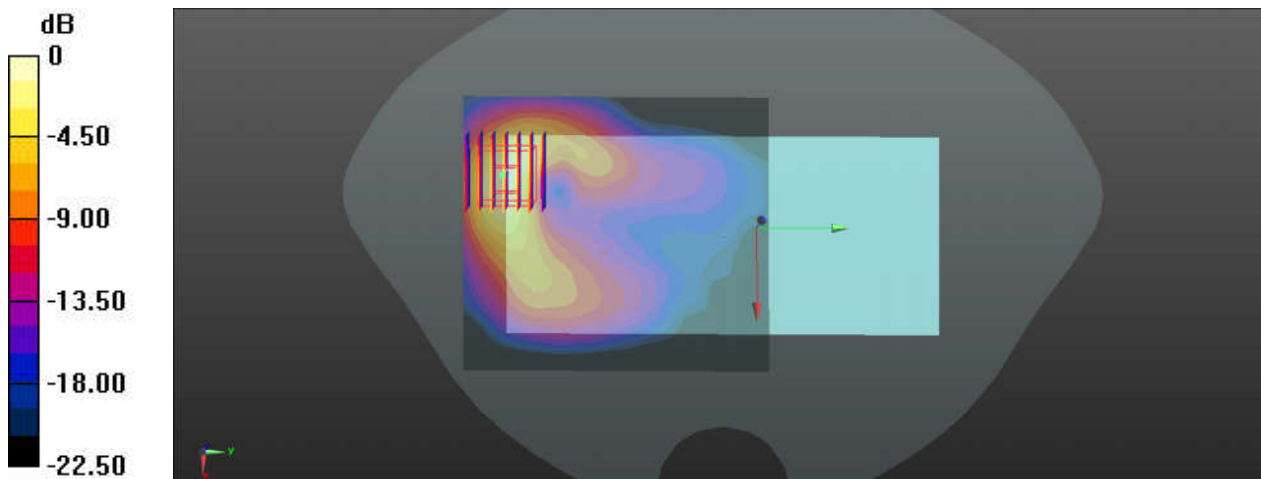

0 dB = 1.82 W/kg

### 87\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch21100


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.932$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch21100/Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.91 W/kg

**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.550 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 2.39 W/kg  
**SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.395 W/kg**  
Maximum value of SAR (measured) = 1.82 W/kg

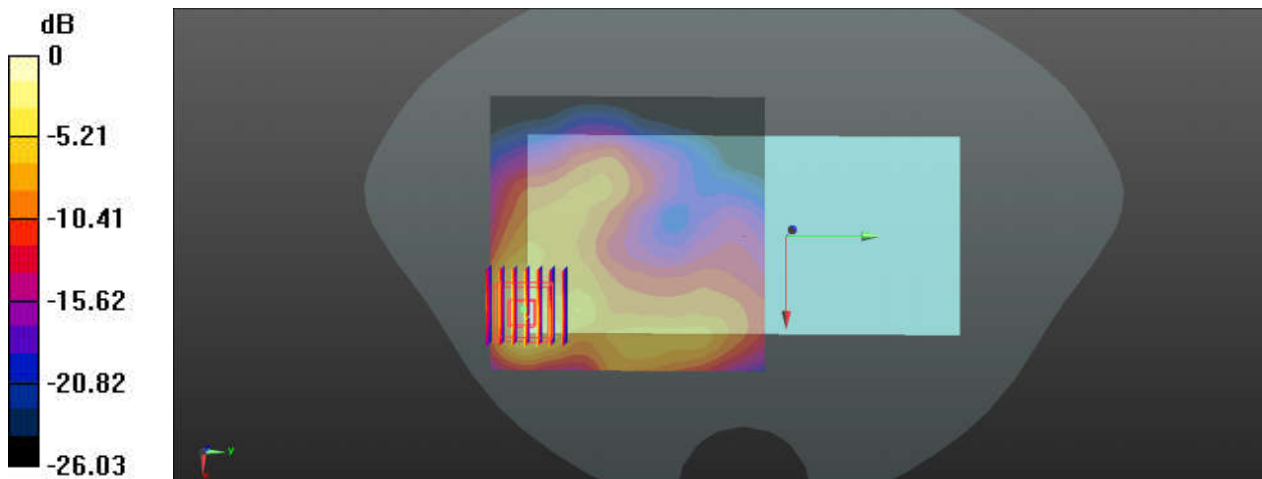

0 dB = 1.82 W/kg

### 88\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch41490


Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:2.331  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.023$  S/m;  $\epsilon_r = 37.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch41490/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.94 W/kg

**Ch41490/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.349 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 2.65 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.411 W/kg**  
Maximum value of SAR (measured) = 1.93 W/kg

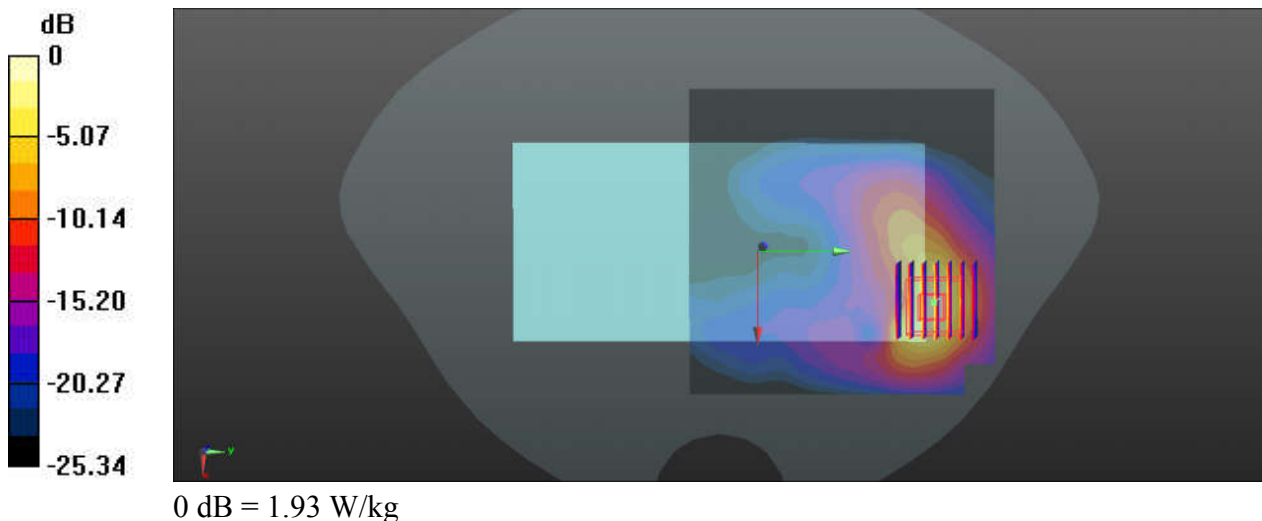

### 89\_FR1 n7\_40M\_QPSK\_108RB\_54Offset\_DFT-15\_Back\_5mm\_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.932$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.79 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.359 V/m; Power Drift = 0.1 dB  
Peak SAR (extrapolated) = 2.39 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.456 W/kg**  
Maximum value of SAR (measured) = 1.80 W/kg

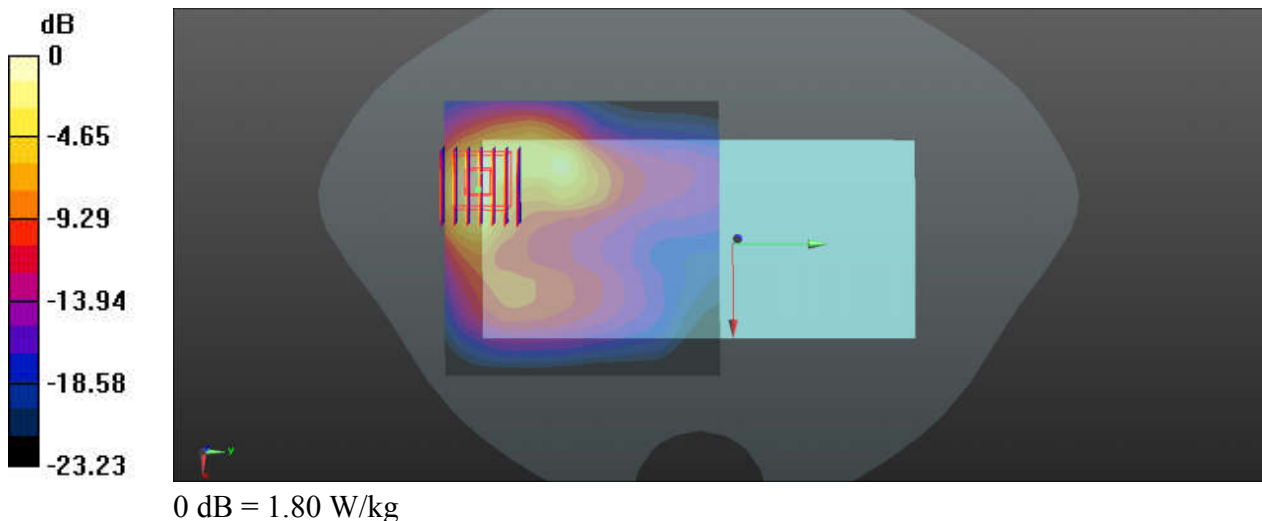

### 90\_FR1 n41\_100M\_QPSK\_135RB\_69Offset\_DFT-30\_Back\_5mm\_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 37.843$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch518598/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.94 W/kg

**Ch518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.197 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 2.46 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.515 W/kg**  
Maximum value of SAR (measured) = 1.87 W/kg

**Ch518598/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.197 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 2.42 W/kg  
**SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.426 W/kg**  
Maximum value of SAR (measured) = 1.79 W/kg

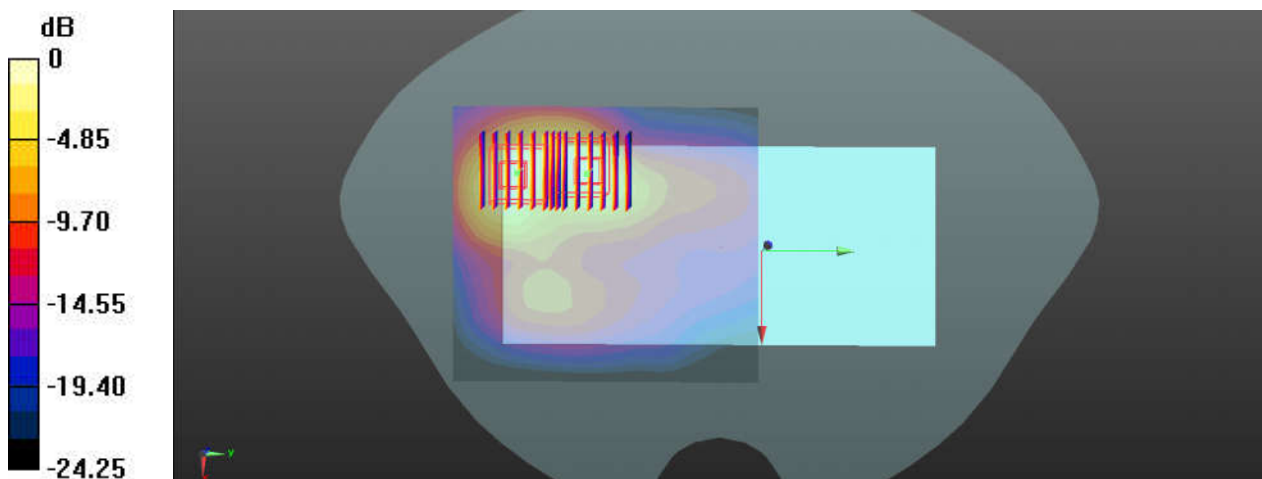

0 dB = 1.79 W/kg = 2.53 dBW/kg



### 91\_LTE Band 48\_20M\_QPSK\_1RB\_0Offset\_Front\_5mm\_Ch56640


Communication System: UID 0, LTE (0); Frequency: 3690 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_3700\_240327 Medium parameters used:  $f = 3690$  MHz;  $\sigma = 3.038$  S/m;  $\epsilon_r = 39.429$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.73, 6.73, 6.73); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch56640/Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 2.01 W/kg

**Ch56640/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 3.115 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 3.23 W/kg  
**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.391 W/kg**  
Maximum value of SAR (measured) = 2.27 W/kg

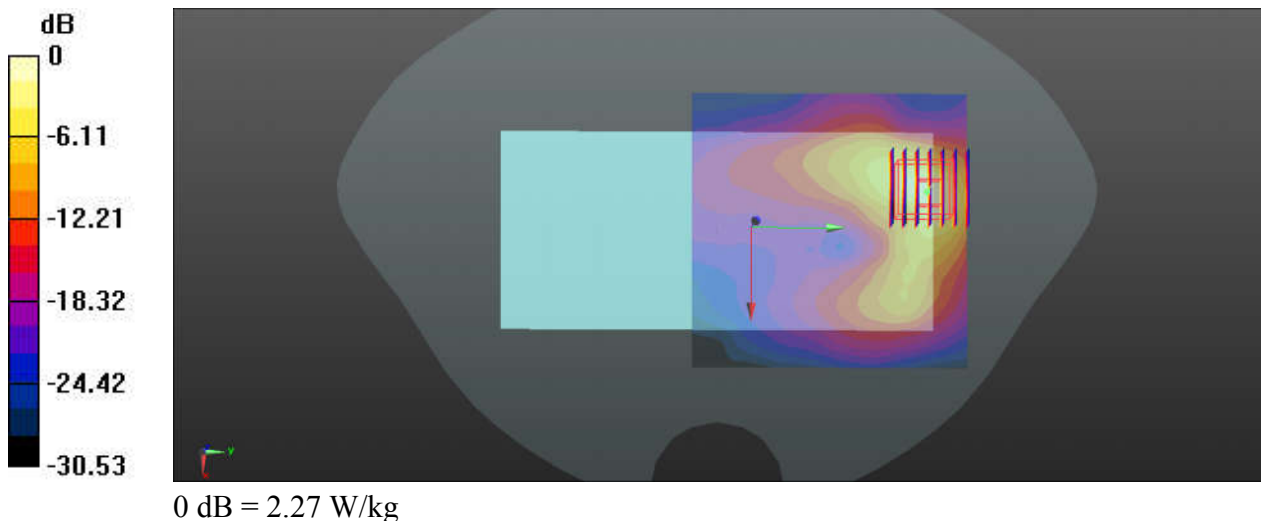

### 92\_FR1 n48\_40M\_QPSK\_1RB\_1Offset\_DFT-30\_Front\_5mm\_Ch645332


Communication System: UID 0, 5G NR (0); Frequency: 3679.98 MHz; Duty Cycle: 1:1  
Medium: HSL\_3700\_240327 Medium parameters used:  $f = 3680$  MHz;  $\sigma = 3.029$  S/m;  $\epsilon_r = 39.437$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.73, 6.73, 6.73); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch645332/Area Scan (101x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.92 W/kg

**Ch645332/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 2.581 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 2.89 W/kg  
**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.357 W/kg**  
Maximum value of SAR (measured) = 2.00 W/kg

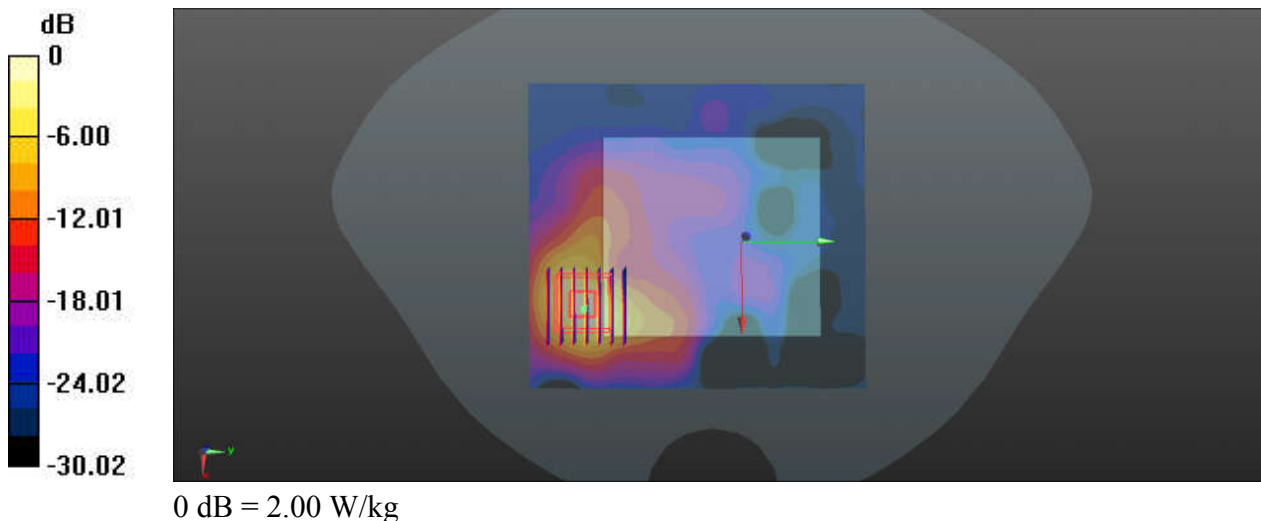

### 93\_FR1 n77\_100M\_QPSK\_135RB\_69Offset\_DFT-30\_Front\_5mm\_Ch633332

Communication System: UID 0, 5G NR (0); Frequency: 3499.98 MHz; Duty Cycle: 1:1  
Medium: HSL\_3500\_240326 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.889$  S/m;  $\epsilon_r = 39.656$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch633332/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.72 W/kg

**Ch633332/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 2.089 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.37 W/kg  
**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.361 W/kg**  
Maximum value of SAR (measured) = 2.10 W/kg

**Ch633332/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 2.089 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 1.26 W/kg  
**SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.243 W/kg**  
Maximum value of SAR (measured) = 0.927 W/kg

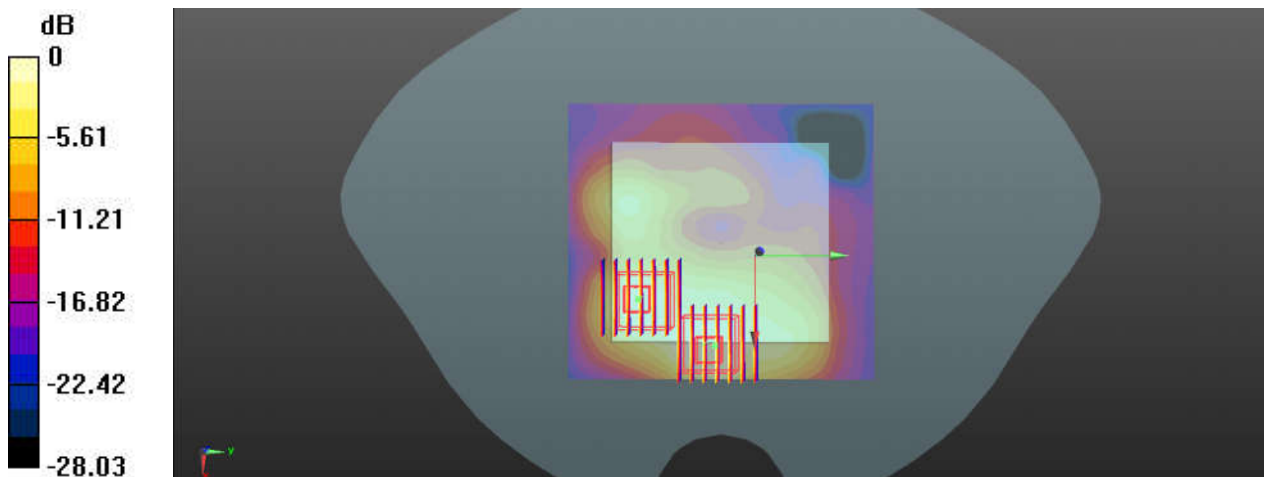

0 dB = 0.927 W/kg

### 94\_Bluetooth\_DH5 1Mbps\_Front\_5mm\_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_240325 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.681$  S/m;  $\epsilon_r = 40.955$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch0/Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.711 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.356 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.46 W/kg  
**SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.231 W/kg**  
Maximum value of SAR (measured) = 1.10 W/kg

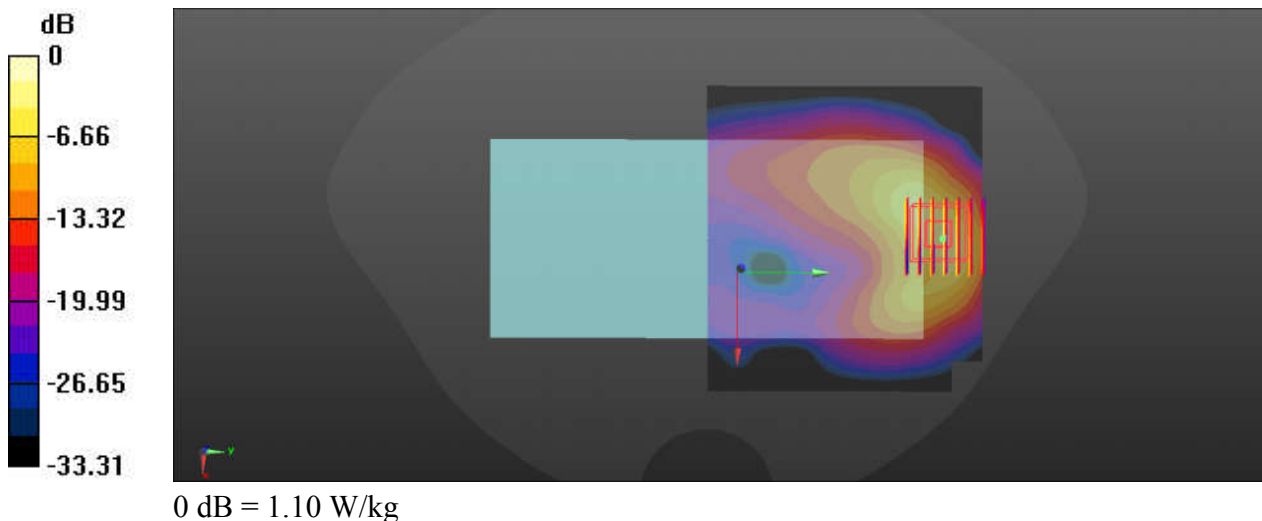

### 95\_WLAN2.4GHz\_802.11b 1Mbps\_Front\_5mm\_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015  
Medium: HSL\_2450\_240325 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 38.581$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch11/Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.63 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.369 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.15 W/kg  
**SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.398 W/kg**  
Maximum value of SAR (measured) = 1.70 W/kg

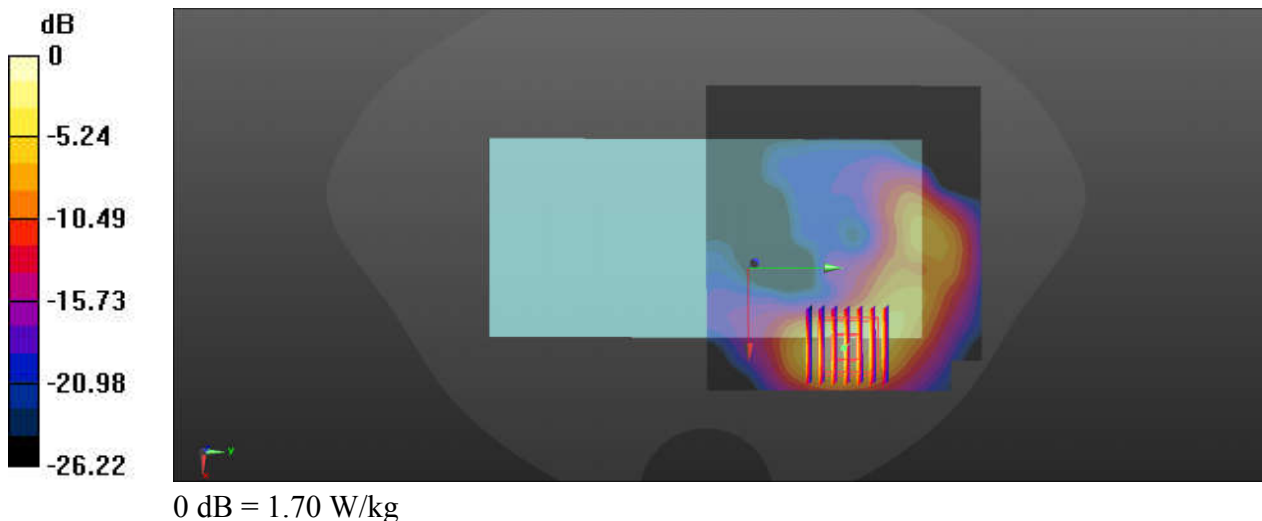

### 96\_WLAN5GHz\_802.11n-HT40 MCS0\_Front\_5mm\_Ch54


Communication System: UID 0, WIFI (0); Frequency: 5270 MHz; Duty Cycle: 1:1  
Medium: HSL\_5250\_240329 Medium parameters used:  $f = 5270$  MHz;  $\sigma = 4.521$  S/m;  $\epsilon_r = 35.947$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch54/Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.21 W/kg

**Ch54/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 7.890 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 3.18 W/kg  
**SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.292 W/kg**  
Maximum value of SAR (measured) = 1.89 W/kg

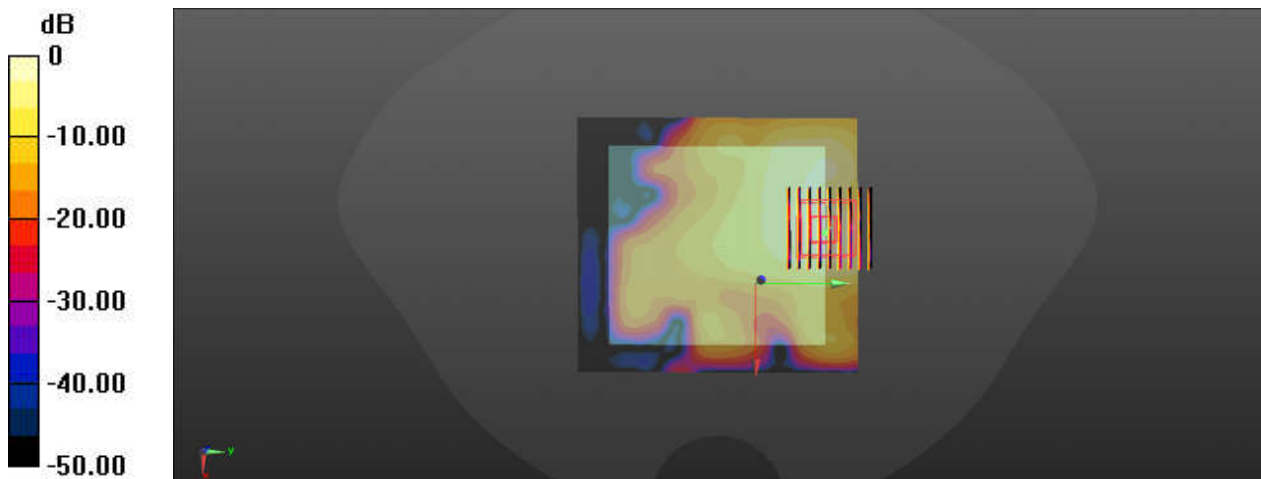

0 dB = 1.89 W/kg

### 97\_WLAN5GHz\_802.11n-HT40 MCS0\_Back\_5mm\_Ch134

Communication System: UID 0, WIFI (0); Frequency: 5670 MHz; Duty Cycle: 1:1  
Medium: HSL\_5600\_240330 Medium parameters used:  $f = 5670$  MHz;  $\sigma = 4.911$  S/m;  $\epsilon_r = 35.423$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch134/Area Scan (111x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.17 W/kg

**Ch134/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.133 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 3.60 W/kg  
**SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.273 W/kg**  
Maximum value of SAR (measured) = 2.05 W/kg

**Ch134/Zoom Scan (8x8x7)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.133 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.78 W/kg  
**SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.212 W/kg**  
Maximum value of SAR (measured) = 1.49 W/kg

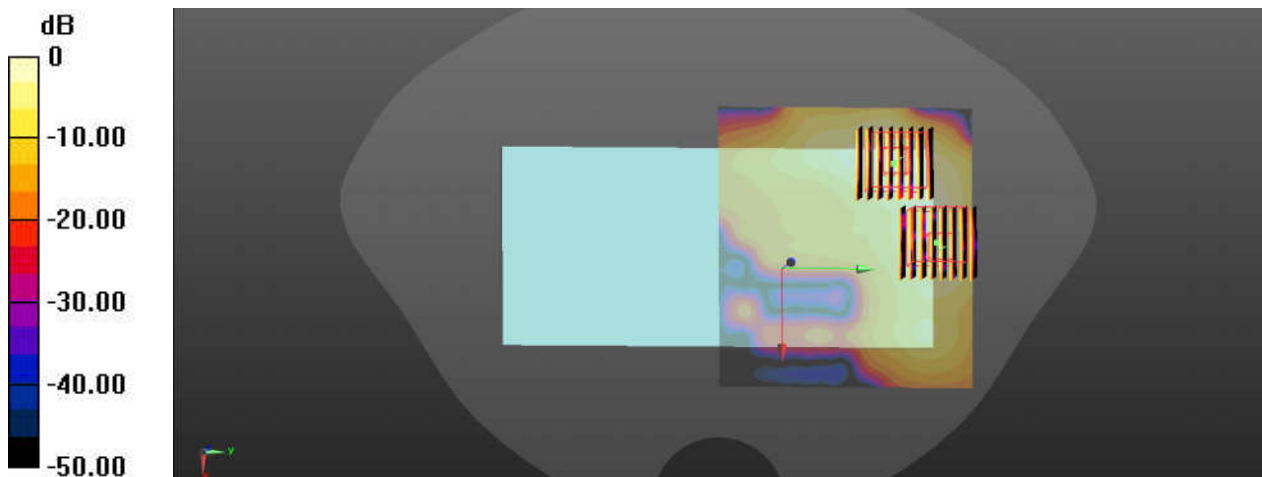

0 dB = 1.49 W/kg

### 98\_WLAN5GHz\_802.11n-HT40 MCS0\_Back\_5mm\_Ch159

Communication System: UID 0, WIFI (0); Frequency: 5795 MHz; Duty Cycle: 1:1  
Medium: HSL\_5750\_240331 Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.036$  S/m;  $\epsilon_r = 35.267$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch159/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.12 W/kg

**Ch159/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.257 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 3.74 W/kg  
**SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.279 W/kg**  
Maximum value of SAR (measured) = 2.11 W/kg

**Ch159/Zoom Scan (8x8x7)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.257 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 2.48 W/kg  
**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.159 W/kg**  
Maximum value of SAR (measured) = 1.31 W/kg

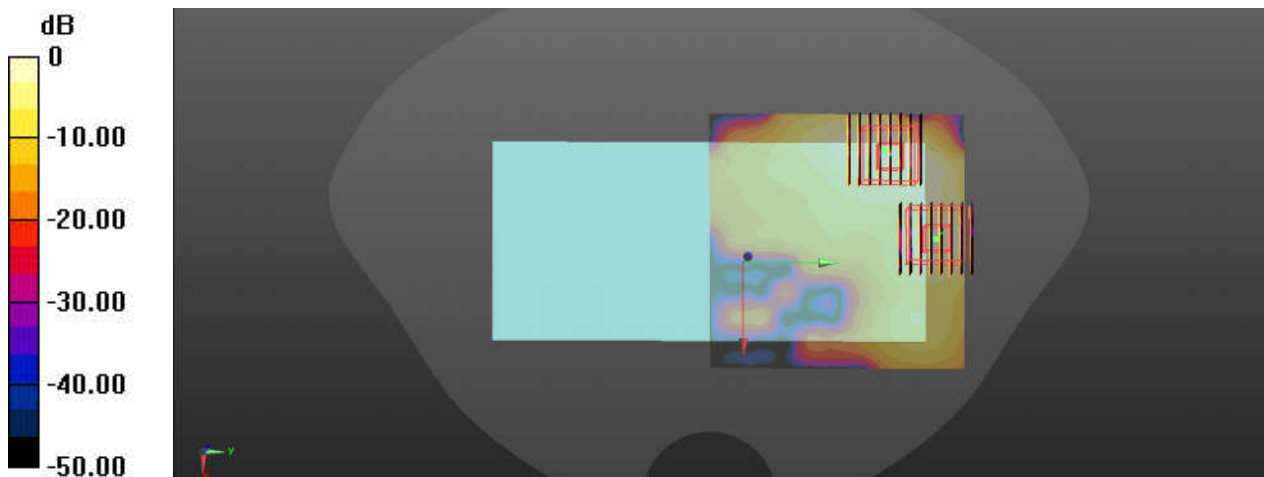

0 dB = 1.31 W/kg



### 99\_WCDMA IV\_RMC 12.2Kbps\_Left Side\_0mm\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240306 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.378 \text{ S/m}$ ;  $\epsilon_r = 41.468$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1513/Area Scan (41x131x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 7.24 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 33.63 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 15.1 W/kg  
**SAR(1 g) = 5.64 W/kg; SAR(10 g) = 2.16 W/kg**  
Maximum value of SAR (measured) = 8.37 W/kg

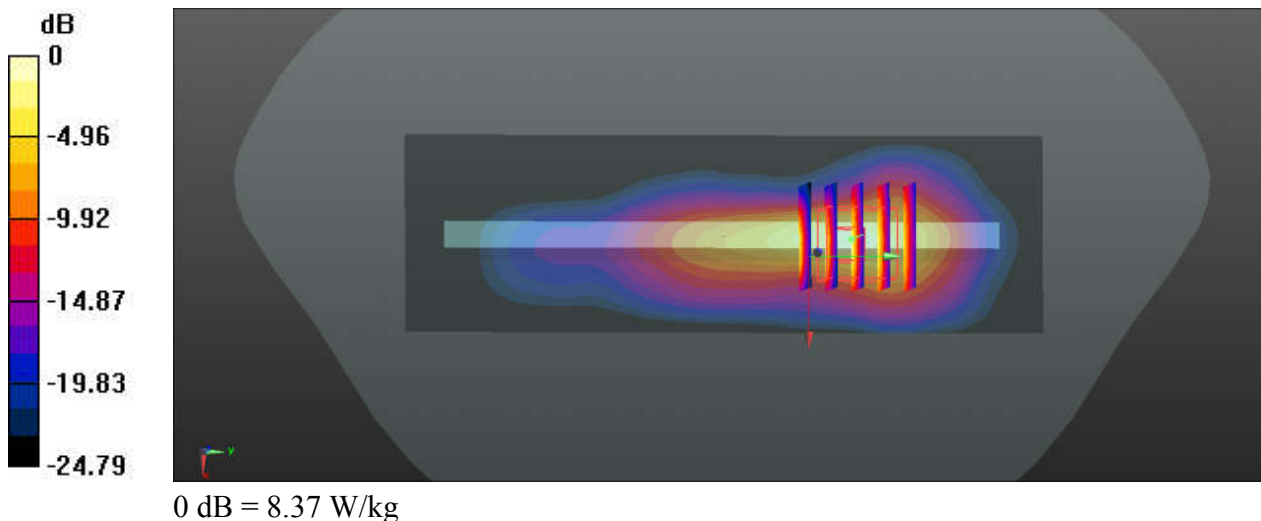

### 100\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Front\_0mm\_Ch132572


Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240306 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.389$  S/m;  $\epsilon_r = 41.438$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132572/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 8.75 W/kg

**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.768 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 14.5 W/kg  
**SAR(1 g) = 5.74 W/kg; SAR(10 g) = 2.38 W/kg**  
Maximum value of SAR (measured) = 11.7 W/kg

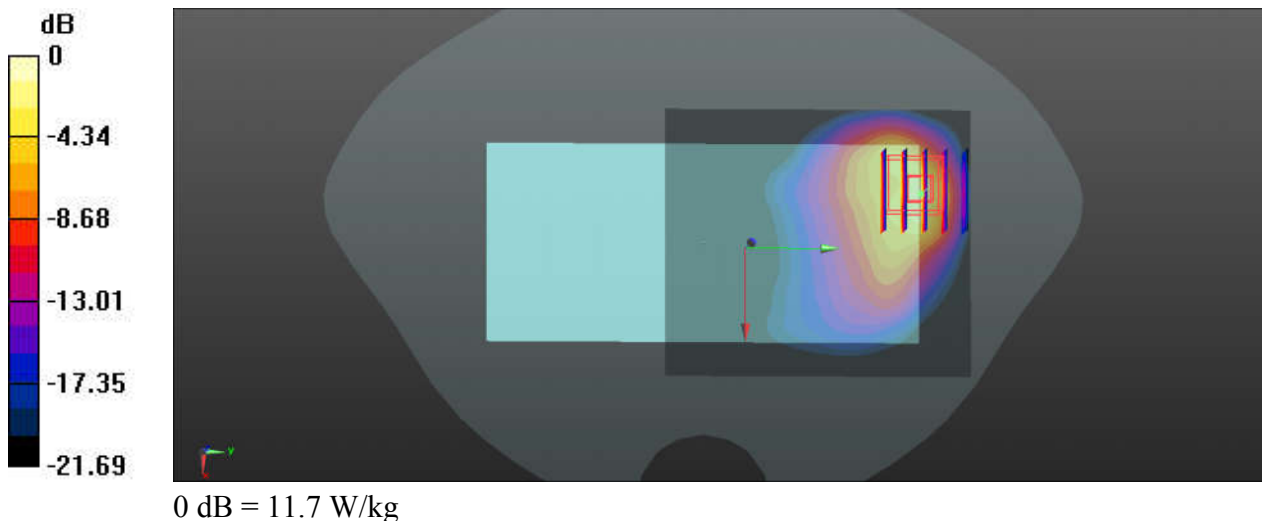

### 101\_FR1 n66\_40M\_QPSK\_108RB\_54Offset\_DFT-15\_Back\_0mm\_Ch349000


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240306 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.476$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch349000/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 10.3 W/kg

**Ch349000/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 23.40 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 13.9 W/kg  
**SAR(1 g) = 5.79 W/kg; SAR(10 g) = 2.45 W/kg**  
Maximum value of SAR (measured) = 9.36 W/kg

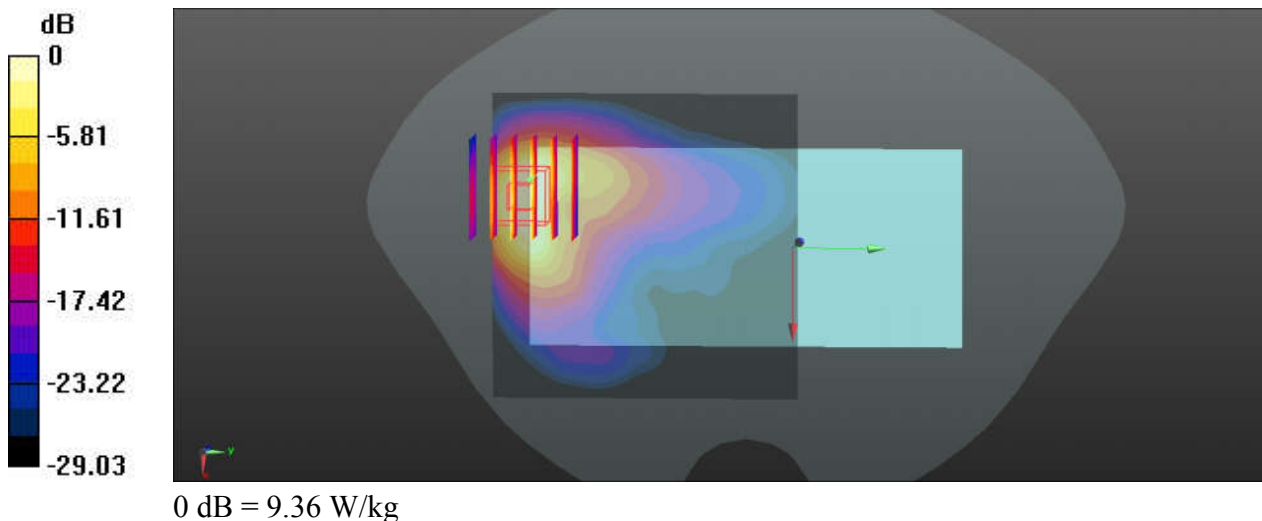

### 102\_FR1 n70\_15M\_QPSK\_36RB\_22Offset\_DFT-15\_Left Side\_0mm\_Ch340500


Communication System: UID 0, 5G NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240306 Medium parameters used:  $f = 1702.5$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 41.543$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch340500/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 12.7 W/kg

**Ch340500/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 44.84 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 28.2 W/kg  
**SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.76 W/kg**  
Maximum value of SAR (measured) = 21.7 W/kg

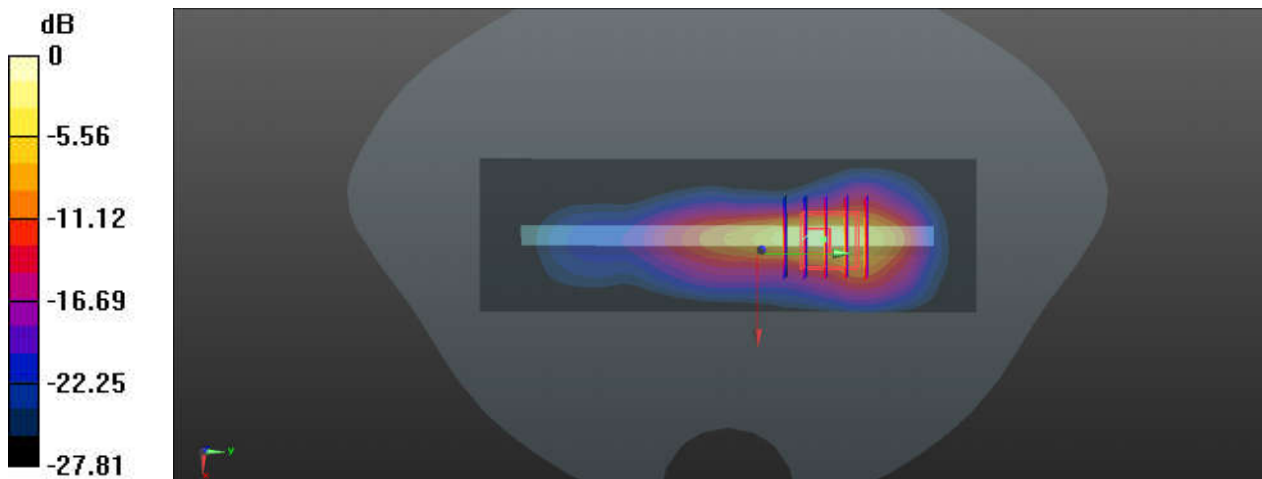

0 dB = 21.7 W/kg

### 103\_GSM1900\_GPRS (3 Tx slots)\_Front\_0mm\_Ch512


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.401$  S/m;  $\epsilon_r = 39.311$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch512/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.84 W/kg

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.035 V/m; Power Drift = 0 dB  
Peak SAR (extrapolated) = 5.81 W/kg  
**SAR(1 g) = 2.29 W/kg; SAR(10 g) = 0.973 W/kg**  
Maximum value of SAR (measured) = 2.77 W/kg

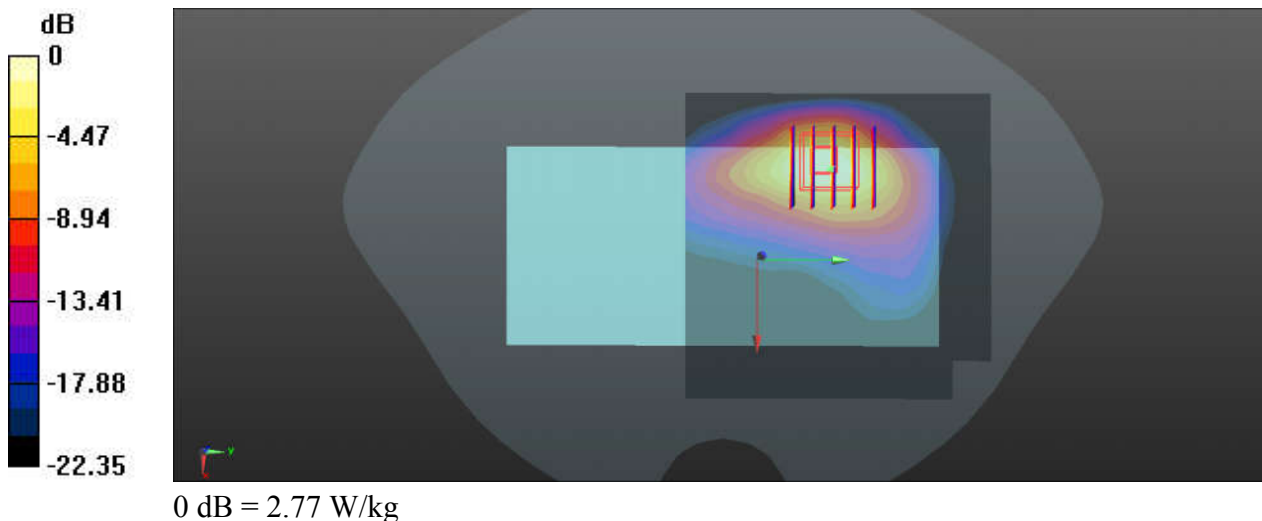

### 104\_WCDMA II\_RMC 12.2Kbps\_Back\_0mm\_Ch9400


Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 39.205$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9400/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 6.68 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.255 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 11.0 W/kg  
**SAR(1 g) = 5.19 W/kg; SAR(10 g) = 2.4 W/kg**  
Maximum value of SAR (measured) = 7.17 W/kg

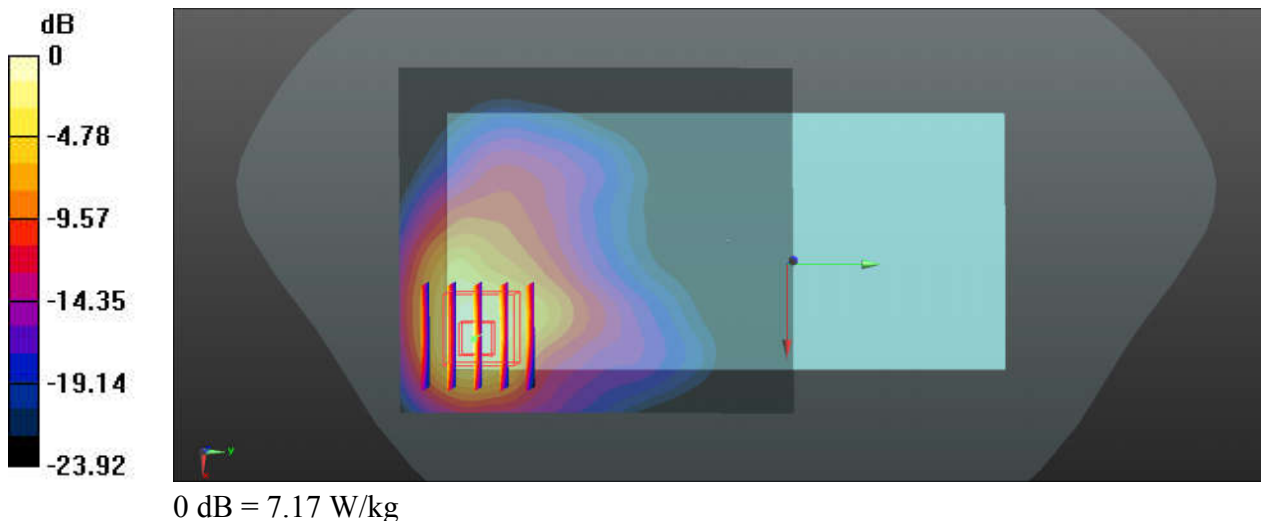

### 105\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_0mm\_Ch26590


Communication System: UID 0, LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.458$  S/m;  $\epsilon_r = 39.117$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26590/Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 15.9 W/kg

**Ch26590/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 49.41 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 20.0 W/kg  
**SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.65 W/kg**  
Maximum value of SAR (measured) = 15.2 W/kg

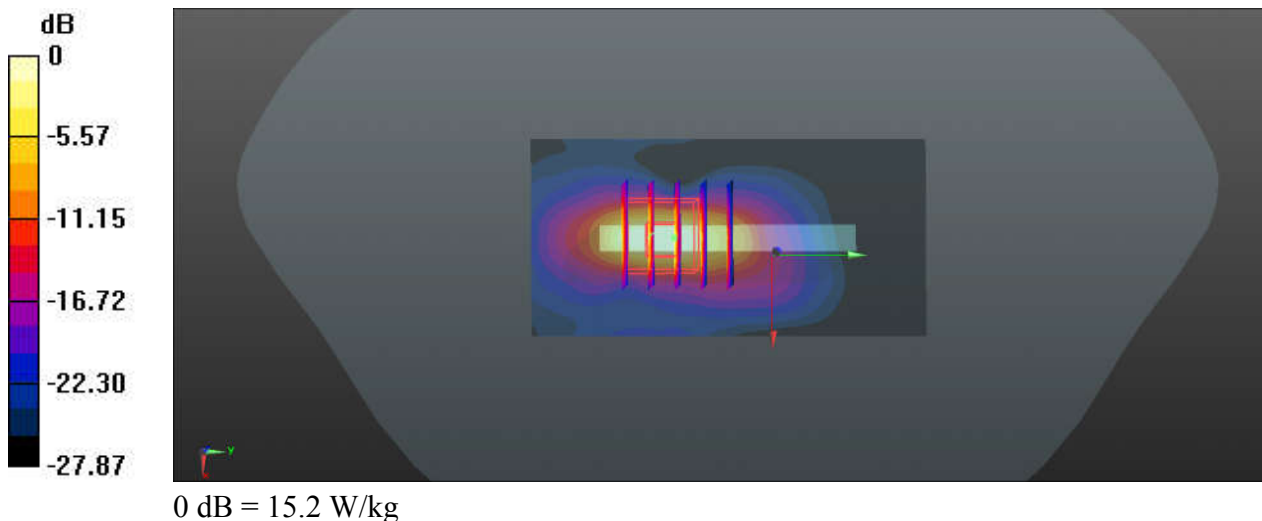

### 106\_FR1 n25\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Back\_0mm\_Ch376500


Communication System: UID 0, 5G NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240312 Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.435$  S/m;  $\epsilon_r = 39.198$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376500/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 8.83 W/kg

**Ch376500/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.906 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 17.6 W/kg  
**SAR(1 g) = 6.22 W/kg; SAR(10 g) = 2.5 W/kg**  
Maximum value of SAR (measured) = 13.1 W/kg

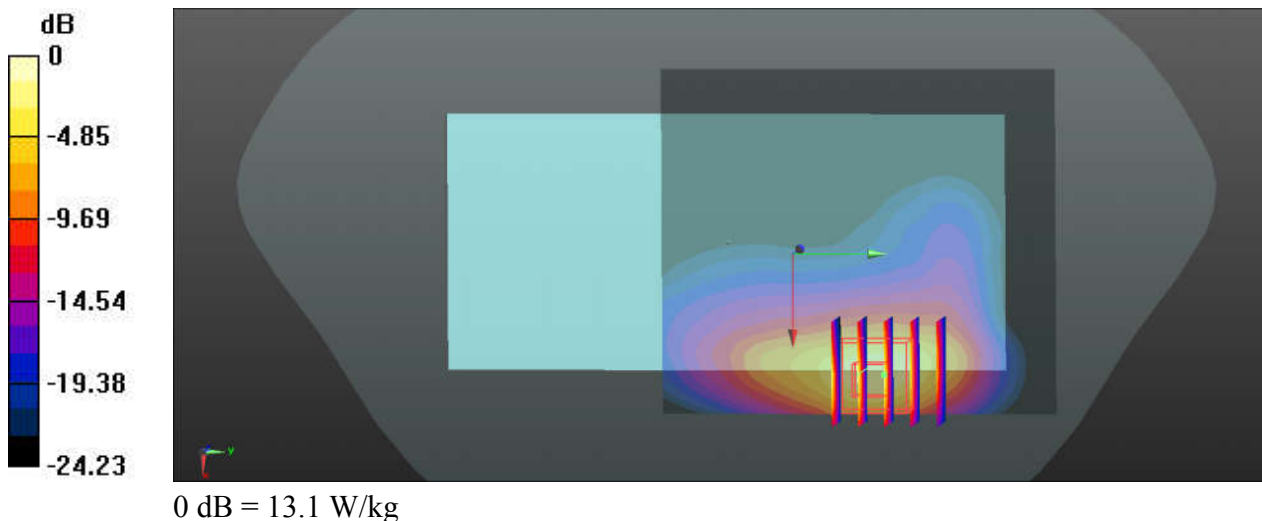



### 107\_LTE Band 30\_10M\_QPSK\_1RB\_0Offset\_Front\_0mm\_Ch27710


Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_240314 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.708$  S/m;  $\epsilon_r = 38.863$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.27, 8.11, 8.15); Calibrated: 2023/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch27710/Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 11.1 W/kg

**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 15.2 W/kg  
**SAR(1 g) = 5.65 W/kg; SAR(10 g) = 2.2 W/kg**  
Maximum value of SAR (measured) = 11.7 W/kg

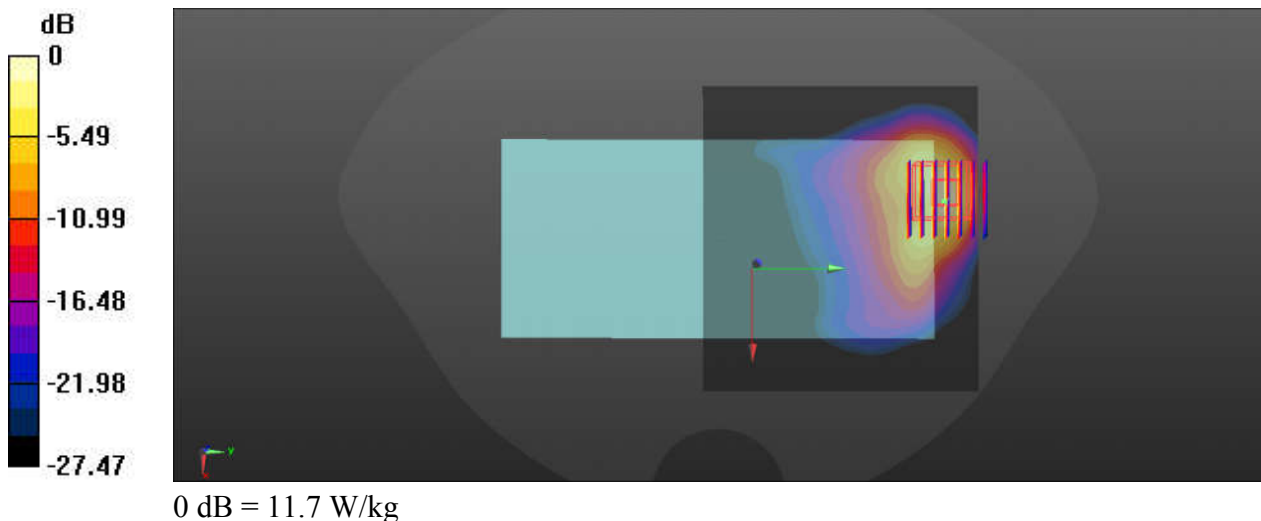

### 108\_FR1 n30\_10M\_QPSK\_25RB\_14Offset\_DFT-15\_Top Side\_0mm\_Ch462000


Communication System: UID 0, 5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_240314 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.708$  S/m;  $\epsilon_r = 38.863$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.27, 8.11, 8.15); Calibrated: 2023/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch462000/Area Scan (51x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 11.0 W/kg

**Ch462000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 57.73 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 22.9 W/kg  
**SAR(1 g) = 7.02 W/kg; SAR(10 g) = 2.33 W/kg**  
Maximum value of SAR (measured) = 16.2 W/kg

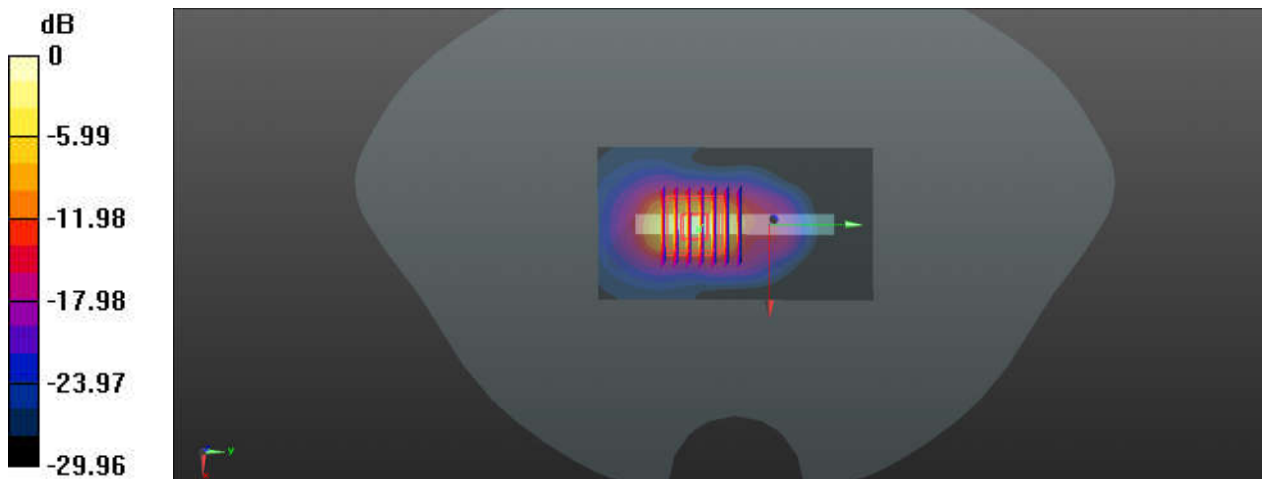

### 109\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Top Side\_0mm\_Ch21350


Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.841$  S/m;  $\epsilon_r = 37.911$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch21350/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 15.4 W/kg

**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 37.16 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 23.4 W/kg  
**SAR(1 g) = 6.72 W/kg; SAR(10 g) = 2.16 W/kg**  
Maximum value of SAR (measured) = 14.7 W/kg

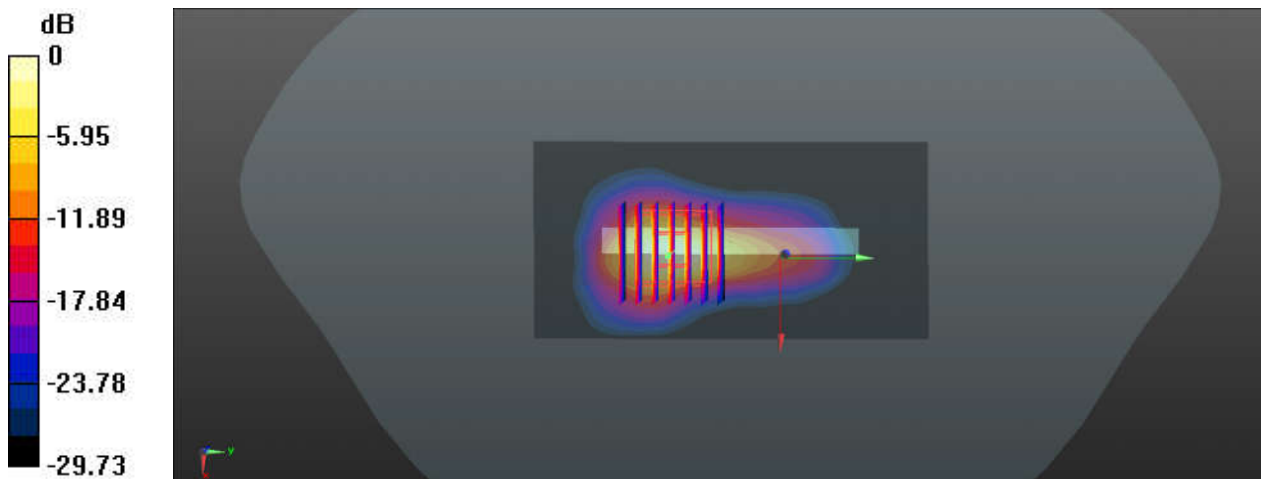

0 dB = 14.7 W/kg

### 110\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_0mm\_Ch40620


Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:2.331  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.978$  S/m;  $\epsilon_r = 37.897$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch40620/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 16.8 W/kg

**Ch40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 38.99 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 20.4 W/kg  
**SAR(1 g) = 7.07 W/kg; SAR(10 g) = 2.57 W/kg**  
Maximum value of SAR (measured) = 14.2 W/kg

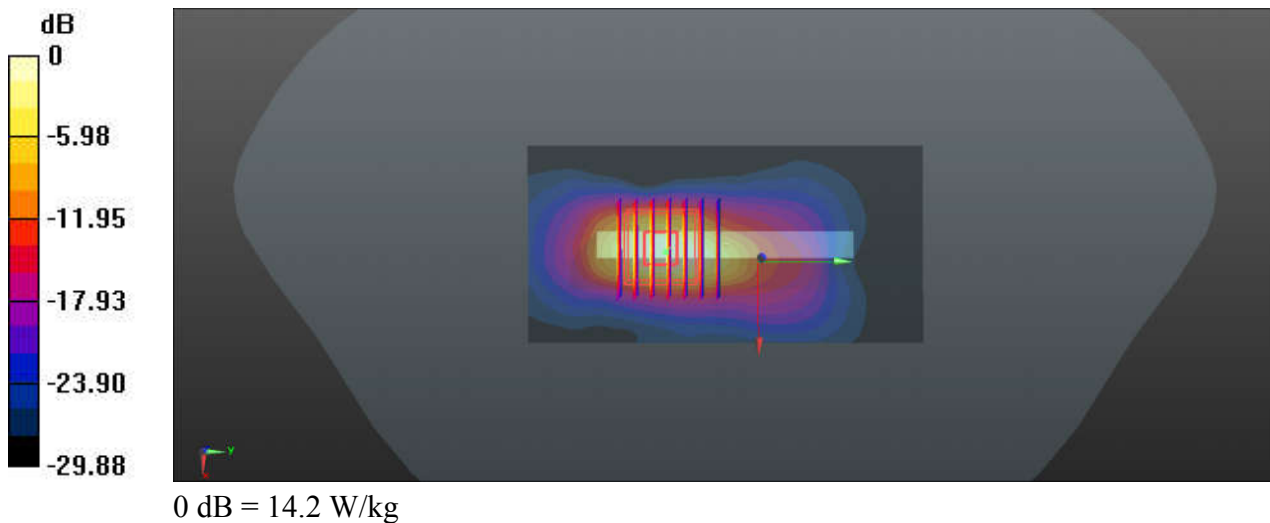

### 111\_FR1 n7\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Left Side\_0mm\_Ch507000


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.932$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (51x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 20.1 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 11.63 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 40.0 W/kg  
**SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.74 W/kg**  
Maximum value of SAR (measured) = 22.2 W/kg

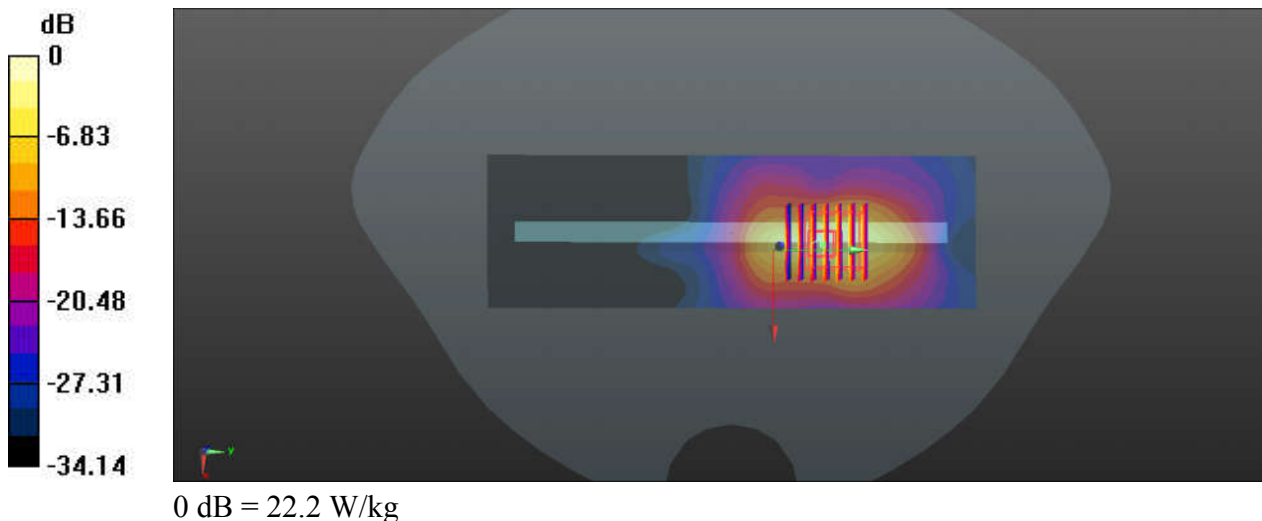

### 112\_FR1 n41\_100M\_QPSK\_1RB\_1Offset\_DFT-30\_Front\_0mm\_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:2  
Medium: HSL\_2600\_240323 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 37.843$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch518598/Area Scan (101x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 13.6 W/kg

**Ch518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.714 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 21.2 W/kg  
**SAR(1 g) = 6.69 W/kg; SAR(10 g) = 2.49 W/kg**  
Maximum value of SAR (measured) = 15.6 W/kg

**Ch518598/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.714 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 19.0 W/kg  
**SAR(1 g) = 6.36 W/kg; SAR(10 g) = 2.32 W/kg**  
Maximum value of SAR (measured) = 13.3 W/kg

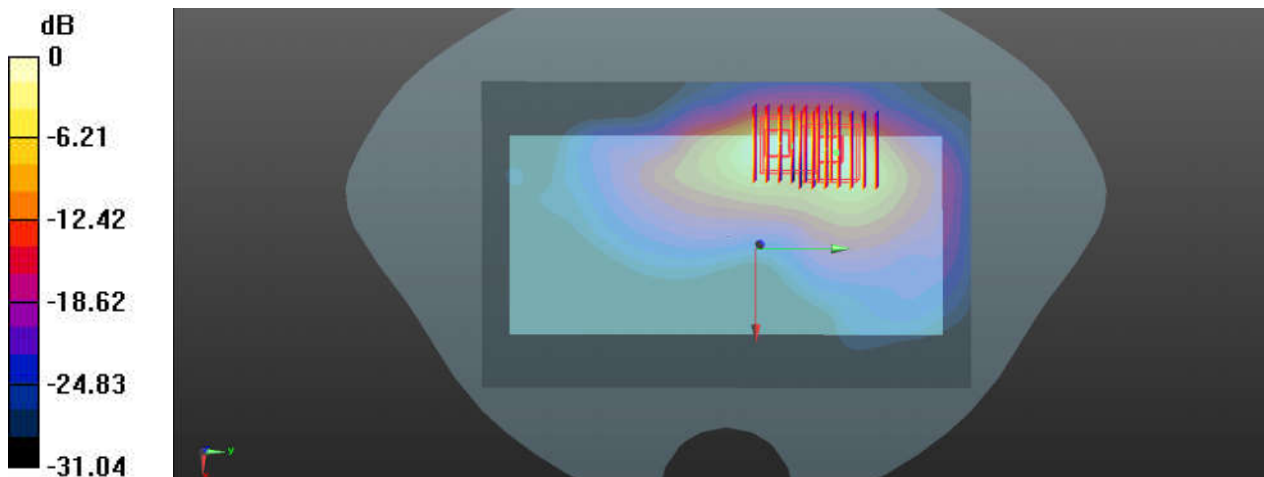

0 dB = 13.3 W/kg

### 113\_LTE Band 48\_20M\_QPSK\_1RB\_0Offset\_Top Side\_0mm\_Ch56640


Communication System: UID 0, LTE (0); Frequency: 3690 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_3700\_240327 Medium parameters used:  $f = 3690$  MHz;  $\sigma = 3.038$  S/m;  $\epsilon_r = 39.429$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.73, 6.73, 6.73); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch56640/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 13.3 W/kg

**Ch56640/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 57.43 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 44.8 W/kg  
**SAR(1 g) = 7.09 W/kg; SAR(10 g) = 1.92 W/kg**  
Maximum value of SAR (measured) = 19.6 W/kg

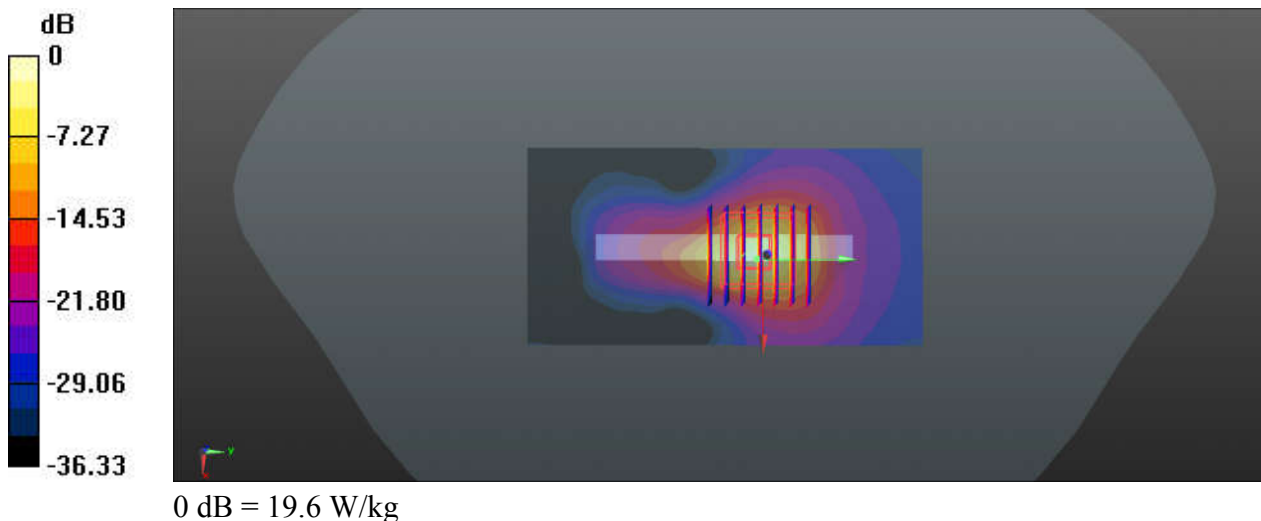

### 115\_FR1 n77\_100M\_QPSK\_1RB\_1Offset\_DFT-30\_Top Side\_0mm\_Ch656000


Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1  
Medium: HSL\_3900\_240328 Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.165$  S/m;  $\epsilon_r = 39.273$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.53, 6.53, 6.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch656000/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 23.7 W/kg

**Ch656000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 39.91 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 51.8 W/kg  
**SAR(1 g) = 9.53 W/kg; SAR(10 g) = 2.58 W/kg**  
Maximum value of SAR (measured) = 27.4 W/kg

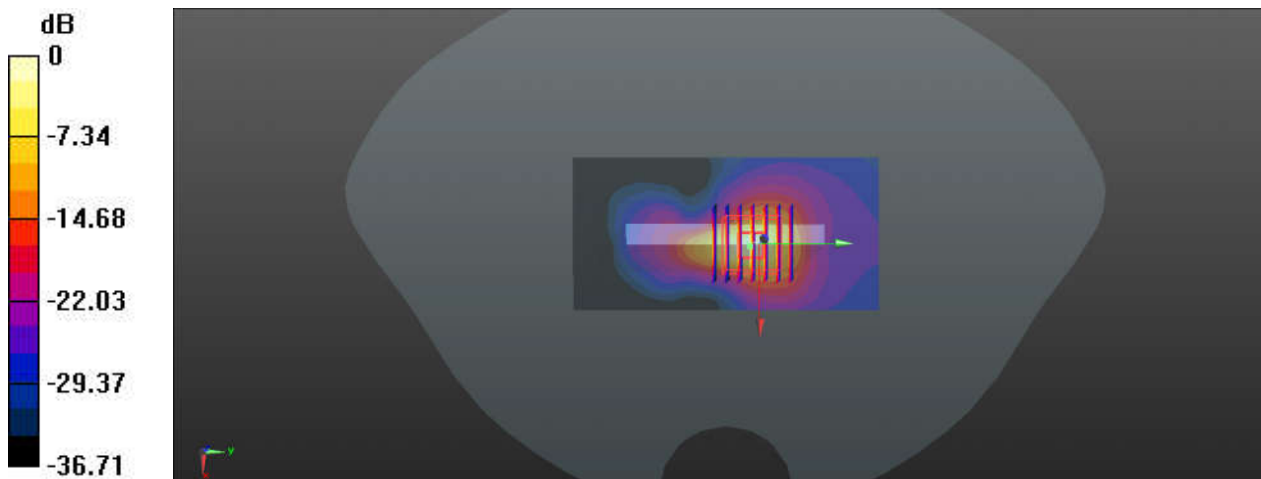

0 dB = 27.4 W/kg



### 114\_FR1 n48\_40M\_QPSK\_1RB\_1Offset\_CP-30\_Top Side\_0mm\_Ch645332


Communication System: UID 0, 5G NR (0); Frequency: 3679.98 MHz; Duty Cycle: 1:1  
Medium: HSL\_3700\_240327 Medium parameters used:  $f = 3680$  MHz;  $\sigma = 3.122$  S/m;  $\epsilon_r = 38.782$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.73, 6.73, 6.73); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch645332/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 13.6 W/kg

**Ch645332/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 19.26 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 56.5 W/kg  
**SAR(1 g) = 8.18 W/kg; SAR(10 g) = 2.09 W/kg**  
Maximum value of SAR (measured) = 26.9 W/kg

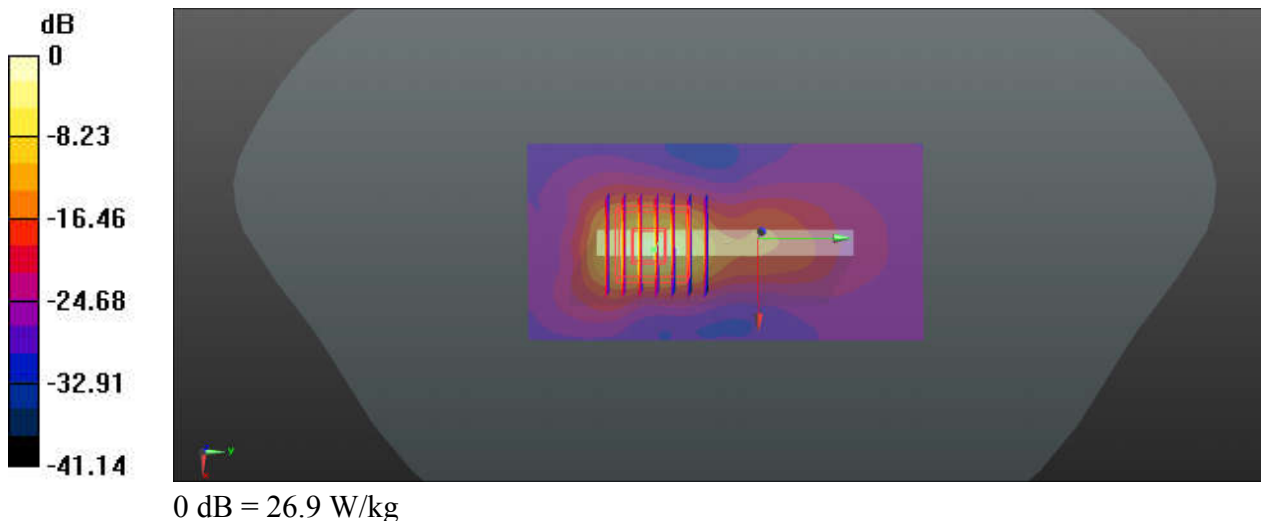

### 116\_Bluetooth\_DH5 1Mbps\_Right Side\_0mm\_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_240325 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.681$  S/m;  $\epsilon_r = 40.955$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch0/Area Scan (41x161x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 9.41 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 11.85 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 12.9 W/kg  
**SAR(1 g) = 3.99 W/kg; SAR(10 g) = 1.32 W/kg**  
Maximum value of SAR (measured) = 9.39 W/kg

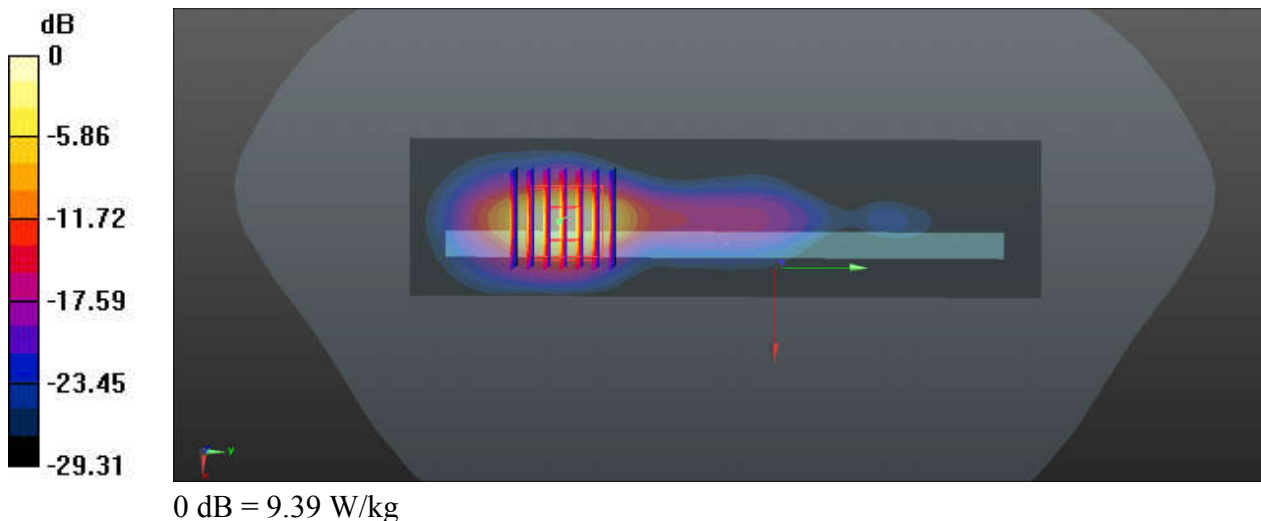

### 117\_WLAN2.4GHz\_802.11b 1Mbps\_Right Side\_0mm\_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015  
Medium: HSL\_2450\_240325 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 38.581$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch11/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 16.2 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.025 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 24.9 W/kg  
**SAR(1 g) = 5.36 W/kg; SAR(10 g) = 1.78 W/kg**  
Maximum value of SAR (measured) = 17.2 W/kg

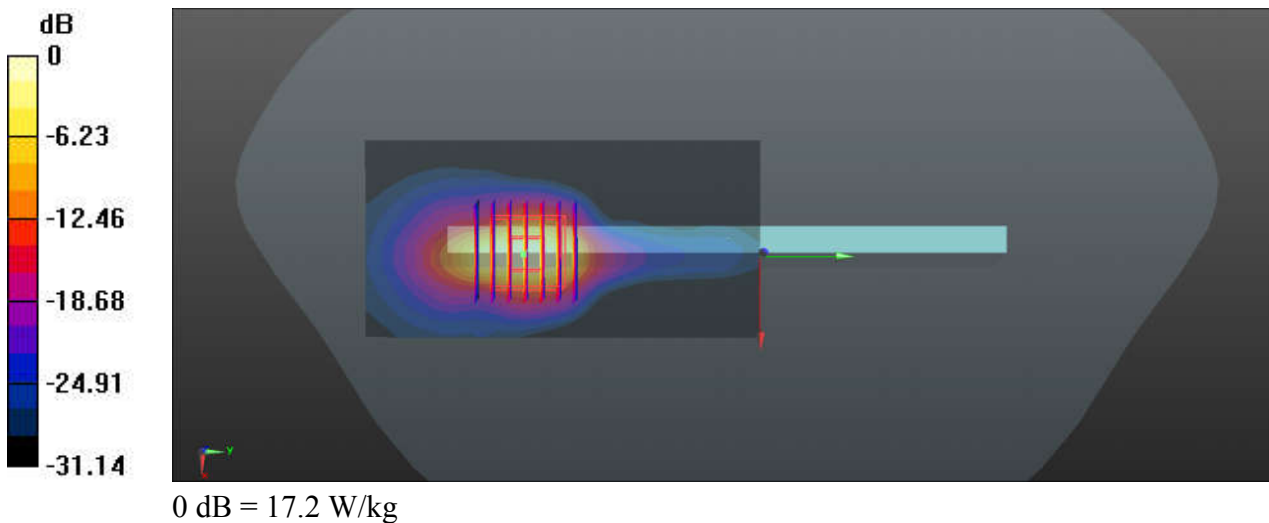

### 118\_WLAN5GHz\_802.11n-HT40 MCS0\_Right Side\_0mm\_Ch46


Communication System: UID 0, WIFI (0); Frequency: 5230 MHz; Duty Cycle: 1:1  
Medium: HSL\_5250\_240329 Medium parameters used:  $f = 5230$  MHz;  $\sigma = 4.476$  S/m;  $\epsilon_r = 36.002$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch46/Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 13.6 W/kg

**Ch46/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 7.260 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 44.0 W/kg  
**SAR(1 g) = 6.79 W/kg; SAR(10 g) = 1.7 W/kg**  
Maximum value of SAR (measured) = 20.6 W/kg

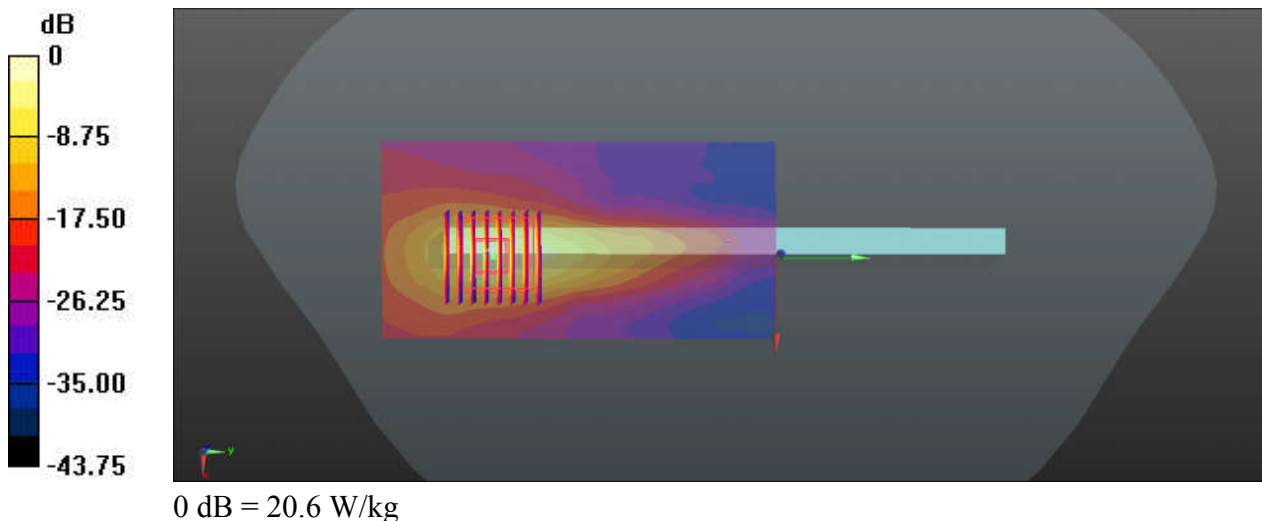

### 119\_WLAN5GHz\_802.11n-HT40 MCS0\_Right Side\_0mm\_Ch54


Communication System: UID 0, WIFI (0); Frequency: 5270 MHz; Duty Cycle: 1:1  
Medium: HSL\_5250\_240329 Medium parameters used:  $f = 5270$  MHz;  $\sigma = 4.521$  S/m;  $\epsilon_r = 35.947$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch54/Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 20.1 W/kg

**Ch54/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 13.83 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 51.0 W/kg  
**SAR(1 g) = 7.15 W/kg; SAR(10 g) = 1.71 W/kg**  
Maximum value of SAR (measured) = 20.2 W/kg

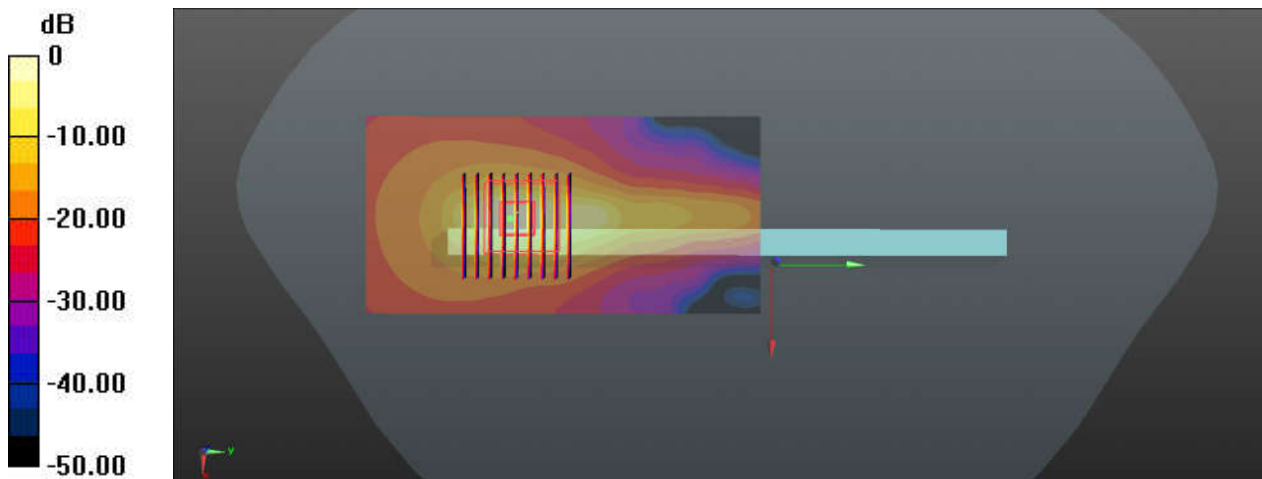

### 120\_WLAN5GHz\_802.11n-HT40 MCS0\_Right Side\_0mm\_Ch110


Communication System: UID 0, WIFI (0); Frequency: 5550 MHz; Duty Cycle: 1:1  
Medium: HSL\_5600\_240330 Medium parameters used:  $f = 5550$  MHz;  $\sigma = 4.79$  S/m;  $\epsilon_r = 35.578$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch110/Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 17.5 W/kg

**Ch110/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 12.00 V/m; Power Drift = 0 dB  
Peak SAR (extrapolated) = 64.5 W/kg  
**SAR(1 g) = 8.64 W/kg; SAR(10 g) = 2.1 W/kg**  
Maximum value of SAR (measured) = 24.6 W/kg

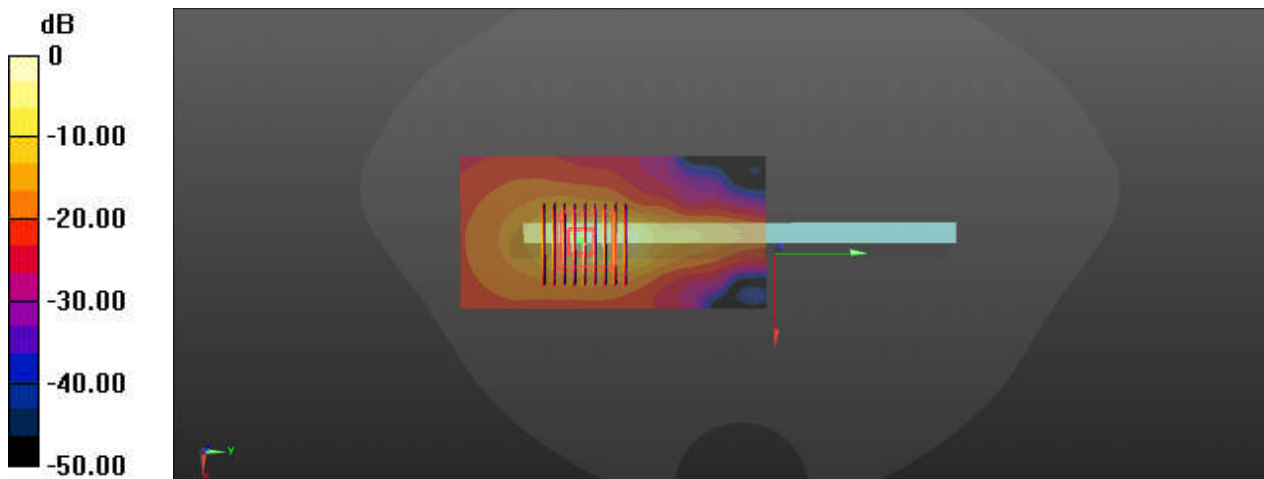

0 dB = 24.6 W/kg

### 121\_WLAN5GHz\_802.11n-HT40 MCS0\_Right Side\_0mm\_Ch159

Communication System: UID 0, WIFI (0); Frequency: 5795 MHz; Duty Cycle: 1:1  
Medium: HSL\_5750\_240331 Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.036$  S/m;  $\epsilon_r = 35.267$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch159/Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 22.9 W/kg

**Ch159/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 11.53 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 65.7 W/kg  
**SAR(1 g) = 8.05 W/kg; SAR(10 g) = 1.98 W/kg**  
Maximum value of SAR (measured) = 25.0 W/kg

