



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2363-3
FCC ID : IHDT56AQ2
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Oct. 24, 2023 ~ Nov. 03, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

 1.9. Specification of Accessory 9

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1. Test Mode 10

 2.2. Connection Diagram of Test System 12

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 24

5. MEASUREMENT UNCERTAINTY 25

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC392114-01	Rev. 01	Initial issue of report	Nov. 03, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 5.37 dB at 0.150 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 11.62 dB at 555.980 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2363-3
FCC ID	IHDT56AQ2
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/NFC/FM
IMEI Code	Conduction: 352643330019317/352643330019325 for Sample 1 352643330025876/352643330025884 for Sample 2 352643330028417/352643330028425 for Sample 3 Radiation: 352643330022758/352643330022766 for Sample 1 352643330025876/352643330025884 for Sample 2 352643330028417/352643330028425 for Sample 3
HW Version	DVT2
SW Version	UUG34.30
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three samples under test: sample 1, sample2 and sample3, the difference please refer to the XT2363-3_Operational Description of Product Equality Declaration exhibit separately. According to the difference, we choose sample 1 to perform full test and sample 2/3 to verify the worst case.
3. The device supports dual SIM slots: PSIM + ESIM.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz; 5G NR n78 :3700 MHz ~ 3800 MHz; 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 26 : 859 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n26 : 859 MHz ~ 894 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz; 5G NR n78 : 3700 MHz ~ 3800 MHz; 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz



	FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : PIFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna NFC: wire coil Antenna FM : External Earphone Antenna
Type of Modulation	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	10CH01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ	CN1256	421272

Note: Test data subcontracted: Test case of Conduction in section 3.1 of this report

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	10CH01-KS	AUDIX	E3	210616
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.9. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Aohai)	Model Name	MC-201L
AC Adapter 1(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-202L
AC Adapter 1(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-203L
AC Adapter 1(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-205L
AC Adapter 1(AR)	Brand Name	Motorola (Aohai)	Model Name	MC-206L
AC Adapter 1(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-201L
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-202L
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-203L
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-205L
AC Adapter 2(AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-206L
AC Adapter 2(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207L
AC Adapter 2(Chile)	Brand Name	Motorola (Salcomp)	Model Name	MC-209L
AC Adapter 3(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-207L
AC Adapter 4(BR local)	Brand Name	Motorola (Cliptech)	Model Name	MC-207L
AC Adapter 5(IN local)	Brand Name	Motorola (XIH)	Model Name	MC-204
Battery 1	Brand Name	Motorola (ATL)	Model Name	QF50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	QF50
Battery 3	Brand Name	Motorola (Sunwoda)	Model Name	QF50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SZN-A026A
USB Cable 2	Brand Name	Motorola (Juwei)	Model Name	JWUB1606-ZN01H
USB Cable 3	Brand Name	Motorola (Washin)	Model Name	HX-ZN-19



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 1) + SIM for Sample 1
	Mode 2: WCDMA Band V Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2(Charging from Adapter 2) + E-SIM for Sample 1
	Mode 3: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 3) + SIM for Sample 1
	Mode 4: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + SIM for Sample 1
	Mode 5: LTE Band 41 RX + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98MHz) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM for Sample 1
	Mode 6: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1
	Mode 7: 5G N5 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + SIM for Sample 1
	Mode 8: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1
	Mode 9: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 3(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1
	Mode 10 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 4) + SIM for Sample 1
	Mode 11 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 5) + SIM for Sample 1
	Mode 12 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + SIM for Sample 2
	Mode 13 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 2
	Mode 14 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery 3 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 3



Radiated Emissions	<p>Mode 1: GSM850 Rx(Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery 1 + USB Cable 1(Charging from Adapter 1) + SIM for Sample 1</p> <p>Mode 2: WCDMA Band V Rx(Middle) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Earphone + Battery 1 + USB Cable 2(Charging from Adapter 2) + E-SIM for Sample 1</p> <p>Mode 3: LTE Band 26 Rx(Low) + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 3) + SIM for Sample 1</p> <p>Mode 4: LTE Band 26 Rx(High) + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 5: LTE Band 41 RX + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx(98MHz) + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM for Sample 1</p> <p>Mode 6: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 7: 5G N5 Rx(Low) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (SD) + SIM for Sample 1</p> <p>Mode 8: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 2(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 9: LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 3(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 1</p> <p>Mode 10 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 4) + SIM for Sample 1</p> <p>Mode 11 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 1 + USB Cable 3(Charging from Adapter 5) + SIM for Sample 1</p> <p>Mode 12 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + SIM for Sample 2</p> <p>Mode 13 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone + Battery 2 + USB Cable 2(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 2</p> <p>Mode 14 : LTE Band 42 RX + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery 3 + USB Cable 2(Data Link with Notebook) + EUT (SD) USB Data Link to PC/NB + SIM for Sample 3</p>
<p>Remark:</p> <ol style="list-style-type: none"> 1. The worst case of AC is mode 6; only the test data of this mode is reported. 2. The worst case of RE is mode 8; only the test data of this mode is reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook. 4. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report. 	

2.2. Connection Diagram of Test System

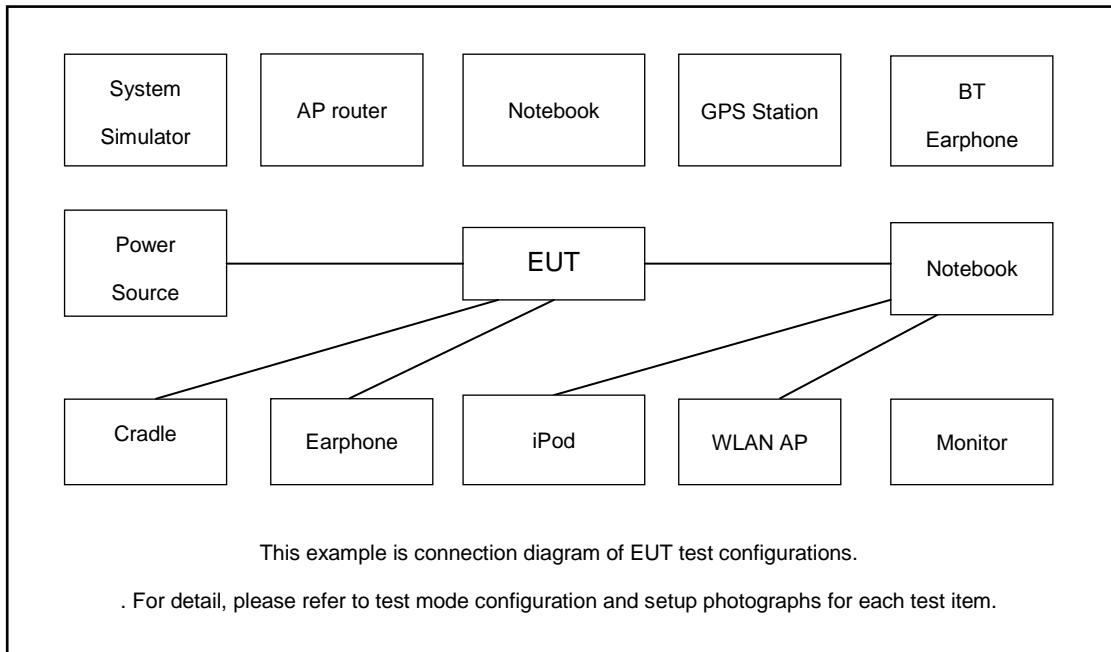

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded,1.8m
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
7.	iPod	Apple	MC69029/A	N/A	N/A	N/A
8.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A
9.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
6. Turn on NFC function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Liangliang Zhong	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

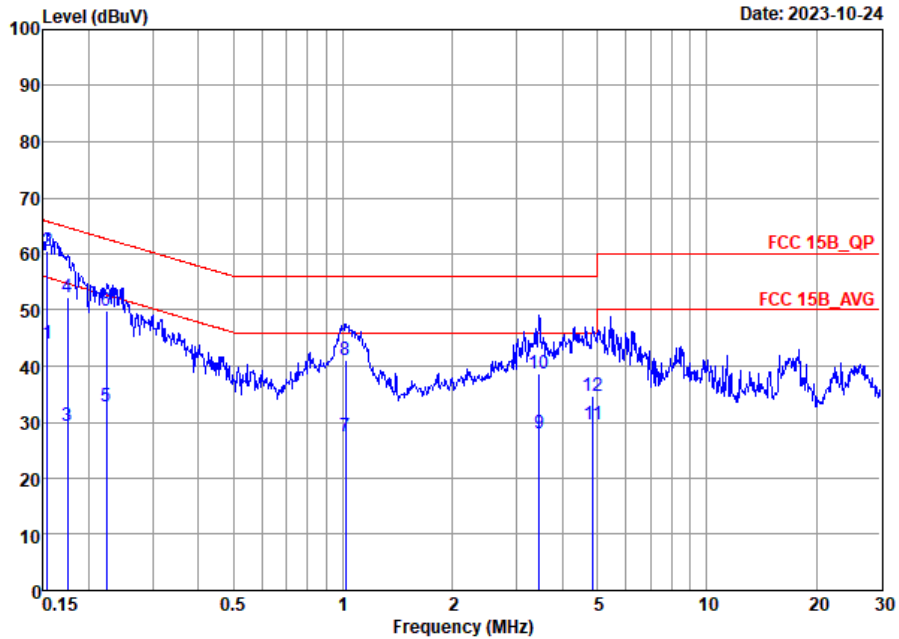


Site : CO01-SZ
 Condition: FCC 15B_QP LISN_20230420_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	44.11	-11.67	55.78	23.51	10.47	10.13	Average
2 *	0.15	60.41	-5.37	65.78	39.81	10.47	10.13	QP
3	0.17	29.21	-25.51	54.72	8.60	10.47	10.14	Average
4	0.17	52.31	-12.41	64.72	31.70	10.47	10.14	QP
5	0.22	32.85	-19.85	52.70	12.30	10.40	10.15	Average
6	0.22	49.75	-12.95	62.70	29.20	10.40	10.15	QP
7	1.02	27.40	-18.60	46.00	7.00	10.24	10.16	Average
8	1.02	41.00	-15.00	56.00	20.60	10.24	10.16	QP
9	3.45	27.88	-18.12	46.00	7.51	10.07	10.30	Average
10	3.45	38.58	-17.42	56.00	18.21	10.07	10.30	QP
11	4.87	29.70	-16.30	46.00	9.30	10.05	10.35	Average
12	4.87	34.70	-21.30	56.00	14.30	10.05	10.35	QP



Test Engineer :	Liangliang Zhong	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

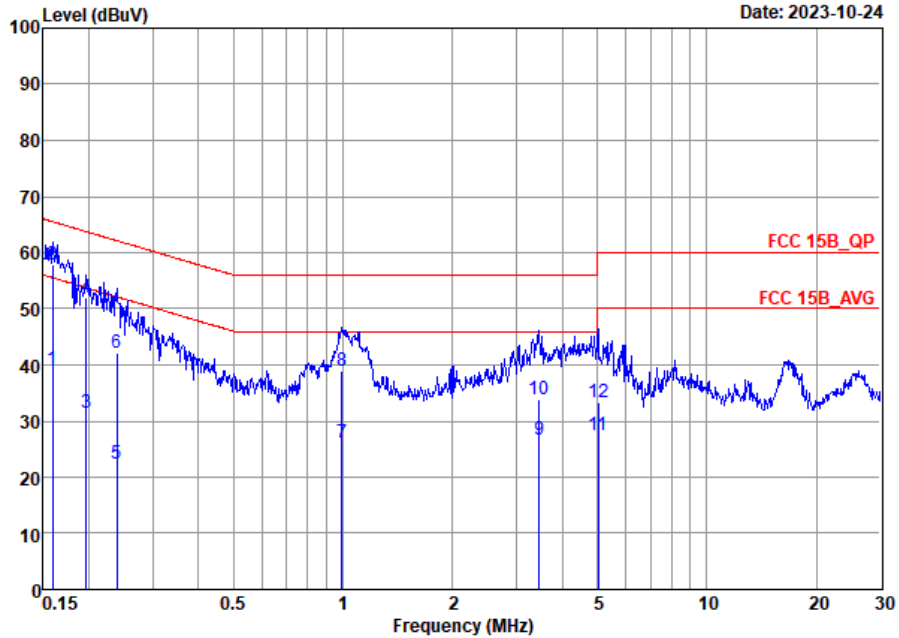

Site : CO01-SZ
 Condition: FCC 15B_QP LISN_20230420_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	39.18	-16.34	55.52	18.59	10.45	10.14	Average
2 *	0.16	57.98	-7.54	65.52	37.39	10.45	10.14	QP
3	0.20	31.51	-22.25	53.76	11.00	10.36	10.15	Average
4	0.20	52.01	-11.75	63.76	31.50	10.36	10.15	QP
5	0.24	22.28	-29.85	52.13	1.80	10.33	10.15	Average
6	0.24	42.18	-19.95	62.13	21.70	10.33	10.15	QP
7	0.99	26.10	-19.90	46.00	5.70	10.24	10.16	Average
8	0.99	39.00	-17.00	56.00	18.60	10.24	10.16	QP
9	3.45	26.75	-19.25	46.00	6.30	10.15	10.30	Average
10	3.45	33.85	-22.15	56.00	13.40	10.15	10.30	QP
11	5.03	27.36	-22.64	50.00	6.90	10.11	10.35	Average
12	5.03	33.46	-26.54	60.00	13.00	10.11	10.35	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

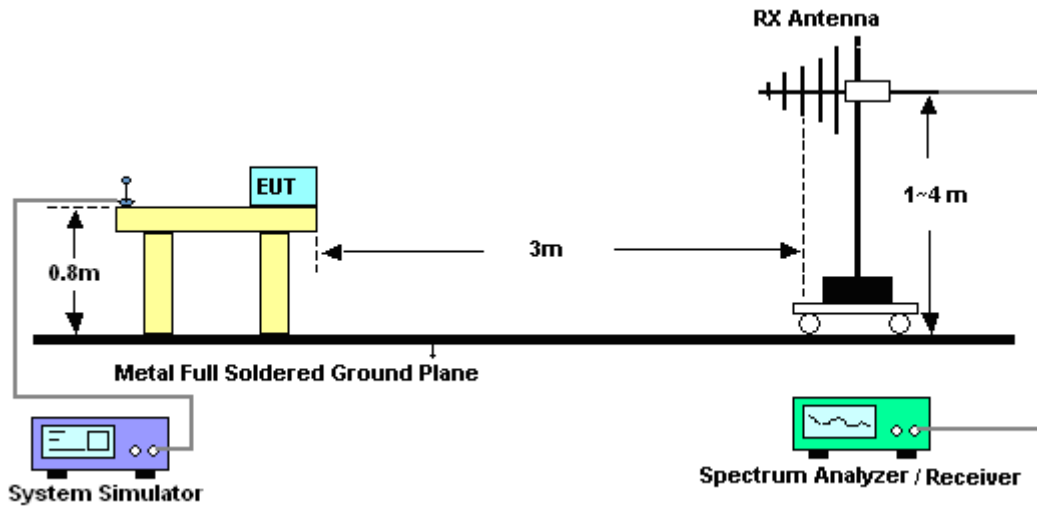


For radiated emissions above 1GHz

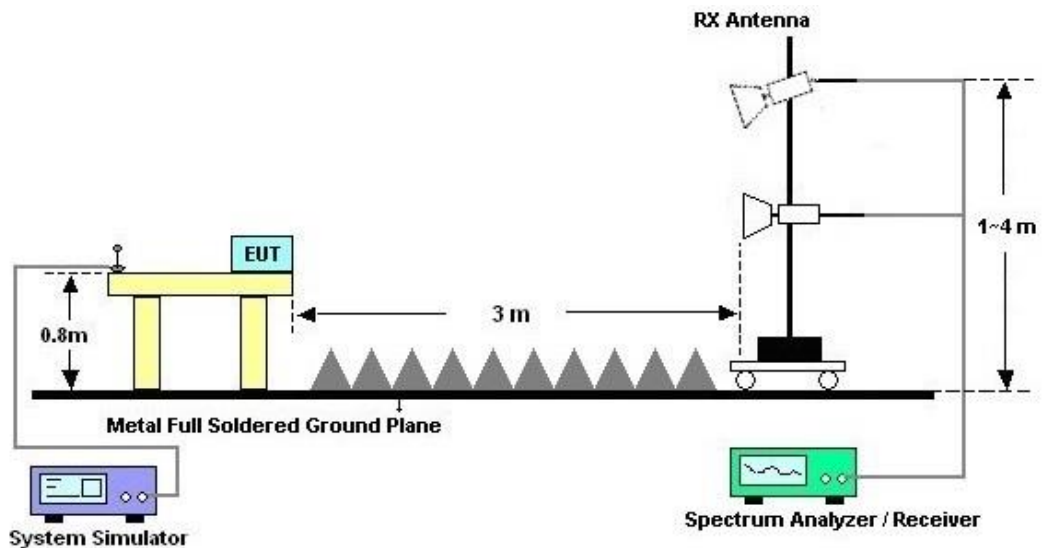




3.2.5. Test Result of Radiated Emission

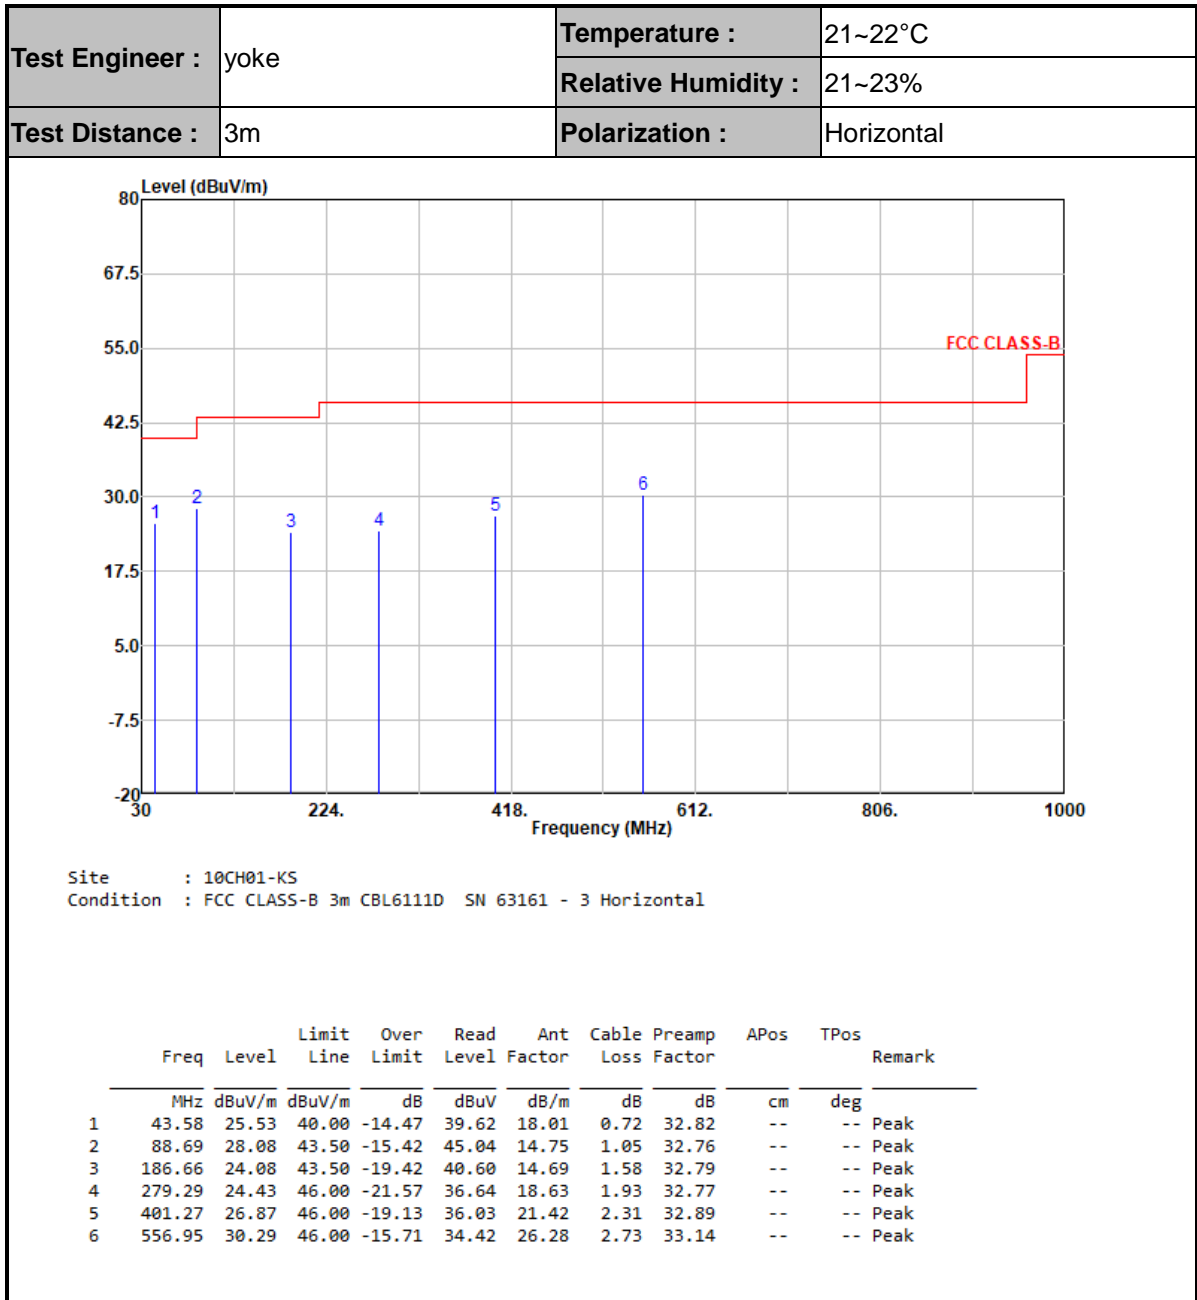



Test Engineer :	yoke	Temperature :	21~22°C
		Relative Humidity :	21~23%
Test Distance :	3m	Polarization :	Horizontal

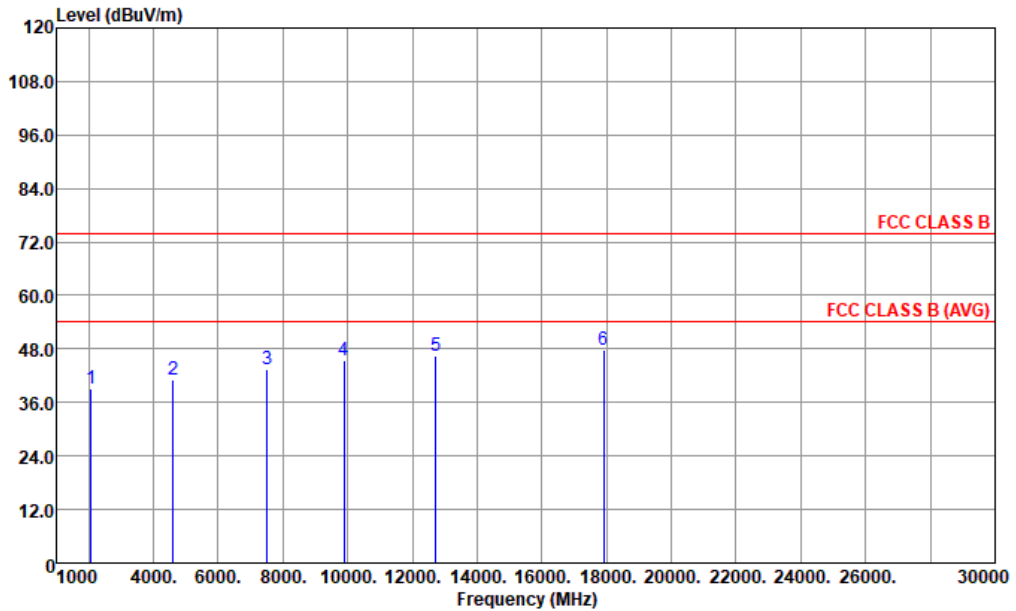


Site : 03CH02-KS
 Condition : FCC CLASS B 3m 00227860 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2071.00	39.19	-34.81	74.00	63.28	31.57	6.83	62.49	---	---	Peak
2	4604.00	41.17	-32.83	74.00	60.53	34.40	10.31	64.07	---	---	Peak
3	7511.00	43.29	-30.71	74.00	57.78	35.80	13.64	63.93	---	---	Peak
4	9891.00	45.40	-28.60	74.00	54.85	37.08	15.79	62.32	---	---	Peak
5	12730.00	46.45	-27.55	74.00	50.92	39.09	18.00	61.56	---	---	Peak
6 p	17898.00	47.87	-26.13	74.00	47.74	41.62	21.32	62.81	---	---	Peak



Test Engineer :	yoke	Temperature :	21~22°C
		Relative Humidity :	21~23%
Test Distance :	3m	Polarization :	Vertical

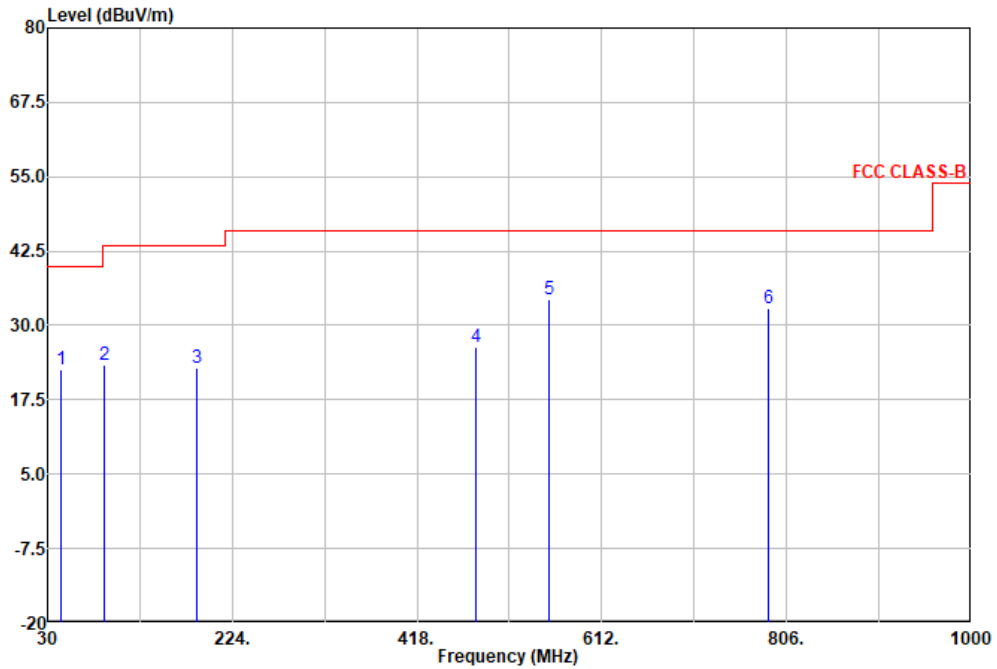


Site : 10CH01-KS
 Condition : FCC CLASS-B 3m CBL6111D SN 63161 - 3 Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	44.07	22.73	40.00	-17.27	37.09	17.73	0.72	32.81	--	--	Peak
2	88.93	23.36	43.50	-20.14	40.28	14.79	1.05	32.76	--	--	Peak
3	187.14	22.88	43.50	-20.62	39.39	14.69	1.59	32.79	--	--	Peak
4	480.08	26.45	46.00	-19.55	33.56	23.25	2.53	32.89	--	--	Peak
5	555.98	34.38	46.00	-11.62	38.60	26.20	2.72	33.14	--	--	Peak
6	786.84	33.00	46.00	-13.00	33.99	28.49	3.22	32.70	--	--	Peak



Test Engineer :	yoke	Temperature :	21~22°C
		Relative Humidity :	21~23%
Test Distance :	3m	Polarization :	Vertical

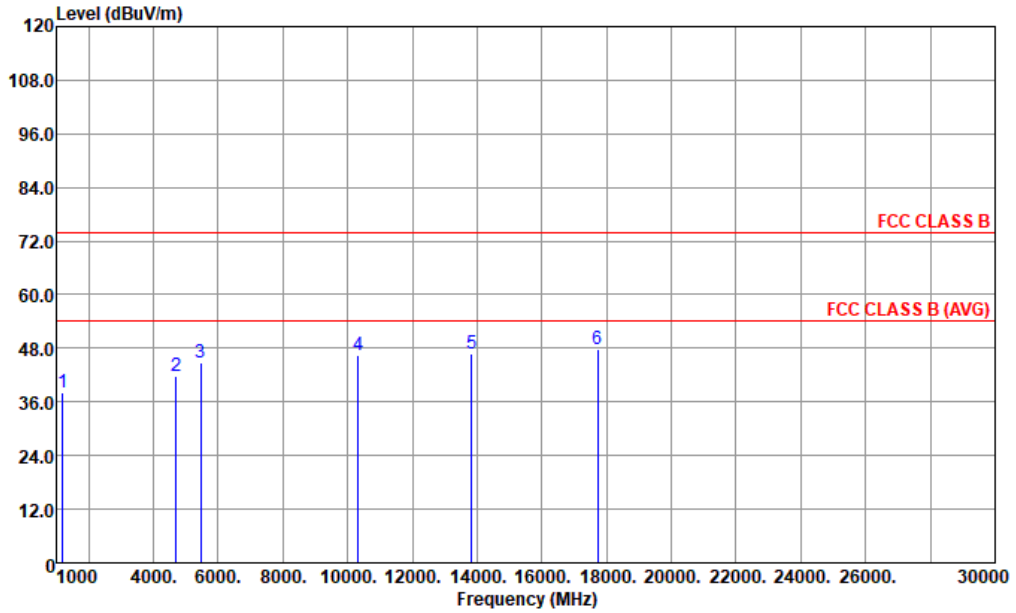

Site : 03CH02-KS
 Condition : FCC CLASS B 3m 00227860 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1187.00	38.02	-35.98	74.00	67.95	27.15	5.12	62.20	---	---	Peak
2	4689.00	41.81	-32.19	74.00	61.13	34.32	10.53	64.17	---	---	Peak
3	5454.00	44.79	-29.21	74.00	63.09	34.60	11.49	64.39	---	---	Peak
4	10333.00	46.37	-27.63	74.00	54.85	37.40	16.18	62.06	---	---	Peak
5	13835.00	46.89	-27.11	74.00	51.10	38.97	18.89	62.07	---	---	Peak
6 p	17728.00	47.76	-26.24	74.00	47.83	41.48	21.26	62.81	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Oct. 24, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Oct. 24, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Oct. 24, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Oct. 24, 2023	Jul. 06, 2024	Conduction (CO01-SZ)
Bilog Antenna	TESEQ	CBL6111D	63161	30MHz~1GHz	Oct. 15, 2023	Nov. 03, 2023	Oct. 14, 2024	Radiation (10CH01-KS)
Bilog Antenna	TESEQ	CBL6111D	63755	30MHz~1GHz	Oct. 15, 2023	Nov. 03, 2023	Oct. 14, 2024	Radiation (10CH01-KS)
EMI test receiver	R&S	ESR7	102630	9KHz~7GHz	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (10CH01-KS)
EMI test receive	R&S	ESR7	102631	9KHz~7GHz	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422544	9KHz ~1GHZ	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422545	9KHz ~1GHZ	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (10CH01-KS)
Radio communication analyzer	Anritsu	MT8821C	6201432838	2G/3G/LTEband 1-46 ,48,65-70	Jan. 04, 2023	Nov. 03, 2023	Jan. 03, 2024	Radiation (10CH01-KS)
Bore-site Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Nov. 03, 2023	NCR	Radiation (10CH01-KS)
Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Nov. 03, 2023	NCR	Radiation (10CH01-KS)
Controller	EM	3000-1	NA	NA	NCR	Nov. 03, 2023	NCR	Radiation (10CH01-KS)
Turn Table	EM	T-300-1	NA	0~360 degree	NCR	Nov. 03, 2023	NCR	Radiation (10CH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 15, 2022	Nov. 03, 2023	Nov. 14, 2023	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Nov. 03, 2023	Jan. 07, 2024	Radiation (03CH02-KS)
Amplifier	EM	EM18G40GGA	060852	18~40GHz	Jan. 05, 2023	Nov. 03, 2023	Jan. 04, 2024	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060806	1GHz~18GHz	Oct. 10, 2023	Nov. 03, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 03, 2023	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Nov. 03, 2023	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Nov. 03, 2023	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01-KS(Horizontal)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	5.14dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01-KS(Vertical)

Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y))	5.12dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)-03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.16dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)-03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.96dB
---	--------