


N71(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH




N71(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH




N71(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

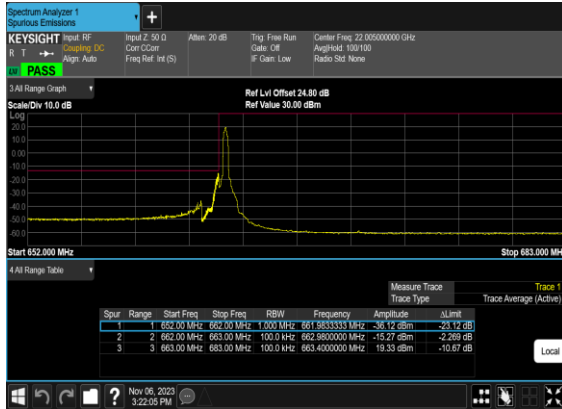


N71(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

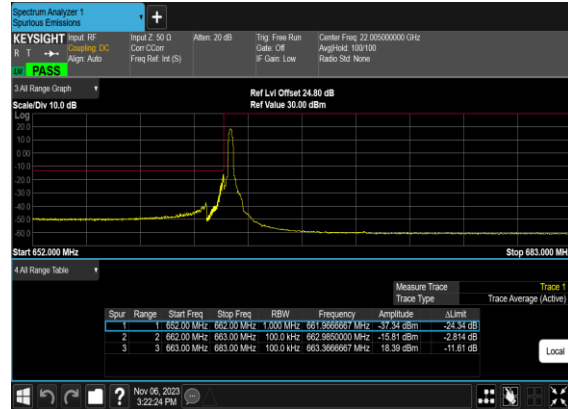

N71(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

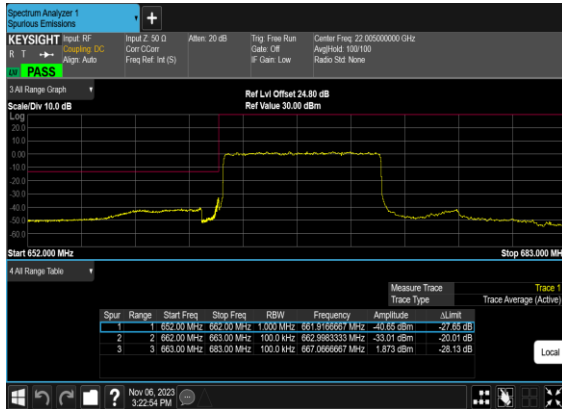


N71(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

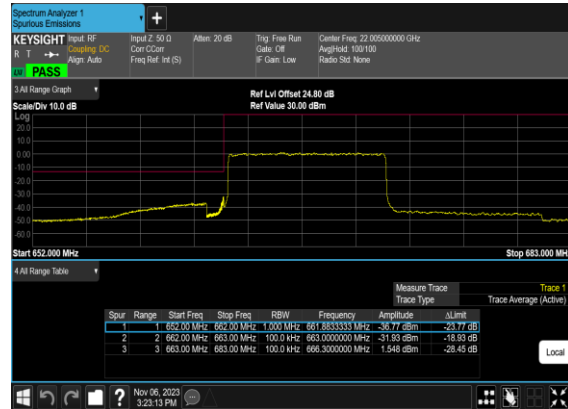

N71(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH



N71(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

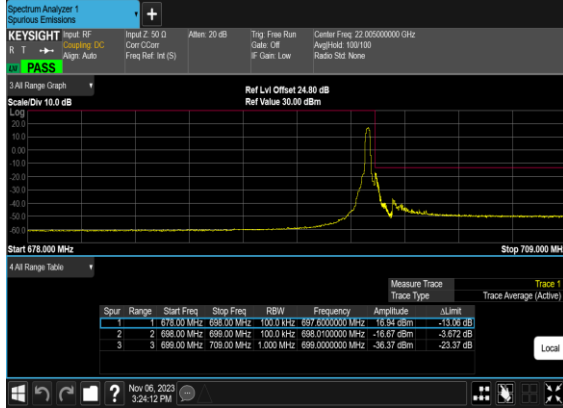


N71(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




N71(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH



N71(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

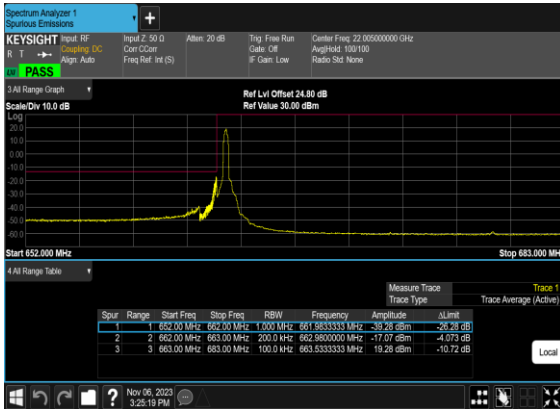


N71(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

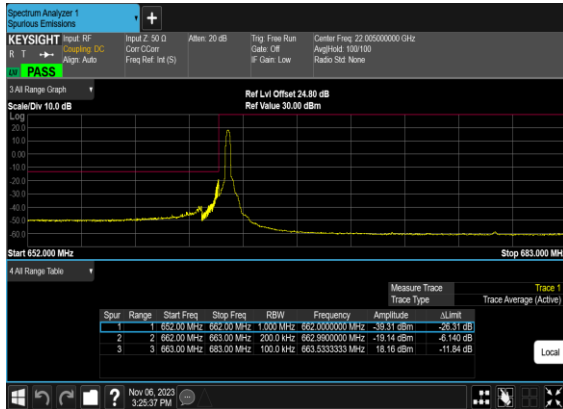

N71(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH




N71(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

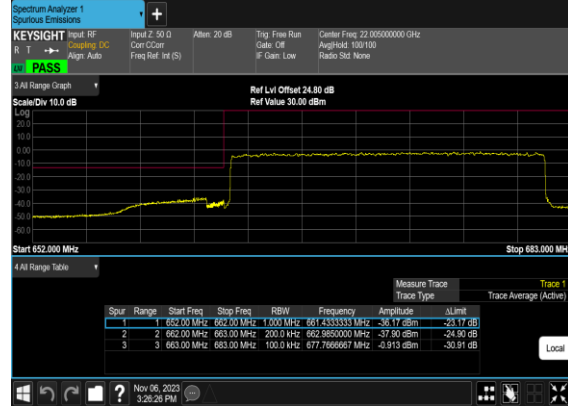

N71(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH




N71(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

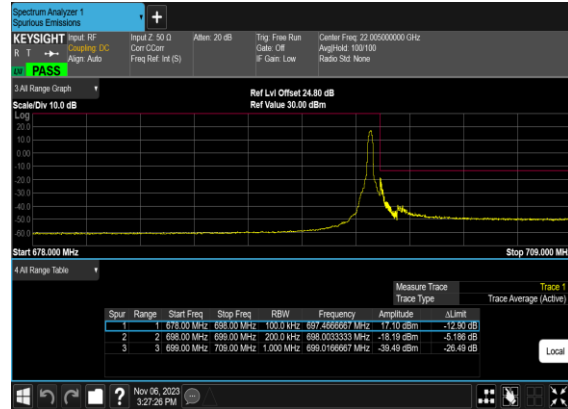

N71(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH



N71(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

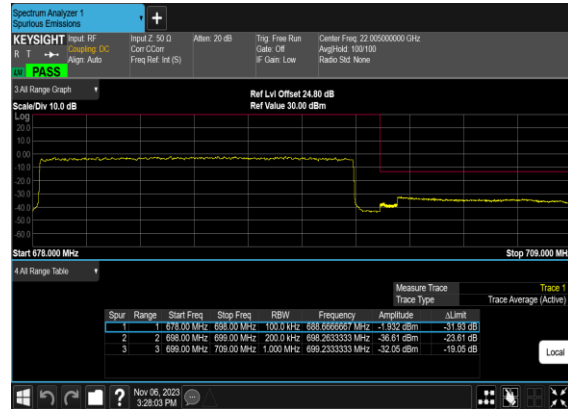



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Jack zhou	Temperature :	23~25°C
		Relative Humidity :	41~42%

Note: Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

SA n7 / NR 40MHz / QPSK / ANT1(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5008	-60.26	-25	-35.26	-70.47	3.03	13.24	H
	7500	-41.19	-25	-16.19	-50.64	3.56	13.01	H
	10006	-48.09	-25	-23.09	-57.61	3.92	13.44	H
	5008	-60.23	-25	-35.23	-70.44	3.03	13.24	V
	7500	-33.00	-25	-8.00	-42.45	3.56	13.01	V
	10006	-53.98	-25	-28.98	-63.50	3.92	13.44	V
Middle	5036	-60.38	-25	-35.38	-70.59	3.03	13.24	H
	7542	-39.96	-25	-14.96	-49.41	3.56	13.01	H
	10062	-49.92	-25	-24.92	-59.44	3.92	13.44	H
	5036	-61.10	-25	-36.10	-71.31	3.03	13.24	V
	7542	-37.09	-25	-12.09	-46.54	3.56	13.01	V
	10062	-52.37	-25	-27.37	-61.89	3.92	13.44	V
Highest	5064	-60.73	-25	-35.73	-70.94	3.03	13.24	H
	7598	-39.66	-25	-14.66	-49.11	3.56	13.01	H
	10118	-48.99	-25	-23.99	-58.51	3.92	13.44	H
	5064	-60.01	-25	-35.01	-70.22	3.03	13.24	V
	7598	-33.45	-25	-8.45	-42.90	3.56	13.01	V
	10118	-53.75	-25	-28.75	-63.27	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_12A_n7A / LTE 10MHz + NR 40MHz / QPSK / ANT0(LTE) & ANT1(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5008	-62.93	-25	-37.93	-73.14	3.03	13.24	H
	7500	-38.12	-25	-13.12	-47.57	3.56	13.01	H
	10006	-46.05	-25	-21.05	-55.57	3.92	13.44	H
	5008	-63.19	-25	-38.19	-73.40	3.03	13.24	V
	7500	-37.13	-25	-12.13	-46.58	3.56	13.01	V
	10006	-54.15	-25	-29.15	-63.67	3.92	13.44	V
Middle	5036	-62.34	-25	-37.34	-72.55	3.03	13.24	H
	7542	-38.97	-25	-13.97	-48.42	3.56	13.01	H
	10062	-48.82	-25	-23.82	-58.34	3.92	13.44	H
	5036	-62.57	-25	-37.57	-72.78	3.03	13.24	V
	7542	-37.28	-25	-12.28	-46.73	3.56	13.01	V
	10062	-53.89	-25	-28.89	-63.41	3.92	13.44	V
Highest	5064	-62.04	-25	-37.04	-72.25	3.03	13.24	H
	7598	-37.53	-25	-12.53	-46.98	3.56	13.01	H
	10118	-46.77	-25	-21.77	-56.29	3.92	13.44	H
	5064	-63.12	-25	-38.12	-73.33	3.03	13.24	V
	7598	-36.16	-25	-11.16	-45.61	3.56	13.01	V
	10118	-54.03	-25	-29.03	-63.55	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SA n12 / NR 15MHz / QPSK / ANT4(NR)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-67.01	-13	-54.01	-73.98	1.58	10.70	H
	2096	-69.41	-13	-56.41	-77.66	2.102	12.50	H
	2800	-69.38	-13	-56.38	-78.27	2.856	13.90	H
	1400	-70.04	-13	-57.04	-77.01	1.58	10.70	V
	2096	-68.64	-13	-55.64	-76.89	2.10	12.50	V
	2800	-69.05	-13	-56.05	-77.94	2.86	13.90	V
Middle	1400	-66.45	-13	-53.45	-73.42	1.58	10.70	H
	2104	-68.46	-13	-55.46	-76.71	2.102	12.50	H
	2800	-69.36	-13	-56.36	-78.25	2.856	13.90	H
	1400	-70.23	-13	-57.23	-77.20	1.58	10.70	V
	2104	-68.81	-13	-55.81	-77.06	2.10	12.50	V
	2800	-69.20	-13	-56.20	-78.09	2.86	13.90	V
Highest	1400	-65.60	-13	-52.60	-72.57	1.58	10.70	H
	2104	-69.86	-13	-56.86	-78.11	2.102	12.50	H
	2808	-69.37	-13	-56.37	-78.26	2.856	13.90	H
	1400	-70.37	-13	-57.37	-77.34	1.58	10.70	V
	2104	-69.58	-13	-56.58	-77.83	2.10	12.50	V
	2808	-69.31	-13	-56.31	-78.20	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 66A_n12A / LTE 20MHz + NR 15MHz / QPSK / ANT0(LTE) & ANT4(NR)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-74.47	-13	-61.47	-81.44	1.58	10.70	H
	2096	-70.66	-13	-57.66	-78.91	2.102	12.50	H
	2800	-69.19	-13	-56.19	-78.08	2.856	13.90	H
	1400	-74.56	-13	-61.56	-81.53	1.58	10.70	V
	2096	-69.84	-13	-56.84	-78.09	2.10	12.50	V
	2800	-68.96	-13	-55.96	-77.85	2.86	13.90	V
Middle	1400	-74.10	-13	-61.10	-81.07	1.58	10.70	H
	2104	-70.55	-13	-57.55	-78.80	2.102	12.50	H
	2800	-69.02	-13	-56.02	-77.91	2.856	13.90	H
	1400	-74.11	-13	-61.11	-81.08	1.58	10.70	V
	2104	-70.19	-13	-57.19	-78.44	2.10	12.50	V
	2800	-69.08	-13	-56.08	-77.97	2.86	13.90	V
Highest	1400	-74.51	-13	-61.51	-81.48	1.58	10.70	H
	2104	-70.72	-13	-57.72	-78.97	2.102	12.50	H
	2808	-69.14	-13	-56.14	-78.03	2.856	13.90	H
	1400	-74.46	-13	-61.46	-81.43	1.58	10.70	V
	2104	-70.01	-13	-57.01	-78.26	2.10	12.50	V
	2808	-69.02	-13	-56.02	-77.91	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SA n41 / NR 100MHz / QPSK / ANT1(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5008	-61.01	-25	-36.01	-71.22	3.03	13.24	H
	7542	-58.72	-25	-33.72	-68.17	3.56	13.01	H
	10006	-54.06	-25	-29.06	-63.58	3.92	13.44	H
	5008	-60.47	-25	-35.47	-70.68	3.03	13.24	V
	7500	-59.11	-25	-34.11	-68.56	3.56	13.01	V
	10006	-53.79	-25	-28.79	-63.31	3.92	13.44	V
Middle	5092	-60.92	-25	-35.92	-71.13	3.03	13.24	H
	7640	-58.14	-25	-33.14	-67.59	3.56	13.01	H
	10188	-53.35	-25	-28.35	-62.87	3.92	13.44	H
	5092	-61.24	-25	-36.24	-71.45	3.03	13.24	V
	7640	-57.86	-25	-32.86	-67.31	3.56	13.01	V
	10188	-52.94	-25	-27.94	-62.46	3.92	13.44	V
Highest	5190	-60.97	-25	-35.97	-71.18	3.03	13.24	H
	7780	-56.73	-25	-31.73	-66.18	3.56	13.01	H
	10384	-51.64	-25	-26.64	-61.16	3.92	13.44	H
	5190	-61.34	-25	-36.34	-71.55	3.03	13.24	V
	7780	-56.93	-25	-31.93	-66.38	3.56	13.01	V
	10384	-51.57	-25	-26.57	-61.09	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_12A_n41A / LTE 10MHz + NR 100MHz / QPSK / ANT0(LTE) & ANT1(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5008	-61.38	-25	-36.38	-71.59	3.03	13.24	H
	7486	-36.83	-25	-11.83	-46.28	3.56	13.01	H
	9992	-43.99	-25	-18.99	-53.51	3.92	13.44	H
	5008	-61.96	-25	-36.96	-72.17	3.03	13.24	V
	7486	-31.93	-25	-6.93	-41.38	3.56	13.01	V
	9992	-52.10	-25	-27.10	-61.62	3.92	13.44	V
Middle	5092	-60.13	-25	-35.13	-70.34	3.03	13.24	H
	7626	-33.65	-25	-8.65	-43.10	3.56	13.01	H
	10174	-43.27	-25	-18.27	-52.79	3.92	13.44	H
	5092	-61.46	-25	-36.46	-71.67	3.03	13.24	V
	7626	-31.51	-25	-6.51	-40.96	3.56	13.01	V
	10174.36	-51.85	-25	-26.85	-61.37	3.92	13.44	V
Highest	5190	-61.45	-25	-36.45	-71.66	3.03	13.24	H
	7780	-34.98	-25	-9.98	-44.43	3.56	13.01	H
	10370	-44.22	-25	-19.22	-53.74	3.92	13.44	H
	5190	-61.92	-25	-36.92	-72.13	3.03	13.24	V
	7780	-32.82	-25	-7.82	-42.27	3.56	13.01	V
	10370	-51.67	-25	-26.67	-61.19	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SA n66 / NR 40MHz / QPSK / ANT4(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-68.34	-13	-55.34	-79.08	2.604	13.34	H
	5136	-59.57	-13	-46.57	-70.08	3.011	13.52	H
	6848	-59.99	-13	-46.99	-70.19	3.271	13.47	H
	3424	-67.98	-13	-54.98	-78.72	2.604	13.34	V
	5136	-59.60	-13	-46.60	-70.11	3.011	13.52	V
	6848	-59.90	-13	-46.90	-70.10	3.271	13.47	V
Middle	3456	-68.69	-13	-55.69	-79.43	2.604	13.34	H
	5176	-55.83	-13	-42.83	-66.34	3.011	13.52	H
	6904	-59.90	-13	-46.90	-70.10	3.271	13.47	H
	3456	-68.66	-13	-55.66	-79.40	2.604	13.34	V
	5176	-57.22	-13	-44.22	-67.73	3.011	13.52	V
	6904	-59.84	-13	-46.84	-70.04	3.271	13.47	V
Highest	3480	-67.95	-13	-54.95	-78.69	2.604	13.34	H
	5224	-60.07	-13	-47.07	-70.58	3.011	13.52	H
	6968	-60.05	-13	-47.05	-70.25	3.271	13.47	H
	3480	-67.06	-13	-54.06	-77.80	2.604	13.34	V
	5224	-60.65	-13	-47.65	-71.16	3.011	13.52	V
	6968	-60.15	-13	-47.15	-70.35	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_13A_n66A / LTE 10MHz + NR 40MHz / QPSK / ANT0(LTE) & ANT4(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-67.64	-13	-54.64	-78.38	2.604	13.34	H
	5130	-61.03	-13	-48.03	-71.54	3.011	13.52	H
	6855	-59.08	-13	-46.08	-69.28	3.271	13.47	H
	3420	-67.61	-13	-54.61	-78.35	2.604	13.34	V
	5130	-56.00	-13	-43.00	-66.51	3.011	13.52	V
	6855	-59.53	-13	-46.53	-69.73	3.271	13.47	V
Middle	3450	-67.26	-13	-54.26	-78.00	2.604	13.34	H
	5175	-61.63	-13	-48.63	-72.14	3.011	13.52	H
	6915	-59.21	-13	-46.21	-69.41	3.271	13.47	H
	3450	-67.45	-13	-54.45	-78.19	2.604	13.34	V
	5175	-58.55	-13	-45.55	-69.06	3.011	13.52	V
	6915	-58.80	-13	-45.80	-69.00	3.271	13.47	V
Highest	3480	-67.47	-13	-54.47	-78.21	2.604	13.34	H
	5220	-61.82	-13	-48.82	-72.33	3.011	13.52	H
	6975	-59.20	-13	-46.20	-69.40	3.271	13.47	H
	3480	-67.75	-13	-54.75	-78.49	2.604	13.34	V
	5220	-61.11	-13	-48.11	-71.62	3.011	13.52	V
	6975	-59.18	-13	-46.18	-69.38	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Other PA : EN-DC_48A_n66A / LTE 20MHz + NR 40MHz / QPSK / ANT0(LTE) & ANT4(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-56.99	-13	-43.99	-67.73	2.604	13.34	H
	5130	-52.30	-13	-39.30	-62.81	3.011	13.52	H
	6855	-52.05	-13	-39.05	-62.25	3.271	13.47	H
	3420	-56.75	-13	-43.75	-67.49	2.604	13.34	V
	5130	-52.11	-13	-39.11	-62.62	3.011	13.52	V
	6855	-52.05	-13	-39.05	-62.25	3.271	13.47	V
Middle	3450	-56.88	-13	-43.88	-67.62	2.604	13.34	H
	5175	-52.87	-13	-39.87	-63.38	3.011	13.52	H
	6915	-52.00	-13	-39.00	-62.20	3.271	13.47	H
	3450	-57.00	-13	-44.00	-67.74	2.604	13.34	V
	5175	-52.71	-13	-39.71	-63.22	3.011	13.52	V
	6915	-52.13	-13	-39.13	-62.33	3.271	13.47	V
Highest	3480	-57.33	-13	-44.33	-68.07	2.604	13.34	H
	5220	-53.44	-13	-40.44	-63.95	3.011	13.52	H
	6975	-51.95	-13	-38.95	-62.15	3.271	13.47	H
	3480	-56.74	-13	-43.74	-67.48	2.604	13.34	V
	5220	-52.86	-13	-39.86	-63.37	3.011	13.52	V
	6975	-52.01	-13	-39.01	-62.21	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA n70 / NR 10MHz / QPSK / ANT4(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3390	-67.46	-13	-54.46	-78.20	2.604	13.34	H
	5085	-55.41	-13	-42.41	-65.92	3.011	13.52	H
	6780	-59.60	-13	-46.60	-69.80	3.271	13.47	H
	3390	-68.12	-13	-55.12	-78.86	2.604	13.34	V
	5085	-54.03	-13	-41.03	-64.54	3.011	13.52	V
	6780	-59.92	-13	-46.92	-70.12	3.271	13.47	V
Middle	3390	-67.42	-13	-54.42	-78.16	2.604	13.34	H
	5100	-55.18	-13	-42.18	-65.69	3.011	13.52	H
	6795	-59.63	-13	-46.63	-69.83	3.271	13.47	H
	3390	-68.35	-13	-55.35	-79.09	2.604	13.34	V
	5100	-54.36	-13	-41.36	-64.87	3.011	13.52	V
	6795	-60.00	-13	-47.00	-70.20	3.271	13.47	V
Highest	3405	-66.98	-13	-53.98	-77.72	2.604	13.34	H
	5100	-55.88	-13	-42.88	-66.39	3.011	13.52	H
	6795	-59.40	-13	-46.40	-69.60	3.271	13.47	H
	3405	-68.18	-13	-55.18	-78.92	2.604	13.34	V
	5100	-55.91	-13	-42.91	-66.42	3.011	13.52	V
	6795	-59.80	-13	-46.80	-70.00	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

SA n70 / NR 15MHz / QPSK / ANT4(NR)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3390	-67.87	-13	-54.87	-78.61	2.604	13.34	H
	5085	-56.03	-13	-43.03	-66.54	3.011	13.52	H
	6780	-59.70	-13	-46.70	-69.90	3.271	13.47	H
	3390	-68.29	-13	-55.29	-79.03	2.604	13.34	V
	5085	-54.12	-13	-41.12	-64.63	3.011	13.52	V
	6780	-59.91	-13	-46.91	-70.11	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



SA n71 / NR 20MHz / QPSK / ANT4(NR)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-70.00	-13	-57.00	-71.75	1.02	4.92	H
	1992	-66.21	-13	-53.21	-68.18	1.27	5.39	H
	2656	-69.16	-13	-56.16	-72.09	1.49	6.57	H
	1328	-73.91	-13	-60.91	-75.66	1.02	4.92	V
	1992	-68.07	-13	-55.07	-70.04	1.27	5.39	V
	2656	-69.43	-13	-56.43	-72.36	1.49	6.57	V
Middle	1344	-69.75	-13	-56.75	-71.50	1.02	4.92	H
	2016	-60.08	-13	-47.08	-62.05	1.27	5.39	H
	2688	-69.72	-13	-56.72	-72.65	1.49	6.57	H
	1344	-70.03	-13	-57.03	-71.78	1.02	4.92	V
	2016	-61.67	-13	-48.67	-63.64	1.27	5.39	V
	2688	-69.40	-13	-56.40	-72.33	1.49	6.57	V
Highest	1360	-68.69	-13	-55.69	-70.44	1.02	4.92	H
	2032	-65.10	-13	-52.10	-67.07	1.27	5.39	H
	2712	-69.32	-13	-56.32	-72.25	1.49	6.57	H
	1360	-72.57	-13	-59.57	-74.32	1.02	4.92	V
	2032	-62.94	-13	-49.94	-64.91	1.27	5.39	V
	2712	-69.21	-13	-56.21	-72.14	1.49	6.57	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_48A_n71A / LTE 20MHz + NR 20MHz / QPSK / ANT0(LTE) & ANT4(NR)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-57.59	-13	-44.59	-59.34	1.02	4.92	H
	1992	-50.33	-13	-37.33	-52.30	1.27	5.39	H
	2656	-49.18	-13	-36.18	-52.11	1.49	6.57	H
	1328	-56.98	-13	-43.98	-58.73	1.02	4.92	V
	1992	-45.16	-13	-32.16	-47.13	1.27	5.39	V
	2656	-49.03	-13	-36.03	-51.96	1.49	6.57	V
Middle	1344	-57.29	-13	-44.29	-59.04	1.02	4.92	H
	2016	-49.47	-13	-36.47	-51.44	1.27	5.39	H
	2688	-49.00	-13	-36.00	-51.93	1.49	6.57	H
	1344	-56.87	-13	-43.87	-58.62	1.02	4.92	V
	2016	-47.42	-13	-34.42	-49.39	1.27	5.39	V
	2688	-48.58	-13	-35.58	-51.51	1.49	6.57	V
Highest	1360	-59.13	-13	-46.13	-60.88	1.02	4.92	H
	2032	-51.24	-13	-38.24	-53.21	1.27	5.39	H
	2720	-51.33	-13	-38.33	-54.26	1.49	6.57	H
	1360	-58.48	-13	-45.48	-60.23	1.02	4.92	V
	2032	-47.41	-13	-34.41	-49.38	1.27	5.39	V
	2720	-50.86	-13	-37.86	-53.79	1.49	6.57	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.