



N70(5M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

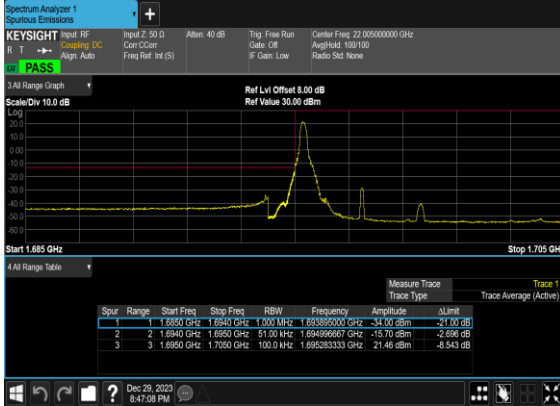


N70(5M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

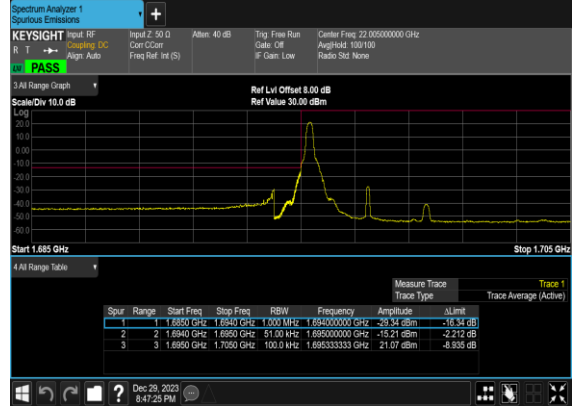


N70(5M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Low\_CH




N70(5M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

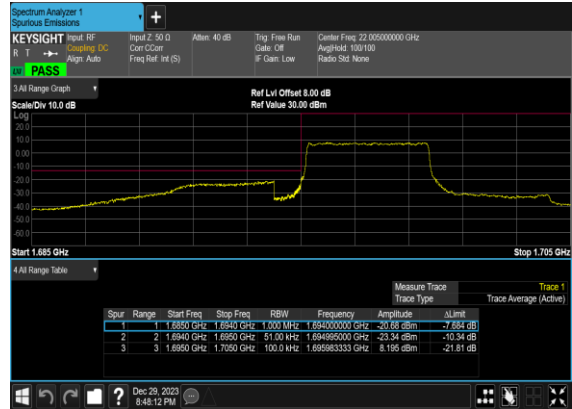

N70(5M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

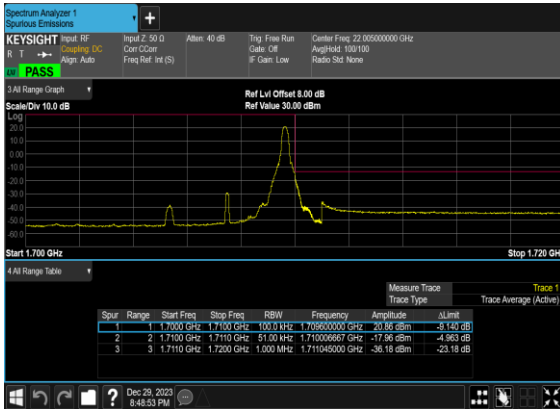

N70(5M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

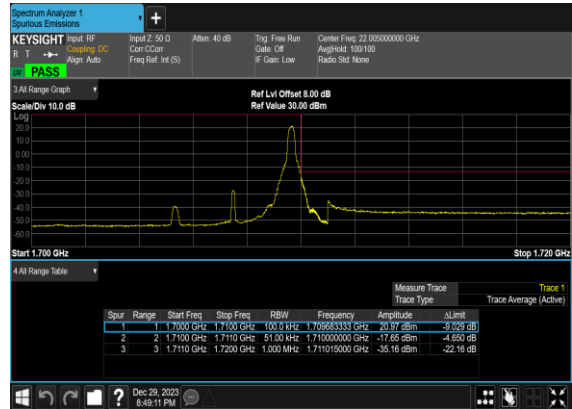


N70(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH




N70(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH




N70(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

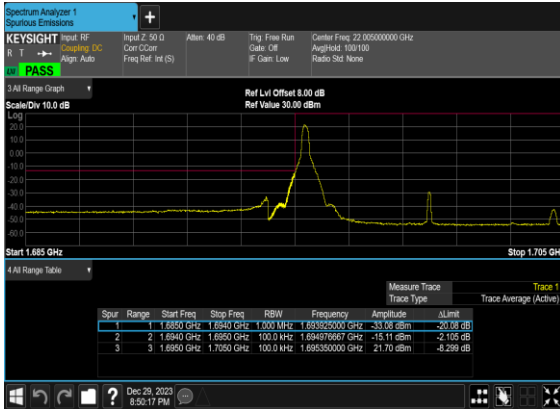


N70(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

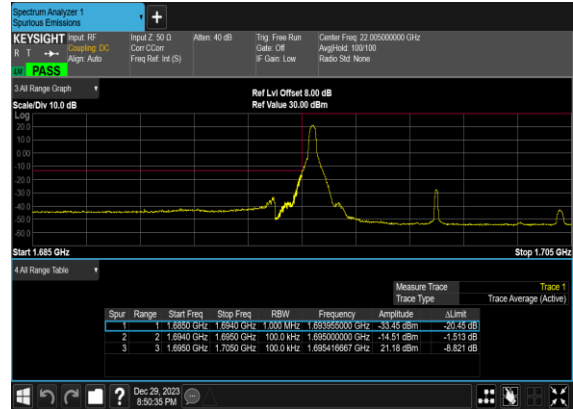


N70(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

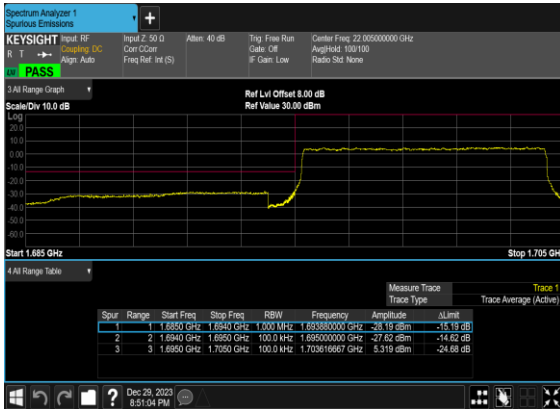


N70(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

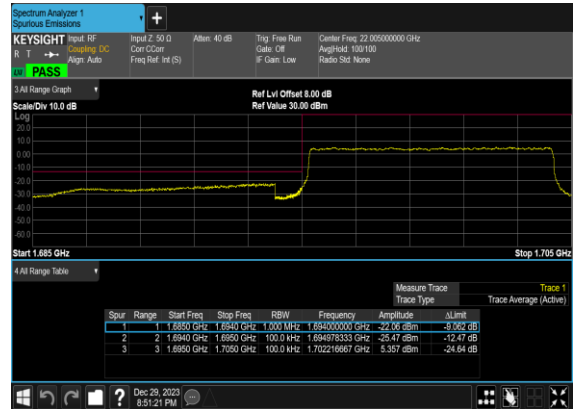

N70(10M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

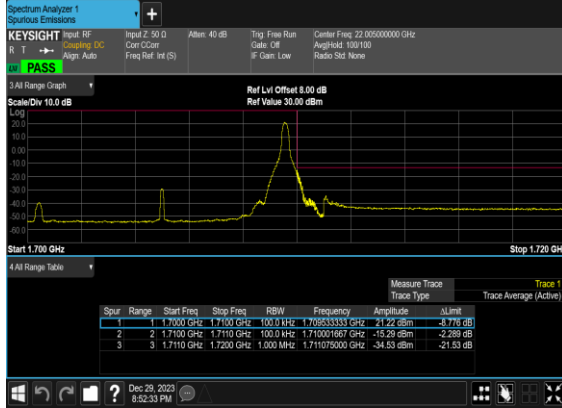

N70(10M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

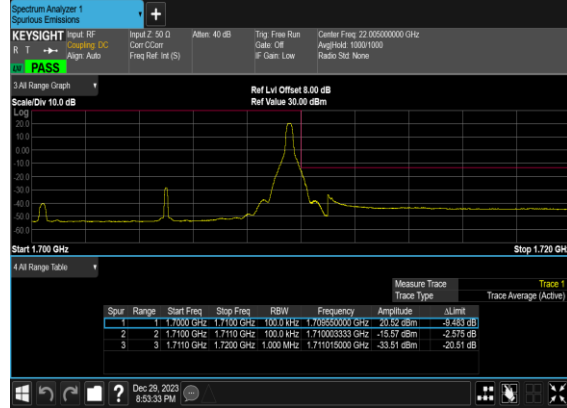


N70(10M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_High\_CH




N70(10M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_High\_CH




N70(15M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

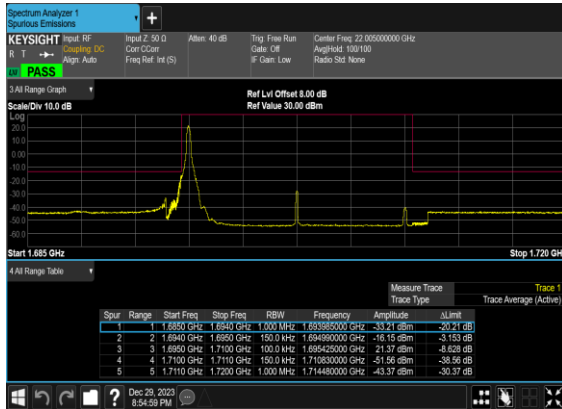


N70(15M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

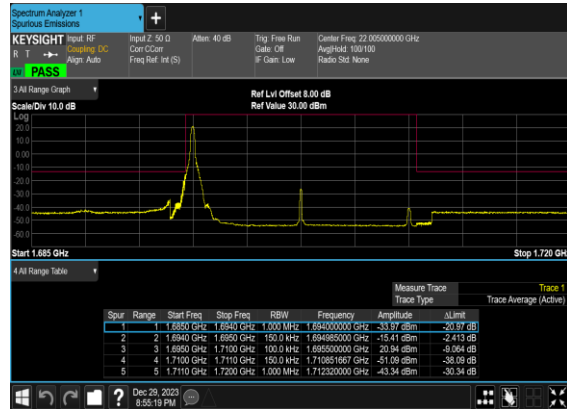


### N70(15M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

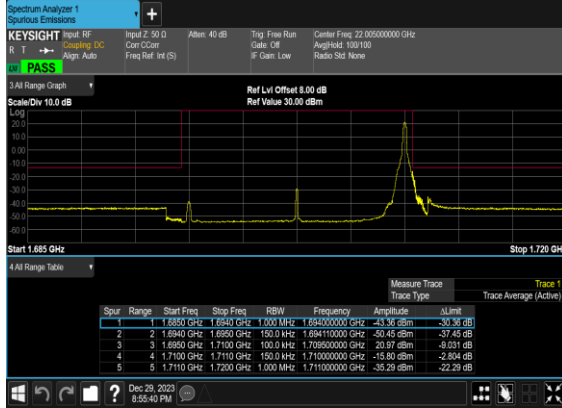


### N70(15M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

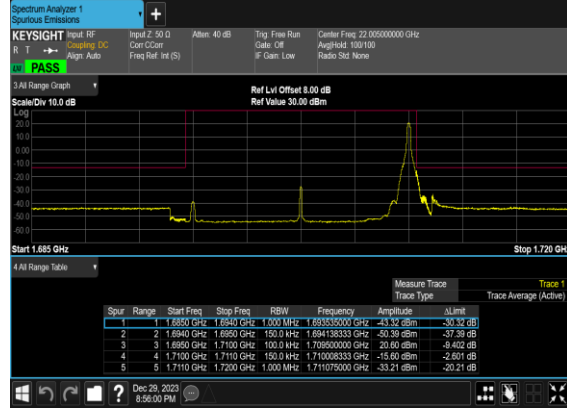

### N70(15M)\_DFT-s- OFDM\_BPSK\_Outer\_Full\_Mid\_CH

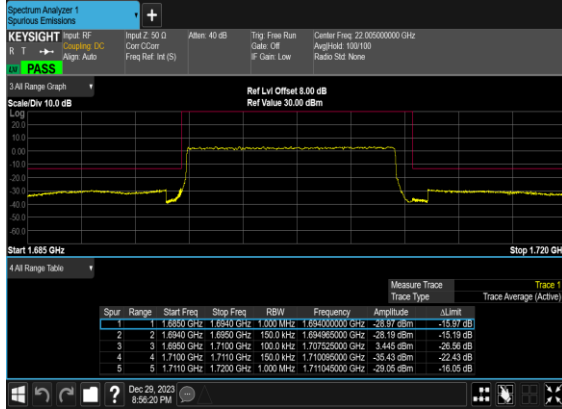

### N70(15M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

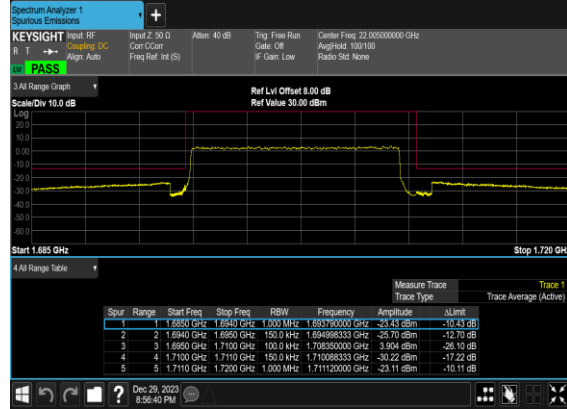



# Appendix B. Test Results of Radiated Test

## Radiated Spurious Emission

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Note: Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

n7 SA / NR 40MHz / QPSK(ANT9)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5012.00	-65.07	-25	-40.07	-81.07	-70.63	7.12	12.68	H
	7518.00	-47.78	-25	-22.78	-68.93	-51.11	8.26	11.59	H
	10024.00	-55.05	-25	-30.05	-80.75	-56.58	10.45	11.98	H
	5012.00	-65.07	-25	-40.07	-80.99	-70.63	7.12	12.68	V
	7518.00	-44.22	-25	-19.22	-65.26	-47.55	8.26	11.59	V
	10024.00	-55.62	-25	-30.62	-80.73	-57.15	10.45	11.98	V
Middle	5032.00	-64.77	-25	-39.77	-80.78	-70.33	7.14	12.70	H
	7548.00	-48.75	-25	-23.75	-69.80	-52.05	8.30	11.60	H
	10064.00	-55.42	-25	-30.42	-81.05	-56.94	10.48	12.00	H
	5032.00	-65.16	-25	-40.16	-81.09	-70.72	7.14	12.70	V
	7548.00	-44.63	-25	-19.63	-65.52	-47.93	8.30	11.60	V
	10064.00	-55.97	-25	-30.97	-81.07	-57.49	10.48	12.00	V
Highest	5052.00	-64.82	-25	-39.82	-80.86	-70.38	7.16	12.72	H
	7578.00	-47.68	-25	-22.68	-68.61	-50.98	8.33	11.63	H
	10104.00	-55.55	-25	-30.55	-81.14	-57.15	10.50	12.10	H
	5052.00	-64.97	-25	-39.97	-80.94	-70.53	7.16	12.72	V
	7578.00	-43.37	-25	-18.37	-64.1	-46.67	8.33	11.63	V
	10104.00	-55.77	-25	-30.77	-80.87	-57.37	10.50	12.10	V



EN-DC_66A_n7A / LTE 20MHz + NR 40MHz / QPSK (ANT1+9)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
NR n7 Lowest	5004.00	-64.09	-25	-39.09	-80.06	-69.65	7.12	12.68	H
	7518.00	-58.78	-25	-33.78	-79.93	-62.11	8.26	11.59	H
	10024.00	-54.86	-25	-29.86	-80.56	-56.39	10.45	11.98	H
	5004.00	-65.19	-25	-40.19	-81.08	-70.75	7.12	12.68	V
	7518.00	-58.86	-25	-33.86	-79.9	-62.19	8.26	11.59	V
	10024.00	-55.13	-25	-30.13	-80.24	-56.66	10.45	11.98	V
LTE Band66 Lowest	3481	-64.38	-13	-51.38	-76.60	-71.23	5.65	12.50	H
	5221.5	-64.40	-13	-51.40	-80.40	-70.07	7.13	12.80	H
	6962	-60.22	-13	-47.22	-80.23	-63.62	8.40	11.80	H
	3481	-63.66	-13	-50.66	-76.42	-70.51	5.65	12.50	V
	5221.5	-64.25	-13	-51.25	-80.2	-69.92	7.13	12.80	V
	6962	-60.15	-13	-47.15	-80.26	-63.55	8.40	11.80	V
NR n7 Middle	5040.00	-64.68	-25	-39.68	-80.71	-70.24	7.14	12.70	H
	7548.00	-57.36	-25	-32.36	-78.41	-60.66	8.30	11.60	H
	10064.00	-55.00	-25	-30.00	-80.63	-56.52	10.48	12.00	H
	5040.00	-64.62	-25	-39.62	-80.58	-70.18	7.14	12.70	V
	7548.00	-59.15	-25	-34.15	-80.04	-62.45	8.30	11.60	V
	10064.00	-55.80	-25	-30.80	-80.9	-57.32	10.48	12.00	V
LTE Band66 Middle	3481	-64.12	-13	-51.12	-76.34	-70.97	5.65	12.50	H
	5221.5	-64.37	-13	-51.37	-80.37	-70.04	7.13	12.80	H
	6962	-60.53	-13	-47.53	-80.54	-63.93	8.40	11.80	H
	3481	-64.17	-13	-51.17	-76.93	-71.02	5.65	12.50	V
	5221.5	-64.03	-13	-51.03	-79.98	-69.70	7.13	12.80	V
	6962	-60.45	-13	-47.45	-80.56	-63.85	8.40	11.80	V
NR n7 Highest	5052.00	-63.74	-25	-38.74	-79.78	-69.30	7.16	12.72	H
	7578.00	-58.38	-25	-33.38	-79.31	-61.68	8.33	11.63	H
	10104.00	-55.24	-25	-30.24	-80.83	-56.84	10.50	12.10	H
	5052.00	-63.55	-25	-38.55	-79.52	-69.11	7.16	12.72	V
	7578.00	-58.63	-25	-33.63	-79.36	-61.93	8.33	11.63	V
	10104.00	-55.29	-25	-30.29	-80.39	-56.89	10.50	12.10	V
LTE Band66 Highest	3481	-62.71	-13	-49.71	-74.93	-69.56	5.65	12.50	H
	5221.5	-63.85	-13	-50.85	-79.85	-69.52	7.13	12.80	H
	6962	-60.21	-13	-47.21	-80.22	-63.61	8.40	11.80	H
	3481	-62.66	-13	-49.66	-75.42	-69.51	5.65	12.50	V
	5221.5	-63.75	-13	-50.75	-79.7	-69.42	7.13	12.80	V
	6962	-60.06	-13	-47.06	-80.17	-63.46	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n41 SA / NR 100MHz / QPSK(ANT9)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4994.80	-56.62	-25	-31.62	-72.60	-62.18	7.12	12.68	H
	7492.20	-49.29	-25	-24.29	-70.55	-52.62	8.26	11.59	H
	9989.60	-55.26	-25	-30.26	-80.97	-56.79	10.45	11.98	H
	4994.80	-58.05	-25	-33.05	-73.95	-63.61	7.12	12.68	V
	7492.20	-51.16	-25	-26.16	-72.34	-54.49	8.26	11.59	V
	9989.60	-55.89	-25	-30.89	-81.01	-57.42	10.45	11.98	V
Middle	5089.00	-58.45	-25	-33.45	-74.53	-64.01	7.14	12.70	H
	7633.50	-52.71	-25	-27.71	-73.61	-56.01	8.30	11.60	H
	10178.00	-55.13	-25	-30.13	-80.62	-56.65	10.48	12.00	H
	5089.00	-60.38	-25	-35.38	-76.39	-65.94	7.14	12.70	V
	7633.50	-51.66	-25	-26.66	-72.37	-54.96	8.30	11.60	V
	10178.00	-56.11	-25	-31.11	-81.19	-57.63	10.48	12.00	V
Highest	5182.80	-59.85	-25	-34.85	-76.07	-65.41	7.16	12.72	H
	7774.20	-52.72	-25	-27.72	-73.80	-56.02	8.33	11.63	H
	10365.60	-55.77	-25	-30.77	-81.02	-57.37	10.50	12.10	H
	5182.80	-62.74	-25	-37.74	-78.91	-68.30	7.16	12.72	V
	7774.20	-52.25	-25	-27.25	-73.32	-55.55	8.33	11.63	V
	10365.60	-55.57	-25	-30.57	-80.62	-57.17	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_66A_n41A / LTE 20MHz + NR 100MHz / QPSK (ANT9+0)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
NR n41 Lowest	4986.00	-60.12	-25	-35.12	-76.12	-65.68	7.12	12.68	H
	7492.20	-53.43	-25	-28.43	-74.69	-56.76	8.26	11.59	H
	9989.60	-50.82	-25	-25.82	-76.53	-52.35	10.45	11.98	H
	4992.00	-61.46	-25	-36.46	-77.37	-67.02	7.12	12.68	V
	7492.20	-52.32	-25	-27.32	-73.5	-55.65	8.26	11.59	V
	9989.60	-50.45	-25	-25.45	-75.57	-51.98	10.45	11.98	V
LTE Band66 Lowest	3481	-64.34	-13	-51.34	-76.56	-71.19	5.65	12.50	H
	5221.5	-62.79	-13	-49.79	-78.79	-68.46	7.13	12.80	H
	6962	-60.77	-13	-47.77	-80.78	-64.17	8.40	11.80	H
	3481	-64.00	-13	-51.00	-76.76	-70.85	5.65	12.50	V
	5221.5	-63.60	-13	-50.60	-79.55	-69.27	7.13	12.80	V
	6962	-60.63	-13	-47.63	-80.74	-64.03	8.40	11.80	V
NR n41 Middle	5076.00	-59.94	-25	-34.94	-76.01	-65.50	7.14	12.70	H
	7633.50	-54.24	-25	-29.24	-75.14	-57.54	8.30	11.60	H
	10178.00	-48.40	-25	-23.40	-73.89	-49.92	10.48	12.00	H
	5088.00	-59.18	-25	-34.18	-75.19	-64.74	7.14	12.70	V
	7633.50	-54.48	-25	-29.48	-75.19	-57.78	8.30	11.60	V
	10178.00	-48.73	-25	-23.73	-73.81	-50.25	10.48	12.00	V
LTE Band66 Middle	3481	-64.37	-13	-51.37	-76.59	-71.22	5.65	12.50	H
	5221.5	-63.26	-13	-50.26	-79.26	-68.93	7.13	12.80	H
	6962	-60.45	-13	-47.45	-80.46	-63.85	8.40	11.80	H
	3481	-63.91	-13	-50.91	-76.67	-70.76	5.65	12.50	V
	5221.5	-63.50	-13	-50.50	-79.45	-69.17	7.13	12.80	V
	6962	-60.43	-13	-47.43	-80.54	-63.83	8.40	11.80	V
NR n41 Highest	5172.00	-59.74	-25	-34.74	-75.95	-65.30	7.16	12.72	H
	7774.20	-51.98	-25	-26.98	-73.06	-55.28	8.33	11.63	H
	10365.60	-51.50	-25	-26.50	-76.75	-53.10	10.50	12.10	H
	5172.00	-63.22	-25	-38.22	-79.38	-68.78	7.16	12.72	V
	7774.20	-48.30	-25	-23.30	-69.37	-51.60	8.33	11.63	V
	10365.60	-50.60	-25	-25.60	-75.65	-52.20	10.50	12.10	V
LTE Band66 Highest	3481	-63.93	-13	-50.93	-76.15	-70.78	5.65	12.50	H
	5221.5	-62.18	-13	-49.18	-78.18	-67.85	7.13	12.80	H
	6962	-59.82	-13	-46.82	-79.83	-63.22	8.40	11.80	H
	3481	-63.72	-13	-50.72	-76.48	-70.57	5.65	12.50	V
	5221.5	-58.59	-13	-45.59	-74.54	-64.26	7.13	12.80	V
	6962	-60.31	-13	-47.31	-80.42	-63.71	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





n66 SA / NR 40MHz / QPSK(ANT0)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3421.84	-65.05	-13	-52.05	-76.52	-71.93	5.60	12.48	H
	5132.76	-61.73	-13	-48.73	-77.88	-67.41	7.10	12.78	H
	6843.68	-60.45	-13	-47.45	-79.93	-63.84	8.38	11.77	H
	3421.84	-64.67	-13	-51.67	-76.71	-71.55	5.60	12.48	V
	5132.76	-63.55	-13	-50.55	-79.64	-69.23	7.10	12.78	V
	6843.68	-60.77	-13	-47.77	-80.01	-64.16	8.38	11.77	V
Middle	3452	-63.06	-13	-50.06	-74.93	-69.91	5.65	12.50	H
	5178	-62.94	-13	-49.94	-79.16	-68.61	7.13	12.80	H
	6904	-60.26	-13	-47.26	-80.01	-63.66	8.40	11.80	H
	3452	-63.35	-13	-50.35	-75.77	-70.20	5.65	12.50	V
	5178	-62.86	-13	-49.86	-79.02	-68.53	7.13	12.80	V
	6904	-60.12	-13	-47.12	-79.8	-63.52	8.40	11.80	V
Highest	3481.4	-64.46	-13	-51.46	-76.69	-71.30	5.68	12.52	H
	5222.1	-62.06	-13	-49.06	-78.06	-67.73	7.15	12.82	H
	6962.8	-59.80	-13	-46.80	-79.81	-63.23	8.42	11.85	H
	3481.4	-63.93	-13	-50.93	-76.7	-70.77	5.68	12.52	V
	5222.1	-62.81	-13	-49.81	-78.75	-68.48	7.15	12.82	V
	6962.8	-59.75	-13	-46.75	-79.86	-63.18	8.42	11.85	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_30A_n66A / LTE 10MHz + NR 40MHz / QPSK (ANT1+0)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
NR n66 Lowest	3421.84	-65.37	-13	-44.79	-53.60	-64.67	5.60	12.48	H
	5132.76	-64.95	-13	-43.89	-57.49	-62.57	7.10	12.78	H
	6843.68	-61.60	-13	-42.41	-56.73	-58.80	8.38	11.77	H
	3421.84	-65.82	-13	-45.00	-54.62	-64.88	5.60	12.48	V
	5132.76	-65.07	-13	-43.45	-57.55	-62.13	7.10	12.78	V
	6843.68	-60.64	-13	-41.96	-55.53	-58.35	8.38	11.77	V
LTE Band30 Lowest	4611.50	-59.14	-40	-19.14	-51.93	-65.39	6.45	12.70	H
	6916.50	-61.73	-40	-21.73	-57.12	-65.13	8.40	11.80	H
	9222.00	-51.92	-40	-11.92	-53.00	-54.27	9.65	12.00	H
	4611.50	-61.20	-40	-21.20	-53.84	-67.45	6.45	12.70	V
	6916.50	-61.90	-40	-21.90	-57.25	-65.30	8.40	11.80	V
	9222.00	-55.63	-40	-15.63	-56.29	-57.98	9.65	12.00	V
NR n66 Middle	3452	-65.03	-13	-45.25	-53.61	-65.10	5.65	12.50	H
	5178	-54.93	-13	-42.82	-47.50	-61.49	7.13	12.80	H
	6904	-61.77	-13	-42.19	-57.12	-58.59	8.40	11.80	H
	3452	-64.99	-13	-43.73	-54.12	-63.58	5.65	12.50	V
	5178	-55.38	-13	-43.80	-47.89	-62.47	7.13	12.80	V
	6904	-61.32	-13	-41.71	-56.6	-58.11	8.40	11.80	V
LTE Band30 Middle	4611.50	-59.05	-40	-19.05	-51.84	-65.30	6.45	12.70	H
	6916.50	-60.40	-40	-20.40	-55.79	-63.80	8.40	11.80	H
	9222.00	-51.75	-40	-11.75	-52.83	-54.10	9.65	12.00	H
	4611.50	-61.38	-40	-21.38	-54.02	-67.63	6.45	12.70	V
	6916.50	-55.98	-40	-15.98	-51.33	-59.38	8.40	11.80	V
	9222.00	-55.76	-40	-15.76	-56.42	-58.11	9.65	12.00	V
NR n66 Highest	3481.84	-63.36	-13	-50.36	-52.28	-70.20	5.68	12.52	H
	5232.76	-64.40	-13	-51.40	-56.57	-70.07	7.15	12.82	H
	6916.5	-51.97	-13	-38.97	-47.36	-55.40	8.42	11.85	H
	3481.84	-65.69	-13	-52.69	-55.15	-72.53	5.68	12.52	V
	5232.76	-64.64	-13	-51.64	-56.76	-70.31	7.15	12.82	V
	6916.5	-56.68	-13	-43.68	-52.03	-60.11	8.42	11.85	V
LTE Band30 Highest	4611.50	-54.43	-40	-14.43	-47.22	-60.68	6.45	12.70	H
	6963.68	-61.42	-40	-21.42	-56.96	-64.82	8.40	11.80	H
	9222.00	-51.61	-40	-11.61	-52.69	-53.96	9.65	12.00	H
	4611.50	-53.52	-40	-13.52	-46.16	-59.77	6.45	12.70	V
	6963.68	-60.72	-40	-20.72	-56.37	-64.12	8.40	11.80	V
	9222.00	-55.35	-40	-15.35	-56.01	-57.70	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC_2A_n66A / LTE 20MHz + NR 40MHz / QPSK (ANT0+1)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
NR n66 Lowest	3414	-65.22	-13	-52.22	-76.61	-72.10	5.60	12.48	H
	5136	-63.10	-13	-50.10	-79.25	-68.78	7.10	12.78	H
	6843.68	-60.83	-13	-47.83	-80.31	-64.22	8.38	11.77	H
	3414	-64.74	-13	-51.74	-76.69	-71.62	5.60	12.48	V
	5136	-63.46	-13	-50.46	-79.56	-69.14	7.10	12.78	V
	6843.68	-61.08	-13	-48.08	-80.32	-64.47	8.38	11.77	V
LTE Band2 Lowest	3751.18	-56.69	-13	-43.69	-77.14	-63.44	5.85	12.60	H
	5626.77	-56.13	-13	-43.13	-79.30	-61.93	7.30	13.10	H
	7502	-54.86	-13	-41.86	-79.06	-58.01	8.35	11.50	H
	3751.18	-54.64	-13	-41.64	-77.42	-61.39	5.85	12.60	V
	5626.77	-55.77	-13	-42.77	-79.06	-61.57	7.30	13.10	V
	7502	-54.94	-13	-41.94	-78.43	-58.09	8.35	11.50	V
NR n66 Middle	3450	-64.61	-13	-51.61	-76.43	-71.46	5.65	12.50	H
	5172	-63.00	-13	-50.00	-79.21	-68.67	7.13	12.80	H
	6904	-60.42	-13	-47.42	-80.17	-63.82	8.40	11.80	H
	3450	-63.98	-13	-50.98	-76.35	-70.83	5.65	12.50	V
	5172	-63.06	-13	-50.06	-79.22	-68.73	7.13	12.80	V
	6904	-60.59	-13	-47.59	-80.27	-63.99	8.40	11.80	V
LTE Band2 Middle	3751.18	-63.22	-13	-50.22	-77.01	-69.97	5.85	12.60	H
	5626.77	-62.68	-13	-49.68	-79.13	-68.48	7.30	13.10	H
	7502	-57.93	-13	-44.93	-79.16	-61.08	8.35	11.50	H
	3751.18	-63.32	-13	-50.32	-77.31	-70.07	5.85	12.60	V
	5626.77	-62.42	-13	-49.42	-78.78	-68.22	7.30	13.10	V
	7502	-56.98	-13	-43.98	-78.12	-60.13	8.35	11.50	V
NR n66 Highest	3474	-64.64	-13	-51.64	-76.76	-71.48	5.68	12.52	H
	5232	-63.81	-13	-50.81	-79.68	-69.48	7.15	12.82	H
	6963.68	-60.81	-13	-47.81	-80.82	-64.24	8.42	11.85	H
	3474	-63.96	-13	-50.96	-76.71	-70.80	5.68	12.52	V
	5232	-63.91	-13	-50.91	-79.73	-69.58	7.15	12.82	V
	6963.68	-60.70	-13	-47.70	-80.82	-64.13	8.42	11.85	V
LTE Band2 Highest	3751.18	-63.50	-13	-50.50	-77.29	-70.25	5.85	12.60	H
	5626.77	-62.71	-13	-49.71	-79.16	-68.51	7.30	13.10	H
	7502	-57.71	-13	-44.71	-78.94	-60.86	8.35	11.50	H
	3751.18	-63.08	-13	-50.08	-77.07	-69.83	5.85	12.60	V
	5626.77	-62.71	-13	-49.71	-79.07	-68.51	7.30	13.10	V
	7502	-57.43	-13	-44.43	-78.57	-60.58	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n70 SA / NR 15MHz / QPSK(ANT0)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3391	-64.02	-13	-51.02	-75.22	-70.90	5.60	12.48	H
	5086.5	-63.28	-13	-50.28	-79.36	-68.96	7.10	12.78	H
	6782	-60.40	-13	-47.40	-79.63	-63.79	8.38	11.77	H
	3391	-64.58	-13	-51.58	-76.32	-71.46	5.60	12.48	V
	5086.5	-63.04	-13	-50.04	-79.05	-68.72	7.10	12.78	V
	6782	-60.74	-13	-47.74	-79.61	-64.13	8.38	11.77	V
Middle	3396	-63.82	-13	-50.82	-75.01	-70.67	5.65	12.50	H
	5094	-64.21	-13	-51.21	-80.31	-69.88	7.13	12.80	H
	6792	-59.55	-13	-46.55	-78.81	-62.95	8.40	11.80	H
	3396	-63.80	-13	-50.80	-75.55	-70.65	5.65	12.50	V
	5094	-64.25	-13	-51.25	-80.29	-69.92	7.13	12.80	V
	6792	-60.12	-13	-47.12	-79.02	-63.52	8.40	11.80	V
Highest	3391	-64.94	-13	-51.94	-76.14	-71.78	5.68	12.52	H
	5086.5	-58.51	-13	-45.51	-74.59	-64.18	7.15	12.82	H
	6782	-59.85	-13	-46.85	-79.08	-63.28	8.42	11.85	H
	3391	-63.58	-13	-50.58	-75.32	-70.42	5.68	12.52	V
	5086.5	-60.02	-13	-47.02	-76.03	-65.69	7.15	12.82	V
	6782	-60.69	-13	-47.69	-79.56	-64.12	8.42	11.85	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n70 SA / NR 15MHz / QPSK(ANT0)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3391.08	-64.46	-13	-51.46	-75.66	-71.31	5.65	12.50	H
	5086.62	-60.47	-13	-47.47	-76.55	-66.14	7.13	12.80	H
	6782.16	-59.75	-13	-46.75	-78.98	-63.15	8.40	11.80	H
	3391.08	-64.88	-13	-51.88	-76.62	-71.73	5.65	12.50	V
	5086.62	-60.06	-13	-47.06	-76.07	-65.73	7.13	12.80	V
	6782.16	-60.41	-13	-47.41	-79.28	-63.81	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.