

01_LTE Band 12_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.383 W/kg; SAR (10g) = 0.239 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.465 W/kg; SAR (10g) = 0.228 W/kg;

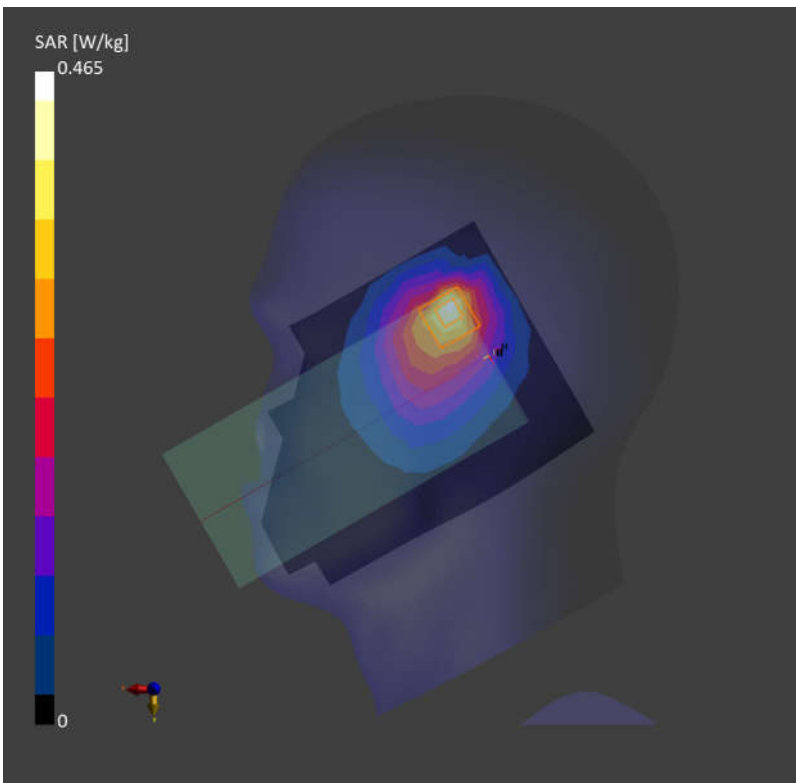

02_GSM850_GPRS (4 Tx slots)_Right Cheek_0mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.497 W/kg; SAR (10g) = 0.313 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.363 W/kg;

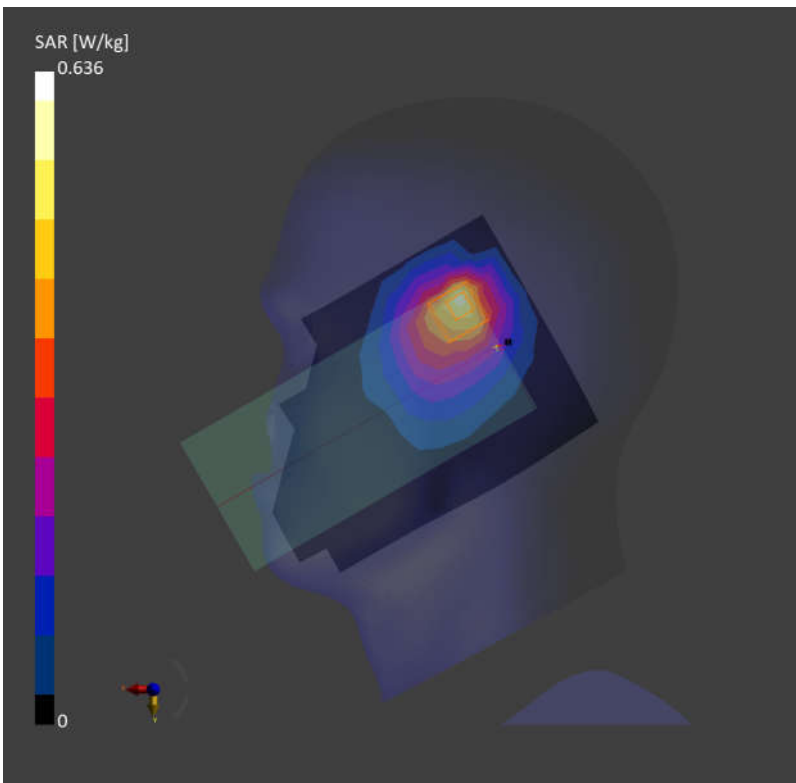

03_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.473 W/kg; SAR (10g) = 0.297 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.519 W/kg; SAR (10g) = 0.280 W/kg;

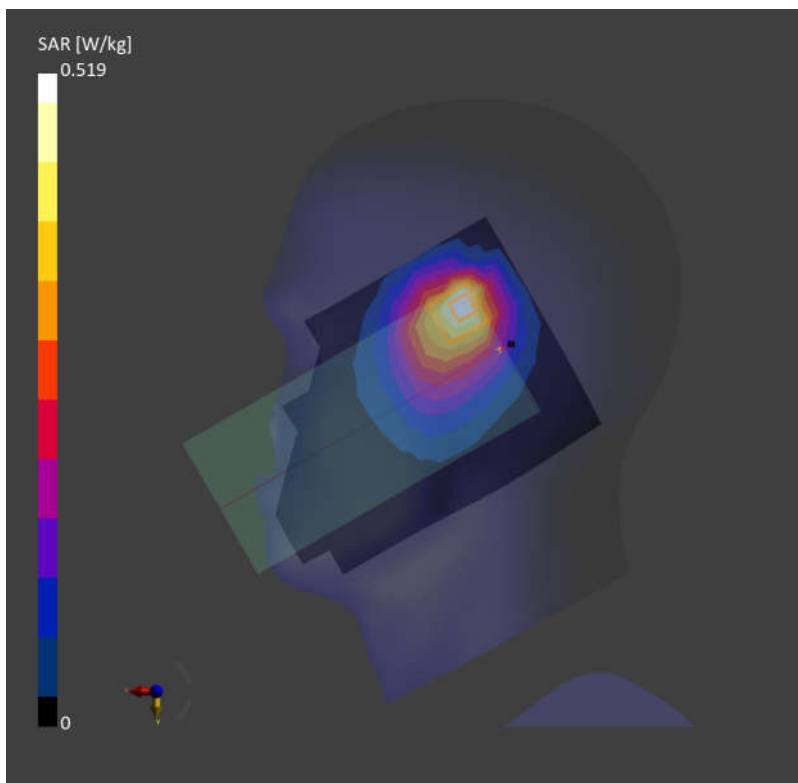

04_LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.372 W/kg; SAR (10g) = 0.235 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.425 W/kg; SAR (10g) = 0.224 W/kg;

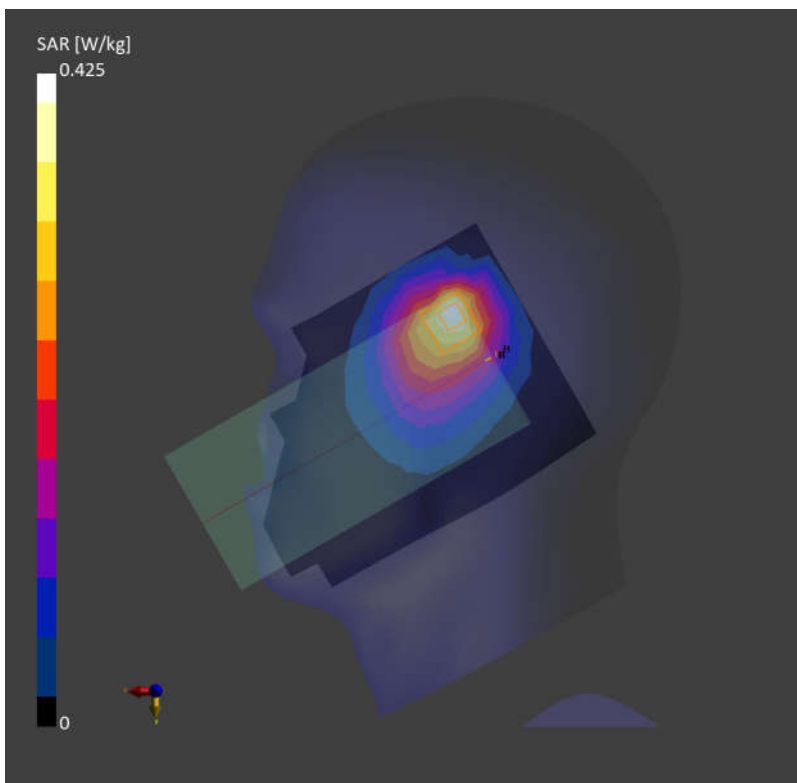

05_FR1 n5_20M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch167300

Communication System: Band n5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.465 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.528 W/kg; SAR (10g) = 0.283 W/kg;

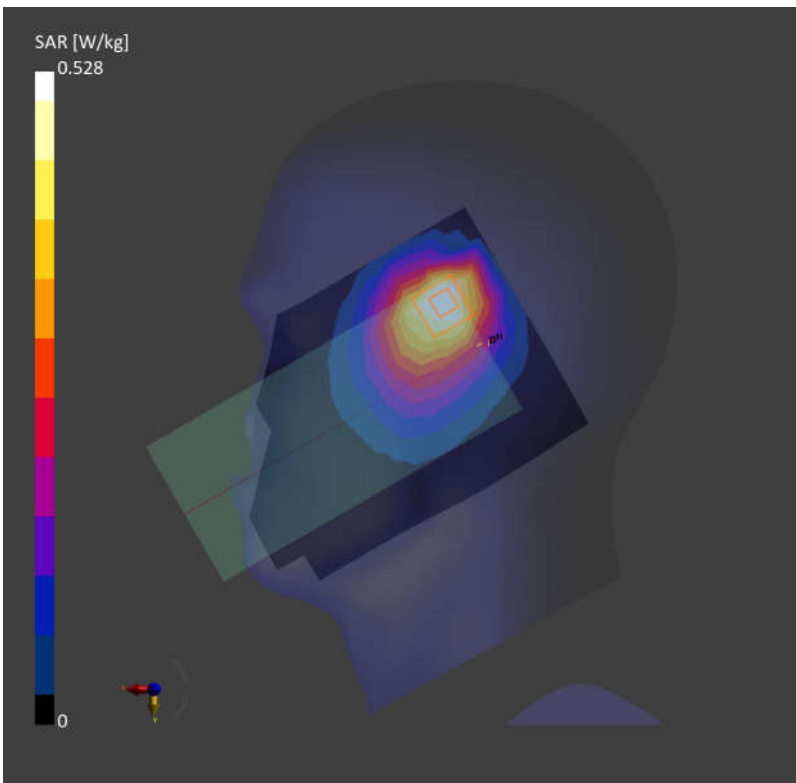

06_WCDMA IV_RMC 12.2Kbps_Right Tilted_0mm_Ch1513

Communication System: Band 4; Frequency: 1752.600

Medium: HSL. Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.508 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.284 W/kg;

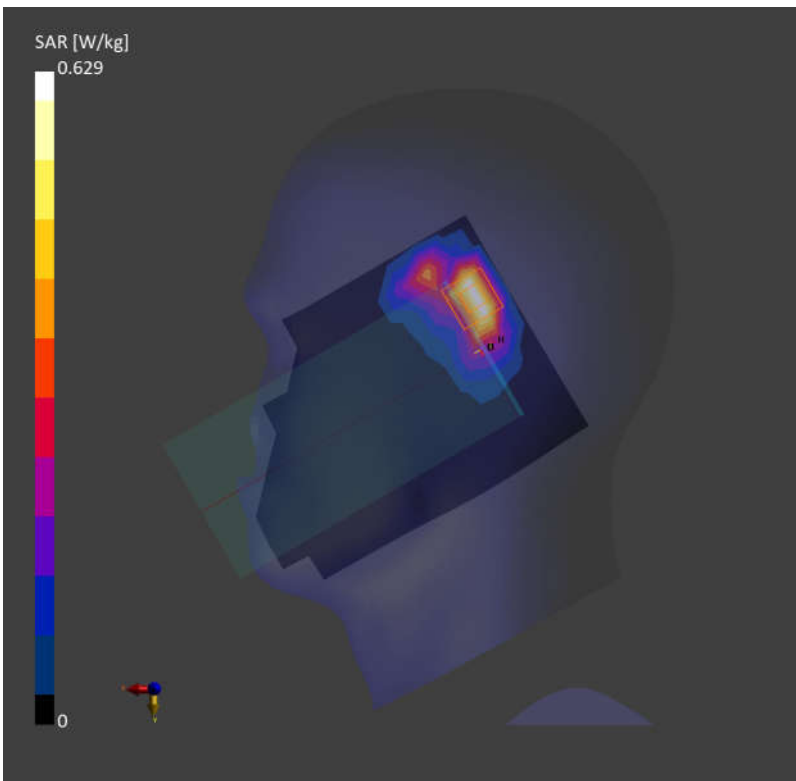

07_LTE Band 66_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch132572

Communication System: Band 66; Frequency: 1770.000

Medium: HSL. Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.515 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.599 W/kg; SAR (10g) = 0.278 W/kg;

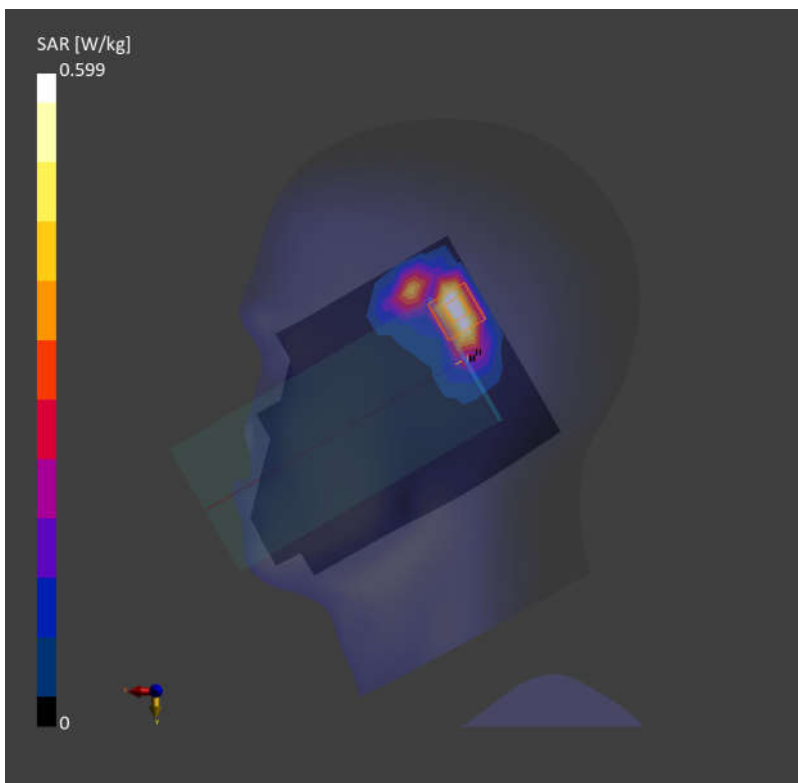

08_FR1 n66_40M_QPSK_1RB_1Offset_Right Tilted_0mm_Ch349000

Communication System: Band n66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.286 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.305 W/kg;

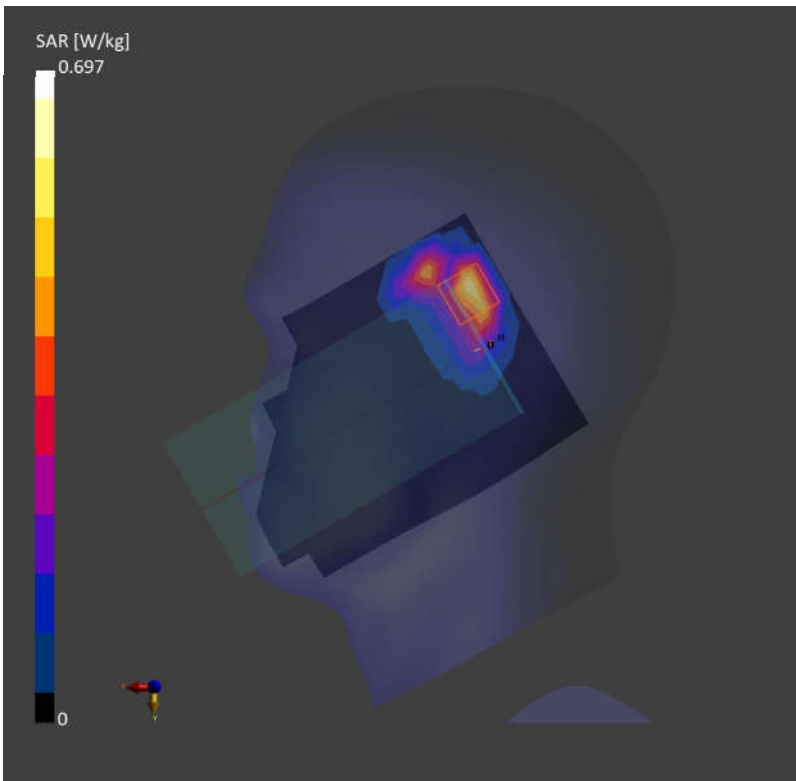

09_GSM1900_GPRS (4 Tx slots)_Right Tilted_0mm_Ch810

Communication System: PCS 1900; Frequency: 1909.800

Medium: HSL. Medium parameters used: $f=1909.800$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.485 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.280 W/kg;

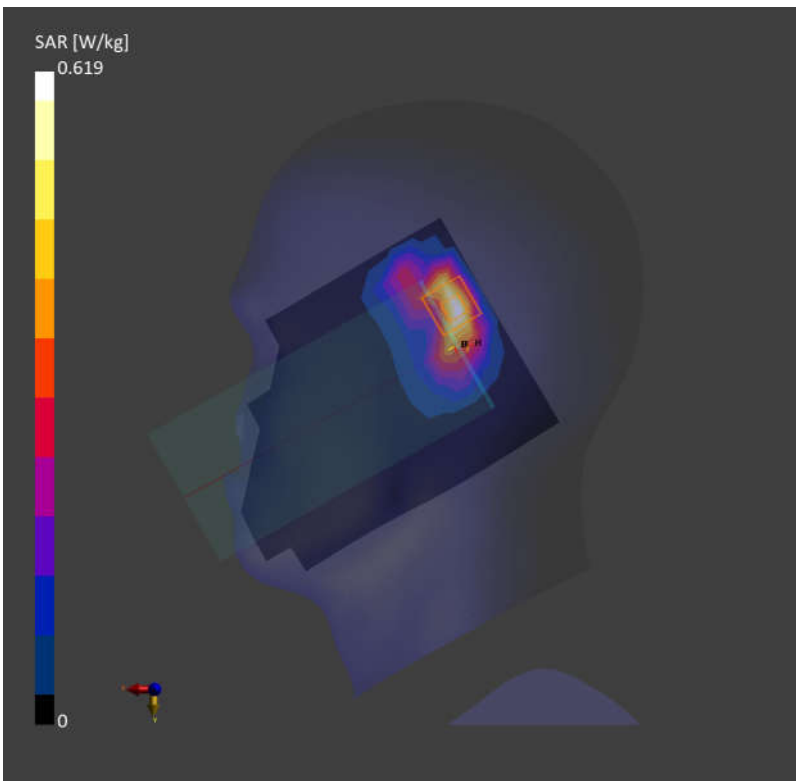

10_WCDMA II_RMC 12.2Kbps_Right Tilted_0mm_Ch9538

Communication System: Band 2; Frequency: 1907.600

Medium: HSL. Medium parameters used: $f=1907.600$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.296 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07dB

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.310 W/kg;

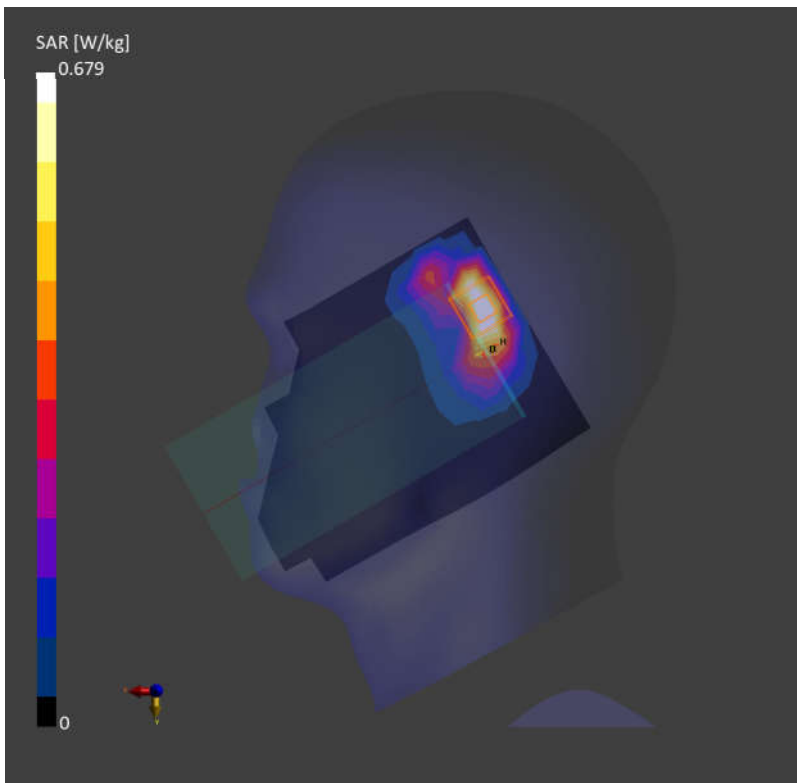

11_LTE Band 2_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch19100

Communication System: Band 2; Frequency: 1900.000

Medium: HSL. Medium parameters used: $f=1900.000$ MHz; $\sigma=1.43$ S/m; $\epsilon_r=39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.304 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.309 W/kg;

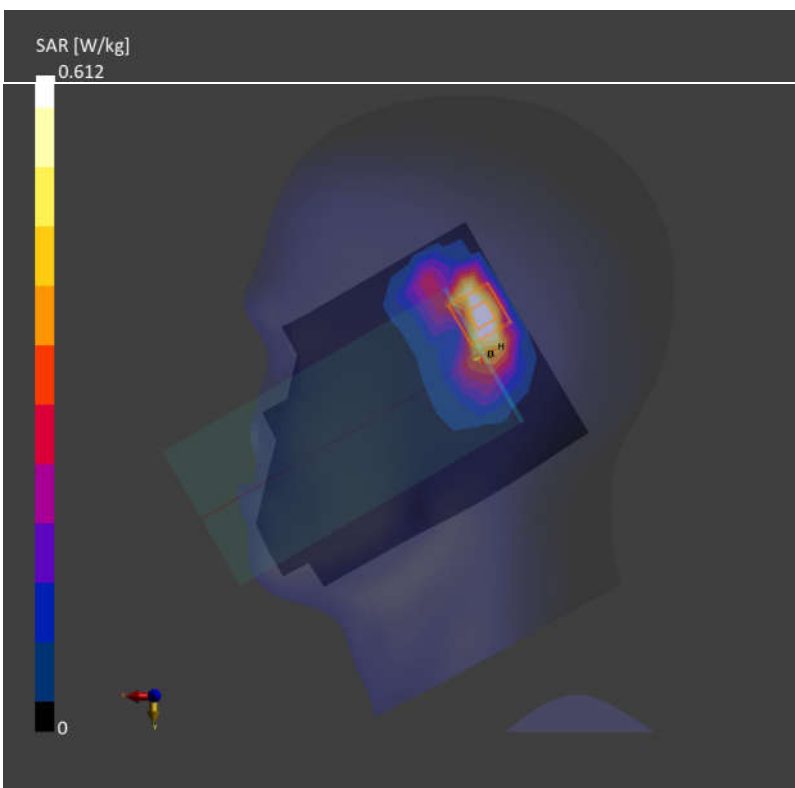

12_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch21100

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.283 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.293 W/kg;

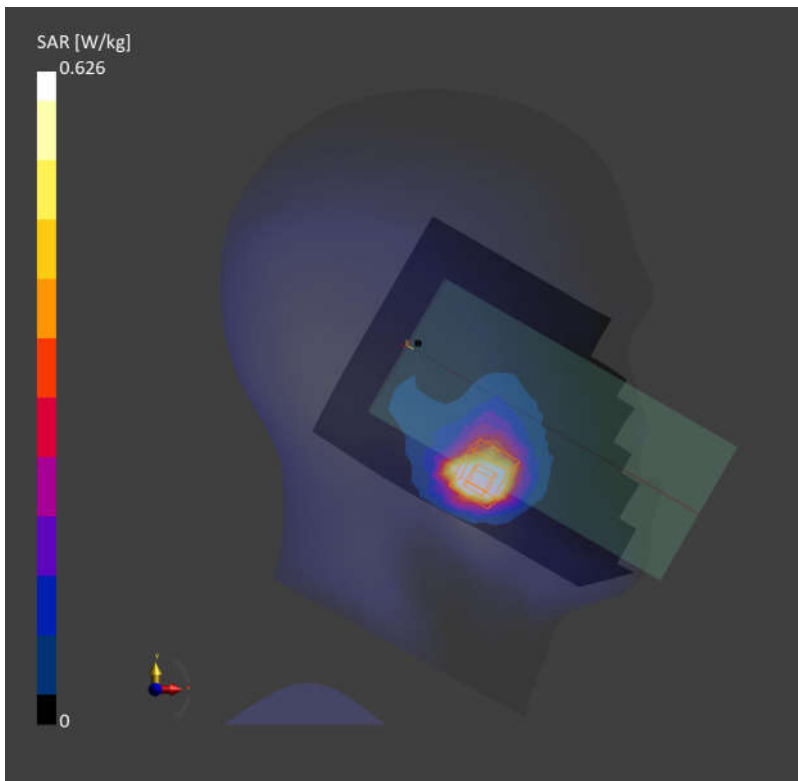

13_LTE Band 41_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch41490

Communication System: Band 41; Frequency: 2680.000

Medium: HSL. Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.644 W/kg; SAR (10g) = 0.286 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.647 W/kg; SAR (10g) = 0.289 W/kg;

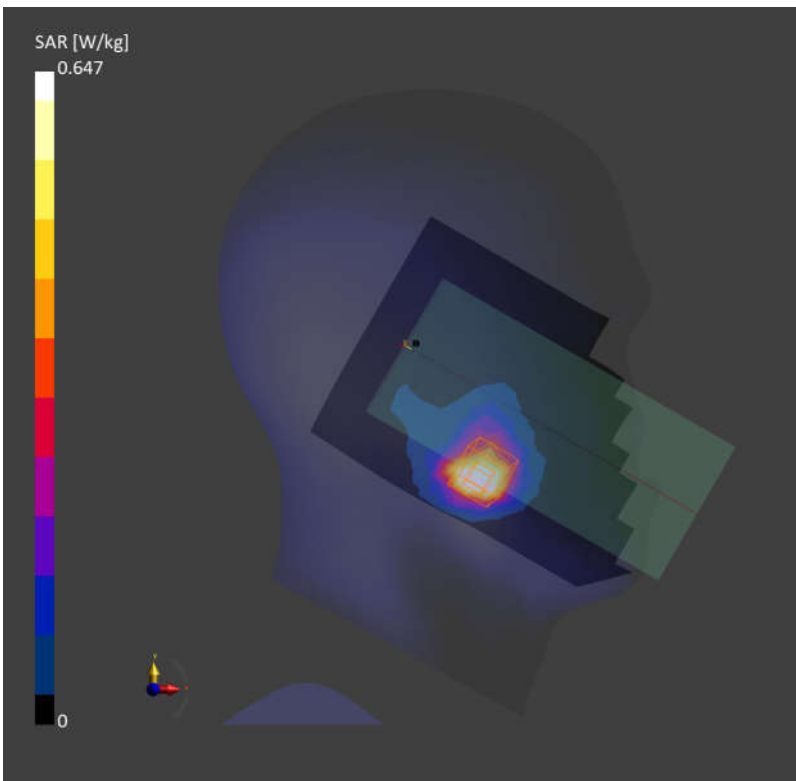

14_FR1 n41_100M_QPSK_1RB_1Offset_Right Tilted_0mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.304 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.302 W/kg;

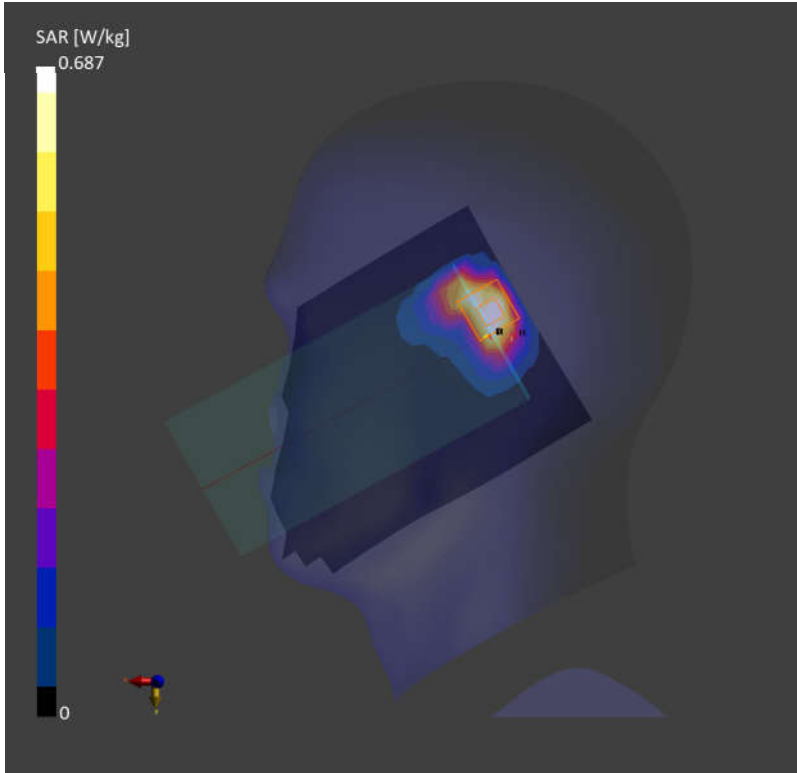

15_LTE Band 42 Part 27Q_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch42990

Communication System: Band 42; Frequency: 3540.000

Medium: HSL. Medium parameters used: $f= 3540.000$ MHz; $\sigma= 2.83$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.613 W/kg; SAR (10g) = 0.253 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.262 W/kg;

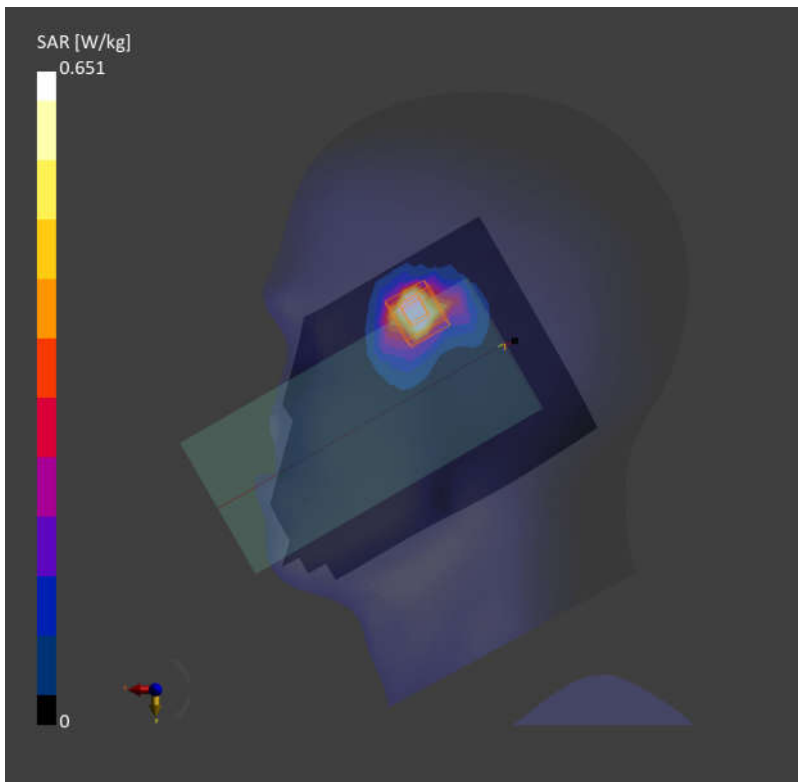

16_FR1 n77 Part 27O_100M_QPSK_135RB_69Offset_Right Cheek_0mm_Ch656000

Communication System: Band n77; Frequency: 3840.000

Medium: HSL. Medium parameters used: $f= 3840.000$ MHz; $\sigma= 3.12$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.276 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.270 W/kg;

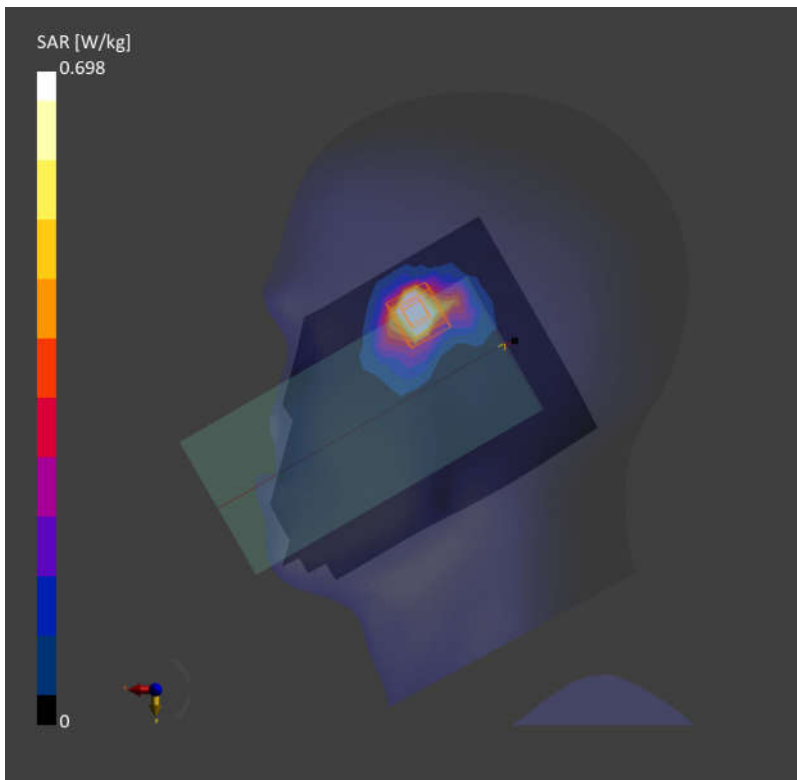

17_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f= 2437.000$ MHz; $\sigma= 1.84$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.333 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.751 W/kg; SAR (10g) = 0.339 W/kg;

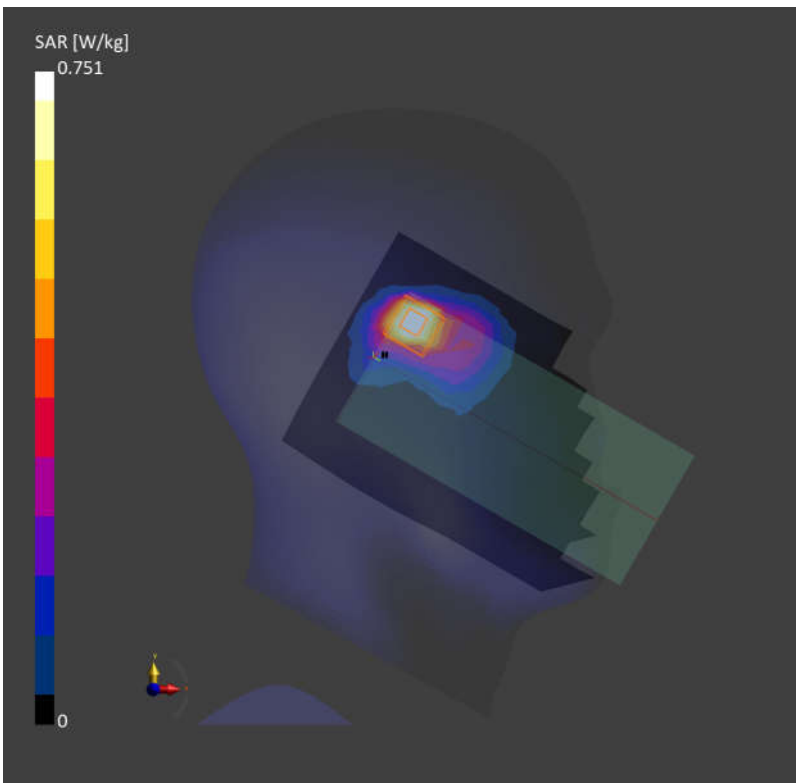

18_Bluetooth_1Mbps_Left Cheek_0mm_Ch0

Communication System: ISM 2.4 GHz Band; Frequency: 2402.000

Medium: HSL. Medium parameters used: $f= 2402.000$ MHz; $\sigma= 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.380 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.114 W/kg;

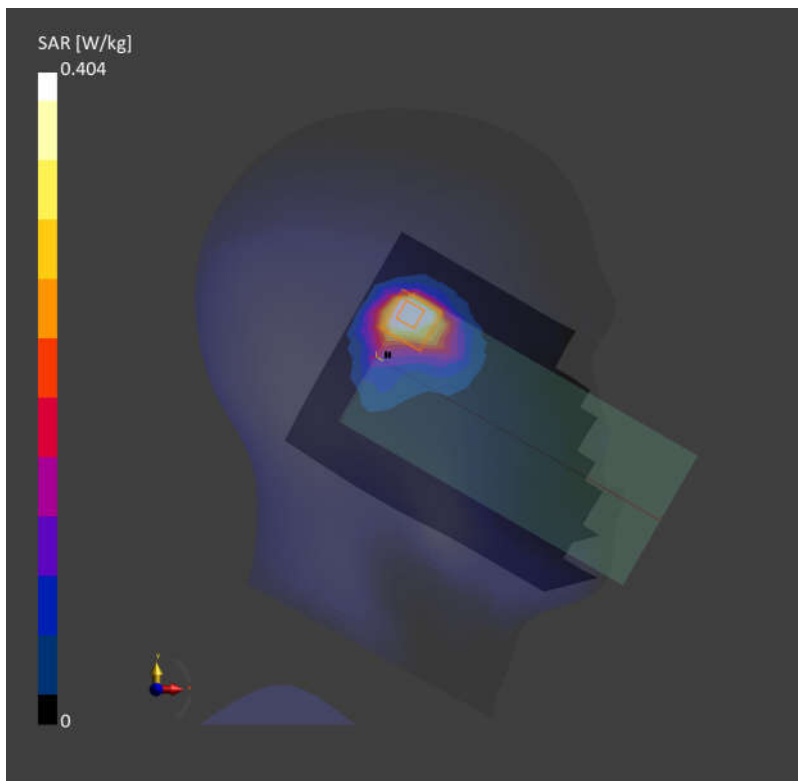

19_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch58

Communication System: WLAN 5GHz; Frequency: 5290.000

Medium: HSL. Medium parameters used: $f= 5290.000$ MHz; $\sigma= 4.60$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.683 W/kg; SAR (10g) = 0.308 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.296 W/kg;

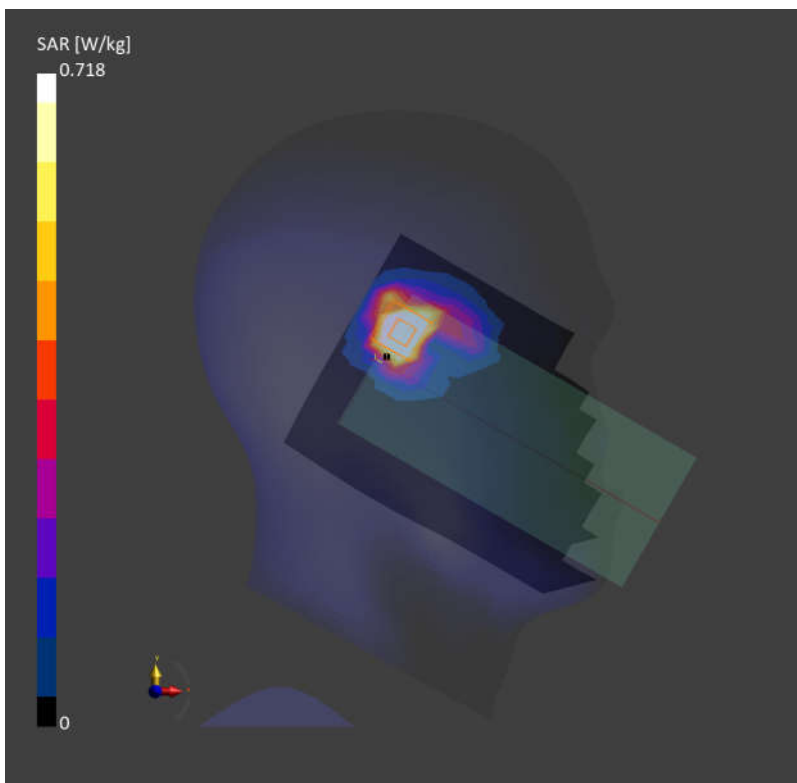

20_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: WLAN 5GHz; Frequency: 5530.000

Medium: HSL. Medium parameters used: $f= 5530.000$ MHz; $\sigma= 4.86$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.39, 5.39, 5.39); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.307 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.745 W/kg; SAR (10g) = 0.303 W/kg;

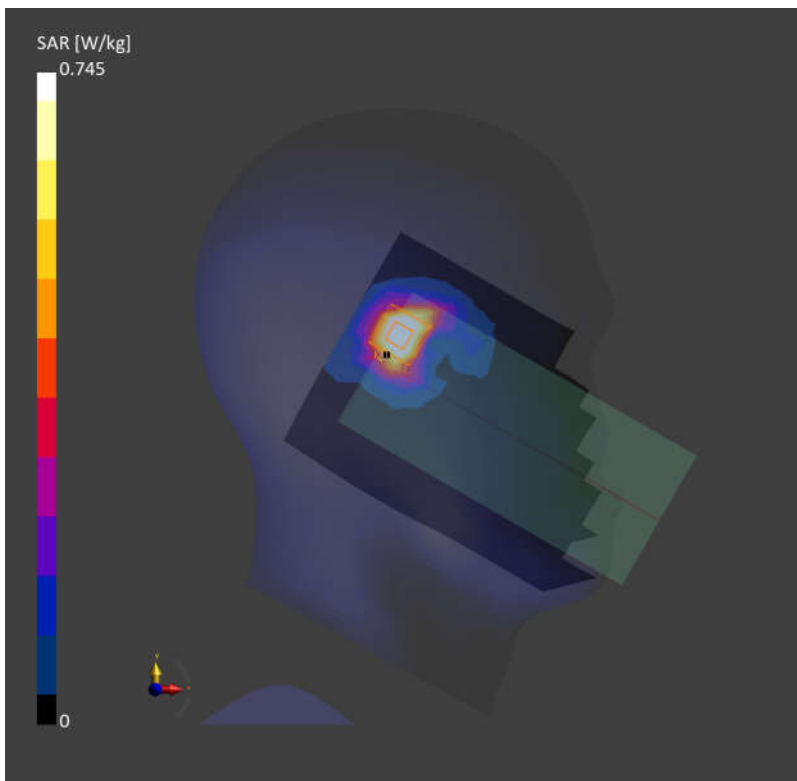

21_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f= 5775.000$ MHz; $\sigma= 5.15$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.303 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.322 W/kg;

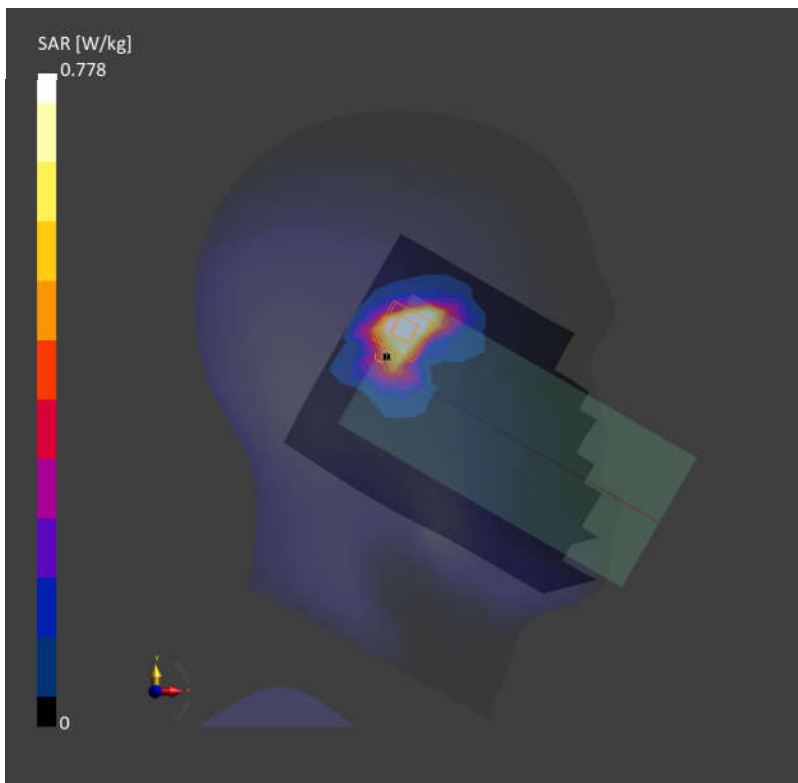

22_WLAN6GHz_802.11ax-HE160 MCS0_Left Cheek_0mm_Ch207

Communication System: U-NII-8; Frequency: 6985.000

Medium: HSL. Medium parameters used: $f = 6985.000$ MHz; $\sigma = 6.75$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.85, 5.85, 5.85); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 0.159 W/kg; SAR (10g) = 0.069 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.173 W/kg; SAR (10g) = 0.083 W/kg;

psAPD (4.0cm², sq) = 1.11 [W/m²];

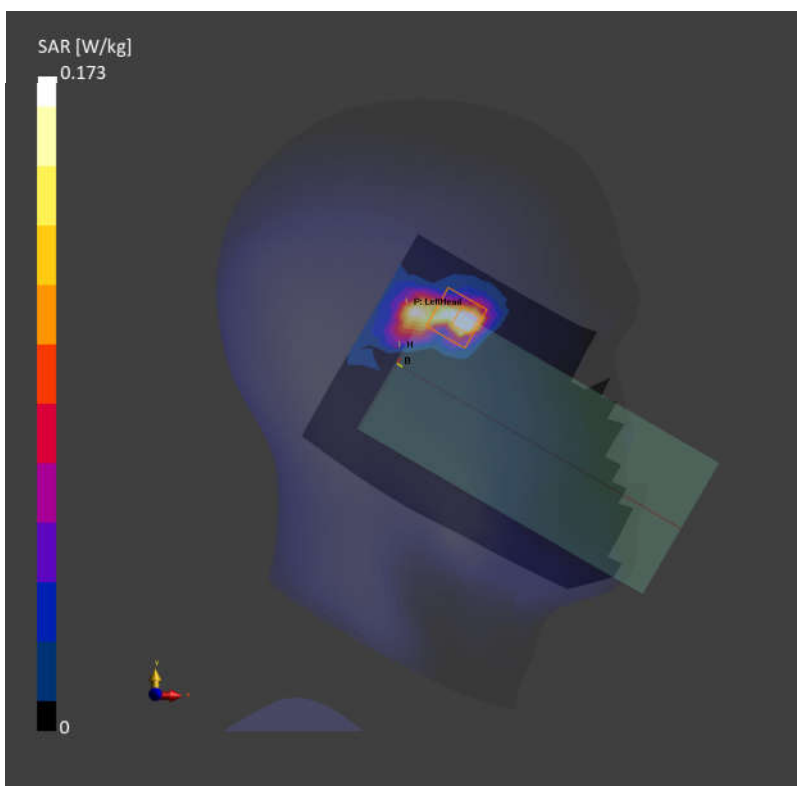

23_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.553 W/kg; SAR (10g) = 0.306 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.319 W/kg;

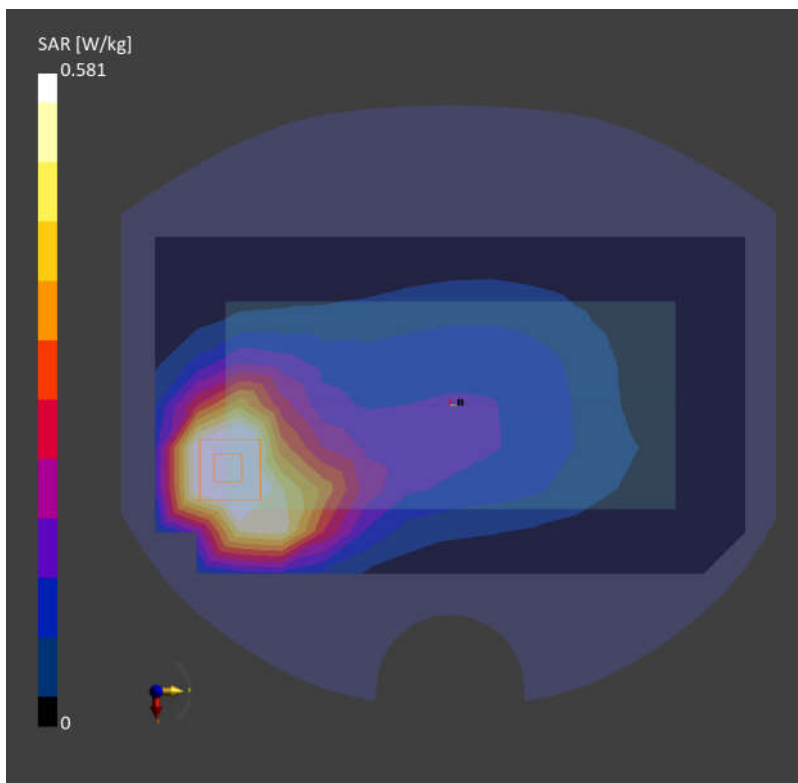

24_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch251

Communication System: GSM 850; Frequency: 848.800

Medium: HSL. Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.737 W/kg; SAR (10g) = 0.351 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.745 W/kg; SAR (10g) = 0.366 W/kg;

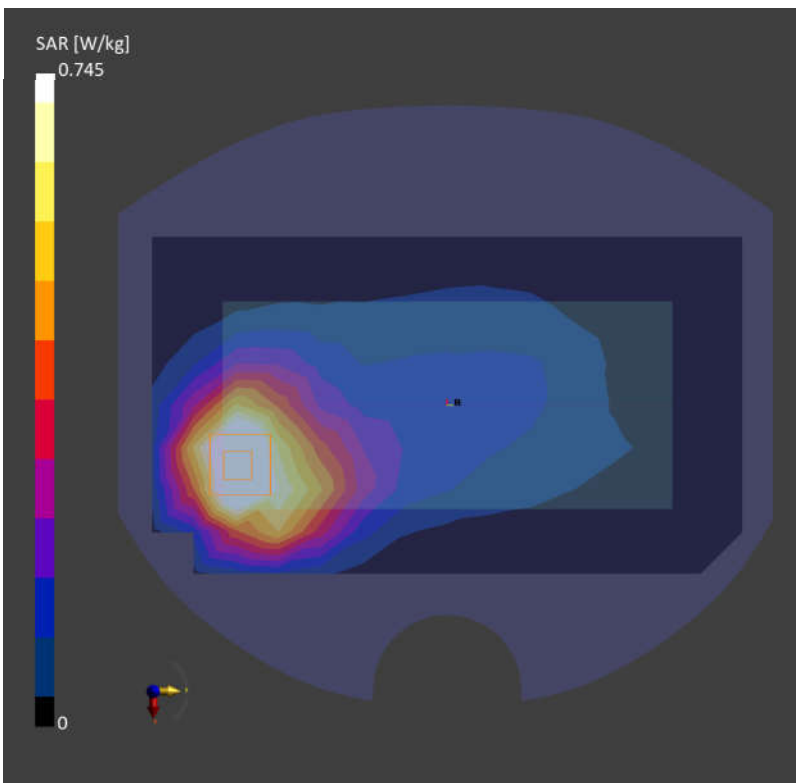

25_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4233

Communication System: Band 5; Frequency: 846.600

Medium: HSL. Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.476 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.392 W/kg;

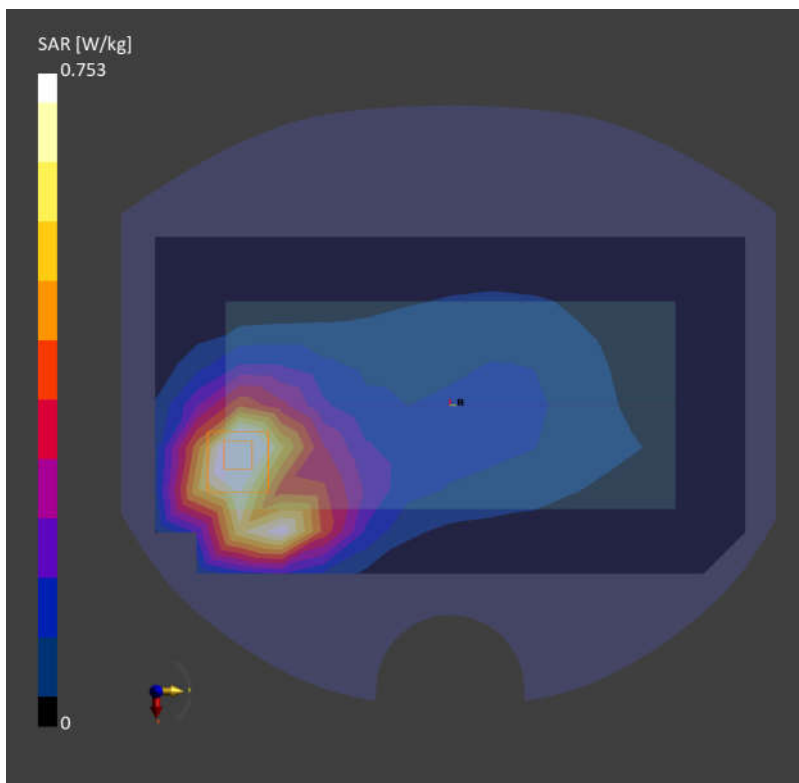

26_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.487 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.505 W/kg; SAR (10g) = 0.284 W/kg;

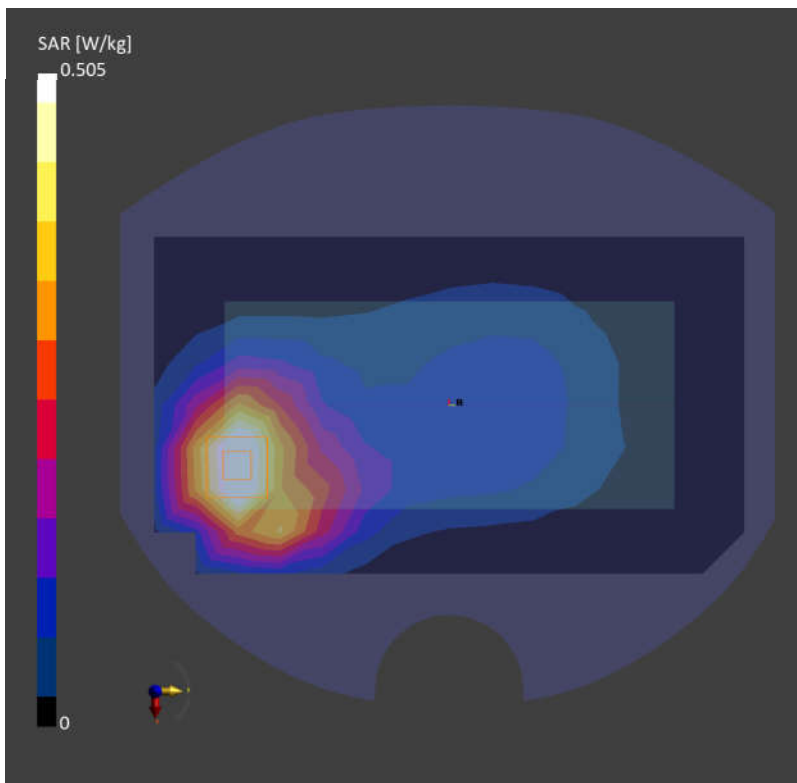

27_FR1 n5_20M_QPSK_1RB_1Offset_Back_5mm_Ch167300

Communication System: Band n5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.247 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.512 W/kg; SAR (10g) = 0.263 W/kg;

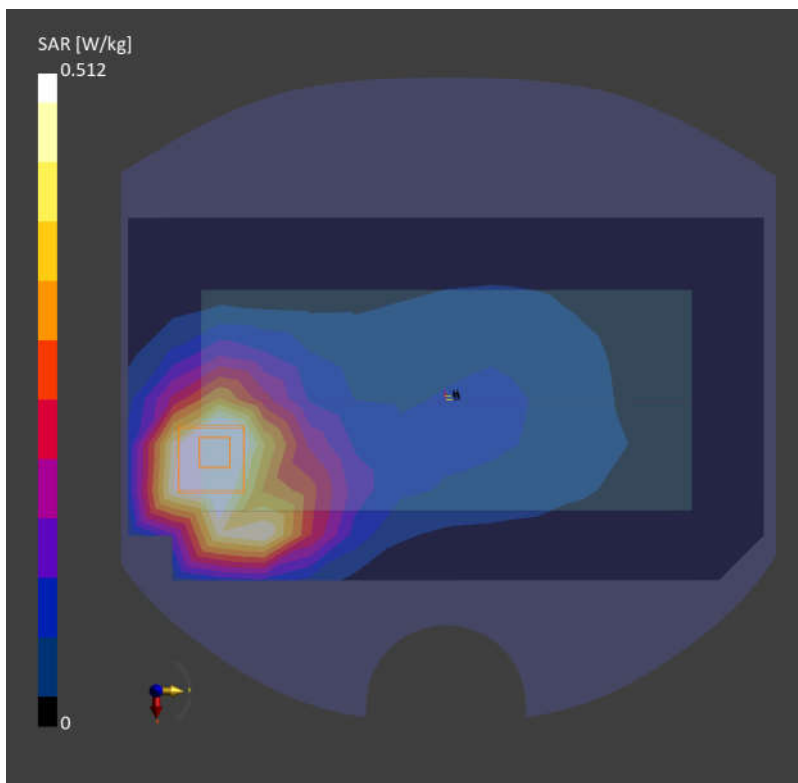

28_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1312

Communication System: Band 4; Frequency: 1712.400

Medium: HSL. Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.894 W/kg; SAR (10g) = 0.467 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.472 W/kg;

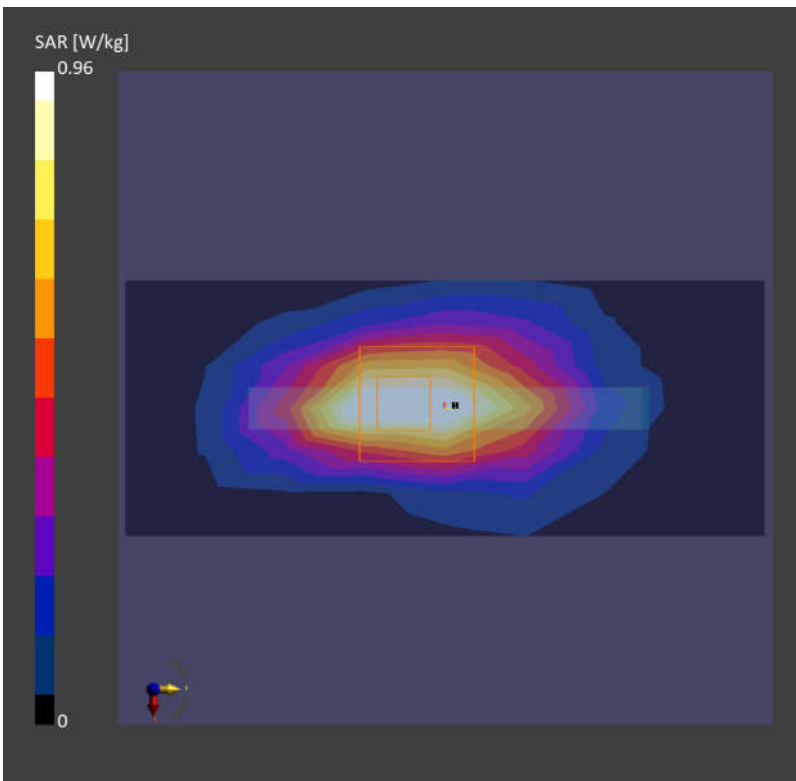

29_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch132072

Communication System: Band 66; Frequency: 1720.000

Medium: HSL. Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.939 W/kg; SAR (10g) = 0.484 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.493 W/kg;

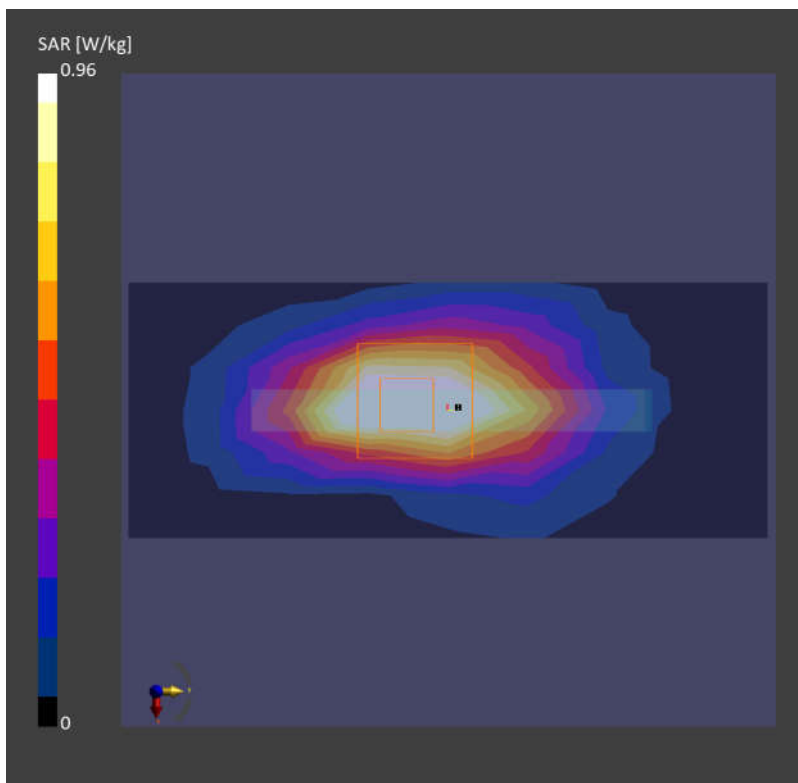

30_FR1 n66_40M_QPSK_108RB_54Offset_Bottom Side_5mm_Ch349000

Communication System: Band n66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.855 W/kg; SAR (10g) = 0.447 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.882 W/kg; SAR (10g) = 0.461 W/kg;

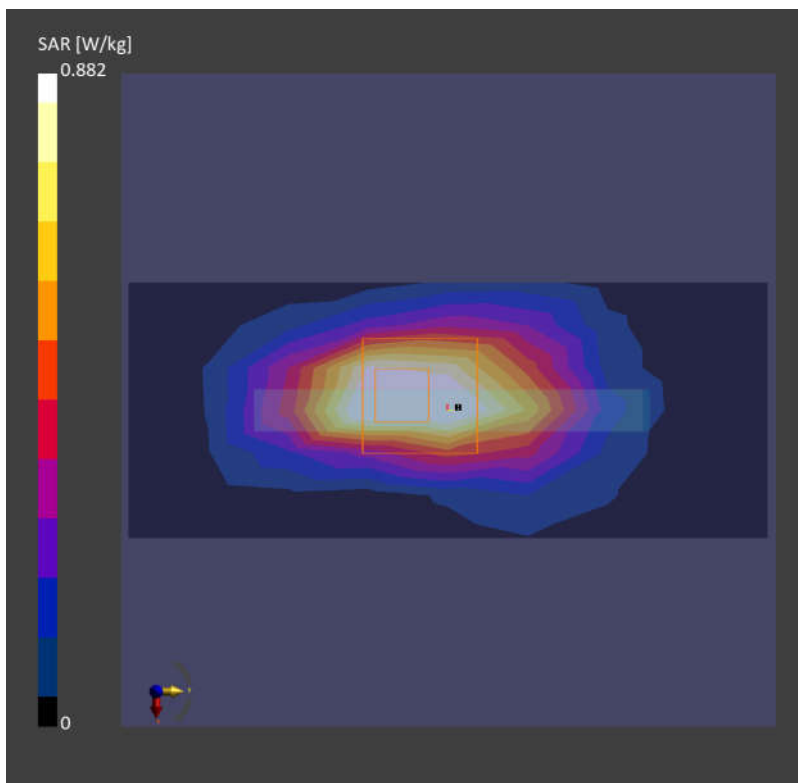

31_GSM1900_GPRS (4 Tx slots)_Bottom Side_5mm_Ch661

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.456 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.948 W/kg; SAR (10g) = 0.461 W/kg;

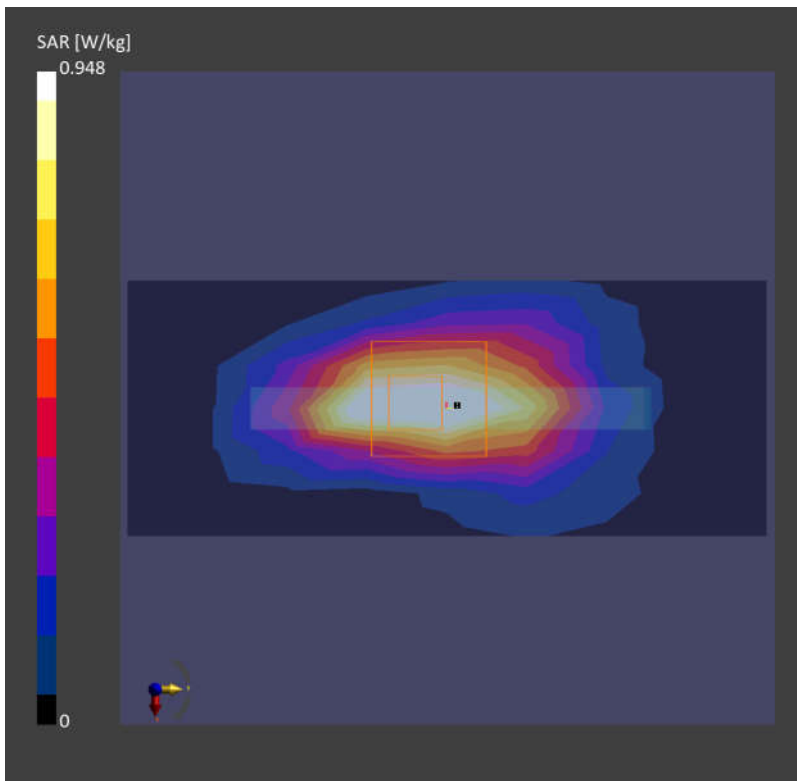

32_WCDMA II_RMC 12.2Kbps_Bottom Side_5mm_Ch9538

Communication System: Band 2; Frequency: 1907.600

Medium: HSL. Medium parameters used: $f=1907.600$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.907 W/kg; SAR (10g) = 0.446 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.966 W/kg; SAR (10g) = 0.452 W/kg;

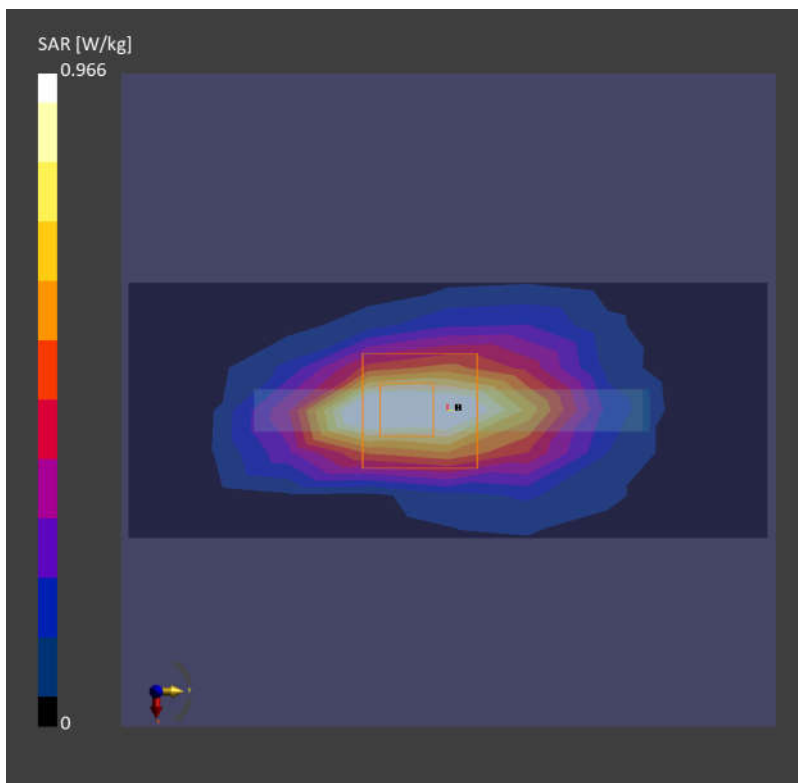

33_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch18700

Communication System: Band 2; Frequency: 1860.000

Medium: HSL. Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.380 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.712 W/kg; SAR (10g) = 0.381 W/kg;

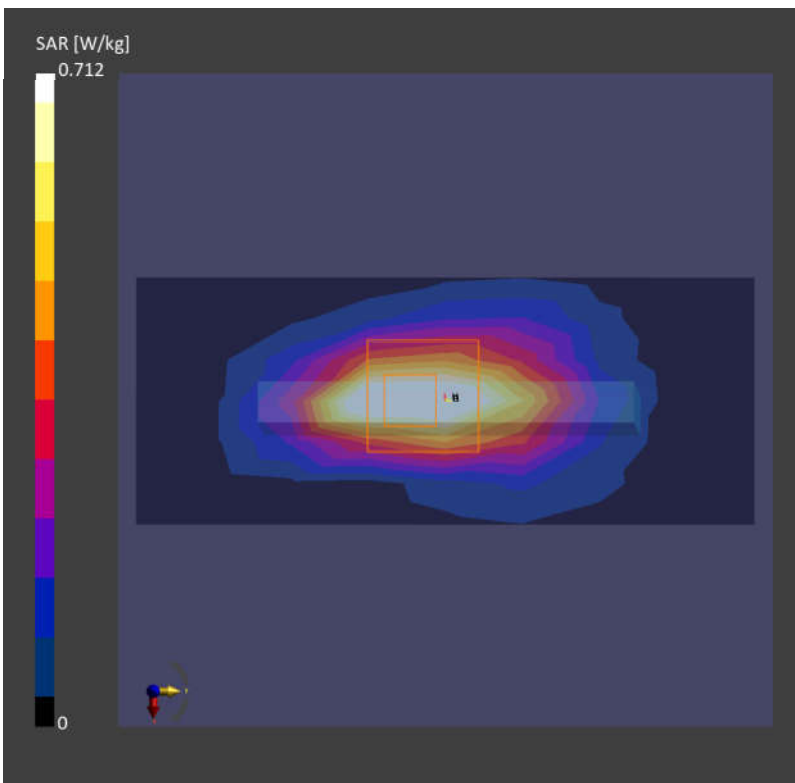

34_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch21350

Communication System: Band 7; Frequency: 2560.000

Medium: HSL. Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.941 W/kg; SAR (10g) = 0.463 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.976 W/kg; SAR (10g) = 0.477 W/kg;

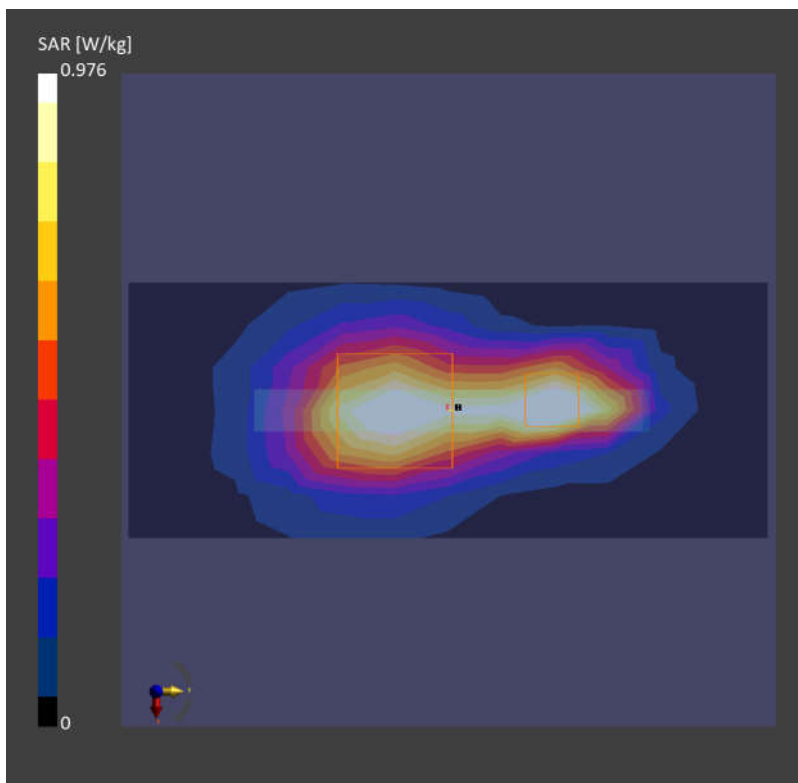

35_LTE Band 41_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch41490

Communication System: Band 41; Frequency: 2680.000

Medium: HSL. Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.653 W/kg; SAR (10g) = 0.244 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.272 W/kg;

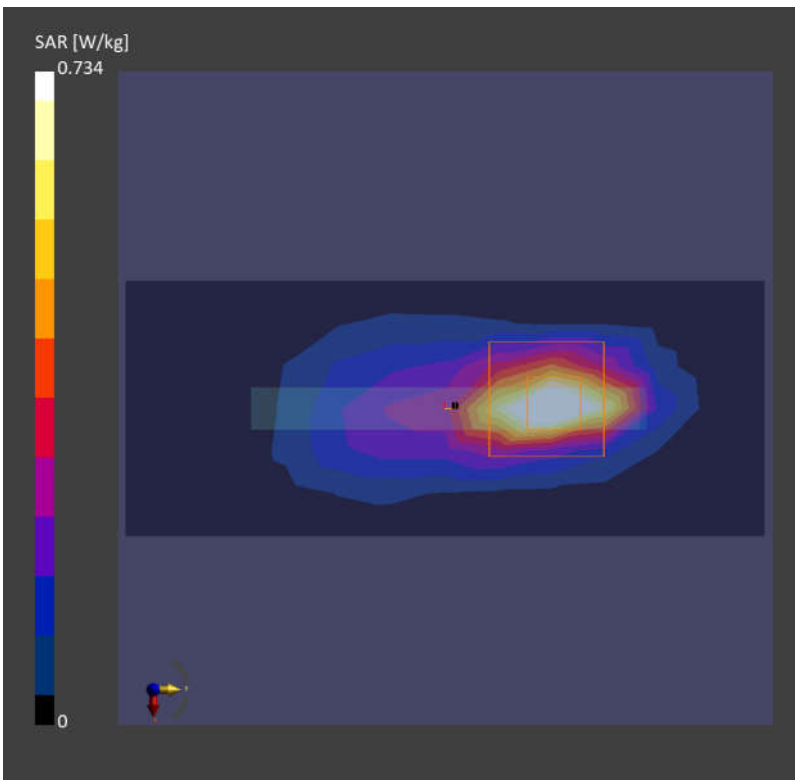

36_FR1 n41_100M_QPSK_1RB_1Offset_Bottom Side_5mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.457 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.469 W/kg;

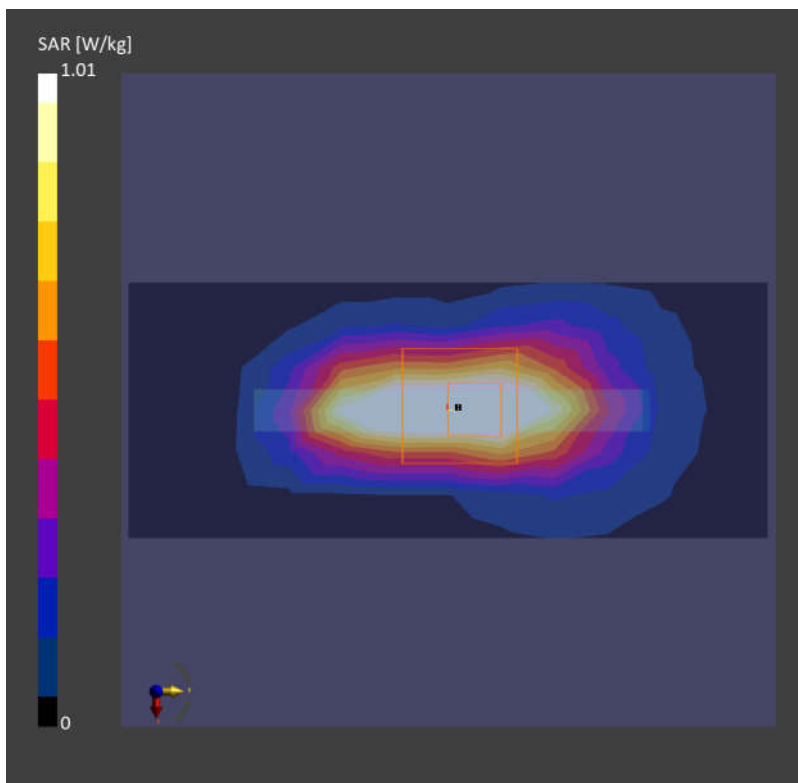

37_LTE Band 42 Part 27Q_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch42590

Communication System: Band 42; Frequency: 3500.000

Medium: HSL. Medium parameters used: $f= 3500.000$ MHz; $\sigma= 2.80$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.363 W/kg; SAR (10g) = 0.148 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.390 W/kg; SAR (10g) = 0.149 W/kg;

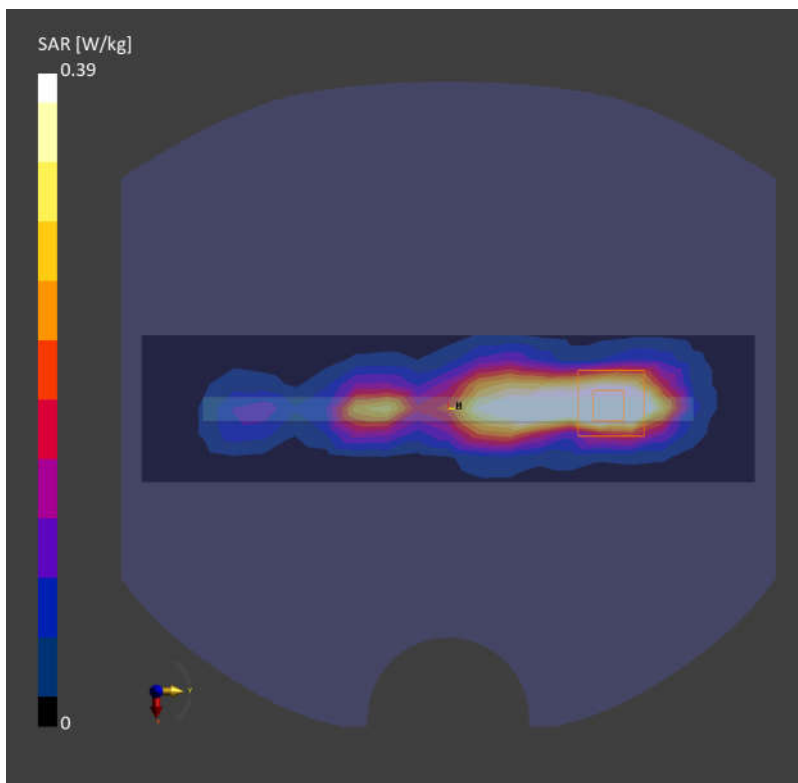

38_FR1 n77 Part 27O_100M_QPSK_1RB_1Offset_Right Side_5mm_Ch656000

Communication System: Band n77; Frequency: 3840.000

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.330 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.303 W/kg;

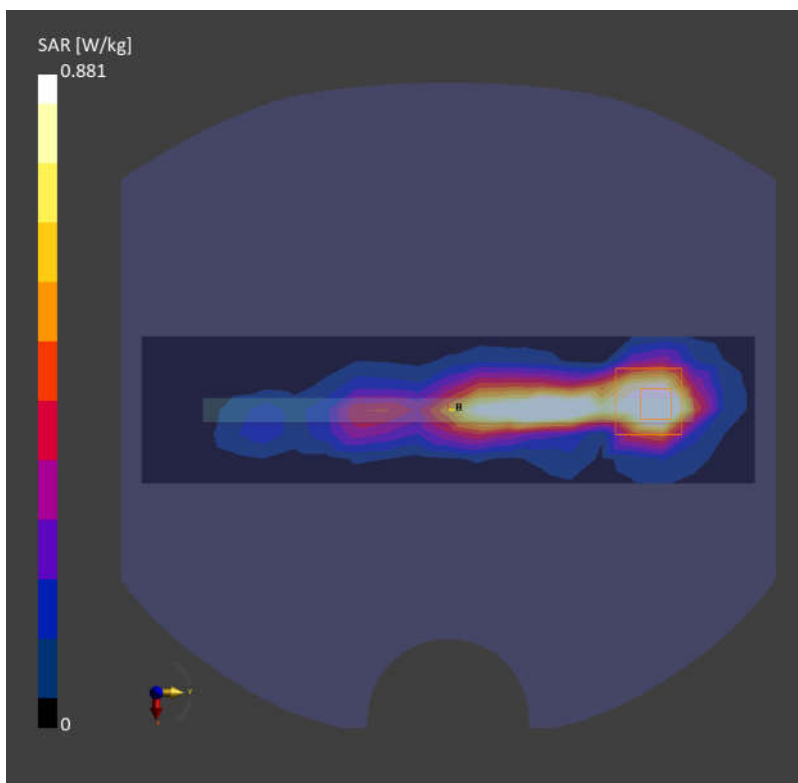

39_WLAN2.4GHz_802.11b 1Mbps_Top Side_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.283 W/kg; SAR (10g) = 0.127 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.289 W/kg; SAR (10g) = 0.132 W/kg;

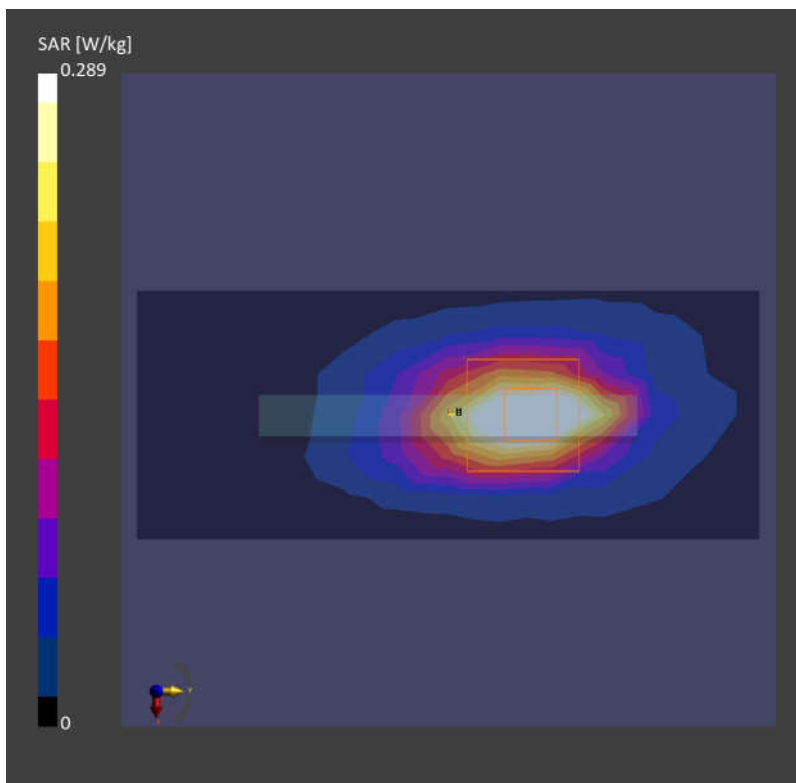

40_Bluetooth_1Mbps_Right Side_5mm_Ch78

Communication System: ISM 2.4 GHz Band; Frequency: 2480.000

Medium: HSL. Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.075 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.194 W/kg; SAR (10g) = 0.098 W/kg;

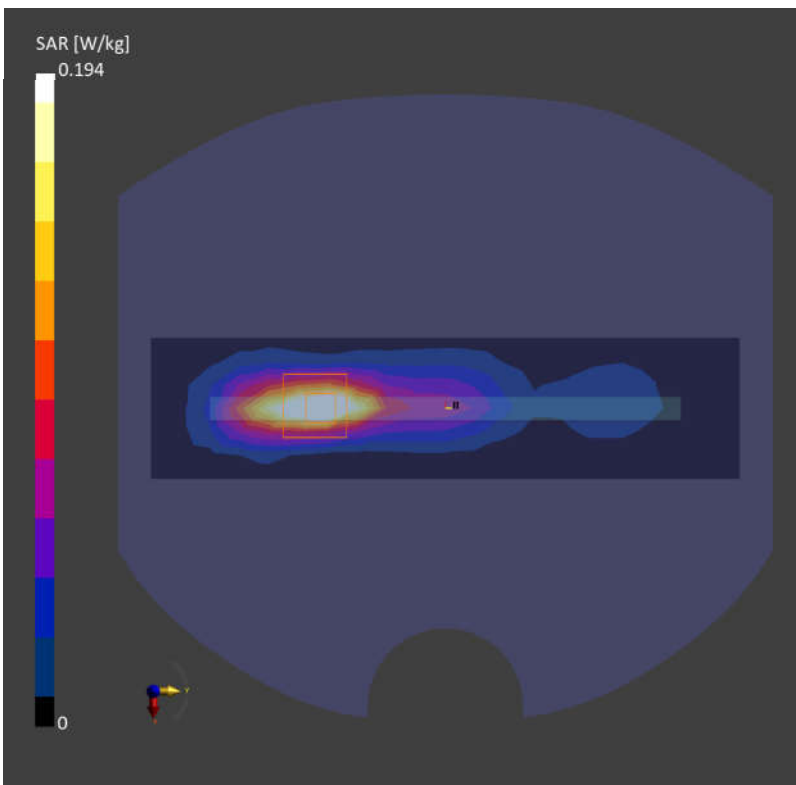

41_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch42

Communication System: WLAN 5GHz; Frequency: 5210.000

Medium: HSL. Medium parameters used: $f= 5210.000$ MHz; $\sigma= 4.51$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.108 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.330 W/kg; SAR (10g) = 0.107 W/kg;

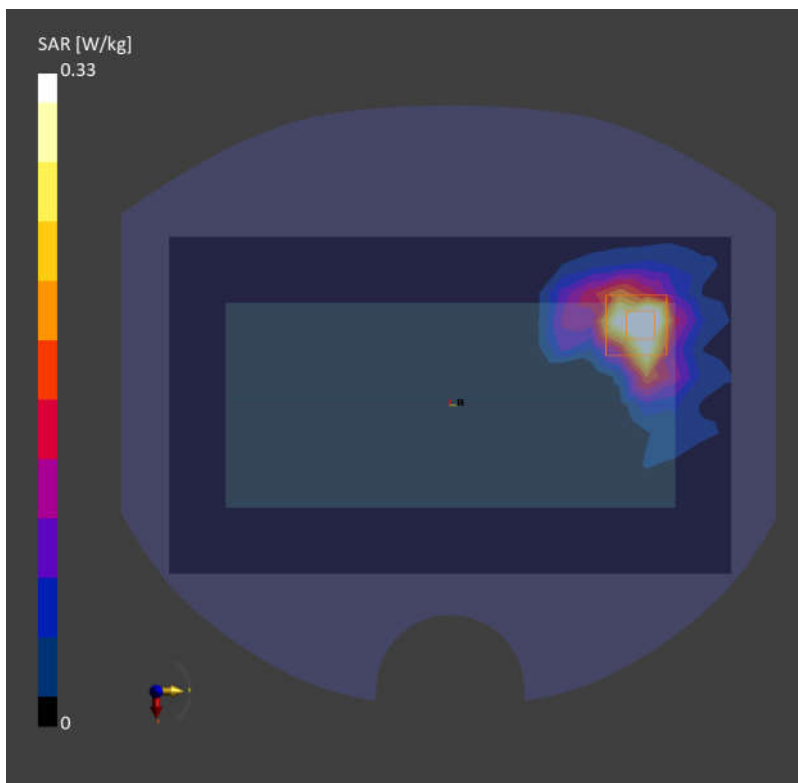

42_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f= 5775.000$ MHz; $\sigma= 5.15$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.385 W/kg; SAR (10g) = 0.152 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.173 W/kg;

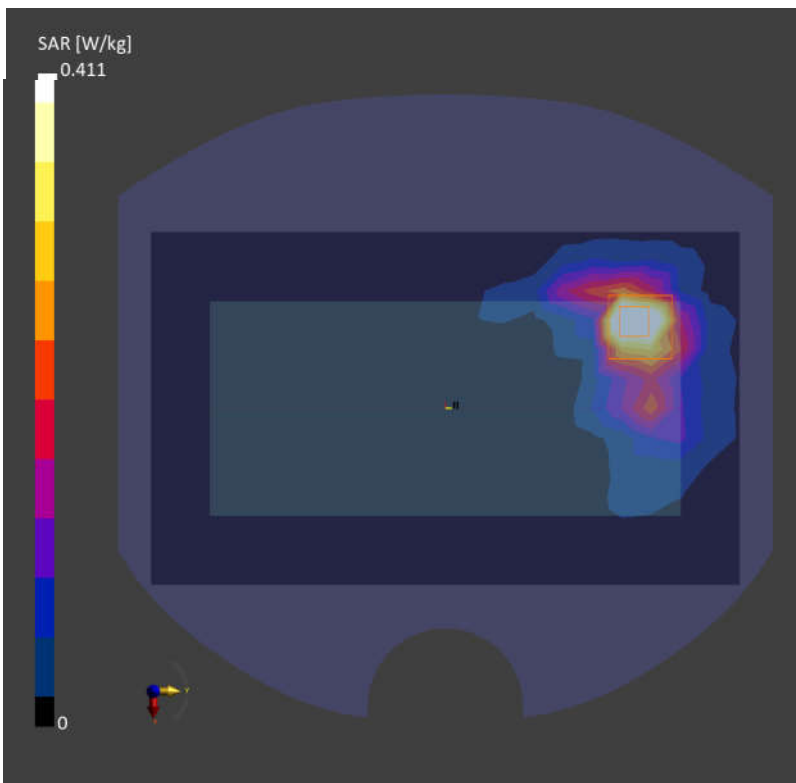

43_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.304 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.579 W/kg; SAR (10g) = 0.308 W/kg;

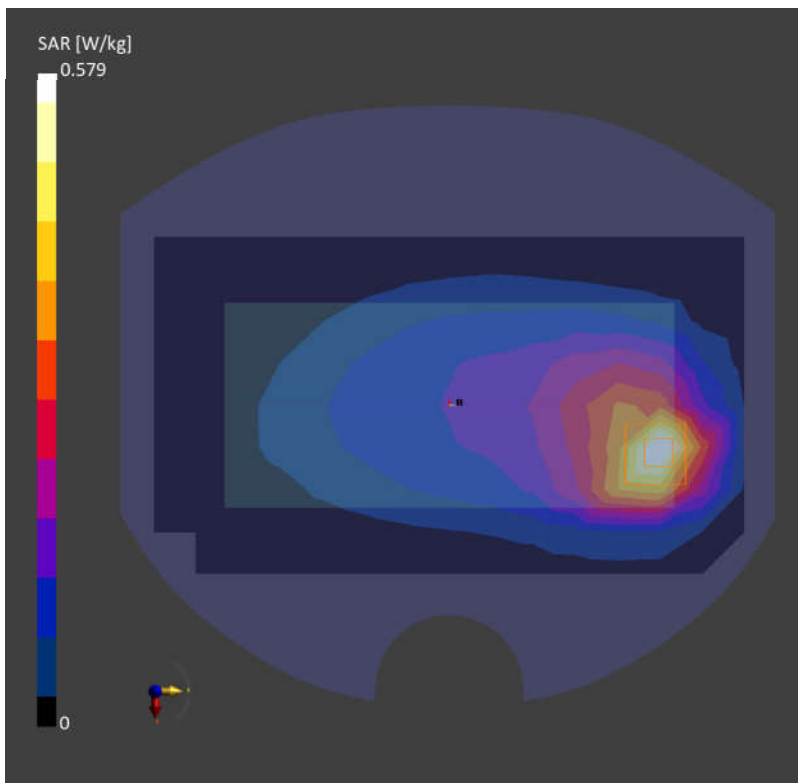

44_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch251

Communication System: GSM 850; Frequency: 848.800

Medium: HSL. Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.737 W/kg; SAR (10g) = 0.351 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.745 W/kg; SAR (10g) = 0.366 W/kg;

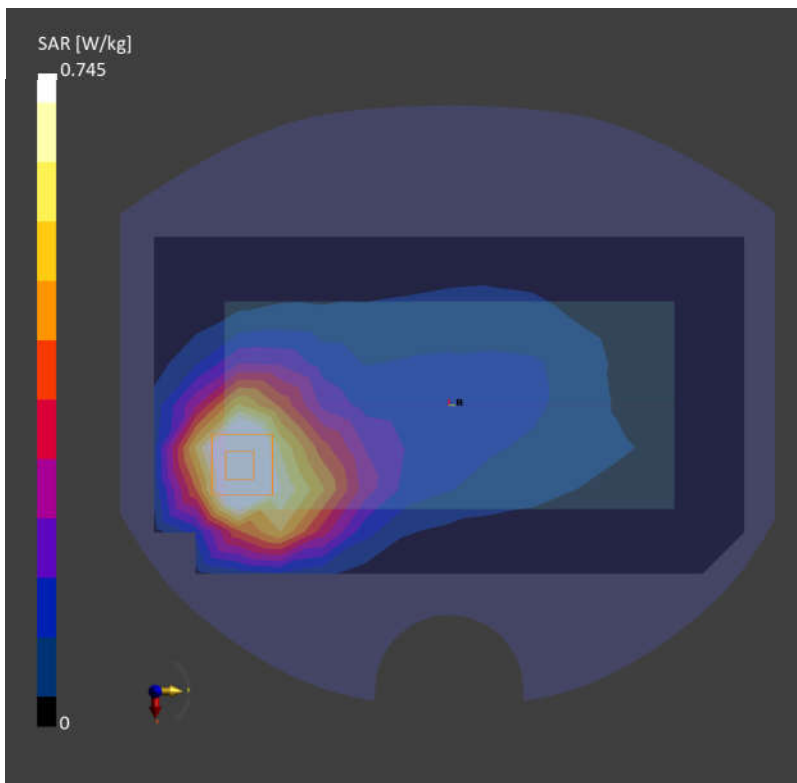

45_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4233

Communication System: Band 5; Frequency: 846.600

Medium: HSL. Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.476 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.392 W/kg;

