

## System Check\_13MHz

**DUT: CLA13-SN:1020**


Communication System: UID 0, CW (0); Frequency: 13 MHz; Duty Cycle: 1:1  
 Medium: HSL\_13 Medium parameters used:  $f = 13 \text{ MHz}$ ;  $\sigma = 0.745 \text{ S/m}$ ;  $\epsilon_r = 56.457$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(15.28, 15.28, 15.28); Calibrated: 2023/6/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2024/1/15
- Phantom: ELI v5.0(Right); Type: QDOVA001BB; Serial: TP:1225
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.217 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 20.32 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 0.688W/kg  
**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.086 W/kg**  
 Maximum value of SAR (measured) = 0.209 W/kg

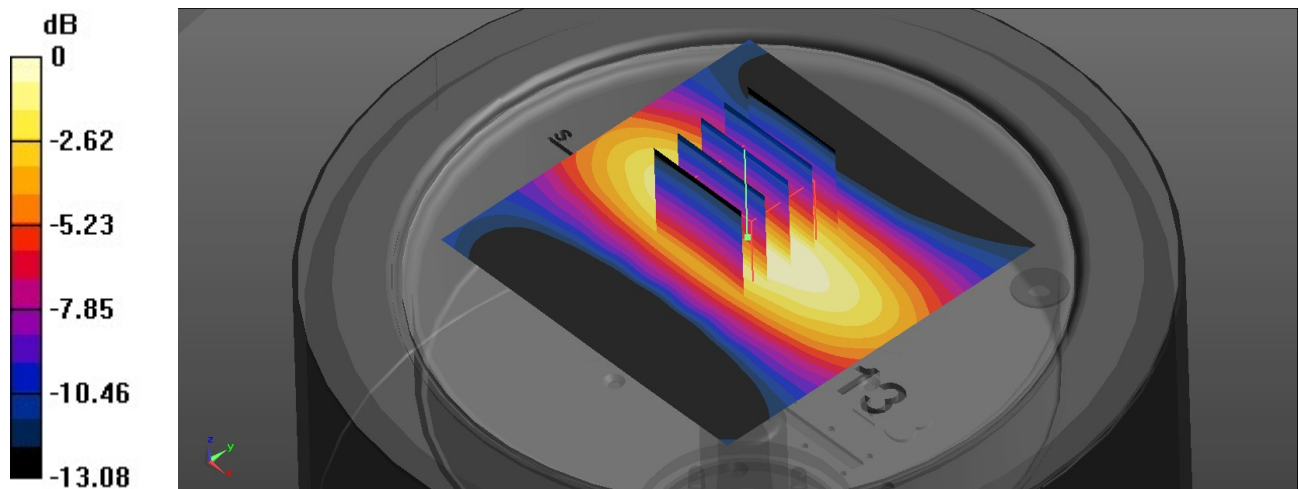

0 dB = 0.209 W/kg