




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

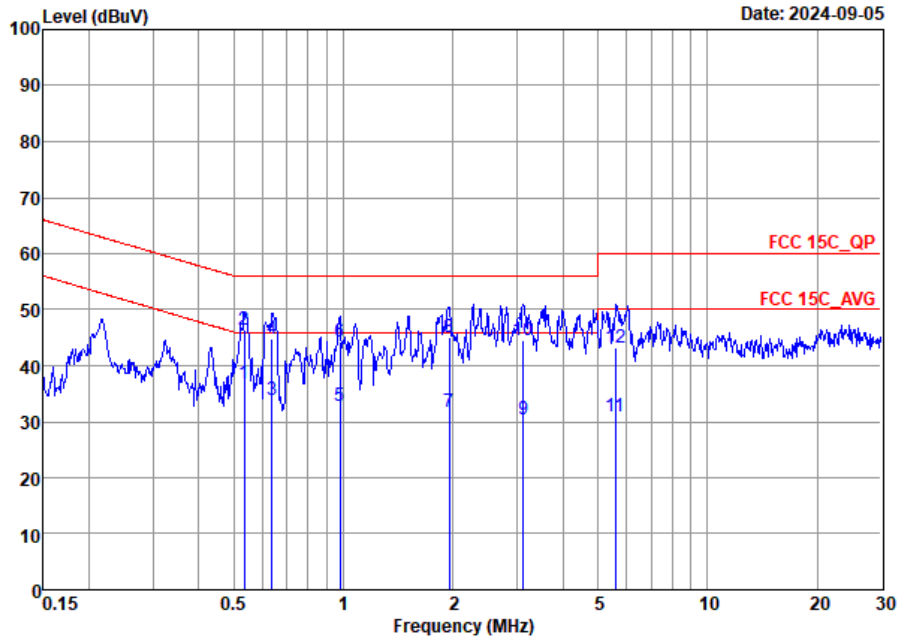


Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.53	36.79	-9.21	46.00	16.90	9.73	10.16	Average
2	0.53	46.39	-9.61	56.00	26.50	9.73	10.16	QP
3	0.64	33.78	-12.22	46.00	13.90	9.72	10.16	Average
4	0.64	44.88	-11.12	56.00	25.00	9.72	10.16	QP
5	0.98	32.69	-13.31	46.00	12.80	9.73	10.16	Average
6	0.98	44.29	-11.71	56.00	24.40	9.73	10.16	QP
7	1.95	31.65	-14.35	46.00	11.70	9.72	10.23	Average
8	1.95	44.95	-11.05	56.00	25.00	9.72	10.23	QP
9	3.12	30.35	-15.65	46.00	10.30	9.76	10.29	Average
10	3.12	44.65	-11.35	56.00	24.60	9.76	10.29	QP
11	5.59	31.01	-18.99	50.00	10.90	9.76	10.35	Average
12	5.59	43.11	-16.89	60.00	23.00	9.76	10.35	QP



Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

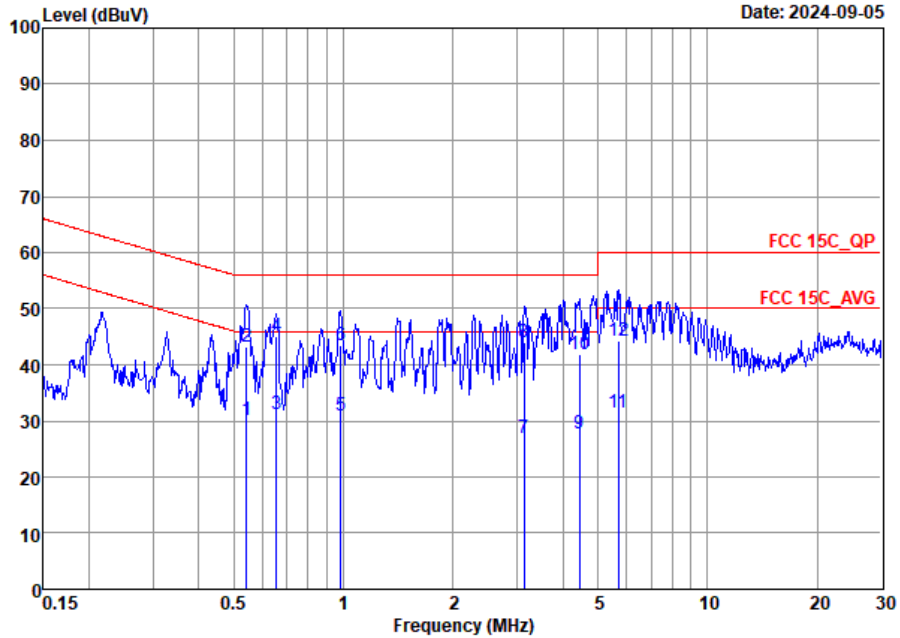

Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.54	30.09	-15.91	46.00	10.20	9.73	10.16	Average
2	0.54	43.09	-12.91	56.00	23.20	9.73	10.16	QP
3	0.65	31.29	-14.71	46.00	11.40	9.73	10.16	Average
4 *	0.65	44.99	-11.01	56.00	25.10	9.73	10.16	QP
5	0.98	30.95	-15.05	46.00	11.10	9.69	10.16	Average
6	0.98	43.45	-12.55	56.00	23.60	9.69	10.16	QP
7	3.14	26.92	-19.08	46.00	6.90	9.73	10.29	Average
8	3.14	43.92	-12.08	56.00	23.90	9.73	10.29	QP
9	4.45	27.75	-18.25	46.00	7.69	9.72	10.34	Average
10	4.45	41.75	-14.25	56.00	21.69	9.72	10.34	QP
11	5.68	31.49	-18.51	50.00	11.40	9.73	10.36	Average
12	5.68	44.39	-15.61	60.00	24.30	9.73	10.36	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 4	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1DH5	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2353.15	44.83	74.00	-29.17	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	44.29	74.00	-29.71	V	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	43.29	74.00	-30.71	H	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2485.60	53.28	74.00	-20.72	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	43.65	74.00	-30.35	V	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	78	869.05	31.88	46.00	-14.12	H	Peak	Pass	LF



Mode	1																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<p>Date: 2024-09-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2376.15</td> <td>43.61</td> <td>74.00</td> <td>-30.39</td> <td>41.77</td> <td>30.64</td> <td>4.78</td> <td>33.58</td> <td>300</td> <td>335</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2376.15</td> <td>18.82</td> <td>54.00</td> <td>-35.18</td> <td>16.98</td> <td>30.64</td> <td>4.78</td> <td>33.58</td> <td>300</td> <td>335</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2376.15	43.61	74.00	-30.39	41.77	30.64	4.78	33.58	300	335	PEAK	2	2376.15	18.82	54.00	-35.18	16.98	30.64	4.78	33.58	300	335	AVERAGE	<p>Date: 2024-09-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>106.19</td> <td>-----</td> <td>104.32</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>300</td> <td>335</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>81.40</td> <td>-----</td> <td>79.53</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>300</td> <td>335</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	106.19	-----	104.32	30.62	4.81	33.56	300	335	PEAK	2	2402.00	81.40	-----	79.53	30.62	4.81	33.56	300	335	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	2376.15	43.61	74.00	-30.39	41.77	30.64	4.78	33.58	300	335	PEAK																																																																																							
2	2376.15	18.82	54.00	-35.18	16.98	30.64	4.78	33.58	300	335	AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	2402.00	106.19	-----	104.32	30.62	4.81	33.56	300	335	PEAK																																																																																								
2	2402.00	81.40	-----	79.53	30.62	4.81	33.56	300	335	AVERAGE																																																																																								



Mode	1																																																																																															
	Band Edge																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																															
ANT	6																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.15</td> <td>44.83</td> <td>74.00</td> <td>-29.17</td> <td>42.98</td> <td>30.68</td> <td>4.76</td> <td>33.59</td> <td>214</td> <td>252</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2353.15</td> <td>20.04</td> <td>54.00</td> <td>-33.96</td> <td>18.19</td> <td>30.68</td> <td>4.76</td> <td>33.59</td> <td>214</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2353.15	44.83	74.00	-29.17	42.98	30.68	4.76	33.59	214	252	PEAK	2	2353.15	20.04	54.00	-33.96	18.19	30.68	4.76	33.59	214	252	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>108.33</td> <td>-----</td> <td>106.46</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>214</td> <td>252</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>83.54</td> <td>-----</td> <td>81.67</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>214</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	108.33	-----	106.46	30.62	4.81	33.56	214	252	PEAK	2	2402.00	83.54	-----	81.67	30.62	4.81	33.56	214	252	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	2353.15	44.83	74.00	-29.17	42.98	30.68	4.76	33.59	214	252	PEAK																																																																																					
2	2353.15	20.04	54.00	-33.96	18.19	30.68	4.76	33.59	214	252	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	2402.00	108.33	-----	106.46	30.62	4.81	33.56	214	252	PEAK																																																																																						
2	2402.00	83.54	-----	81.67	30.62	4.81	33.56	214	252	AVERAGE																																																																																						



Mode	1																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.89</td> <td>74.00</td> <td>-33.11</td> <td>64.14</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>16.10</td> <td>54.00</td> <td>-37.90</td> <td>39.35</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	40.89	74.00	-33.11	64.14	34.23	7.74	65.22	--	--	Peak	2	4804.00	16.10	54.00	-37.90	39.35	34.23	7.74	65.22	--	--	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>44.29</td> <td>74.00</td> <td>-29.71</td> <td>67.54</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>19.50</td> <td>54.00</td> <td>-34.50</td> <td>42.75</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.29	74.00	-29.71	67.54	34.23	7.74	65.22	--	--	Peak	2	4804.00	19.50	54.00	-34.50	42.75	34.23	7.74	65.22	--	--	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4804.00	40.89	74.00	-33.11	64.14	34.23	7.74	65.22	--	--	Peak																																																																																					
2	4804.00	16.10	54.00	-37.90	39.35	34.23	7.74	65.22	--	--	Average																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4804.00	44.29	74.00	-29.71	67.54	34.23	7.74	65.22	--	--	Peak																																																																																					
2	4804.00	19.50	54.00	-34.50	42.75	34.23	7.74	65.22	--	--	Average																																																																																					



Mode	2																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																	
ANT	6																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<p>Date: 2024-09-19</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>41.71</td> <td>74.00</td> <td>-32.29</td> <td>64.85</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>16.92</td> <td>74.00</td> <td>-57.08</td> <td>40.06</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>43.29</td> <td>74.00</td> <td>-30.71</td> <td>63.53</td> <td>35.43</td> <td>8.97</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>18.50</td> <td>54.00</td> <td>-35.50</td> <td>38.74</td> <td>35.43</td> <td>8.97</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4882.00	41.71	74.00	-32.29	64.85	34.34	7.77	65.25	--	--	Peak	2	4882.00	16.92	74.00	-57.08	40.06	34.34	7.77	65.25	--	--	Average	3	7323.00	43.29	74.00	-30.71	63.53	35.43	8.97	64.64	--	--	Peak	4	7323.00	18.50	54.00	-35.50	38.74	35.43	8.97	64.64	--	--	Average	<p>Date: 2024-09-19</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>40.94</td> <td>74.00</td> <td>-33.06</td> <td>64.08</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>16.15</td> <td>74.00</td> <td>-57.85</td> <td>39.29</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>42.97</td> <td>74.00</td> <td>-31.03</td> <td>63.21</td> <td>35.43</td> <td>8.97</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>18.18</td> <td>54.00</td> <td>-35.82</td> <td>38.42</td> <td>35.43</td> <td>8.97</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4882.00	40.94	74.00	-33.06	64.08	34.34	7.77	65.25	--	--	Peak	2	4882.00	16.15	74.00	-57.85	39.29	34.34	7.77	65.25	--	--	Average	3	7323.00	42.97	74.00	-31.03	63.21	35.43	8.97	64.64	--	--	Peak	4	7323.00	18.18	54.00	-35.82	38.42	35.43	8.97	64.64	--	--	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																											
1	4882.00	41.71	74.00	-32.29	64.85	34.34	7.77	65.25	--	--	Peak																																																																																																																																							
2	4882.00	16.92	74.00	-57.08	40.06	34.34	7.77	65.25	--	--	Average																																																																																																																																							
3	7323.00	43.29	74.00	-30.71	63.53	35.43	8.97	64.64	--	--	Peak																																																																																																																																							
4	7323.00	18.50	54.00	-35.50	38.74	35.43	8.97	64.64	--	--	Average																																																																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																											
1	4882.00	40.94	74.00	-33.06	64.08	34.34	7.77	65.25	--	--	Peak																																																																																																																																							
2	4882.00	16.15	74.00	-57.85	39.29	34.34	7.77	65.25	--	--	Average																																																																																																																																							
3	7323.00	42.97	74.00	-31.03	63.21	35.43	8.97	64.64	--	--	Peak																																																																																																																																							
4	7323.00	18.18	54.00	-35.82	38.42	35.43	8.97	64.64	--	--	Average																																																																																																																																							



Mode	3																																																																																														
	Band Edge																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<p style="text-align: right;">Date: 2024-09-18</p>	<p style="text-align: right;">Date: 2024-09-18</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.60</td> <td>53.28</td> <td>74.00</td> <td>-20.72</td> <td>51.01</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>399</td> <td>312</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2485.60</td> <td>28.49</td> <td>54.00</td> <td>-25.51</td> <td>26.22</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>399</td> <td>312</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2485.60	53.28	74.00	-20.72	51.01	30.86	4.92	33.51	399	312	PEAK	2	2485.60	28.49	54.00	-25.51	26.22	30.86	4.92	33.51	399	312	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>107.11</td> <td>-----</td> <td>104.86</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>399</td> <td>312</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>82.32</td> <td>-----</td> <td>80.07</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>399</td> <td>312</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	107.11	-----	104.86	30.84	4.92	33.51	399	312	PEAK	2	2480.00	82.32	-----	80.07	30.84	4.92	33.51	399	312
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	2485.60	53.28	74.00	-20.72	51.01	30.86	4.92	33.51	399	312	PEAK																																																																																				
2	2485.60	28.49	54.00	-25.51	26.22	30.86	4.92	33.51	399	312	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	2480.00	107.11	-----	104.86	30.84	4.92	33.51	399	312	PEAK																																																																																					
2	2480.00	82.32	-----	80.07	30.84	4.92	33.51	399	312	AVERAGE																																																																																					



Mode	3																																																																																														
	Band Edge																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																														
ANT	6																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	<p style="text-align: right;">Date: 2024-09-18</p>	<p style="text-align: right;">Date: 2024-09-18</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.54</td> <td>51.09</td> <td>74.00</td> <td>-22.91</td> <td>48.82</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>325</td> <td>278</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2484.54</td> <td>26.30</td> <td>54.00</td> <td>-27.70</td> <td>24.03</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>325</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.54	51.09	74.00	-22.91	48.82	30.86	4.92	33.51	325	278	PEAK	2	2484.54	26.30	54.00	-27.70	24.03	30.86	4.92	33.51	325	278	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>110.40</td> <td>-----</td> <td>108.15</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>325</td> <td>278</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>85.61</td> <td>-----</td> <td>83.36</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>325</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	110.40	-----	108.15	30.84	4.92	33.51	325	278	PEAK	2	2480.00	85.61	-----	83.36	30.84	4.92	33.51	325	278
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	2484.54	51.09	74.00	-22.91	48.82	30.86	4.92	33.51	325	278	PEAK																																																																																				
2	2484.54	26.30	54.00	-27.70	24.03	30.86	4.92	33.51	325	278	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	2480.00	110.40	-----	108.15	30.84	4.92	33.51	325	278	PEAK																																																																																					
2	2480.00	85.61	-----	83.36	30.84	4.92	33.51	325	278	AVERAGE																																																																																					




Mode	3																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																
ANT	6																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg																																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.26</td> <td>74.00</td> <td>-31.74</td> <td>65.29</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>17.47</td> <td>74.00</td> <td>-56.53</td> <td>40.50</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.64</td> <td>74.00</td> <td>-30.36</td> <td>63.58</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>18.85</td> <td>54.00</td> <td>-35.15</td> <td>38.79</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	42.26	74.00	-31.74	65.29	34.45	7.81	65.29	--	--	Peak	2	4960.00	17.47	74.00	-56.53	40.50	34.45	7.81	65.29	--	--	Average	3	7440.00	43.64	74.00	-30.36	63.58	35.41	9.19	64.54	--	--	Peak	4	7440.00	18.85	54.00	-35.15	38.79	35.41	9.19	64.54	--	--	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.80</td> <td>74.00</td> <td>-32.20</td> <td>64.83</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>17.01</td> <td>74.00</td> <td>-56.99</td> <td>40.04</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.65</td> <td>74.00</td> <td>-30.35</td> <td>63.59</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>18.86</td> <td>54.00</td> <td>-35.14</td> <td>38.80</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	41.80	74.00	-32.20	64.83	34.45	7.81	65.29	--	--	Peak	2	4960.00	17.01	74.00	-56.99	40.04	34.45	7.81	65.29	--	--	Average	3	7440.00	43.65	74.00	-30.35	63.59	35.41	9.19	64.54	--	--	Peak	4	7440.00	18.86	54.00	-35.14	38.80	35.41	9.19	64.54	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																										
1	4960.00	42.26	74.00	-31.74	65.29	34.45	7.81	65.29	--	--	Peak																																																																																																																																						
2	4960.00	17.47	74.00	-56.53	40.50	34.45	7.81	65.29	--	--	Average																																																																																																																																						
3	7440.00	43.64	74.00	-30.36	63.58	35.41	9.19	64.54	--	--	Peak																																																																																																																																						
4	7440.00	18.85	54.00	-35.15	38.79	35.41	9.19	64.54	--	--	Average																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																										
1	4960.00	41.80	74.00	-32.20	64.83	34.45	7.81	65.29	--	--	Peak																																																																																																																																						
2	4960.00	17.01	74.00	-56.99	40.04	34.45	7.81	65.29	--	--	Average																																																																																																																																						
3	7440.00	43.65	74.00	-30.35	63.59	35.41	9.19	64.54	--	--	Peak																																																																																																																																						
4	7440.00	18.86	54.00	-35.14	38.80	35.41	9.19	64.54	--	--	Average																																																																																																																																						




Mode	4																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHZ																																																																																																																																																																									
ANT	6																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>47.46</td><td>18.57</td><td>40.00</td><td>-21.43</td><td>33.26</td><td>19.62</td><td>0.69</td><td>35.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>155.13</td><td>21.49</td><td>43.50</td><td>-22.01</td><td>36.20</td><td>18.69</td><td>1.30</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>183.26</td><td>20.18</td><td>43.50</td><td>-23.32</td><td>36.46</td><td>16.99</td><td>1.43</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>319.06</td><td>21.57</td><td>46.00</td><td>-24.43</td><td>34.78</td><td>19.54</td><td>1.85</td><td>34.60</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>486.87</td><td>24.19</td><td>46.00</td><td>-21.81</td><td>33.16</td><td>23.20</td><td>2.33</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>869.05</td><td>31.88</td><td>46.00</td><td>-14.12</td><td>34.33</td><td>28.73</td><td>3.12</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	47.46	18.57	40.00	-21.43	33.26	19.62	0.69	35.00	--	--	Peak	2	155.13	21.49	43.50	-22.01	36.20	18.69	1.30	34.70	--	--	Peak	3	183.26	20.18	43.50	-23.32	36.46	16.99	1.43	34.70	--	--	Peak	4	319.06	21.57	46.00	-24.43	34.78	19.54	1.85	34.60	--	--	Peak	5	486.87	24.19	46.00	-21.81	33.16	23.20	2.33	34.50	--	--	Peak	6	869.05	31.88	46.00	-14.12	34.33	28.73	3.12	34.30	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>64.92</td><td>24.39</td><td>40.00</td><td>-15.61</td><td>40.42</td><td>17.95</td><td>0.82</td><td>34.80</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>155.13</td><td>22.83</td><td>43.50</td><td>-20.67</td><td>37.54</td><td>18.69</td><td>1.30</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>179.38</td><td>21.94</td><td>43.50</td><td>-21.56</td><td>38.00</td><td>17.22</td><td>1.42</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>488.81</td><td>24.09</td><td>46.00</td><td>-21.91</td><td>33.04</td><td>23.22</td><td>2.33</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>708.03</td><td>27.56</td><td>46.00</td><td>-18.44</td><td>31.95</td><td>27.18</td><td>2.83</td><td>34.40</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>942.77</td><td>30.71</td><td>46.00</td><td>-15.29</td><td>32.17</td><td>29.60</td><td>3.24</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	64.92	24.39	40.00	-15.61	40.42	17.95	0.82	34.80	--	--	Peak	2	155.13	22.83	43.50	-20.67	37.54	18.69	1.30	34.70	--	--	Peak	3	179.38	21.94	43.50	-21.56	38.00	17.22	1.42	34.70	--	--	Peak	4	488.81	24.09	46.00	-21.91	33.04	23.22	2.33	34.50	--	--	Peak	5	708.03	27.56	46.00	-18.44	31.95	27.18	2.83	34.40	--	--	Peak	6	942.77	30.71	46.00	-15.29	32.17	29.60	3.24	34.30	--	--	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	47.46	18.57	40.00	-21.43	33.26	19.62	0.69	35.00	--	--	Peak																																																																																																																																																															
2	155.13	21.49	43.50	-22.01	36.20	18.69	1.30	34.70	--	--	Peak																																																																																																																																																															
3	183.26	20.18	43.50	-23.32	36.46	16.99	1.43	34.70	--	--	Peak																																																																																																																																																															
4	319.06	21.57	46.00	-24.43	34.78	19.54	1.85	34.60	--	--	Peak																																																																																																																																																															
5	486.87	24.19	46.00	-21.81	33.16	23.20	2.33	34.50	--	--	Peak																																																																																																																																																															
6	869.05	31.88	46.00	-14.12	34.33	28.73	3.12	34.30	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	64.92	24.39	40.00	-15.61	40.42	17.95	0.82	34.80	--	--	Peak																																																																																																																																																															
2	155.13	22.83	43.50	-20.67	37.54	18.69	1.30	34.70	--	--	Peak																																																																																																																																																															
3	179.38	21.94	43.50	-21.56	38.00	17.22	1.42	34.70	--	--	Peak																																																																																																																																																															
4	488.81	24.09	46.00	-21.91	33.04	23.22	2.33	34.50	--	--	Peak																																																																																																																																																															
5	708.03	27.56	46.00	-18.44	31.95	27.18	2.83	34.40	--	--	Peak																																																																																																																																																															
6	942.77	30.71	46.00	-15.29	32.17	29.60	3.24	34.30	--	--	Peak																																																																																																																																																															

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

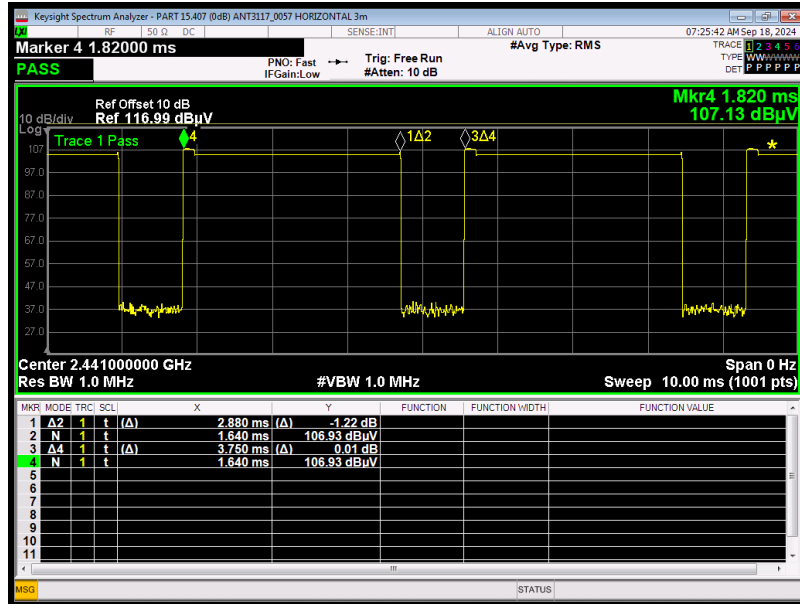

DH5 on time (Count Pulses) Plot on Channel 39

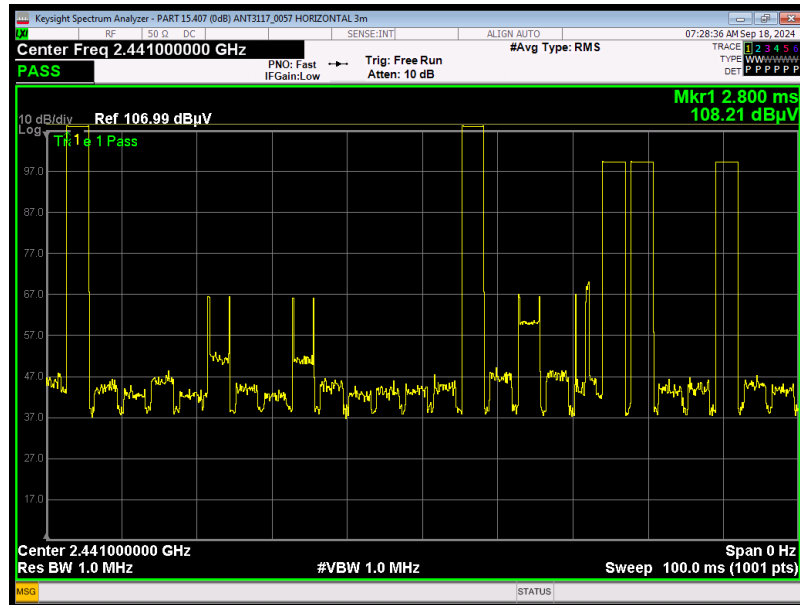

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.