



**MOTOROLA**

**PERSONAL COMMUNICATIONS SECTOR**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

Test Report Number – 3989-4

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature \_\_\_\_\_ Name: Kirby Munroe

Title: Compliance Engineer

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



## **Test Report Details**

Tests Performed By: Motorola Personal Communications Sector  
Product Safety and Compliance Group  
1500 Gateway Boulevard  
Boynton Beach, FL 33426  
PH (561) 739-2179 Fax (561) 739-2131

Tests Requested By: Motorola Inc.  
Personal Communications Sector  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: Analog, CDMA 800, CDMA 1900

Model Number: SUG2353A

## **Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2000

## General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

## Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

## Measuring Equipment and Calibration Information

<b>Manufacturer</b>	<b>Item</b>	<b>Item Version/</b>	<b>Serial</b>	<b>CALIBRATION</b>
<b>Name</b>	<b>Name</b>	<b>Model #</b>	<b>Number</b>	<b>DUE DATE</b>
	<b>Description</b>			
Rohde & Schwarz	EMI Test Receiver	ESI26	838386/010	2/28/2002
Hewlett Packard	RF Amplifier	8347A	3307A01225	12/19/2001
Hewlett Packard	Pre-Amplifier	8449B	3008A00535	12/19/2001
ETS	DRG Horn Antenna	3115	6222	9/23/2002
A.H. Systems Inc.	DRG Horn Antenna	SAS-200/571	265	8/21/2002
A.H. Systems Inc.	DRG Horn Antenna	SAS-200/571	365	10/26/2001
ETS	Log-Periodic Antenna	3148	1189	11/3/2001
ETS	Log-Periodic Antenna	3148	1188	11/3/2001
ETS	Biconical Antenna	3110B	3369	11/2/2001
ETS	Biconical Antenna	3110B	3370	11/2/2001
Hewlett Packard	CDMA Mobile Test Set	E8285A	US39220601	9/17/2002
Hewlett Packard	TDMA Mobile Test Set	8920B	US39225370	1/24/2002
Hewlett Packard	TDMA Cellular Adaptor	83206A	US39402234	1/24/2002
Hewlett Packard	GSM Mobile Test Set	8922M	3639U01033	4/10/2002
Hewlett Packard	GSM DCS/PCS RF Interface	83220E	3639U01057	4/12/2002
Hewlett Packard	Signal Generator	83623B	3844A00935	12/18/2001
Hewlett Packard	Signal Generator	83623B	3844A01195	1/23/2002
Thermotron	Environmental Chamber	S-4	31580	12/20/2001

All equipment is on a one-year calibration cycle.

**Measurement Procedures and Data**

**RF POWER OUTPUT**

**Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of a HPE4406A Vector Signal Analyzer through a 10dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR Part 2.1046

**Measurement Results**

**ANALOG**

<u>Frequency (MHz)</u>	<u>Power (dBm)</u>
824.04	28.39
836.52	28.21
848.97	28.18

**CDMA 800**

<u>Frequency (MHz)</u>	<u>Power (dBm)</u>
824.7	25.78
836.52	25.44
848.31	25.65

**CDMA 1900**

<u>Frequency (MHz)</u>	<u>Power (dBm)</u>
1851.25	25.91
1880.0	24.90
1908.75	25.04

## RADIATED RF POWER OUTPUT

### Measurement Procedure

The phone was tested in a 16' cubical anechoic chamber with a 2-axis positioner system that permits taking complete spherical scans of the AUT's radiation patterns. For all tests, the phone was supported in a free-space type environment, vertically oriented in the chamber. Tests were done for CDMA 800 frequencies (824.70, 836.52, and 848.37 MHz); PCS 1900 frequencies (1851.3, 1880.0, 1908.75 MHz); and AMPS Analog frequencies (824.04, 836.52, 848.97 MHz) with antenna extended and retracted.

CDMA measurements were made with the phone placed in a call using the HP E8285A mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at every 15 degree step from  $\theta=0$  to 165 degrees and  $\phi=0$  to 360 degrees. The radiated power was measured using a Gigatronics 8542C power meter in "Mod Avg" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data.

For all measurement, calibration was performed via gain substitution with a half-wave dipole.

### Measurement Results

#### **800 MHz:**

Maximum EIRP: 26.5 dBm  
Maximum ERP: 24.4 dBm (0.28 Watt)

#### **800 MHz:**

Maximum EIRP: 26.9 dBm  
Maximum ERP: 24.8 dBm (0.3 Watt)

#### **1900 MHz:**


Maximum EIRP: 25.3 dBm (0.34 Watt)

## MODULATION CHARACTERISTICS


CFR Part 2.1047, 22.915

### Measurement Results



#### Transmit Audio Frequency Response

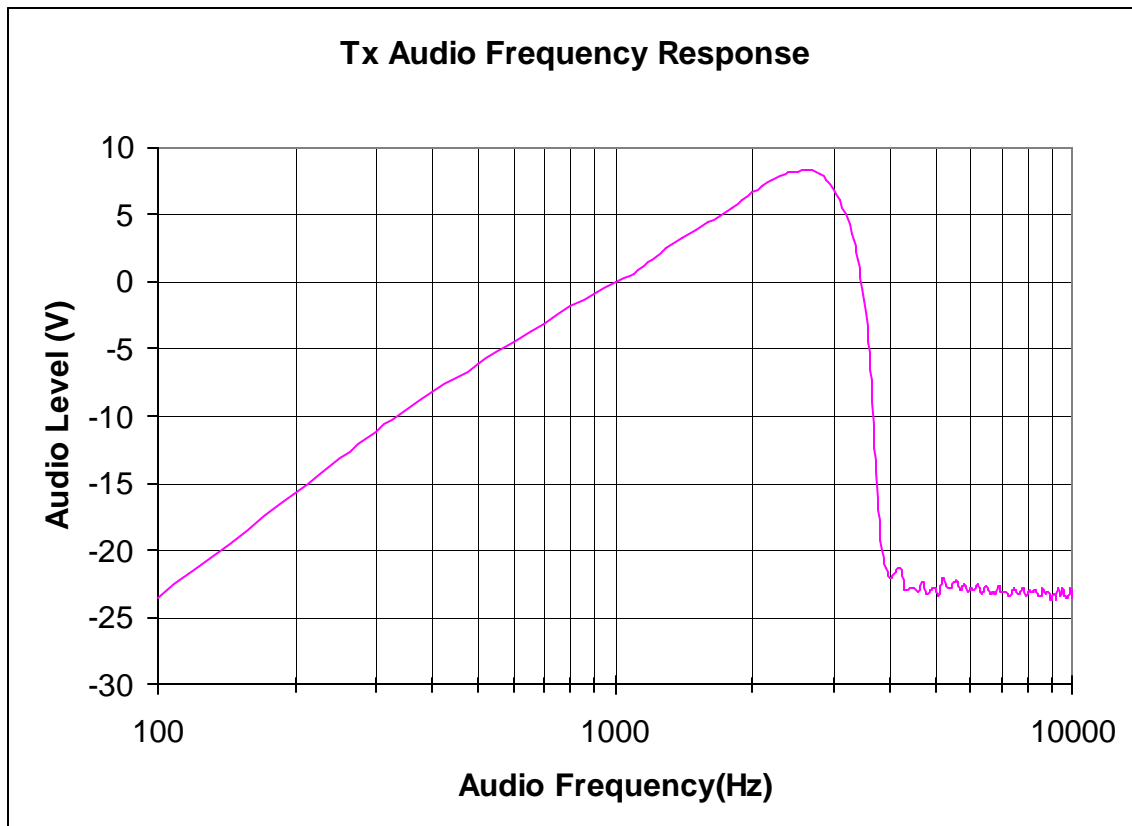

**Post Limiter Filter Attenuation**

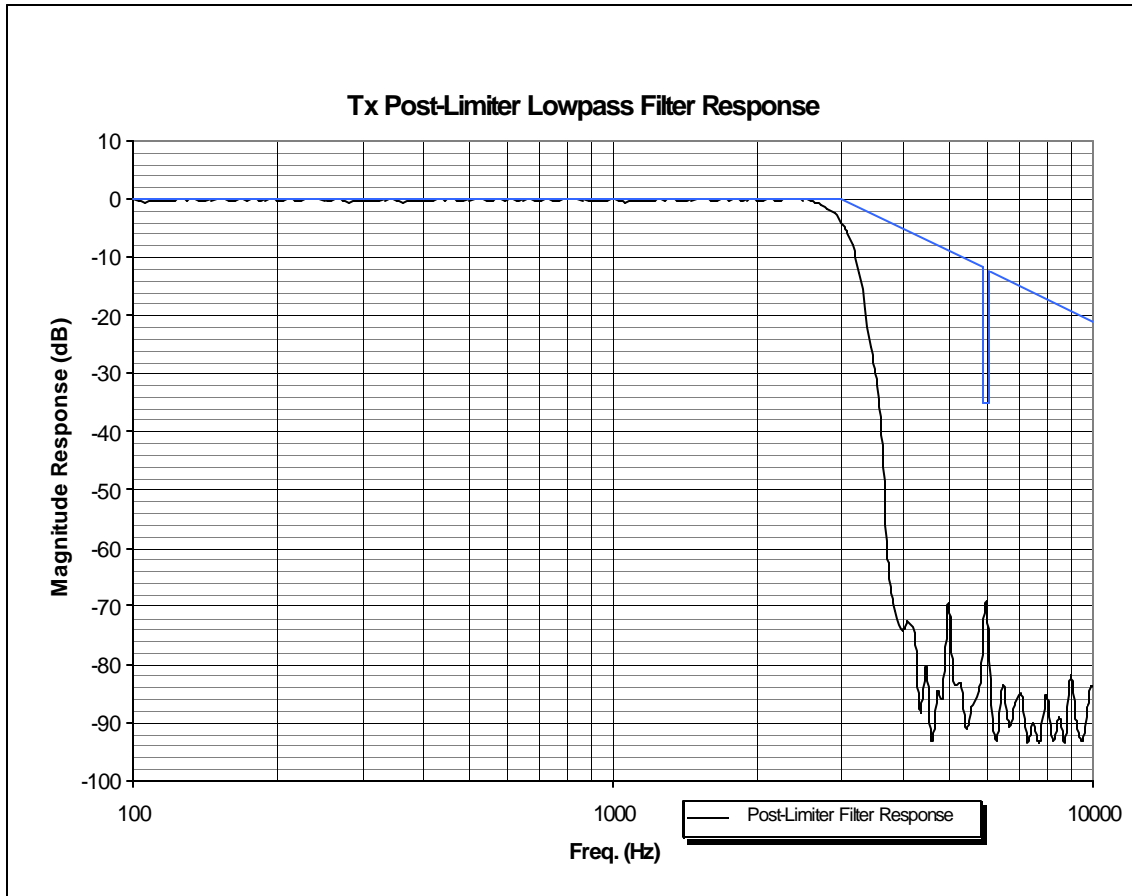

### Modulation Limiting vs. Modulation Input Voltage

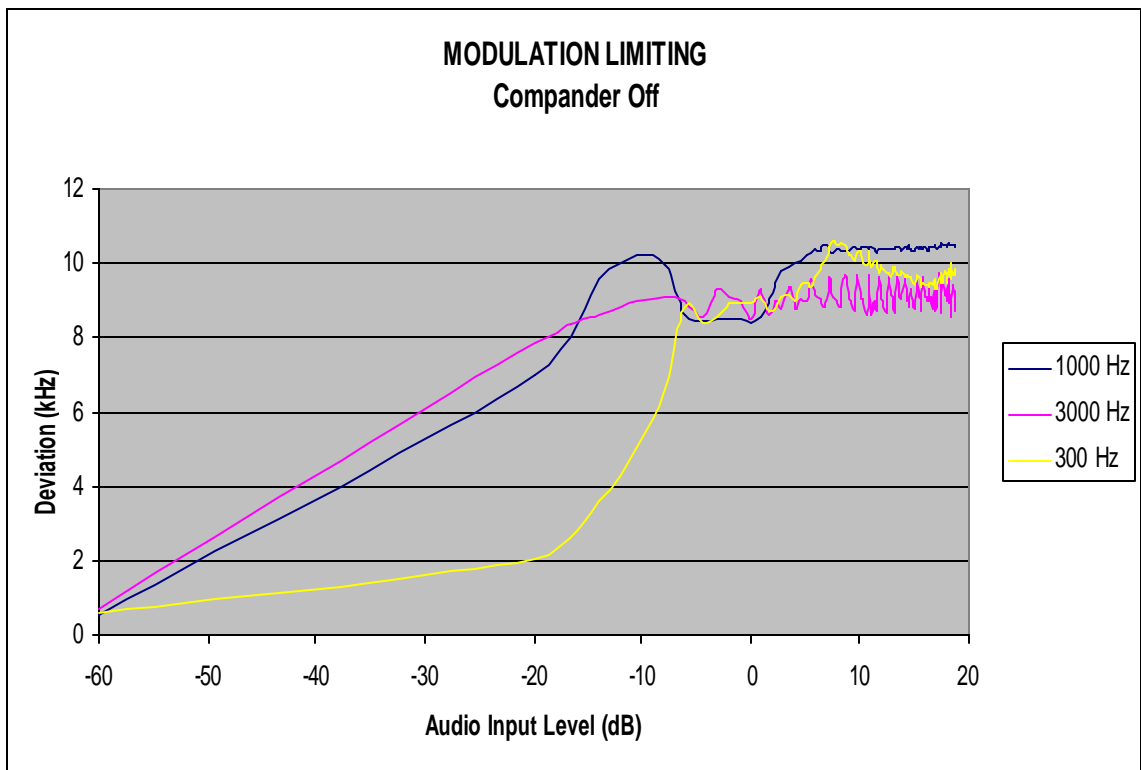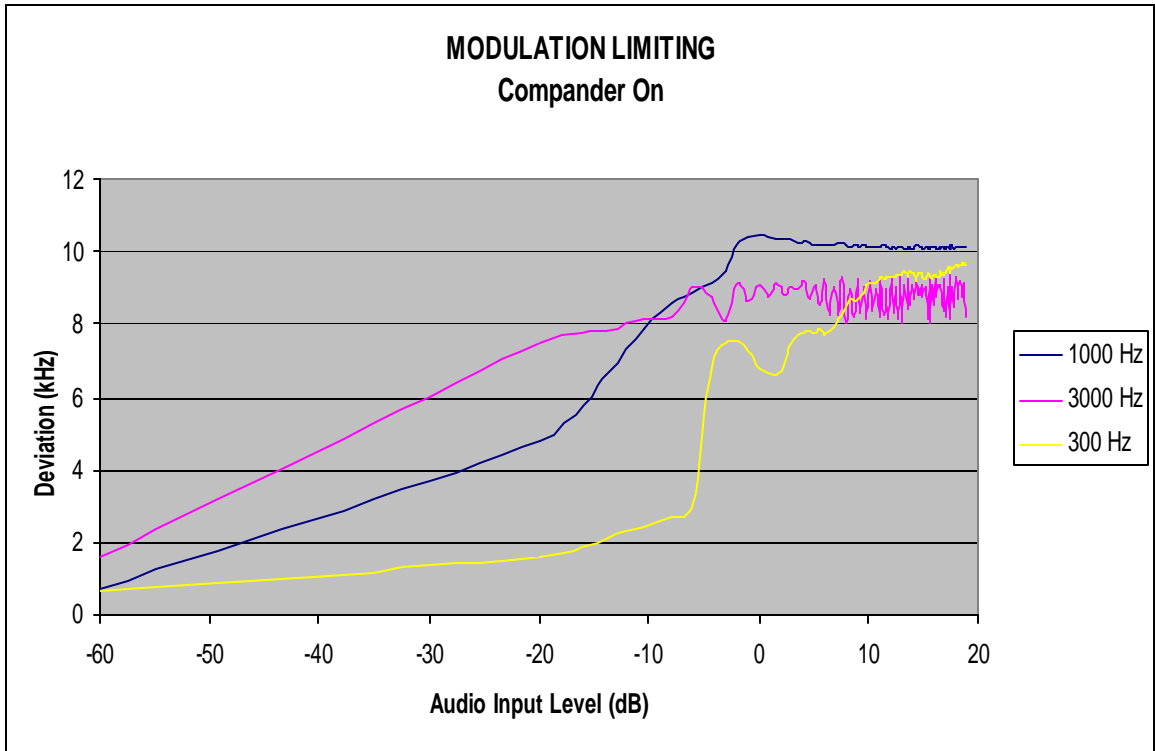

## OCCUPIED BANDWIDTH

CFR Part 2.1049, 24.238, 22.917


### Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

### Measurement Results


#### AMPS - Unmodulated Carrier

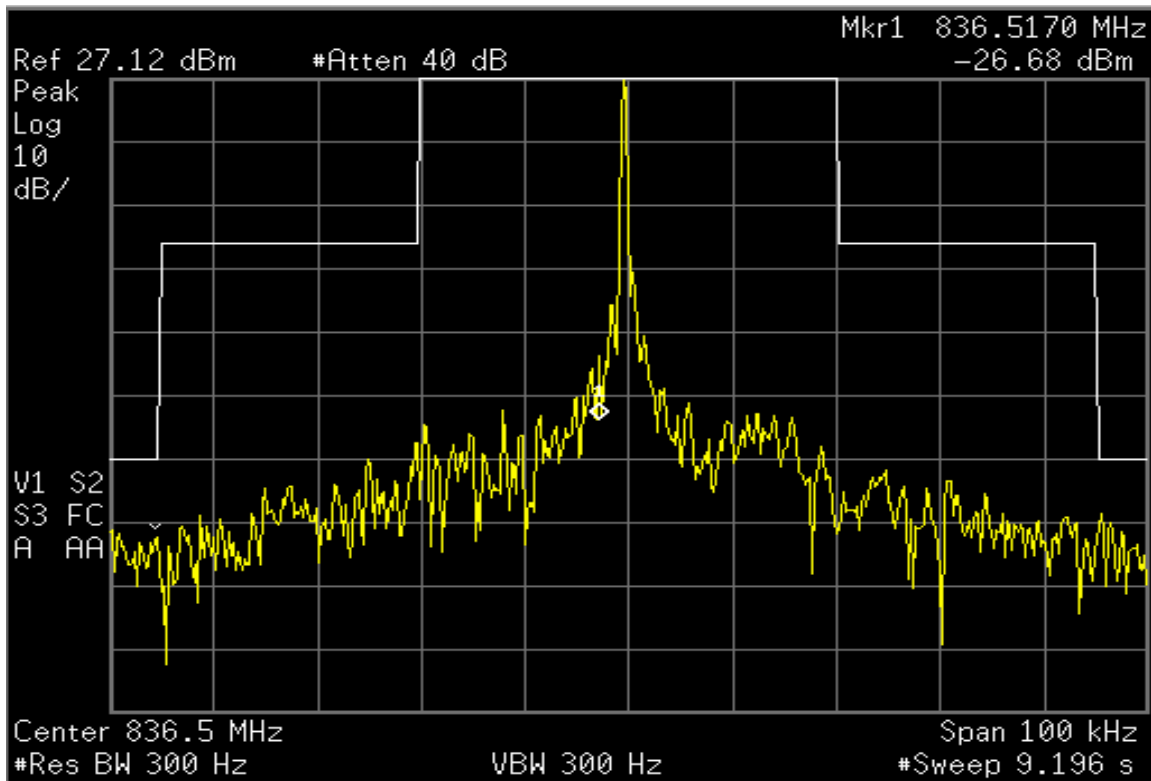


**AMPS - Supervisory Audio Tone**

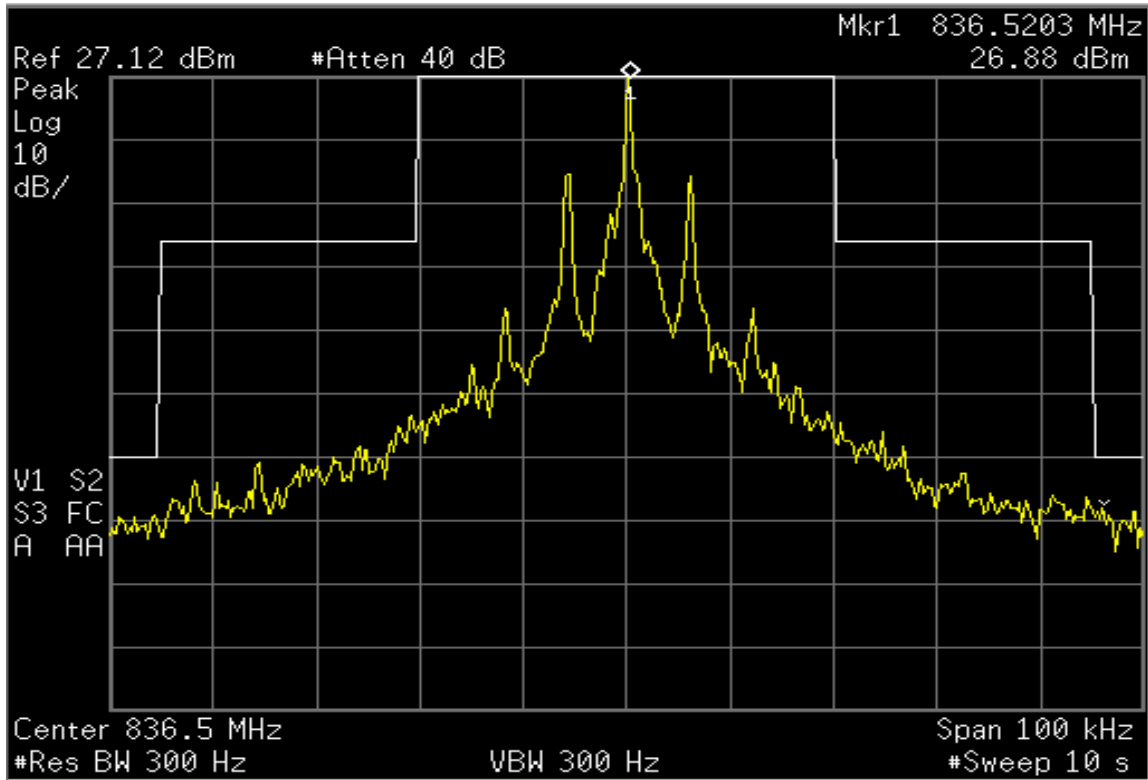


**AMPS - Voice**

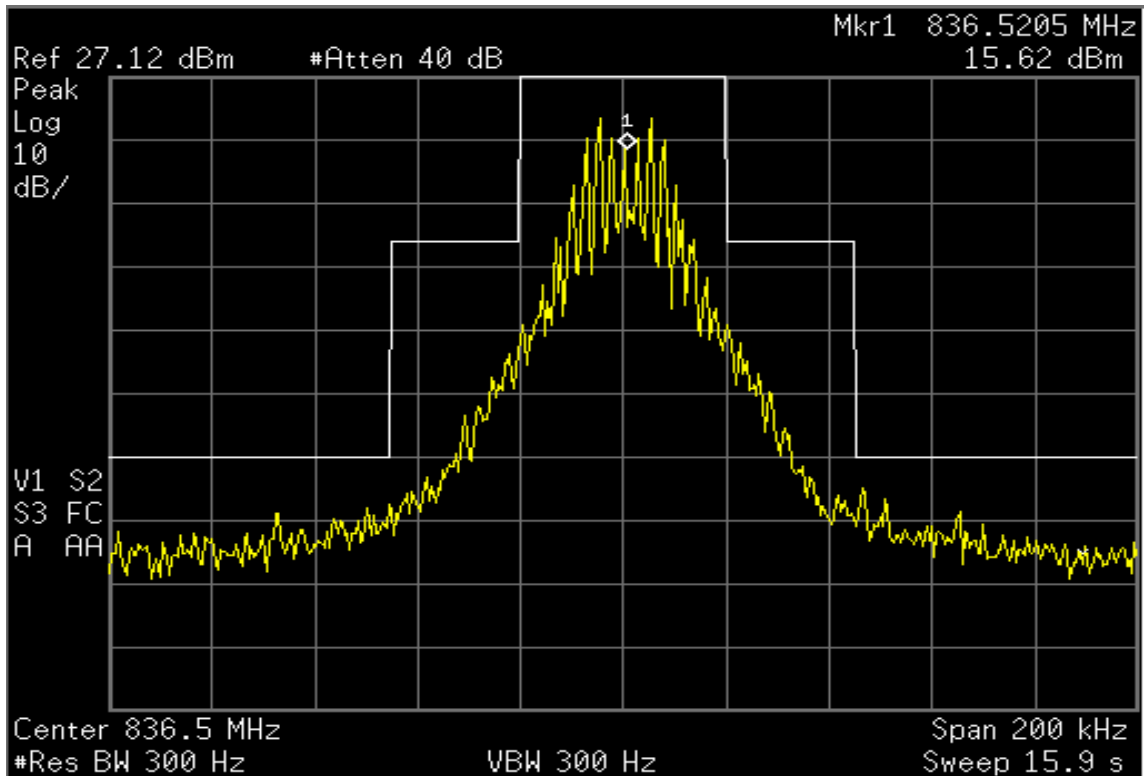


**AMPS – Signaling Tone**

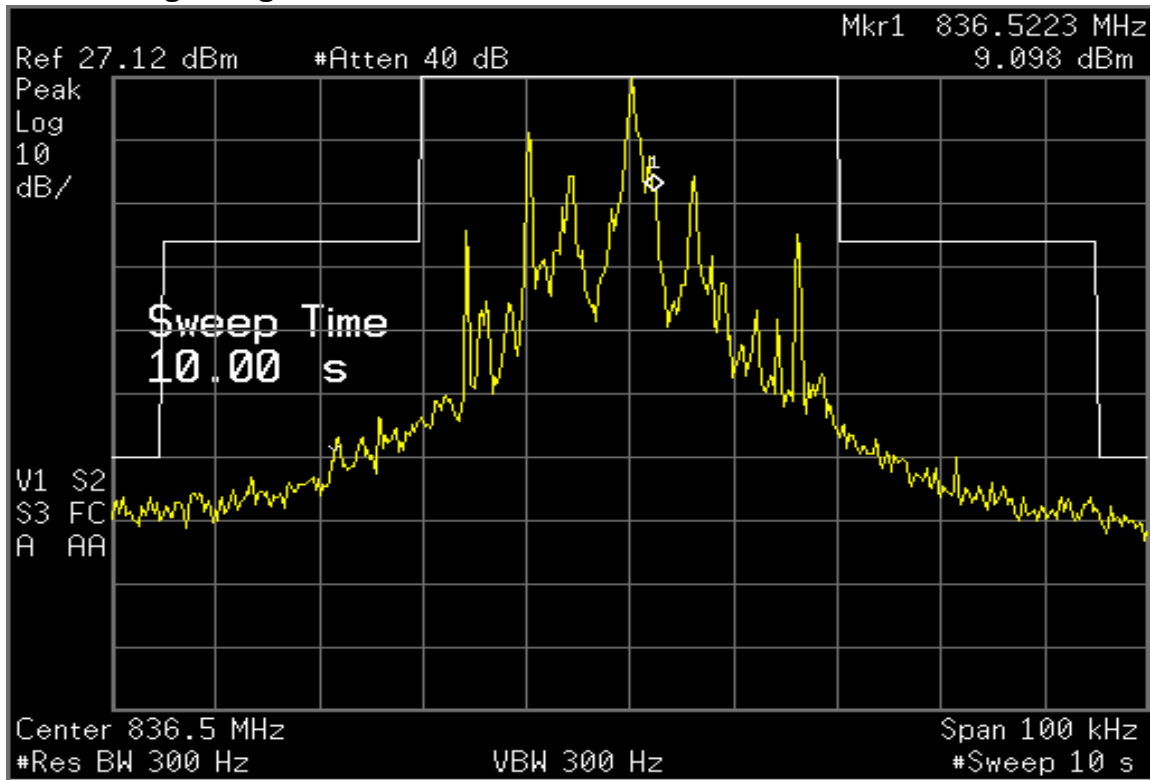


**AMPS – 10kb/s Wideband Data**

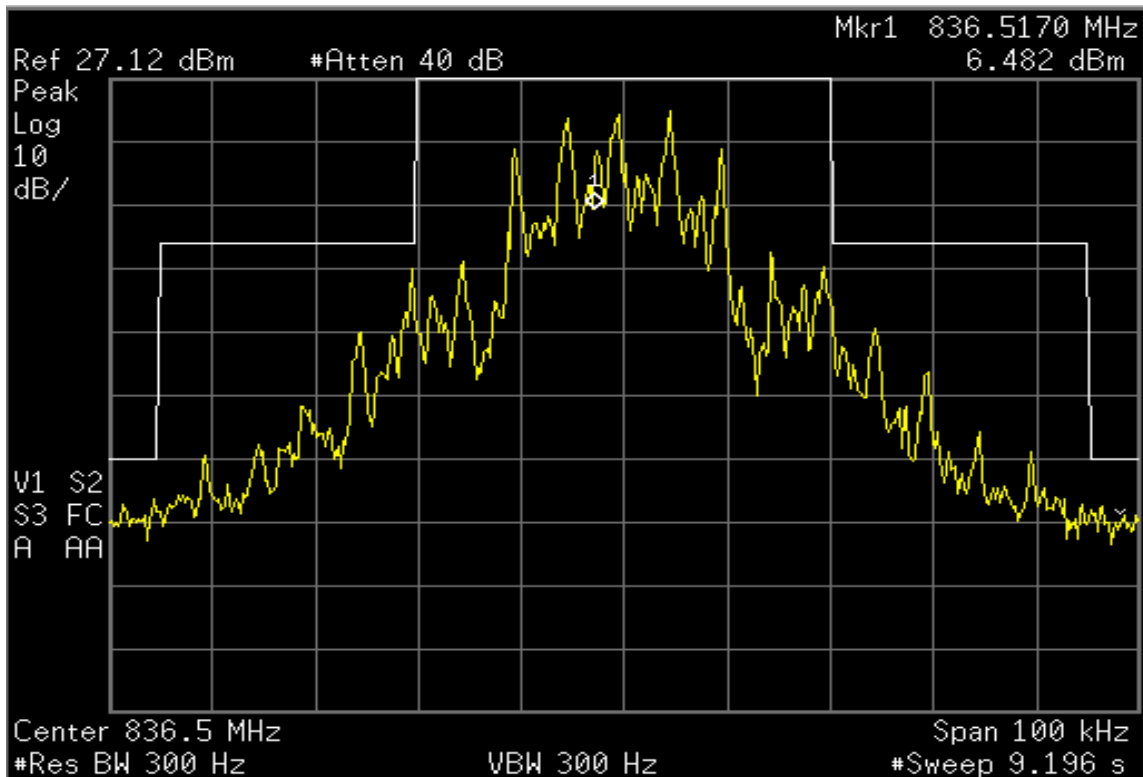


**CDMA 800**

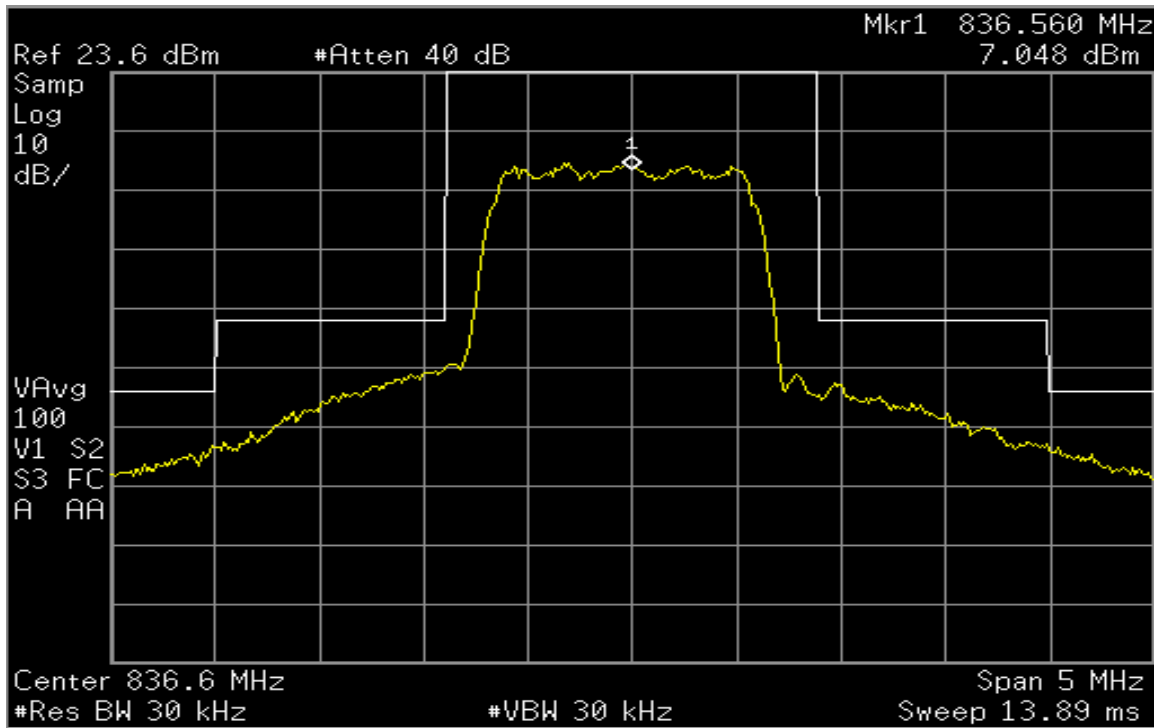


**CDMA 800 – Lower Band Edge**

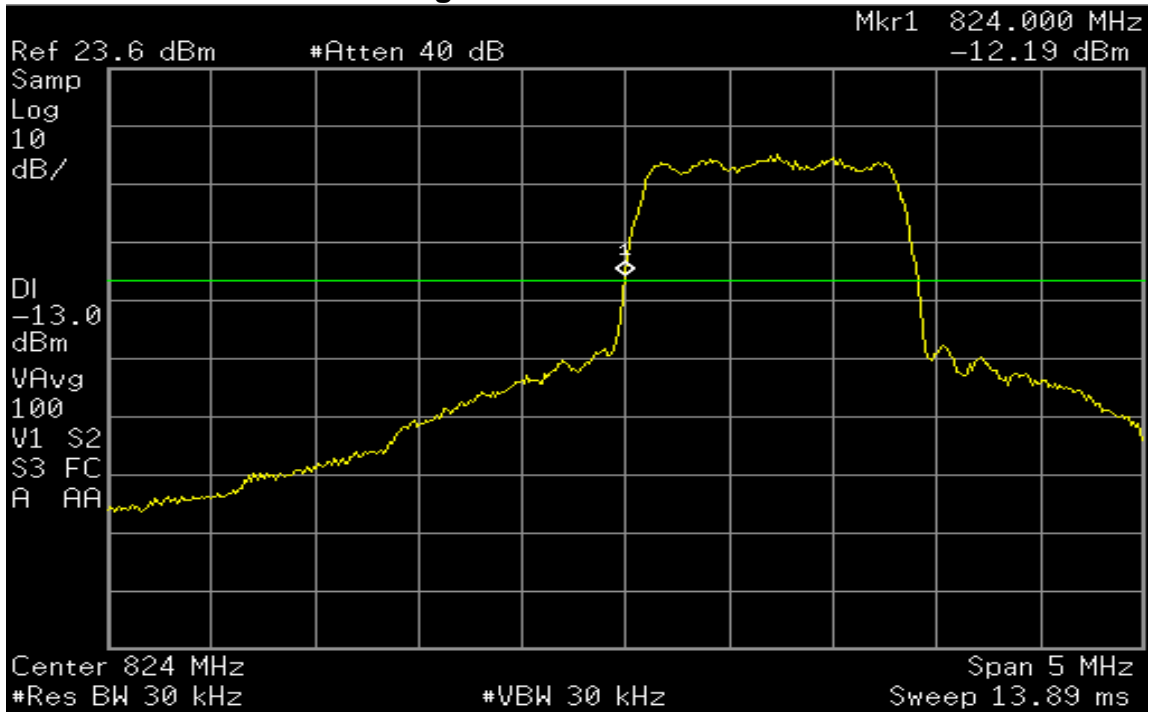


### CDMA 800 – Upper Band Edge

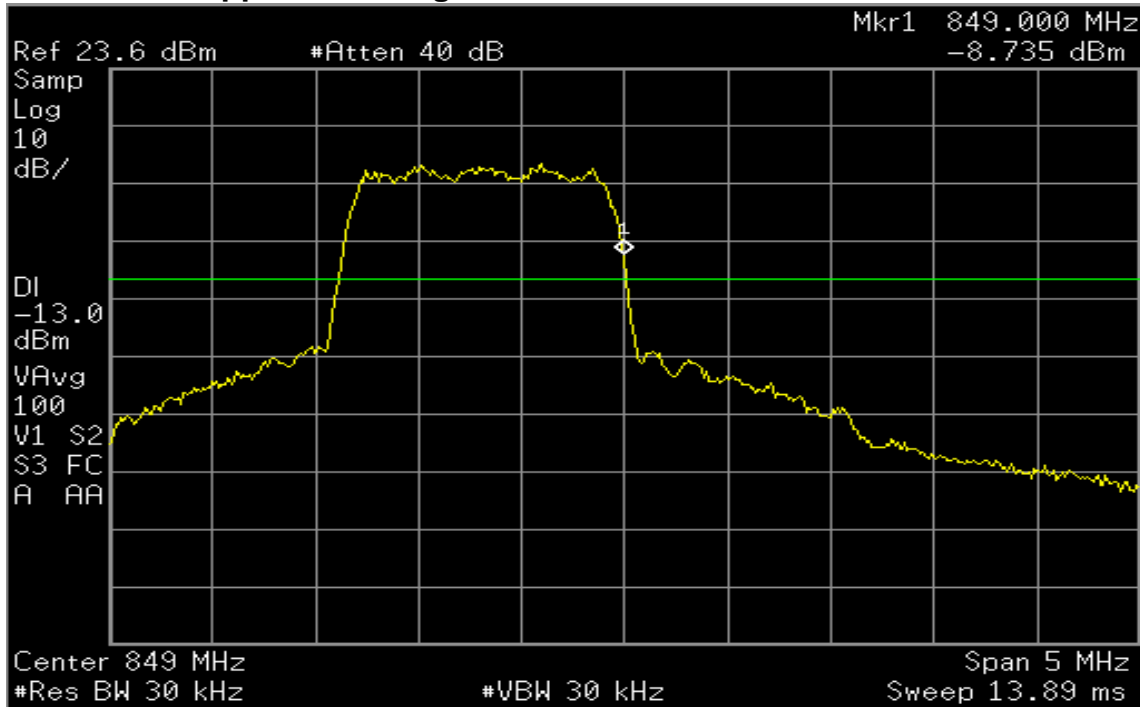


### CDMA 1900

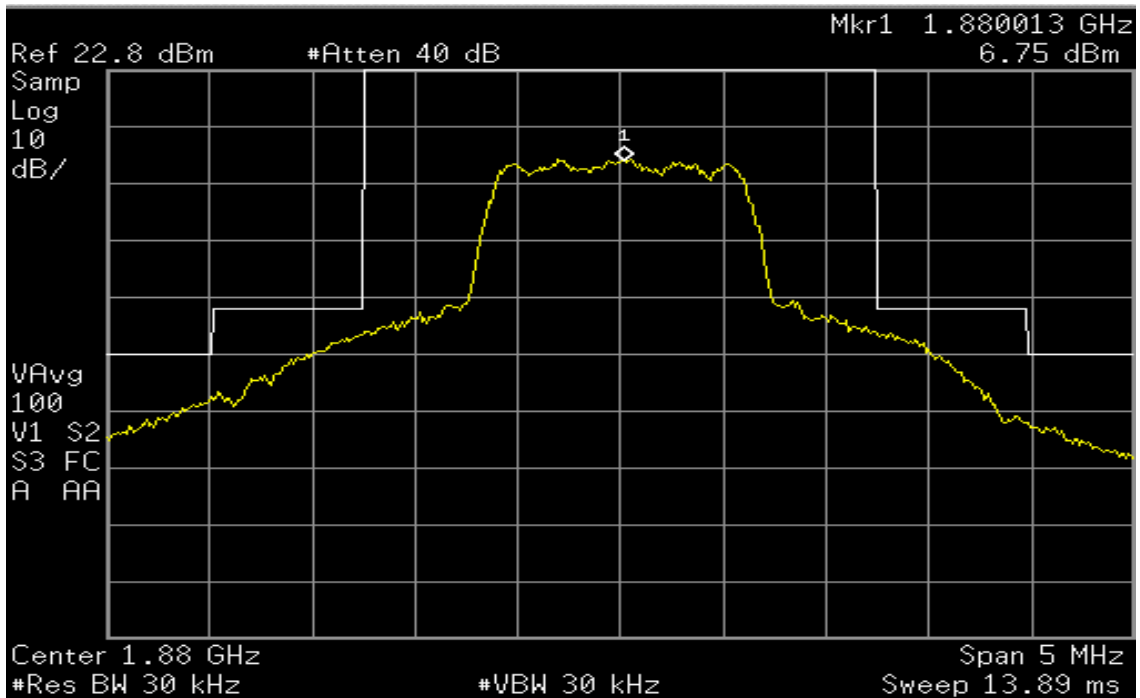

### CDMA 1900 – Lower Band Edge

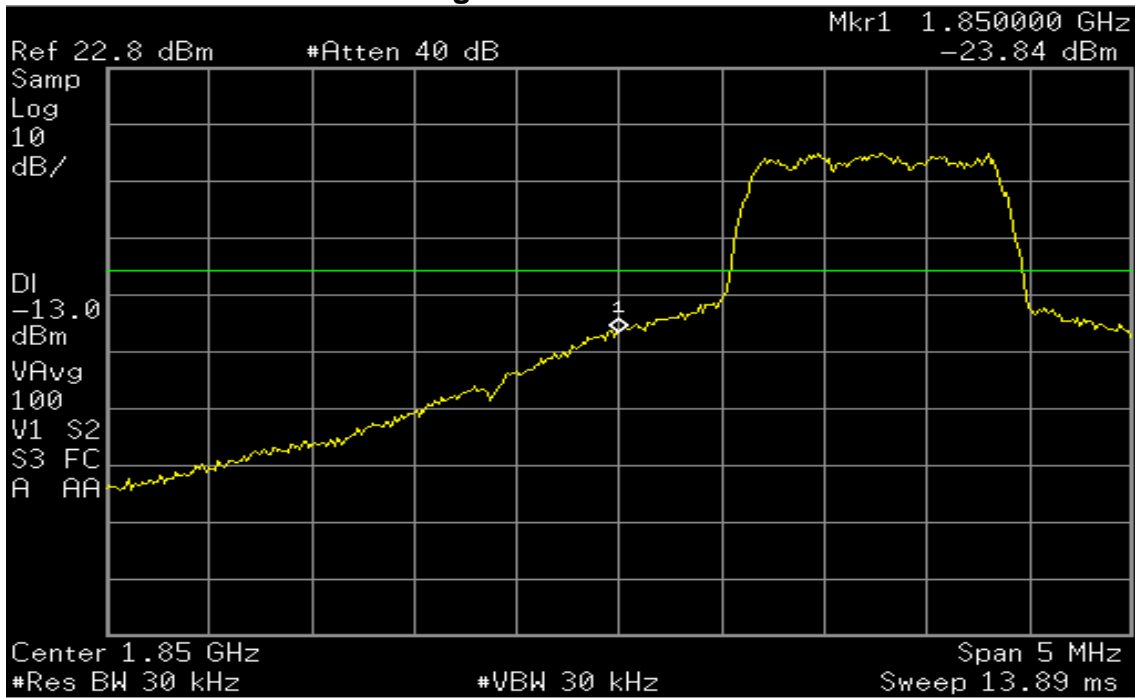

### CDMA 1900 – Upper Band Edge

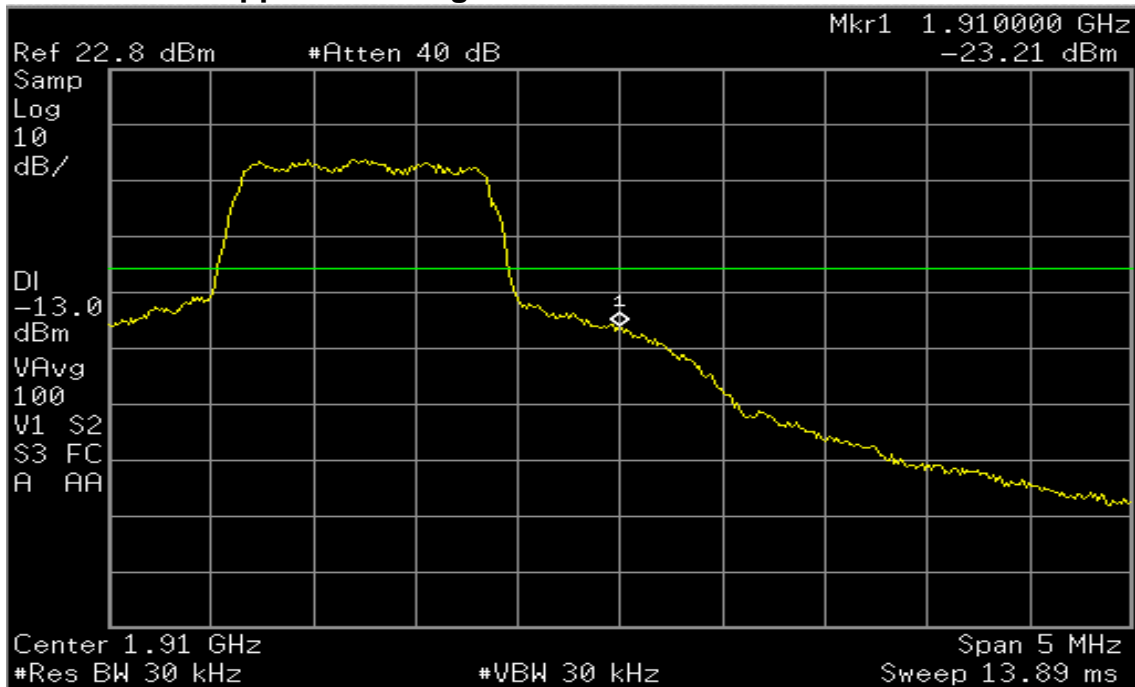

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

CFR Part 2.1051, 22.917, 24.238

### **Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

### **Measurement Results**


Attached

**Measurement Results**

**Modulation: AMPS**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-44.8
3rd harmonic	-13	-58.0
4th harmonic	-13	-39.3
5th harmonic	-13	-52.4
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

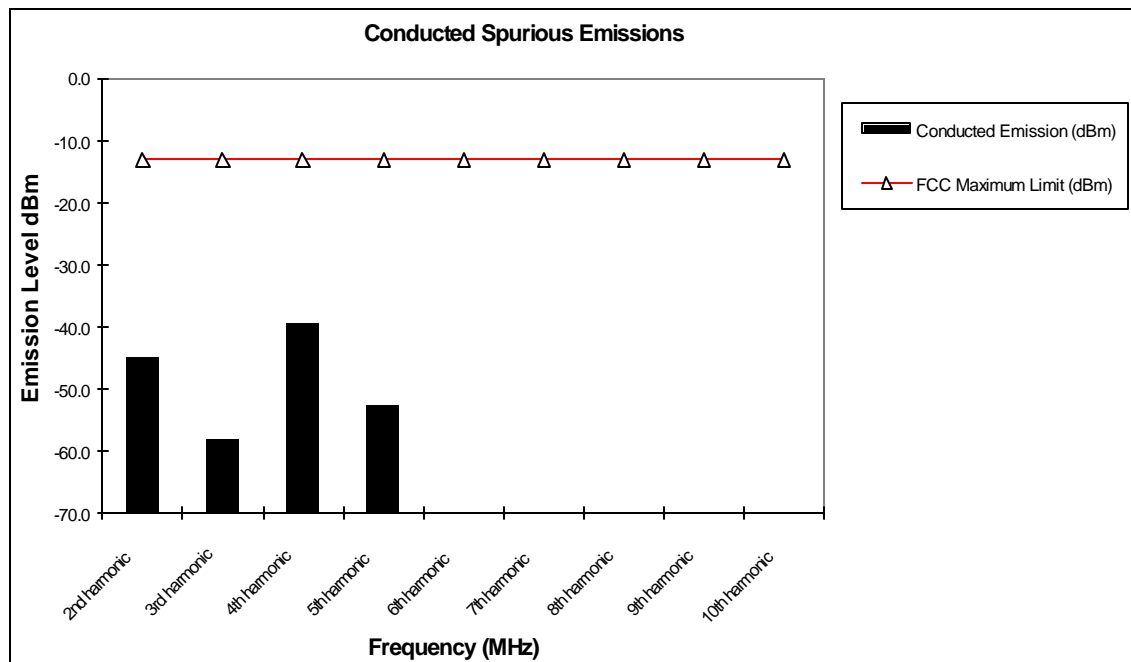

**Notes:**


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

**Measurement Results**

**Modulation: CDMA 800**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-46.3
3rd harmonic	-13	*
4th harmonic	-13	-50.5
5th harmonic	-13	-51.1
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

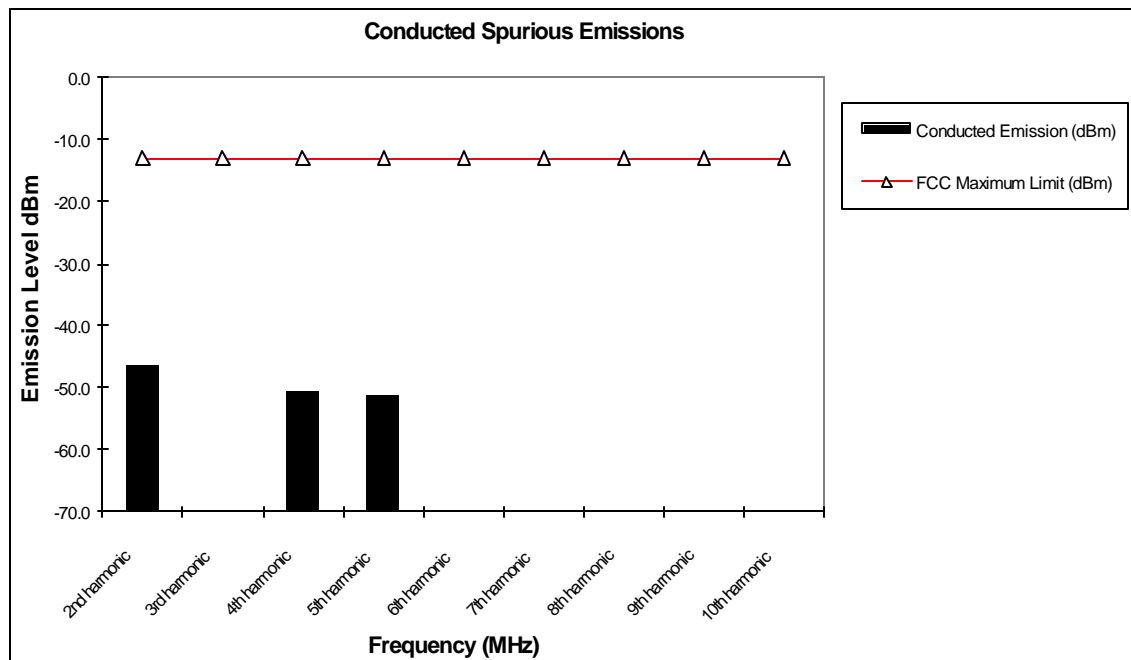

**Notes:**


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

**Measurement Results**

**Modulation: CDMA 1900**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-47.0
3rd harmonic	-13	-29.5
4th harmonic	-13	-32.1
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

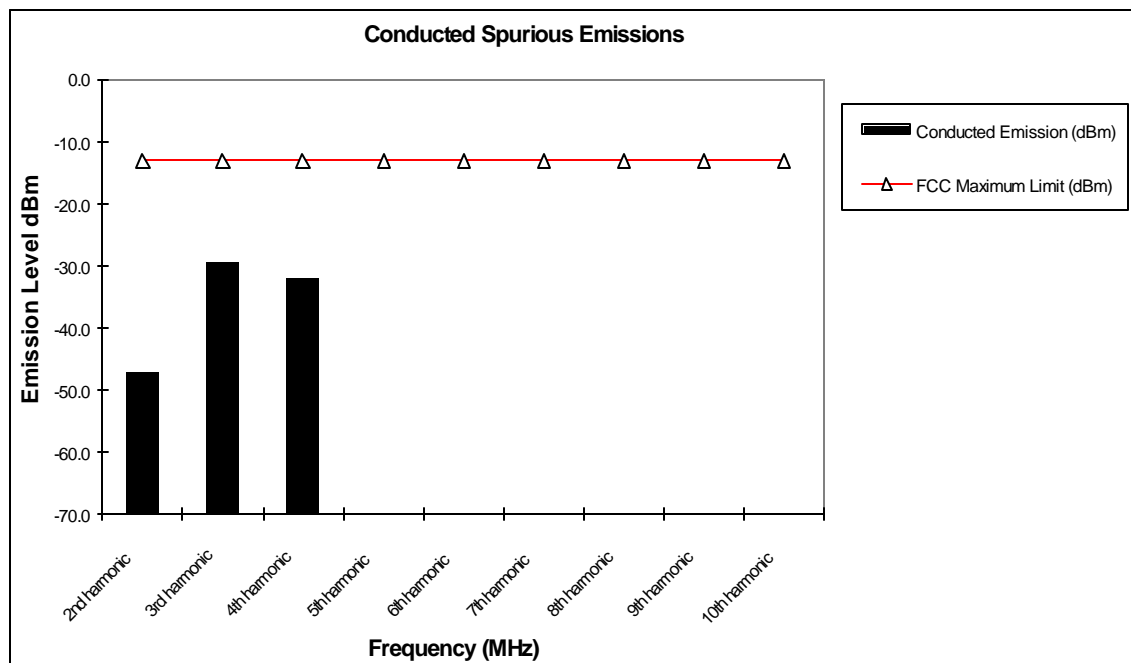

**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

## **FIELD STRENGTH OF SPURIOUS EMISSIONS**

CFR Part 2.1053, 22.917, 24.238

### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

### **Measurement Results**


Attached

**Measurement Results**

**Modulation: ANALOG**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-44.7	-40.3
3rd harmonic	-13	-38.8	-36.9
4th harmonic	-13	-52.8	-47.9
5th harmonic	-13	-52.3	-52.7
6th harmonic	-13	*	-52.8
7th harmonic	-13	-45.6	-52.3
8th harmonic	-13	*	*
9th harmonic	-13	*	-49.1
10th harmonic	-13	*	*

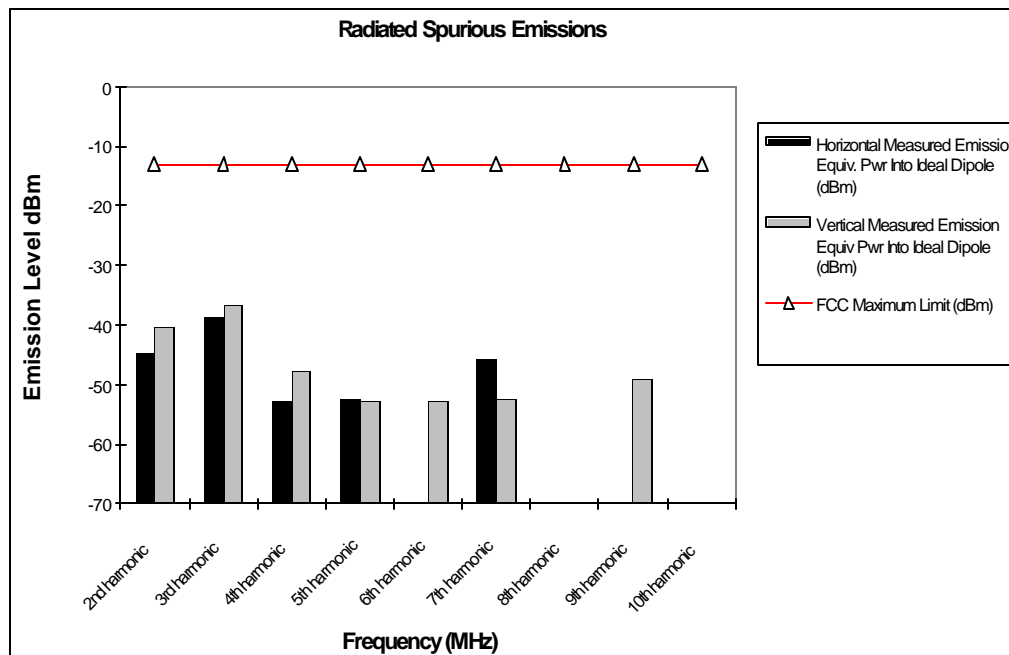

**Notes:**


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

**Measurement Results**

**Modulation: CDMA 800**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-55.1	-49.0
3rd harmonic	-13	-41.2	-47.2
4th harmonic	-13	-59.3	-54.8
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

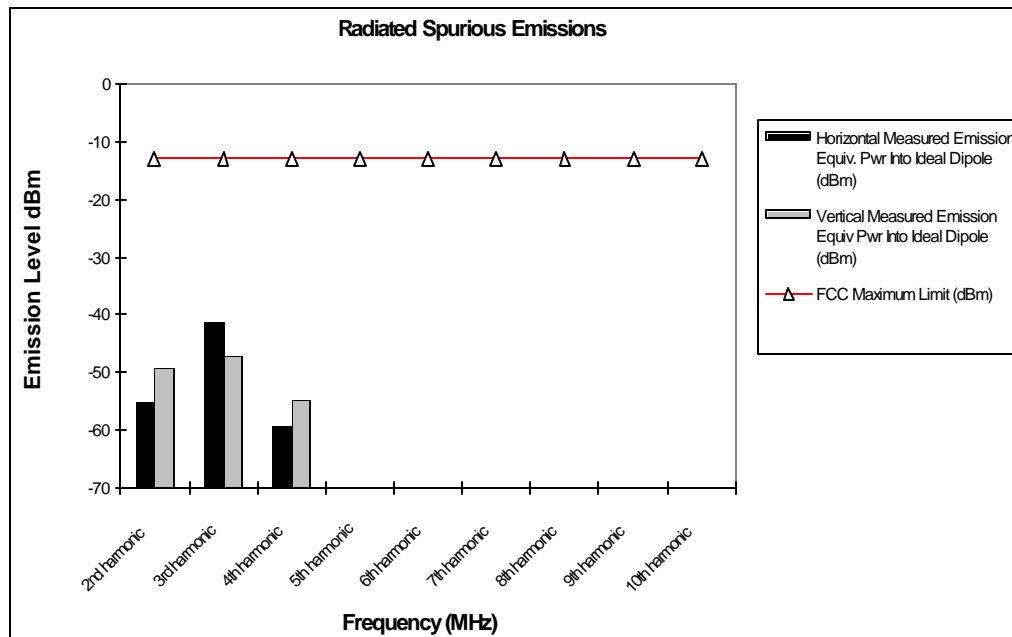


Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

**Measurement Results**  
**Modulation: CDMA 1900**  
**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-28.0	-29.1
3rd harmonic	-13	-15.5	-20.7
4th harmonic	-13	-22.5	-19.4
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

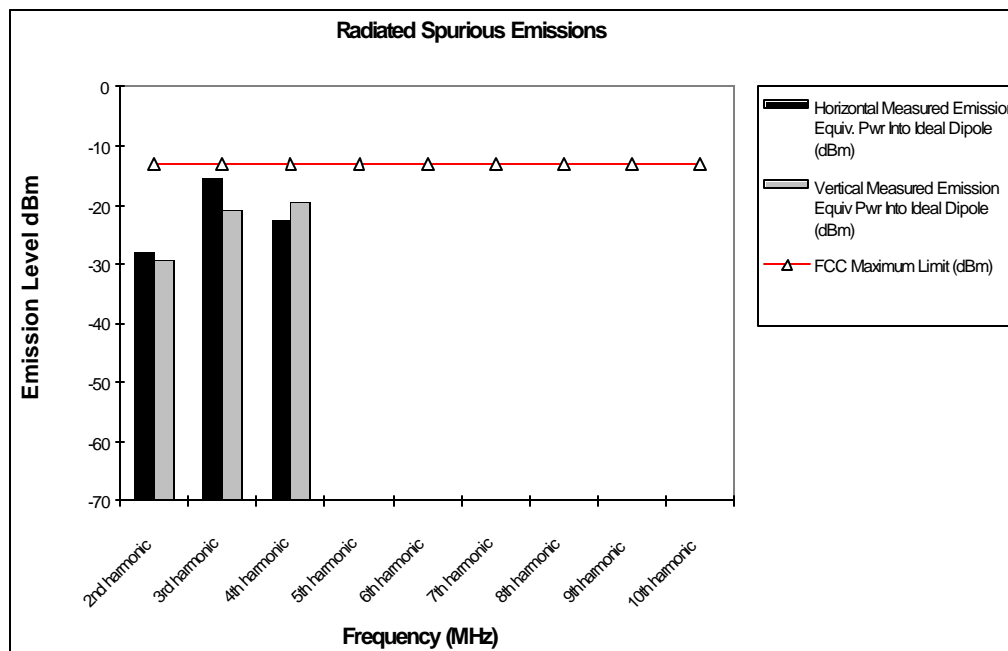

Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

## FREQUENCY STABILITY

CFR Part 2.1055, 22.355, 24.235

### **Measurement Procedure**

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

### **Measurement Results**


Attached

**Measurement Results**  
**Modulation: ANALOG**

## Frequency Stability

<b>Mode:</b>	Analog	<b>Operating Frequency:</b>	836.52 MHz
<b>Channel:</b>	384	<b>Deviation Limit (PPM):</b>	2.5ppm
	Tarpon 1X Phone		October 18 2001

Temperature	Frequency Error	Frequency Error	Voltage	Power
C	HZ	(PPM)	(%)	(VDC)
-30.C	124.00	0.148	100%	3.60
-20.C	125.00	0.149	100%	3.60
-10.C	119.00	0.142	100%	3.60
0.C	126.00	0.151	100%	3.60
10.C	124.00	0.148	100%	3.60
20.C	126.00	0.151	100%	3.60
30.C	121.00	0.145	100%	3.60
40.C	119.00	0.142	100%	3.60
50.C	125.00	0.149	100%	3.60
60.C	118.00	0.141	100%	3.60
20.C	125.00	0.149	Battery Endpoint	3.20

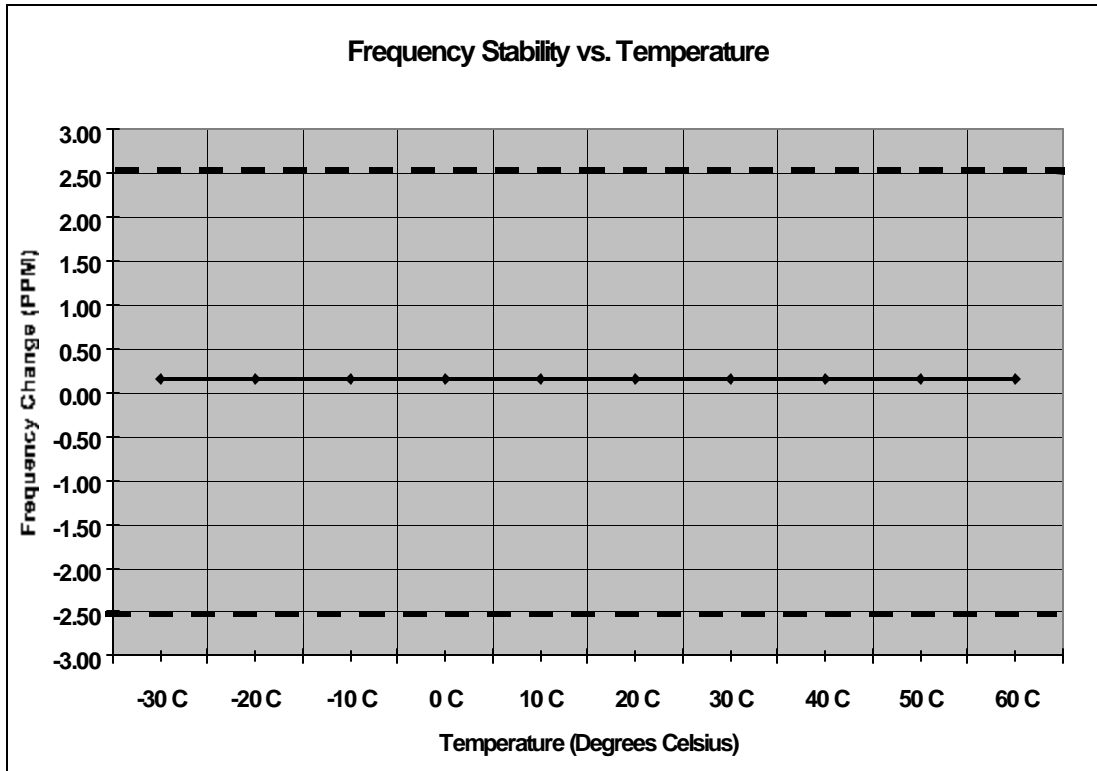


**Measurement Results**  
**Modulation: CDMA 800**

**Frequency Stability**

**Mode:** CDMA 800      **Operating Frequency:** 836.52 MHz  
**Channel:** 384      **Deviation Limit (Hz):** 0.359ppm (+/-300 Hz)  
 Tarpon 1X Phone      Oct 18 01

Temperature	Frequency Error	Frequency Error	Voltage	Power
C	HZ	(PPM)	(%)	(VDC)
-30 C	144.10	0.172	100%	3.60
-20 C	79.50	0.095	100%	3.60
-10 C	66.40	0.079	100%	3.60
0 C	82.80	0.099	100%	3.60
10 C	59.80	0.071	100%	3.60
20 C	47.10	0.056	100%	3.60
30 C	62.10	0.074	100%	3.60
40 C	37.40	0.045	100%	3.60
50 C	36.20	0.043	100%	3.60
60 C	49.20	0.059	100%	3.60
20 C	72.00	0.086	Battery Endpoint	3.20

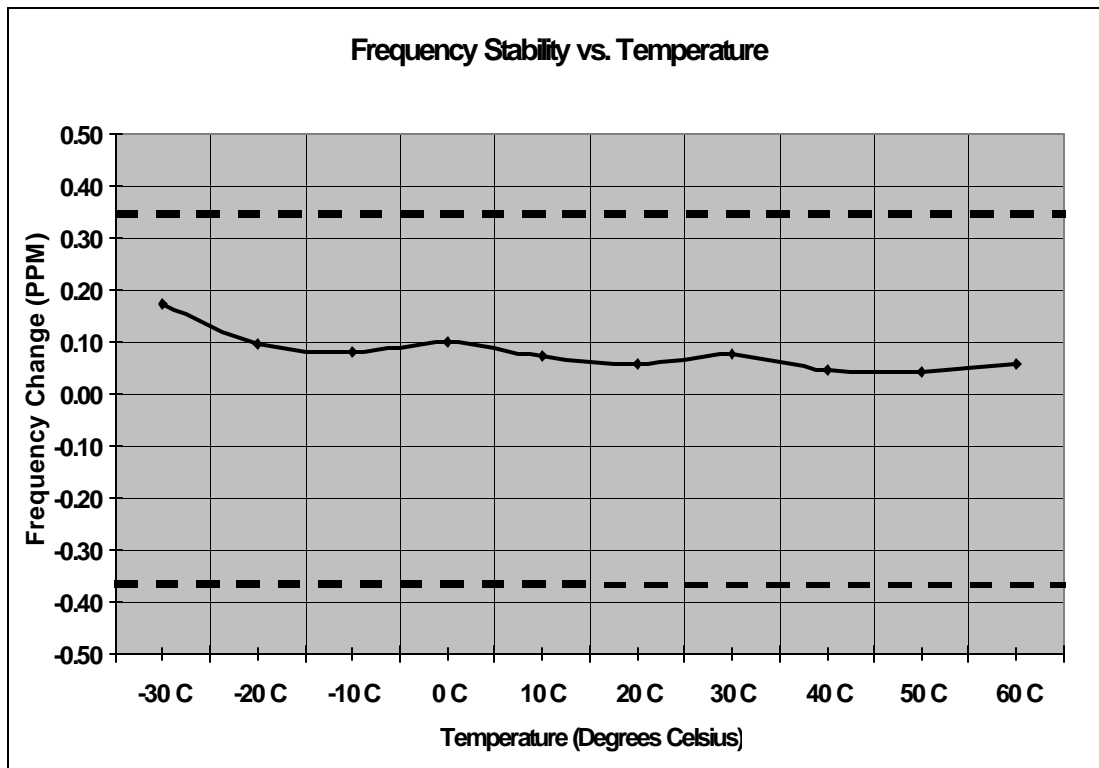


**Measurement Results**  
**Modulation: CDMA 1900**

**Frequency Stability**

**Mode:** CDMA 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 600      **Deviation Limit (PPM):** 0.08ppm (+/-150Hz)  
 Tarpon Phone 1X      Oct 23 2001

Temperature	Frequency Error	Frequency Error	Voltage	Power
C	HZ	(PPM)	(%)	(VDC)
-30 C	115.80	0.062	100%	3.60
-20 C	87.30	0.046	100%	3.60
-10 C	121.20	0.064	100%	3.60
0 C	93.40	0.050	100%	3.60
10 C	-103.80	-0.055	100%	3.60
20 C	107.60	0.057	100%	3.60
30 C	98.30	0.052	100%	3.60
40 C	122.50	0.065	100%	3.60
50 C	-95.60	-0.051	100%	3.60
60 C	87.70	0.047	100%	3.60
20 C	93.50	0.050	Battery Endpoint	3.20

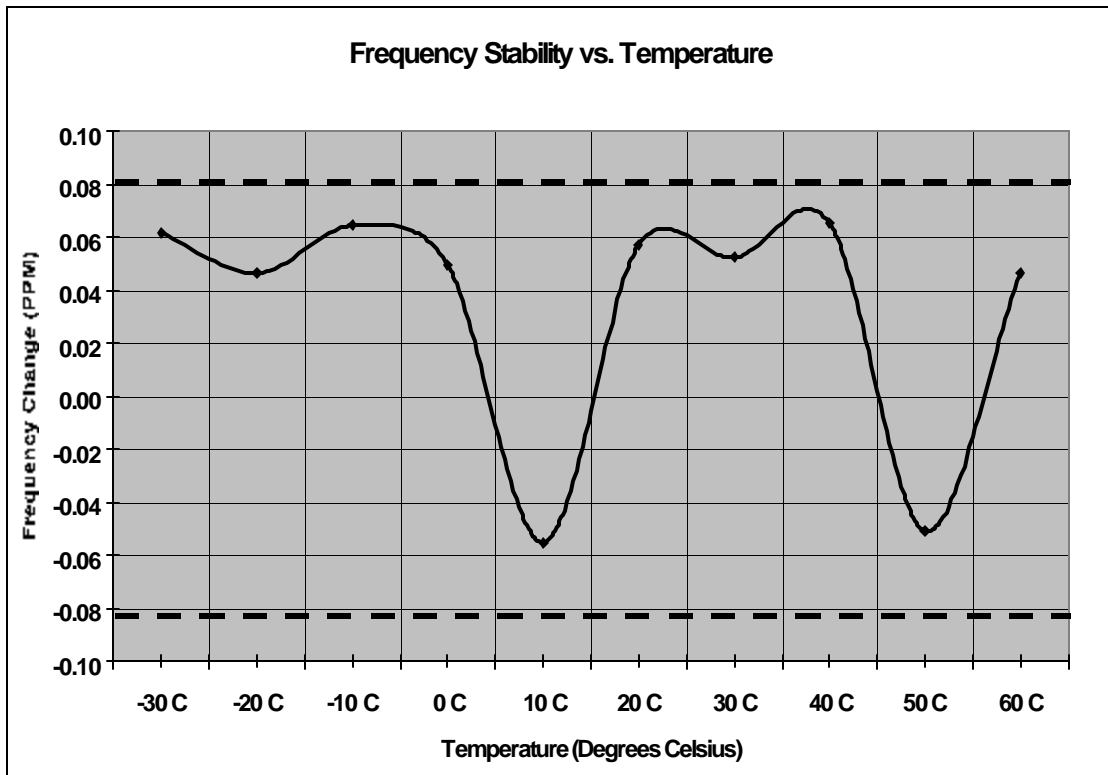

## **FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**

CFR Part 15.109

### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -  
Amplifier Gain (dB) + Antenna Correction Factor (1/m)

### **Measurement Results**


Attached

**Measurement Results**

**Modulation: ANALOG**

**Receiver Radiated Spurious Emissions**

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	50.2	50.7
2nd harmonic	54	44.7	43.6
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*

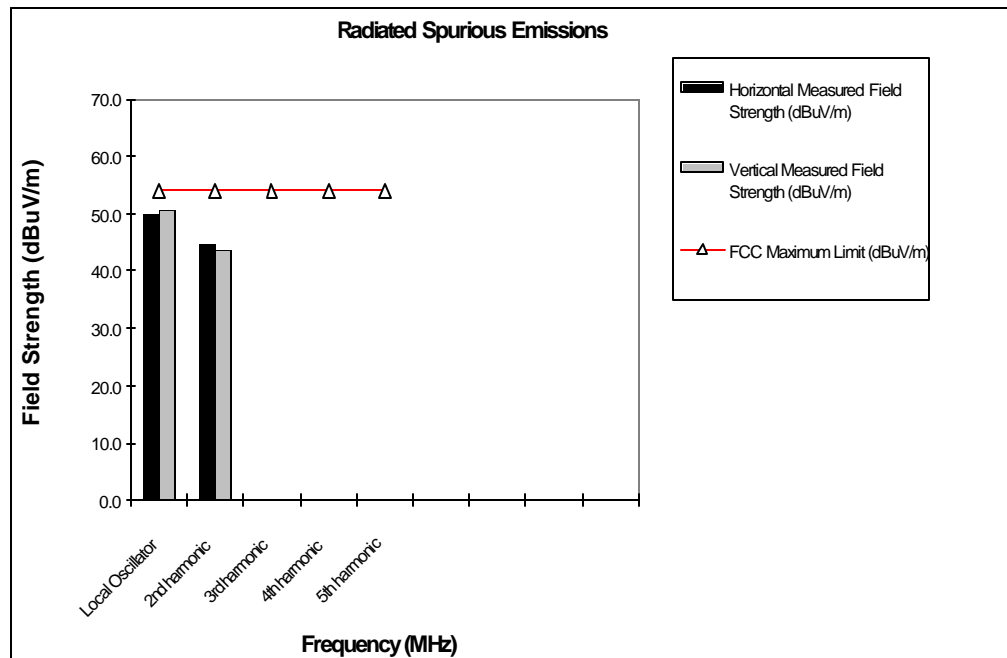

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

**Measurement Results**

**Modulation: CDMA 800**

**Receiver Radiated Spurious Emissions**

Frequency (MHz)	FCC Maximum Limit (dBu/m)	Horizontal Measured Field Strength (dBu/m)	Vertical Measured Field Strength (dBu/m)
Local Oscillator	54	*	*
2nd harmonic	54	48.9	48.7
3rd harmonic	54	*	*
4th harmonic	54	44.5	43.5
5th harmonic	54	*	*

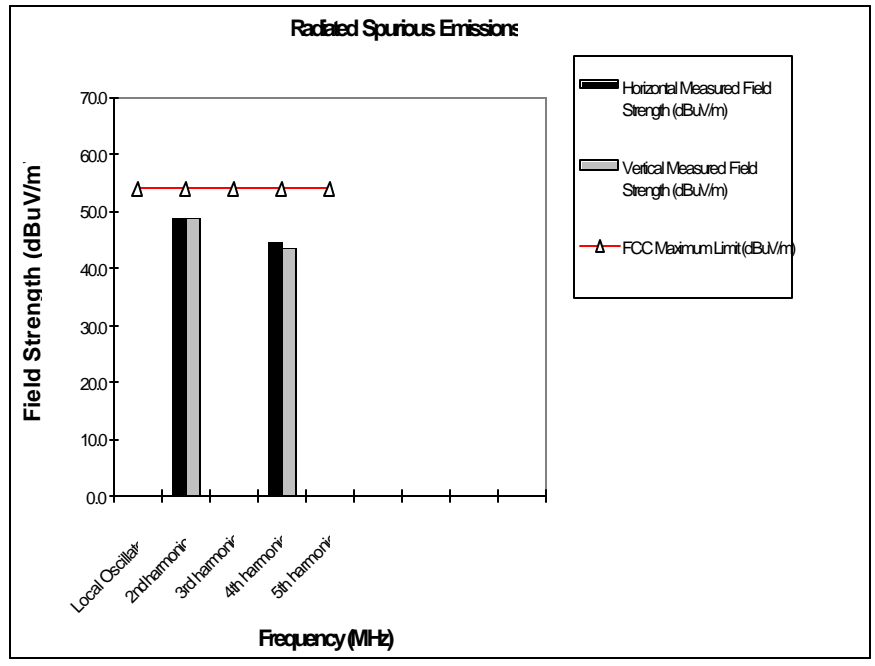


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

**Measurement Results**  
**Modulation: CDMA 1900**

**Receiver Radiated Spurious Emissions**

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	51.2	50.2
2nd harmonic	54	45.6	44.0
3rd harmonic	54	*	*
4th harmonic	54	52.9	52.3
5th harmonic	54	*	*

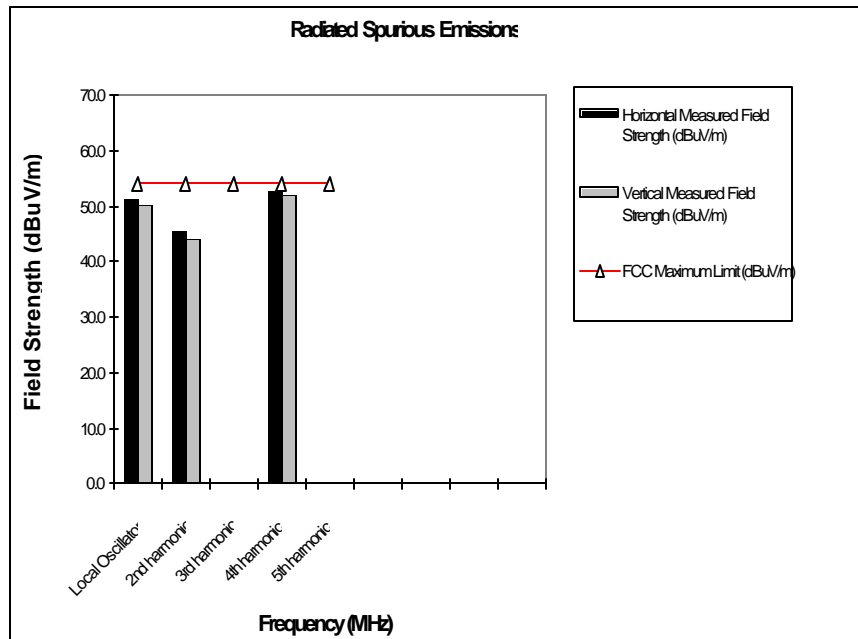

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.