



## Exhibit 11: SAR Test Report IHDT56FQ1

**Date of test:** 11/01/2005 through 11/07/2005  
**Date of Report:** 11/16/2005

**Laboratory:** Motorola Mobile Devices Business Product Safety & Compliance Laboratory  
 600 N. US Highway 45  
 Room: MW113  
 Libertyville, Illinois 60048

**Test Responsible:** Paul Ma  
 RF Engineer

**Accreditation:** This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:



Tests:  
 Electromagnetic Specific Absorption Rate

Procedures:  
 ANSI/IEEE C95.1-1992, 1999  
 (SAR) IEEE C95.3-1991  
 IEEE 1528, IEC 62209-1  
 FCC OET Bulletin 65 (*including Supplements A, B, C*)  
 Australian Communications Authority Radio  
 Communications (Electromagnetic Radiation – Human  
 Exposure) Standard 1999  
 CENELEC EN 50361 (2001)  
 APP-0247  
 DOI-0876, 0900, 0902, 0904, 0915

Simulated Tissue Preparation  
 RF Power Measurement

On the following products or types of products:

Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #1651-01

**Statement of Compliance:**

Motorola declares under its sole responsibility that portable cellular telephone FCC ID IHDT56FQ1 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093). It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2005

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

## Table of Contents

|                                                                                       |           |
|---------------------------------------------------------------------------------------|-----------|
| <b>1. INTRODUCTION .....</b>                                                          | <b>3</b>  |
| <b>2. DESCRIPTION OF THE DEVICE UNDER TEST.....</b>                                   | <b>3</b>  |
| <b>2.1 Antenna description .....</b>                                                  | <b>3</b>  |
| <b>2.2 Device description.....</b>                                                    | <b>3</b>  |
| <b>3. TEST EQUIPMENT USED.....</b>                                                    | <b>3</b>  |
| <b>3.1 Dosimetric System .....</b>                                                    | <b>3</b>  |
| <b>3.2 Additional Equipment.....</b>                                                  | <b>4</b>  |
| <b>4. ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID .....</b>                 | <b>4</b>  |
| <b>5. SYSTEM ACCURACY VERIFICATION.....</b>                                           | <b>5</b>  |
| <b>6. TEST RESULTS.....</b>                                                           | <b>6</b>  |
| <b>6.1 Head Adjacent Test Results.....</b>                                            | <b>7</b>  |
| <b>6.2 Body Worn Test Results .....</b>                                               | <b>9</b>  |
| <b>APPENDIX 1: SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION .....</b> | <b>12</b> |
| <b>APPENDIX 2: SAR DISTRIBUTION PLOTS FOR PHANTOM HEAD ADJACENT USE .....</b>         | <b>13</b> |
| <b>APPENDIX 3: SAR DISTRIBUTION PLOTS FOR BODY WORN CONFIGURATION .....</b>           | <b>14</b> |
| <b>APPENDIX 4: PROBE CALIBRATION CERTIFICATE .....</b>                                | <b>15</b> |
| <b>APPENDIX 5: MEASUREMENT UNCERTAINTY BUDGET.....</b>                                | <b>16</b> |
| <b>APPENDIX 6: DIPOLE CHARACTERIZATION CERTIFICATE .....</b>                          | <b>19</b> |

## 1 Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone (FCC ID IHDT56FQ1). The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with FCC OET Bulletin 65 Supplement C 01-01.

## 2 Description of the Device Under Test

### 2.1 Antenna description

|                                   |                               |       |
|-----------------------------------|-------------------------------|-------|
| <b>Type</b>                       | Internal Antenna              |       |
| <b>Location – CDMA 800 Band</b>   | Bottom ; Rear Side            |       |
| <b>Location – PCS 1900 Band</b>   | Upper Left Corner ; Rear Side |       |
| <b>Dimensions – CDMA 800 Band</b> | Length                        | 48 mm |
|                                   | Width                         | 17 mm |
| <b>Dimensions – PCS 1900 Band</b> | Length                        | 17 mm |
|                                   | Width                         | 15 mm |
| <b>Configuration</b>              | PIFA                          |       |

### 2.2 Device description

|                                                                |                                   |              |                  |
|----------------------------------------------------------------|-----------------------------------|--------------|------------------|
| <b>FCC ID Number</b>                                           | <b>IHDT56FQ1</b>                  |              |                  |
| <b>Serial number</b>                                           | 5281C085                          |              |                  |
| <b>Mode(s) of Operation</b>                                    | 800 CDMA                          | 1900 CDMA    | BlueTooth        |
| <b>Modulation Mode(s)</b>                                      | CDMA                              | CDMA         | BlueTooth        |
| <b>Maximum Output Power Setting</b>                            | 26.00dBm                          | 25.00dBm     | 4.00dBm          |
| <b>Duty Cycle</b>                                              | 1:1                               | 1:1          | 1:1              |
| <b>Transmitting Frequency Rang(s)</b>                          | 824-849MHz                        | 1851-1909MHz | 2400 - 2483.5MHz |
| <b>Production Unit or Identical Prototype (47 CFR §2..908)</b> | Identical Prototype               |              |                  |
| <b>Device Category</b>                                         | Portable                          |              |                  |
| <b>RF Exposure Limits</b>                                      | General Population / Uncontrolled |              |                  |

## 3 Test Equipment Used

### 3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.5) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall RSS uncertainty of the measurement system is  $\pm 11.1\%$  (K=1) with an expanded uncertainty of  $\pm 22.2\%$  (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg. The list of calibrated equipment used for the measurements is shown below.

| Description                     | Serial Number | Cal Due Date |
|---------------------------------|---------------|--------------|
| DASY4 DAE3                      | 437           | 3/24/2006    |
| DASY4 DAE4                      | 661           | 8/26/2006    |
| E-Field Probe ET3DV6R           | 1397          | 4/22/2006    |
| E-Field Probe ET3DV6R           | 1506          | 5/26/2006    |
| Dipole Validation Kit, D900V2   | 80            |              |
| S.A.M. Phantom used for 800MHz  | TP-1153       |              |
| Dipole Validation Kit, D900V2   | 91            |              |
| S.A.M. Phantom used for 800MHz  | TP-1005       |              |
| Dipole Validation Kit, D1800V2  | 251TR         |              |
| S.A.M. Phantom used for 1900MHz | TP-1159       |              |
| Dipole Validation Kit, D1800V2  | 259TR         |              |

### 3.2 Additional Equipment

| Description                   | Serial Number | Cal Due Date |
|-------------------------------|---------------|--------------|
| Signal Generator HP8648C      | 3847A04845    | 8/22/2006    |
| Signal Generator HP8648C      | 3847A04810    | 8/19/2006    |
| Power Meter E4419B            | GB39511087    | 12/28/2005   |
| Power Meter E4419B            | GB39511088    | 12/16/2005   |
| Power Sensor #1 - 9301A       | MY41495336    | 12/28/2005   |
| Power Sensor #2 - 9301A       | US39211007    | 8/29/2006    |
| Power Sensor #1 - 9301A       | US39210930    | 8/29/2006    |
| Power Sensor #2 - 9301A       | US39211006    | 8/29/2006    |
| Network Analyzer HP8753ES     | US39172529    | 2/21/2006    |
| Dielectric Probe Kit HP85070B | US99360070    |              |

## 4 Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon_r$ , and the conductivity,  $\sigma$ , of the tissue simulating liquids were measured with the HP85070 Dielectric Probe Kit. These values, along with the temperature of the tissue simulate are shown in the table below. The recommended limits for maximum permittivity and minimum conductivity are also shown. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. It is seen that the measured parameters are satisfactory for compliance testing.

| f<br>(MHz) | Tissue<br>type | Limits / Measured   | Dielectric Parameters |                |              |
|------------|----------------|---------------------|-----------------------|----------------|--------------|
|            |                |                     | $\epsilon_r$          | $\sigma$ (S/m) | Temp<br>(°C) |
| 835        | Head           | Measured, 11/1/2005 | 42.4                  | 0.92           | 20.2         |
|            |                | Recommended Limits  | 41.5 $\pm$ 5%         | 0.90 $\pm$ 5%  | 18-25        |
|            | Body           | Measured, 11/4/2005 | 53.9                  | 0.98           | 19.6         |
|            |                | Recommended Limits  | 55.2 $\pm$ 5%         | 0.97 $\pm$ 5%  | 18-25        |
| 1880       | Head           | Measured, 11/3/2005 | 39.2                  | 1.45           | 19.5         |
|            |                | Recommended Limits  | 40.0 $\pm$ 5%         | 1.40 $\pm$ 5%  | 18-25        |
|            | Body           | Measured, 11/7/2005 | 51.1                  | 1.59           | 20.5         |
|            |                | Recommended Limits  | 53.3 $\pm$ 5%         | 1.52 $\pm$ 5%  | 18-25        |

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

| Ingredient | 800MHz Head | 800MHz Body | 1900MHz Head | 1900MHz Body |
|------------|-------------|-------------|--------------|--------------|
| Sugar      | 57.0        | 44.9        | --           | --           |
| DGBE       | --          | --          | 47.0         | 30.80        |
| Water      | 40.45       | 53.06       | 52.8         | 68.91        |
| Salt       | 1.45        | 0.94        | 0.2          | 0.29         |
| HEC        | 1.0         | 1.0         | --           | --           |
| Bact.      | 0.1         | 0.1         | --           | --           |

## 5 System Accuracy Verification

A system accuracy verification of the DASY4 v4.5 was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within center section of the SAM phantom.

A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR indicated in Section 8.3.7 Reference SAR Values in IEEE 1528, or Appendix 7 for the 900MHz target reference SAR value. These tests were done at 900MHz, 1800MHz. These frequencies are within 100MHz of the mid-band frequency of the test device. This is within the allowable window given in Supplement C 01-01 *Appendix D System Verification* section item #5. The test was conducted on the same days as the measurement of the DUT. Recommended limits for maximum permittivity, minimum conductivity are shown in the table below. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. The obtained results from the system accuracy verification are displayed in the table below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1. SAR values are normalized to 1W forward power delivered to the dipole.

| f<br>(MHz) | Description          | SAR<br>(W/kg),<br>1gram | Dielectric Parameters |                | Ambient<br>Temp<br>(°C) | Tissue<br>Temp<br>(°C) |
|------------|----------------------|-------------------------|-----------------------|----------------|-------------------------|------------------------|
|            |                      |                         | $\epsilon_r$          | $\sigma$ (S/m) |                         |                        |
| 900        | Measured, 11/01/2005 | 11.2                    | 41.6                  | 0.98           | 22.0                    | 20.7                   |
|            | Measured, 11/04/2005 | 11.0                    | 40.7                  | 0.97           | 22.0                    | 20.0                   |
|            | Recommended Limits   | 11.3                    | 41.5 ±5%              | 0.97 ±5%       | 18-25                   | 18-25                  |
| 1800       | Measured, 11/03/2005 | 37.8                    | 39.6                  | 1.37           | 23.0                    | 19.7                   |
|            | Measured, 11/07/2005 | 38.2                    | 39.0                  | 1.37           | 21.0                    | 19.8                   |
|            | Recommended Limits   | 38.1                    | 40.0 ±5%              | 1.4 ±5%        | 18-25                   | 18-25                  |

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

| Description              | Serial Number | f<br>(MHz) | Conversion Factor | Cal Cert<br>pg # |
|--------------------------|---------------|------------|-------------------|------------------|
| E-Field Probe<br>ET3DV6R | SN1397        | 900        | 6.38              | 8 of 9           |
|                          |               | 1800       | 5.17              | 8 of 9           |
| E-Field Probe<br>ET3DV6R | SN1506        | 900        | 5.89              | 8 of 9           |
|                          |               | 1800       | 4.83              | 8 of 9           |

## 6 Test Results

The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in OET Bulletin 65 Supplement C 01-01. Motorola also followed the requirements in Supplement. C / Appendix D: SAR Measurement Procedures, section titled “*Devices Operating Next To A Person’s Ear* “. These directions state “The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).“

The DASY4 v4.5 SAR measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The phone was positioned into the measurement configurations using the positioner supplied with the DASY4 v4.5 SAR measurement system. The measured dielectric constant of the material used for the positioner is less than 2.9 and the loss tangent is less than 0.02 ( $\pm 30\%$ ) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and use for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone (FCC ID IHDT56FQ1) has the following battery options:

Model #1 – SNN5765A - 1640mAH Battery

Model #2 – SNN5783A - 1130mAH Battery


The battery with the highest capacity is the SNN5765A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

## 6.1 Head Adjacent Test Results

To aid in positioning repeatability, the ear reference line of the device and the axis reference line of the device have been physically added using a non-metallic marker.

- Per Figure 1, the "Ear Reference Line" is centered vertically through the center of the listening area (as defined by the speaker holes in the housing).
- The "Axis Reference Line" bisects the front surface of the device at its top and bottom edges.
- The intersection of these two lines defines the location of the "Ear Reference Point".

The lines drawn on the device extended to the outside edges, as shown in blue in the figure below, & wrap around the sides of the device.

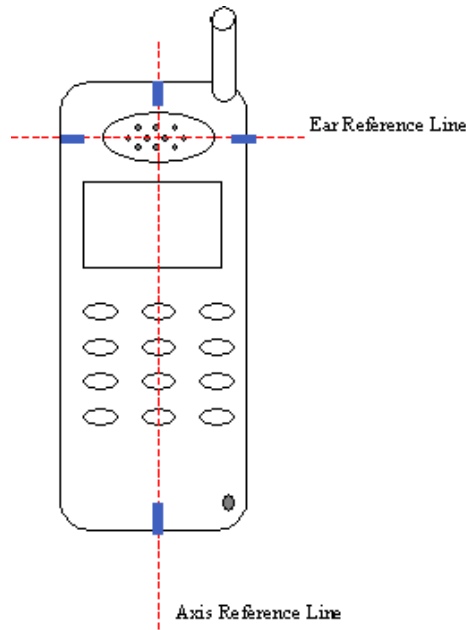

The SAR results shown in tables 1 through 4 are maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is  $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and tissue simulate are used for the system accuracy verification as the device SAR measurements, the Z-axis scans included in within Appendix 1 are applicable for verification of tissue simulate depth to be 15.0cm ±0.5cm. Note that 800MHz digital mode SAR measurements were performed in accordance with Supplement C.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

| Description           | Serial Number | f (MHz) | Conversion Factor | Cal Cert pg # |
|-----------------------|---------------|---------|-------------------|---------------|
| E-Field Probe ET3DV6R | SN1397        | 900     | 6.38              | 8 of 9        |
|                       |               | 1800    | 5.17              | 8 of 9        |
| E-Field Probe ET3DV6R | SN1506        | 900     | 5.89              | 8 of 9        |
|                       |               | 1800    | 4.83              | 8 of 9        |

| f (MHz)         | Description  | Conducted Output Power (dBm) | Cheek / Touch Position |            |                     |                    |                 |              |                     |                    |
|-----------------|--------------|------------------------------|------------------------|------------|---------------------|--------------------|-----------------|--------------|---------------------|--------------------|
|                 |              |                              | Left Head              |            |                     |                    | Right Head      |              |                     |                    |
|                 |              |                              | Measured (W/kg)        | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB)   | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz  | Channel 1013 | 26.13                        | 0.807                  | -0.31      | 0.87                | 20.2               | 0.853           | 0.1          | 0.85                | 20.1               |
|                 | Channel 384  | 26.11                        | 0.83                   | -0.07      | 0.84                | 20.2               | <b>0.878</b>    | <b>0.2</b>   | <b>0.88</b>         | <b>20.2</b>        |
|                 | Channel 777  | 25.84                        | 0.763                  | 0.11       | 0.76                | 20.2               | 0.821           | -0.29        | 0.88                | 20.1               |
| Digital 1900MHz | Channel 25   | 25.10                        |                        |            |                     |                    |                 |              |                     |                    |
|                 | Channel 600  | 25.09                        | 0.605                  | 0.15       | 0.61                | 19.5               | <b>0.734</b>    | <b>-0.26</b> | <b>0.78</b>         | <b>19.5</b>        |
|                 | Channel 1175 | 25.12                        |                        |            |                     |                    |                 |              |                     |                    |

**Table 1: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the head in the Cheek/Touch Position.**

| f (MHz)         | Description  | Conducted Output Power (dBm) | 15° Tilt Position |            |                     |                    |                 |              |                     |                    |
|-----------------|--------------|------------------------------|-------------------|------------|---------------------|--------------------|-----------------|--------------|---------------------|--------------------|
|                 |              |                              | Left Head         |            |                     |                    | Right Head      |              |                     |                    |
|                 |              |                              | Measured (W/kg)   | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB)   | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz  | Channel 1013 | 26.13                        |                   |            |                     |                    |                 |              |                     |                    |
|                 | Channel 384  | 26.11                        | 0.589             | 0.06       | 0.59                | 20.2               | 0.545           | 0.05         | 0.55                | 20.2               |
|                 | Channel 777  | 25.84                        |                   |            |                     |                    |                 |              |                     |                    |
| Digital 1900MHz | Channel 25   | 25.10                        | 0.639             | 0.2        | 0.64                | 19.5               | 0.67            | 0.18         | 0.67                | 19.5               |
|                 | Channel 600  | 25.09                        | 0.805             | 0.07       | 0.81                | 19.5               | 0.855           | 0.14         | 0.86                | 19.5               |
|                 | Channel 1175 | 25.12                        | 1.05              | -0.12      | 1.08                | 19.5               | <b>1.03</b>     | <b>-0.32</b> | <b>1.11</b>         | <b>19.5</b>        |

**Table 2: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the head in the 15° Tilt Position.**

| f (MHz)         | Description  | Conducted Output Power (dBm) | Cheek/Touch Position With SNN5783A battery |            |                     |                    |                 |            |                     |                    |
|-----------------|--------------|------------------------------|--------------------------------------------|------------|---------------------|--------------------|-----------------|------------|---------------------|--------------------|
|                 |              |                              | Left Head                                  |            |                     |                    | Right Head      |            |                     |                    |
|                 |              |                              | Measured (W/kg)                            | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz  | Channel 1013 | 26.13                        |                                            |            |                     |                    |                 |            |                     |                    |
|                 | Channel 384  | 26.11                        |                                            |            |                     |                    |                 |            |                     |                    |
|                 | Channel 777  | 25.84                        |                                            |            |                     |                    | 0.827           | -0.15      | 0.86                | 20.2               |
| Digital 1900MHz | Channel 25   | 25.10                        |                                            |            |                     |                    |                 |            |                     |                    |
|                 | Channel 600  | 25.09                        |                                            |            |                     |                    | 0.729           | -0.06      | 0.74                | 19.5               |
|                 | Channel 1175 | 25.12                        |                                            |            |                     |                    |                 |            |                     |                    |

**Table 3: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the head in the Cheek/Touch Position.**

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | 15° Tilt Position With SNN5783A battery |               |                        |                          |                    |               |                        |                          |
|--------------------|--------------|---------------------------------------|-----------------------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Left Head                               |               |                        |                          | Right Head         |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)                      | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg) | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 |                                         |               |                        |                          |                    |               |                        |                          |
|                    | Channel 384  | 26.11                                 | <b>0.607</b>                            | <b>-0.2</b>   | <b>0.64</b>            | <b>20.2</b>              |                    |               |                        |                          |
|                    | Channel 777  | 25.84                                 |                                         |               |                        |                          |                    |               |                        |                          |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                                         |               |                        |                          |                    |               |                        |                          |
|                    | Channel 600  | 25.09                                 |                                         |               |                        |                          |                    |               |                        |                          |
|                    | Channel 1175 | 25.12                                 |                                         |               |                        |                          | 0.983              | -0.13         | 1.01                   | 20.4                     |

**Table 4: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the head in the 15° Tilt Position.**

## 6.2 Body Worn Test Results

The SAR results shown in tables 5 through 9 are the maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is  $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. Note that 800MHz digital mode SAR measurements were performed in accordance with OET Bulletin 65 Supplement C 01-01.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There are two Body-Worn Accessories available for this phone:

Slim Holster  
Wide Holster

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

| Description              | Serial Number | f<br>(MHz) | Conversion Factor | Cal Cert<br>pg # |
|--------------------------|---------------|------------|-------------------|------------------|
| E-Field Probe<br>ET3DV6R | SN1397        | 900        | 6.22              | 8 of 9           |
|                          |               | 1800       | 4.77              | 8 of 9           |
| E-Field Probe<br>ET3DV6R | SN1506        | 900        | 5.55              | 8 of 9           |
|                          |               | 1800       | 4.30              | 8 of 9           |

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | Body Worn 15mm from phantom |               |                        |                          |                    |               |                        |                          |
|--------------------|--------------|---------------------------------------|-----------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Front                       |               |                        |                          | Back               |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)          | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg) | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 |                             |               |                        |                          | 0.839              | 0.05          | 0.84                   | 20.4                     |
|                    | Channel 384  | 26.11                                 | 0.536                       | 0.03          | 0.54                   | 20.4                     | 0.903              | -0.05         | 0.91                   | 20.4                     |
|                    | Channel 777  | 25.84                                 |                             |               |                        |                          | 0.672              | -0.07         | 0.68                   | 20.4                     |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                             |               |                        |                          |                    |               |                        |                          |
|                    | Channel 600  | 25.09                                 | 0.345                       | 0.146         | 0.35                   | 20.5                     | 0.532              | -0.05         | 0.54                   | 20                       |
|                    | Channel 1175 | 25.12                                 |                             |               |                        |                          |                    |               |                        |                          |

**Table 5: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the body.**

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | Body Worn 15mm from phantom With Bluetooth |               |                        |                          |                    |               |                        |                          |
|--------------------|--------------|---------------------------------------|--------------------------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Front                                      |               |                        |                          | Back               |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)                         | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg) | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 |                                            |               |                        |                          | 0.985              | -0.13         | 1.02                   | 20.5                     |
|                    | Channel 384  | 26.11                                 |                                            |               |                        |                          | 1.03               | 0.05          | 1.03                   | 20.5                     |
|                    | Channel 777  | 25.84                                 |                                            |               |                        |                          | 0.987              | -0.09         | 1.01                   | 20.5                     |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                                            |               |                        |                          |                    |               |                        |                          |
|                    | Channel 600  | 25.09                                 |                                            |               |                        |                          | 0.468              | -0.04         | 0.47                   | 19.9                     |
|                    | Channel 1175 | 25.12                                 |                                            |               |                        |                          |                    |               |                        |                          |

**Table 6: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the body.**

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | Body Worn 15mm from phantom With Battery SNN5783A |               |                        |                          |                    |               |                        |                          |
|--------------------|--------------|---------------------------------------|---------------------------------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Bluetooth                                         |               |                        |                          | Back               |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)                                | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg) | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 | 1.25                                              | -0.01         | 1.25                   | 20.5                     |                    |               |                        |                          |
|                    | Channel 384  | 26.11                                 | 1.32                                              | 0             | 1.32                   | 20.5                     |                    |               |                        |                          |
|                    | Channel 777  | 25.84                                 | 1.18                                              | -0.17         | 1.23                   | 20.5                     |                    |               |                        |                          |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                                                   |               |                        |                          |                    |               |                        |                          |
|                    | Channel 600  | 25.09                                 |                                                   |               |                        |                          | 0.663              | 0.07          | 0.66                   | 19.9                     |
|                    | Channel 1175 | 25.12                                 |                                                   |               |                        |                          |                    |               |                        |                          |

**Table 7: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the body.**

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | Body Worn Back of Phone With Slim Holster and Battery SNN5783A |               |                        |                          |                                                   |               |                        |                          |
|--------------------|--------------|---------------------------------------|----------------------------------------------------------------|---------------|------------------------|--------------------------|---------------------------------------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Phone on Holster Rotated 90°<br>Clockwise                      |               |                        |                          | Phone on Holster Rotated 90°<br>Counter-Clockwise |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)                                             | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg)                                | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 | 1.26                                                           | 0.09          | 1.26                   | 20.5                     |                                                   |               |                        |                          |
|                    | Channel 384  | 26.11                                 | <b>1.44</b>                                                    | <b>-0.08</b>  | <b>1.47</b>            | <b>19.6</b>              |                                                   |               |                        |                          |
|                    | Channel 777  | 25.84                                 | 1.37                                                           | -0.3          | 1.47                   | 20.5                     |                                                   |               |                        |                          |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                                                                |               |                        |                          | <b>0.984</b>                                      | <b>-0.23</b>  | <b>1.04</b>            | <b>20.5</b>              |
|                    | Channel 600  | 25.09                                 |                                                                |               |                        |                          | 0.995                                             | 0.032         | 1.00                   | 19.0                     |
|                    | Channel 1175 | 25.12                                 |                                                                |               |                        |                          | 1.03                                              | 0.12          | 1.03                   | 20.5                     |

**Table 8: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the body.**

| f<br>(MHz)         | Description  | Conducted<br>Output<br>Power<br>(dBm) | Body Worn Back of Phone With Wide Holster and Battery SNN5783A |               |                        |                          |                                                   |               |                        |                          |
|--------------------|--------------|---------------------------------------|----------------------------------------------------------------|---------------|------------------------|--------------------------|---------------------------------------------------|---------------|------------------------|--------------------------|
|                    |              |                                       | Phone on Holster Rotated 90°<br>Clockwise                      |               |                        |                          | Phone on Holster Rotated 90°<br>Counter-Clockwise |               |                        |                          |
|                    |              |                                       | Measured<br>(W/kg)                                             | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) | Measured<br>(W/kg)                                | Drift<br>(dB) | Extrapolated<br>(W/kg) | Simulate<br>Temp<br>(°C) |
| Digital<br>800MHz  | Channel 1013 | 26.13                                 |                                                                |               |                        |                          |                                                   |               |                        |                          |
|                    | Channel 384  | 26.11                                 | 1.18                                                           | 0.07          | 1.18                   | 19.2                     |                                                   |               |                        |                          |
|                    | Channel 777  | 25.84                                 |                                                                |               |                        |                          |                                                   |               |                        |                          |
| Digital<br>1900MHz | Channel 25   | 25.10                                 |                                                                |               |                        |                          |                                                   |               |                        |                          |
|                    | Channel 600  | 25.09                                 |                                                                |               |                        |                          | 0.686                                             | -0.15         | 0.71                   | 19.0                     |
|                    | Channel 1175 | 25.12                                 |                                                                |               |                        |                          |                                                   |               |                        |                          |

**Table 9: SAR measurement results for the portable cellular telephone FCC ID IHDT56FQ1 at highest possible output power. Measured against the body.**

## **Appendix 1**

### **SAR distribution comparison for the system accuracy verification**

Date/Time: 11/1/2005 8:42:01 AM

## Test Laboratory: Motorola

**110105 900Mhz GOOD-0.7%****DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:080**

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 80 PM1 Power = 200 mW

Sim.Temp@meas = 20.7°C Sim.Temp@SPC = 20.7°C Room Temp @ SPC = 22°C

Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used:  $\sigma = 0.98$  mho/m,  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.38, 6.38, 6.38); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Sugar Water SAM; Type: SAM; Serial: TP-1153;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.04 mW/g

**Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.2 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 3.26 W/kg

**SAR(1 g) = 2.18 mW/g; SAR(10 g) = 1.4 mW/g**

Maximum value of SAR (measured) = 2.38 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.2 V/m; Power Drift = -0.054 dB



Peak SAR (extrapolated) = 3.45 W/kg

**SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.48 mW/g**

Maximum value of SAR (measured) = 2.51 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm

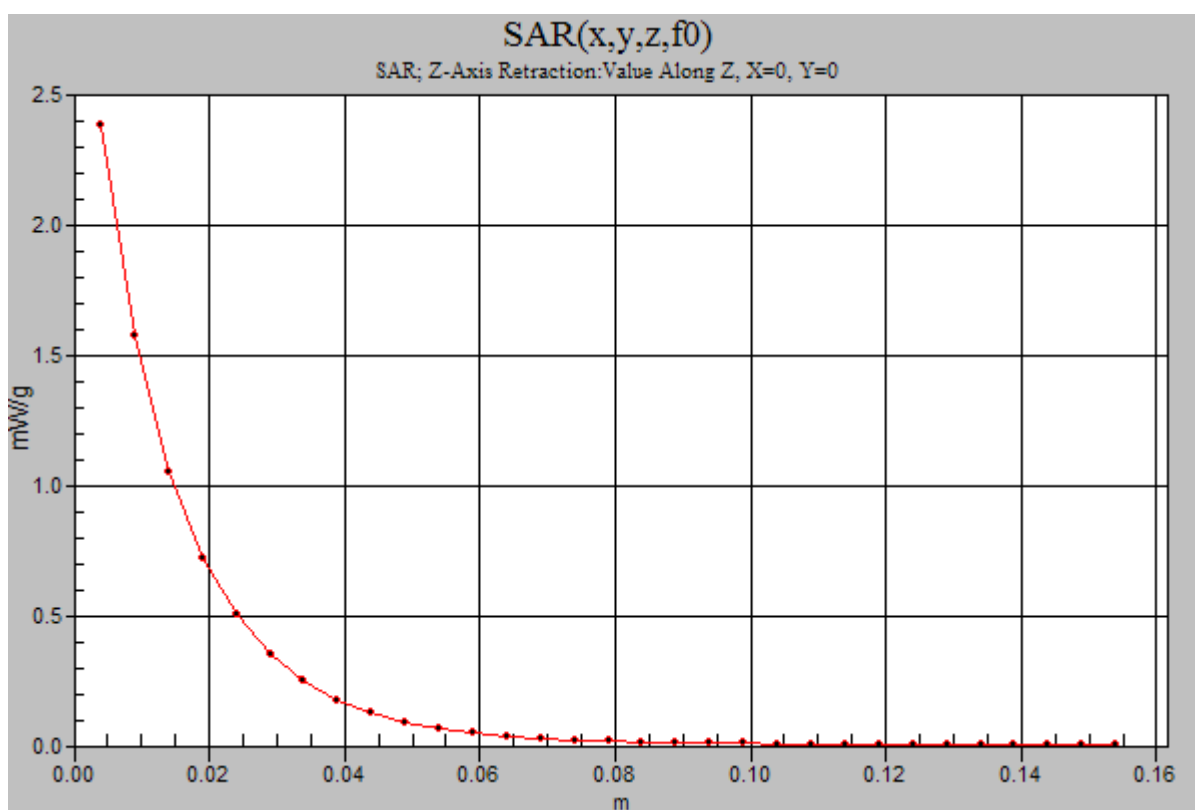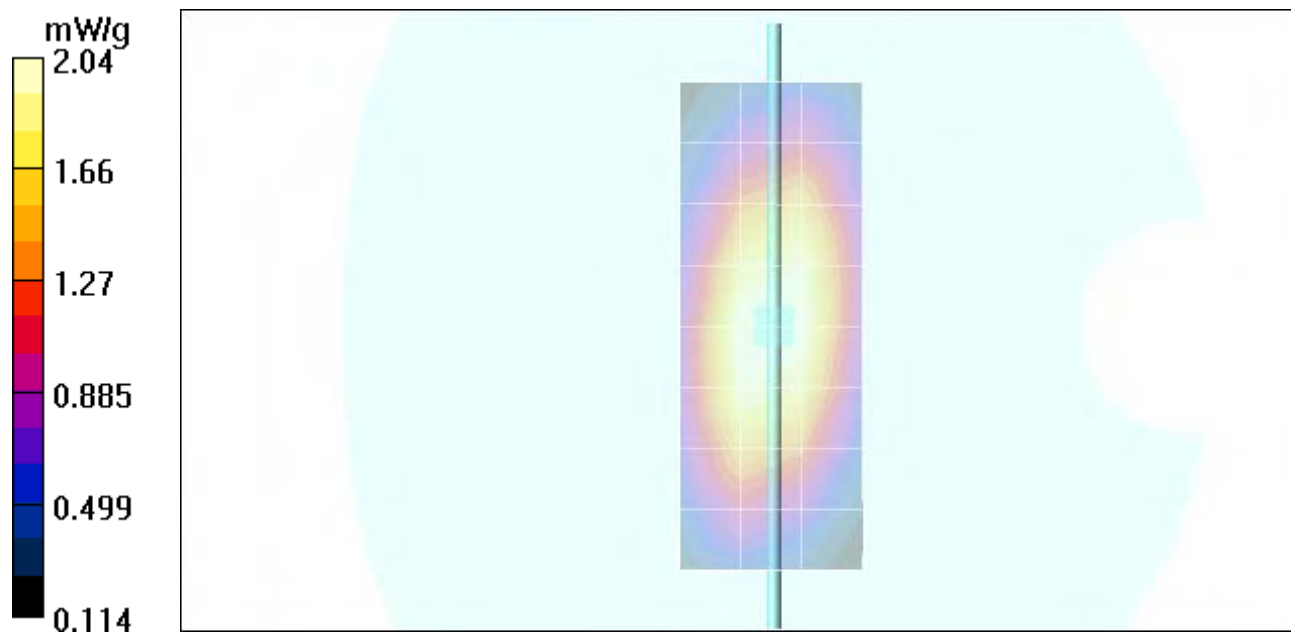

Date/Time: 11/3/2005 6:43:20 AM

## Test Laboratory: Motorola

### 110305 1800Mhz GOOD-0.9%

**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:251tr**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 251tr PM1 Power = 200 mW

Sim.Temp@meas = 20.0°C Sim.Temp@SPC = 19.7°C Room Temp @ SPC = 23°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used:  $\sigma = 1.37$  mho/m,  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Glycol SAM; Type: SAM; Serial: TP-1159;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.05 mW/g

**Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.4 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 12.6 W/kg

**SAR(1 g) = 7.4 mW/g; SAR(10 g) = 3.98 mW/g**

Maximum value of SAR (measured) = 8.34 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.4 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 13.0 W/kg



**SAR(1 g) = 7.7 mW/g; SAR(10 g) = 4.14 mW/g**

Maximum value of SAR (measured) = 8.64 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 8.37 mW/g

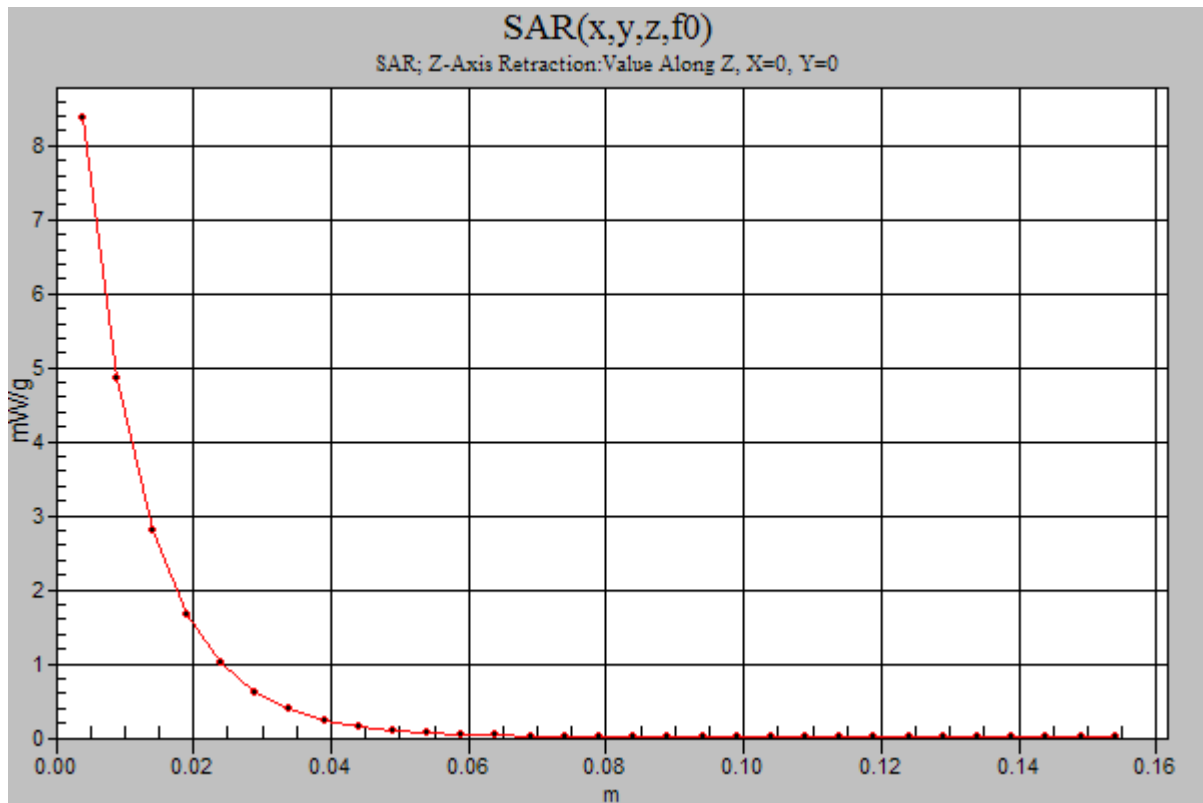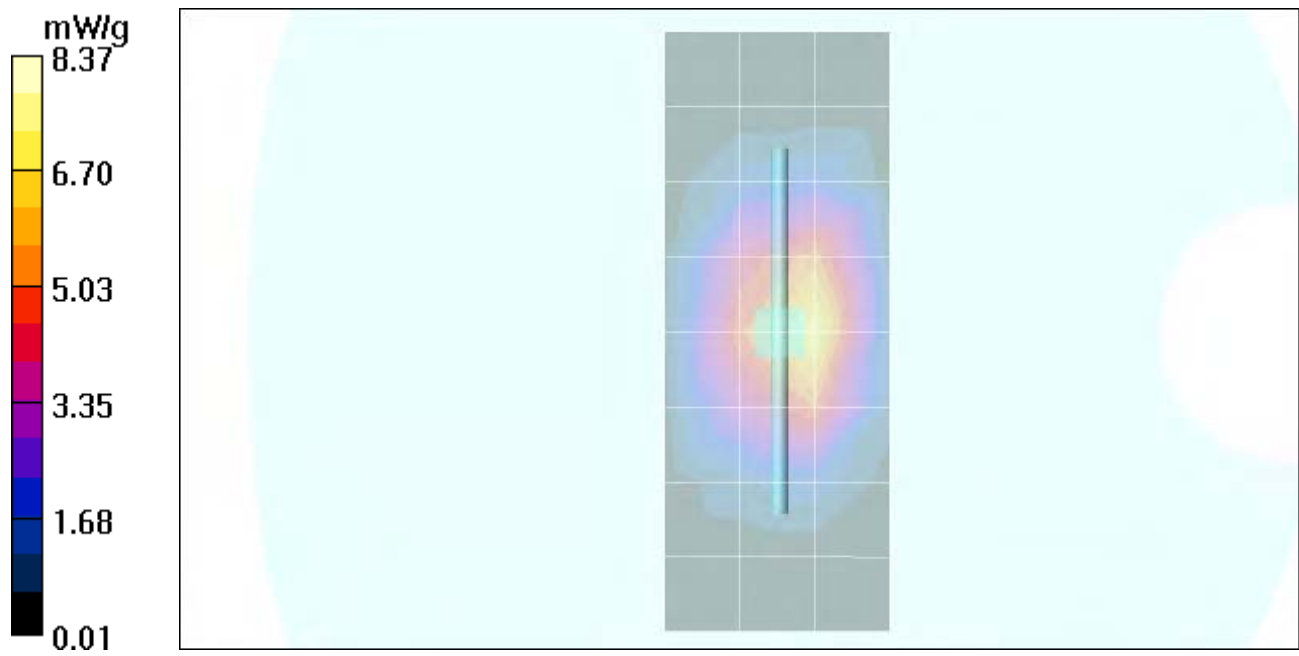

Date/Time: 11/4/2005 8:39:53 AM

## Test Laboratory: Motorola

**110405 900MHz -3.1%****DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:091**

Procedure Notes: 900MHz System Performance Check / Dipole Sn# 091 PM1 Power = 200 mW

Sim.Temp@meas = 20.7 Sim.Temp@SPC = 20.0 Room Temp @ SPC = 22

Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used:  $\sigma = 0.97 \text{ mho/m}$ ,  $\epsilon_r = 40.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.89, 5.89, 5.89); Calibrated: 5/26/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 8/26/2005
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.18 mW/g

**Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.4 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 3.19 W/kg

**SAR(1 g) = 2.16 mW/g; SAR(10 g) = 1.39 mW/g**

Maximum value of SAR (measured) = 2.34 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.4 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 3.30 W/kg



**SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.43 mW/g**

Maximum value of SAR (measured) = 2.33 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.35 mW/g

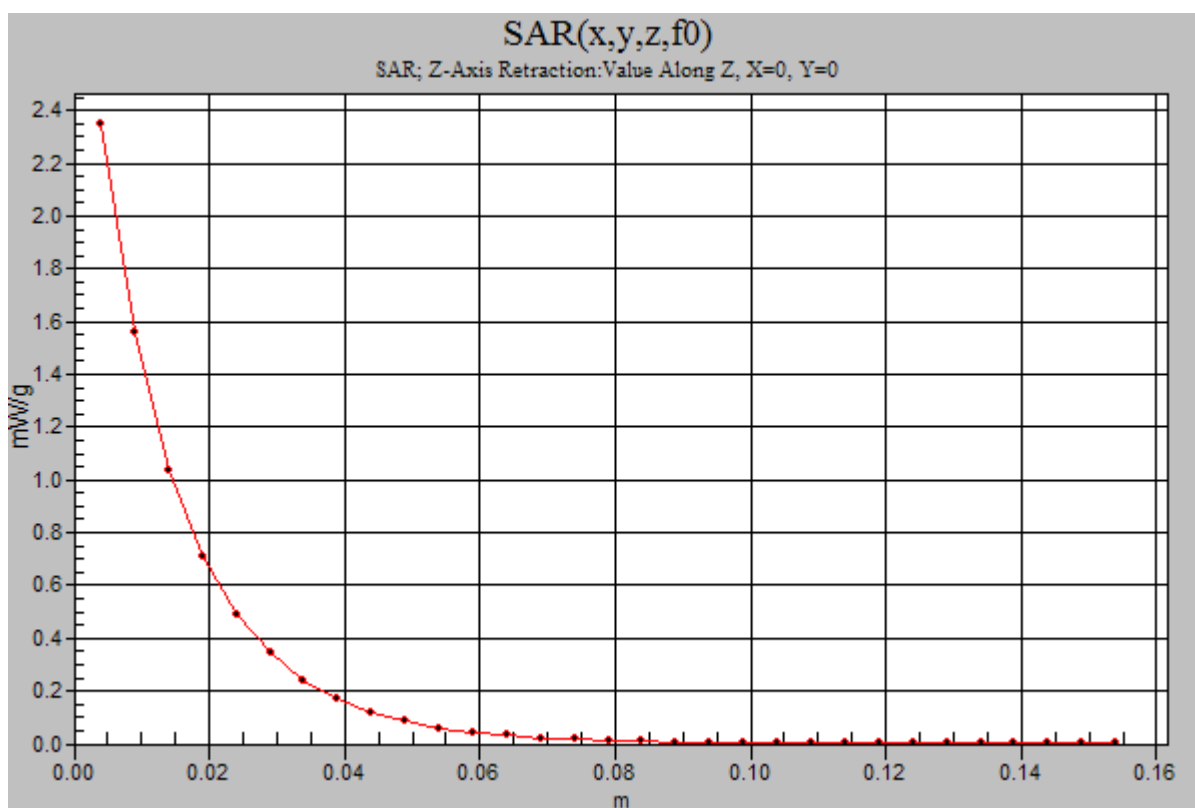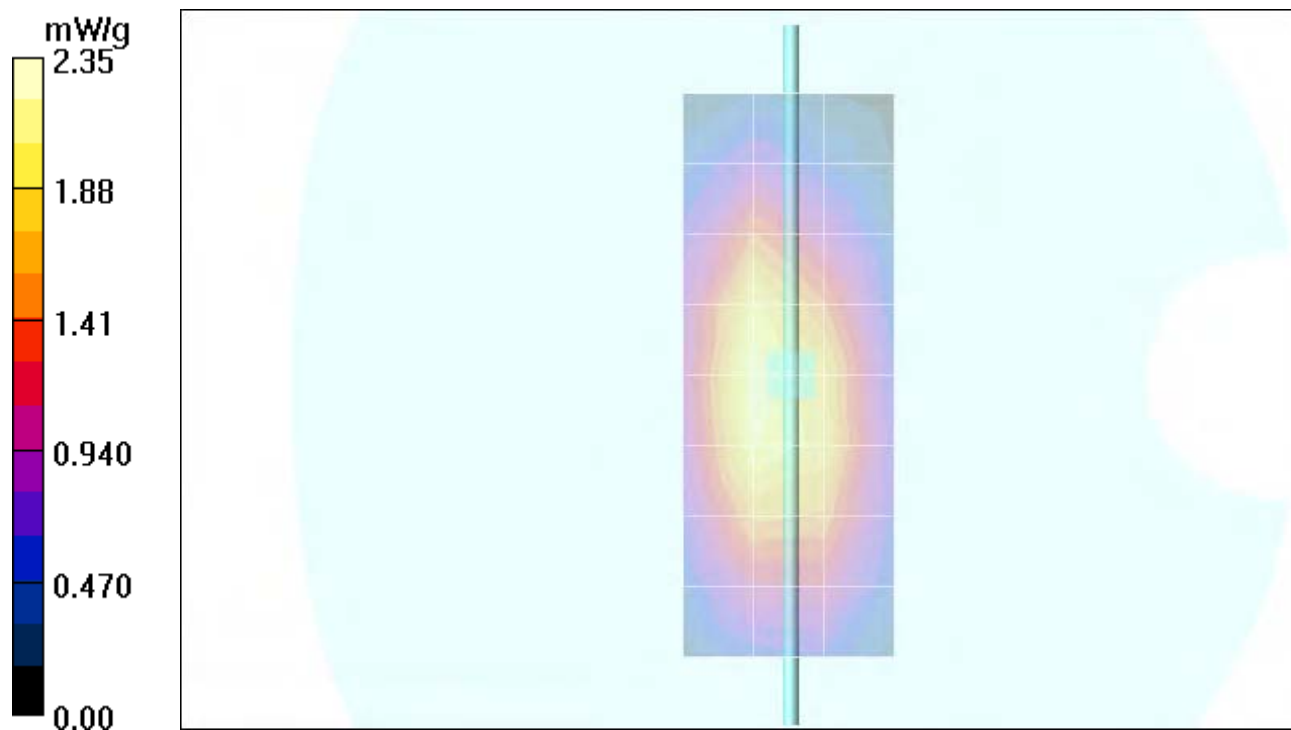

## Test Laboratory: Motorola

**110705 1800MHz +0.3%**

**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:259TR**

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 259TR PM1 Power = 200 mW

Sim.Temp@meas = 20.1C Sim.Temp@SPC = 19.8C Room Temp @ SPC = 21C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used:  $\sigma = 1.37$  mho/m,  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.83, 4.83, 4.83); Calibrated: 5/26/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 8/26/2005
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

### Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.41 mW/g

### Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.3 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 13.1 W/kg

**SAR(1 g) = 7.62 mW/g; SAR(10 g) = 4.03 mW/g**

Maximum value of SAR (measured) = 8.58 mW/g

### Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.3 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 13.2 W/kg



**SAR(1 g) = 7.67 mW/g; SAR(10 g) = 4.06 mW/g**

Maximum value of SAR (measured) = 8.53 mW/g

### Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 8.52 mW/g

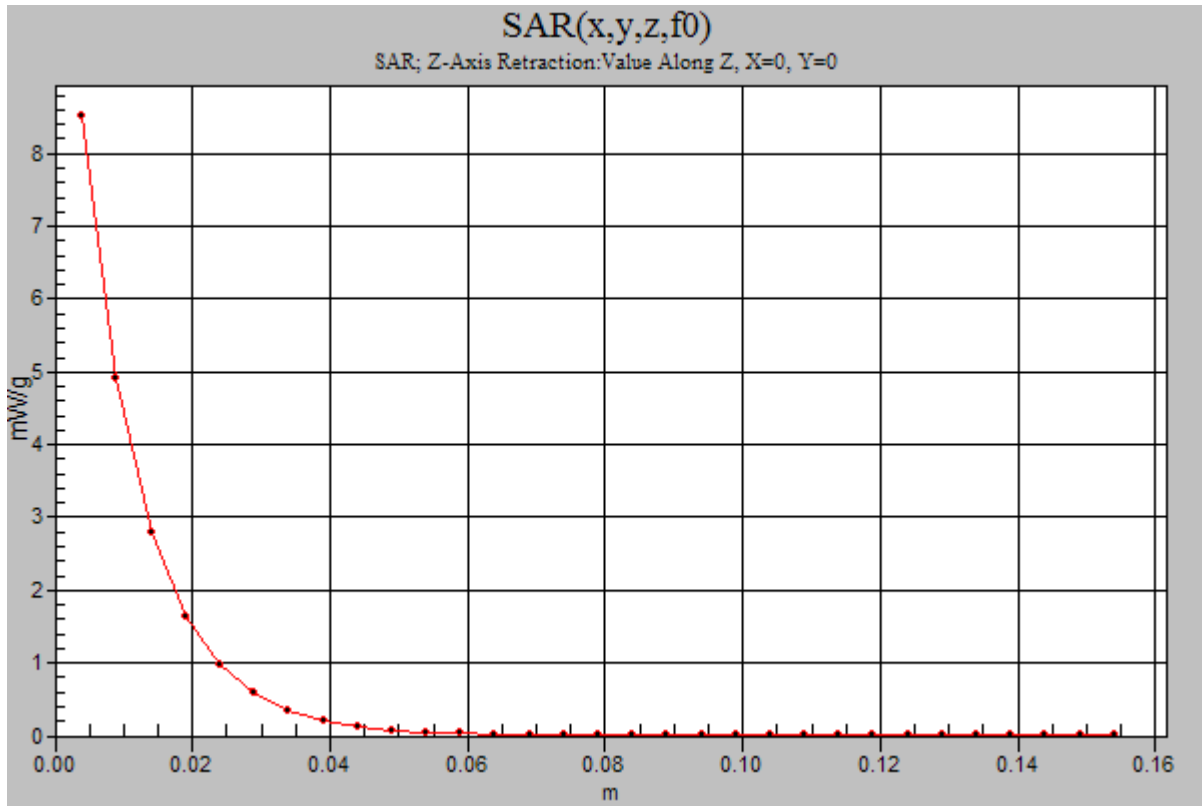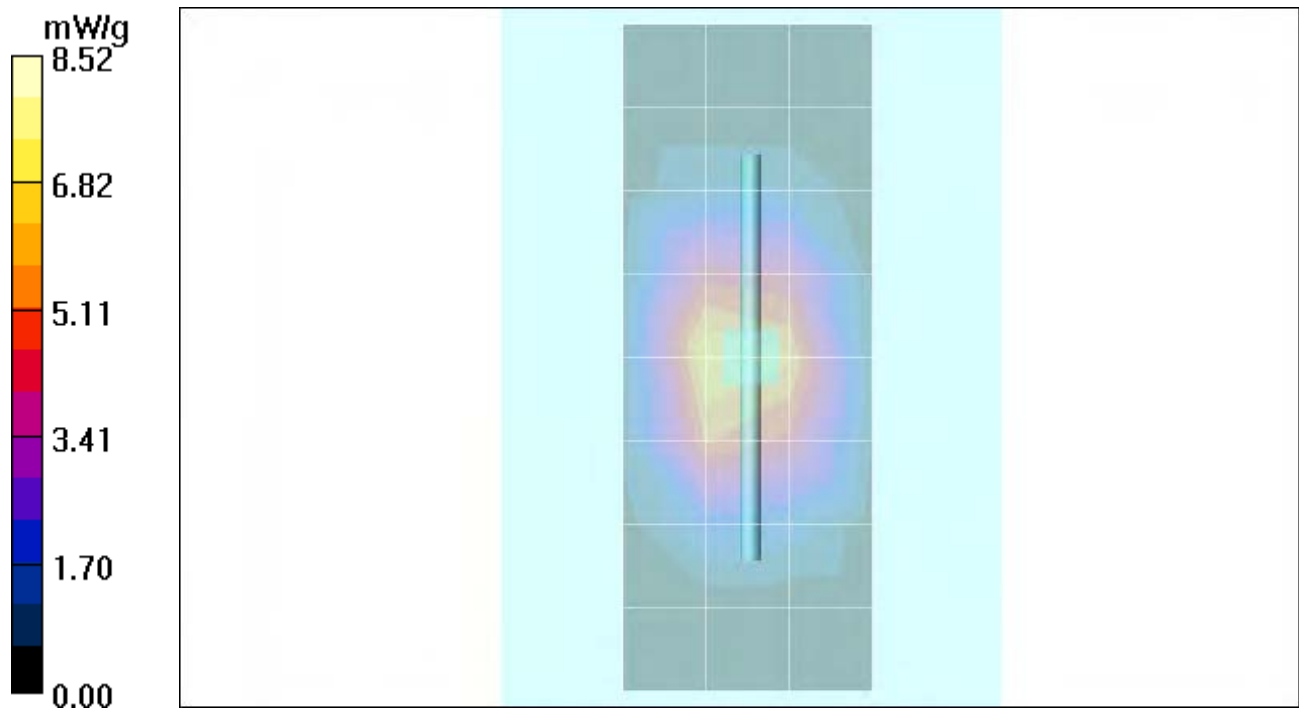

## **Appendix 2**

### **SAR distribution plots for Phantom Head Adjacent Use**

Date/Time: 11/2/2005 1:30:05 AM

## Test Laboratory: Motorola

835 LH Tilt ch384

**Serial: 5281C085**

Procedure Notes: Pwr Step: Always Up

Antenna Position: Internal

Battery Model #: SNN5783A

DEVICE POSITION (cheek or rotated): Rotated

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Low Freq Head; Medium parameters used:  $\sigma = 0.92$  mho/m,  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.38, 6.38, 6.38); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Sugar Water SAM; Type: SAM; Serial: TP-1153;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

### Left Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.595 mW/g

### Left Head Template/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.197 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.457 mW/g**

Maximum value of SAR (measured) = 0.652 mW/g

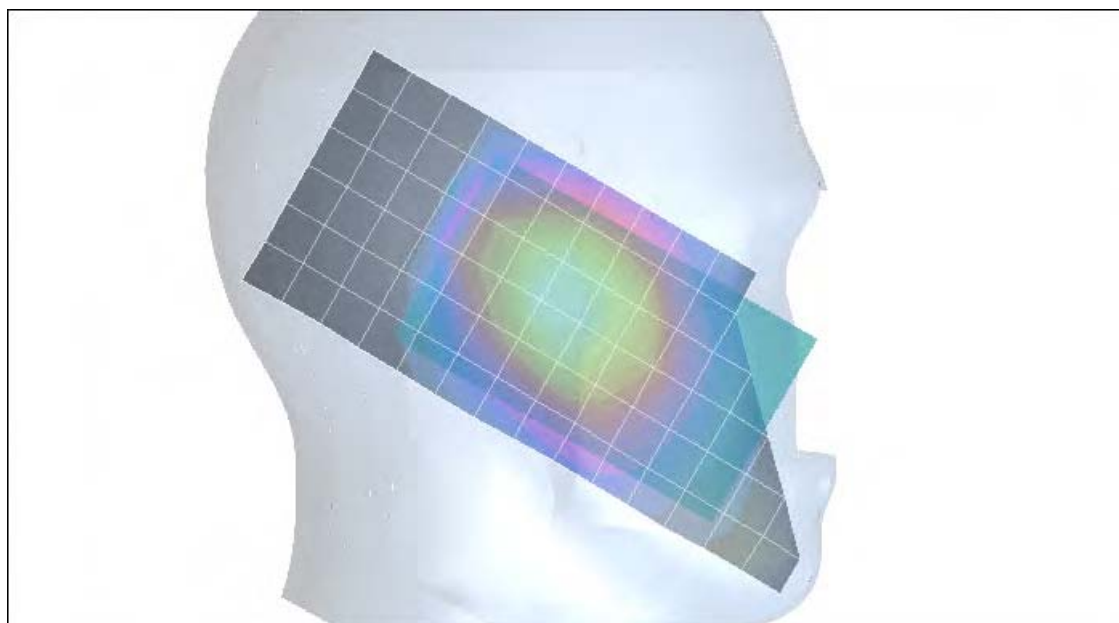

Date/Time: 11/1/2005 6:13:45 PM

**Test Laboratory: Motorola****835 RH Cheek ch384****Serial: 5281C085**

Procedure Notes: Pwr Step: Always Up

Antenna Position: Internal

Battery Model #: SNN5765A

DEVICE POSITION (cheek or rotated): CHEEK

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Low Freq Head; Medium parameters used:  $\sigma = 0.92$  mho/m,  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.38, 6.38, 6.38); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Sugar Water SAM; Type: SAM; Serial: TP-1153;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.884 mW/g

**Right Head Template/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.2 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.646 mW/g**

Maximum value of SAR (measured) = 0.981 mW/g

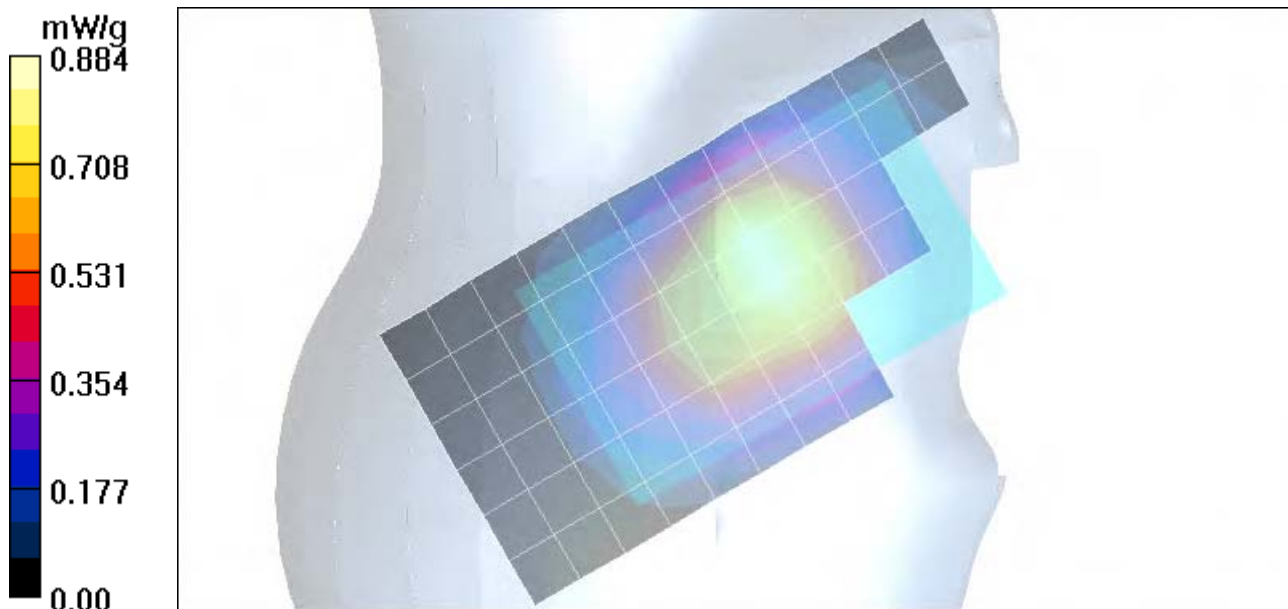

Date/Time: 11/3/2005 1:19:41 PM

**Test Laboratory: Motorola****1900 RH Cheek ch600****Serial: 5281C085**

Procedure Notes: Pwr Step: Alway Up

Antenna Position: Internal

Battery Model #: SNN5765A

DEVICE POSITION (cheek or rotated): Cheek

Communication System: CDMA 1900; Frequency: 1880 MHz; Channel Number: 600; Duty Cycle: 1:1

Medium: Back-Up Glycol Head; Medium parameters used:  $\sigma = 1.45$  mho/m,  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Glycol SAM; Type: SAM; Serial: TP-1159;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.801 mW/g

**Right Head Template/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = -0.258 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.402 mW/g**

Maximum value of SAR (measured) = 0.877 mW/g

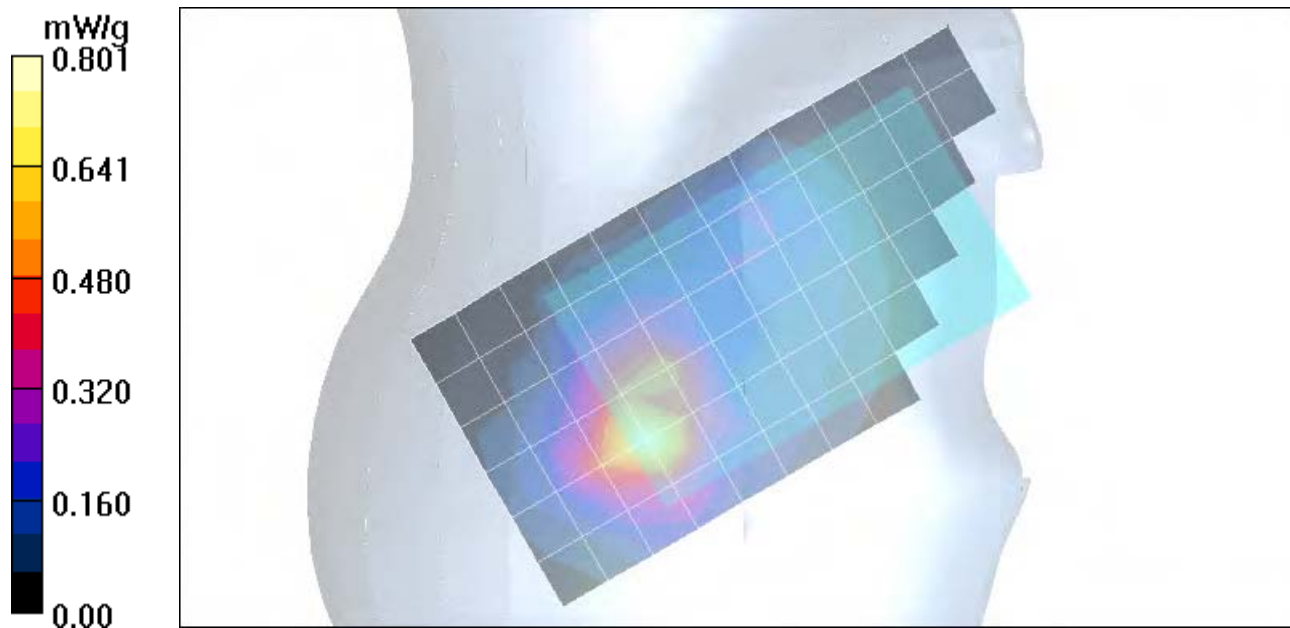

Date/Time: 11/3/2005 3:11:58 PM

**Test Laboratory: Motorola****1900 RH Tilt ch1175****Serial: 5281C085**

Procedure Notes: Pwr Step: Alway Up

Antenna Position: Internal

Battery Model #: SNN5765A

DEVICE POSITION (cheek or rotated): Rotated

Communication System: CDMA 1900; Frequency: 1908.75 MHz; Channel Number: 1175; Duty Cycle: 1:1

Medium: Back-Up Glycol Head; Medium parameters used:  $\sigma = 1.45$  mho/m,  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/22/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn437; Calibrated: 3/24/2005
- Phantom: R3: Glycol SAM; Type: SAM; Serial: TP-1159;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 mW/g

**Right Head Template/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.315 dB

Peak SAR (extrapolated) = 2.11 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.577 mW/g**

Maximum value of SAR (measured) = 1.20 mW/g

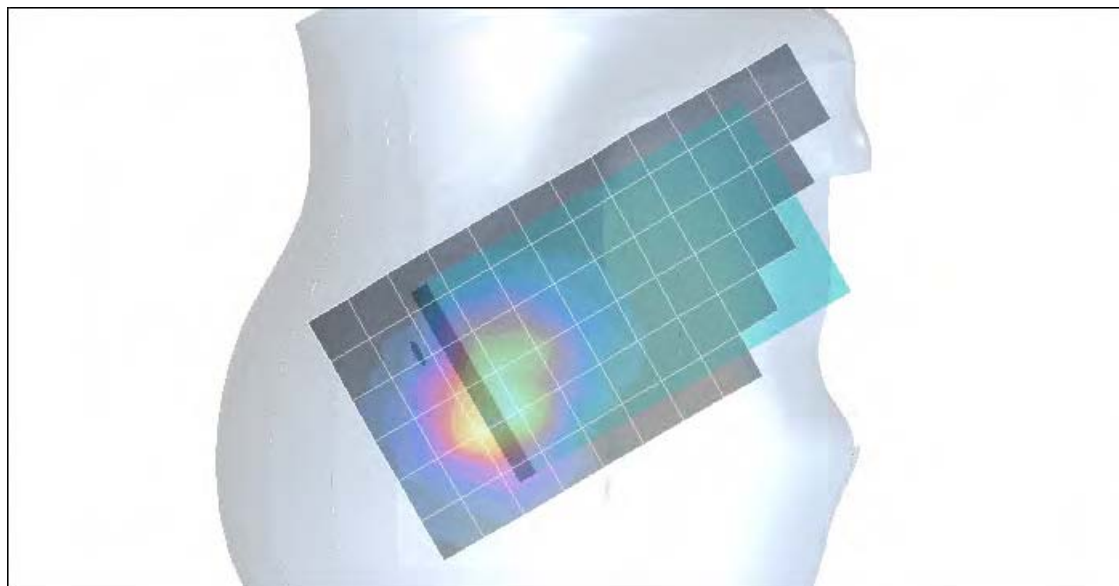

### **Appendix 3**

#### **SAR distribution plots for Body Worn Configuration**

Date/Time: 11/4/2005 12:14:51 PM

**Test Laboratory: Motorola****835 BW Slim Holster ch384****Serial: 5281C085**

Procedure Notes: Pwr Step: all up      Antenna Position: internal      Battery Model #: SNN5783A

Accessory Model # = SLIM Holster and Phone on Holster Rotated 90 Degrees CLOCKWISE

Communication System: CDMA 835; Frequency: 836.52 MHz; Channel Number: 384; Duty Cycle: 1:1

Medium: Low Freq Body; Medium parameters used:  $\sigma = 0.98$  mho/m,  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.55, 5.55, 5.55); Calibrated: 5/26/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 8/26/2005
- Phantom: R1: Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 147

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.55 mW/g

**Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.9 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 2.11 W/kg

**SAR(1 g) = 1.44 mW/g; SAR(10 g) = 1.07 mW/g**

Maximum value of SAR (measured) = 1.62 mW/g

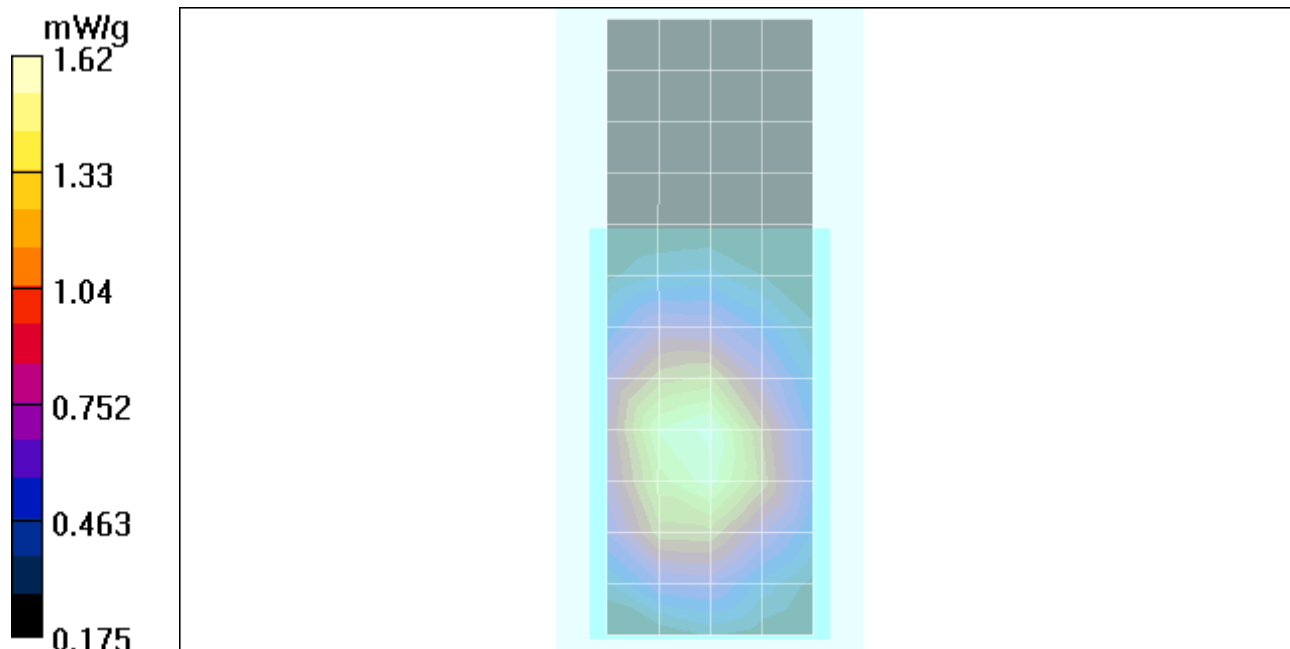

Date/Time: 11/7/2005 6:50:32 PM

**Test Laboratory: Motorola****1900 BW Slim Holster ch25****Serial: 5281C085**

Procedure Notes: Pwr Step: always up      Antenna Position: internal      Battery Model #: snn5783a

Accessory Model # = slim holster rotated 90 degree counter clockwise

Communication System: CDMA 1900; Frequency: 1851.25 MHz; Channel Number: 25; Duty Cycle: 1:1

Medium: Regular Glycol Body; Medium parameters used:  $\sigma = 1.59$  mho/m,  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.3, 4.3, 4.3); Calibrated: 5/26/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 8/26/2005
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 147

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (16x7x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 mW/g

**Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.230 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.602 mW/g**

Maximum value of SAR (measured) = 1.09 mW/g

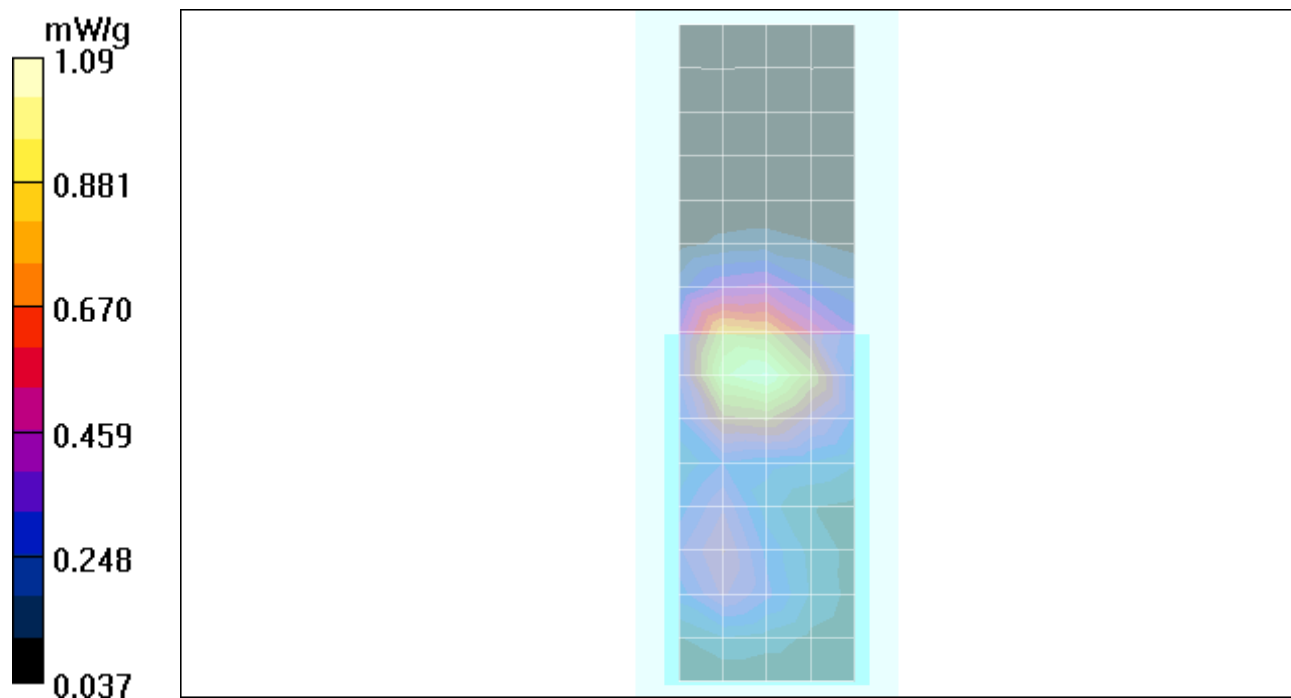

**Appendix 4**

**Probe Calibration Certificate**



Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No. **ET3-1397\_Apr05**

## CALIBRATION CERTIFICATE

Object **ET3DV6R - SN:1397**

Calibration procedure(s) **QA CAL-01 v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 22, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-------------------------------------------|-----------------------|
| Power meter E4419B         | GB41293874      | 5-May-04 (METAS, No. 251-00388)           | May-05                |
| Power sensor E4412A        | MY41495277      | 5-May-04 (METAS, No. 251-00388)           | May-05                |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 10-Aug-04 (METAS, No. 251-00403)          | Aug-05                |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 3-May-04 (METAS, No. 251-00389)           | May-05                |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 10-Aug-04 (METAS, No. 251-00404)          | Aug-05                |
| Reference Probe ES3DV2     | SN: 3013        | 7-Jan-05 (SPEAG, No. ES3-3013_Jan05)      | Jan-06                |
| DAE4                       | SN: 617         | 19-Jan-05 (SPEAG, No. DAE4-617_Jan05)     | Jan-06                |

| Secondary Standards       | ID #         | Check Date (in house)                    | Scheduled Check        |
|---------------------------|--------------|------------------------------------------|------------------------|
| Power sensor HP 8481A     | MY41092180   | 18-Sep-02 (SPEAG, in house check Oct-03) | In house check: Oct 05 |
| RF generator HP 8648C     | US3642U01700 | 4-Aug-99 (SPEAG, in house check Dec-03)  | In house check: Dec-05 |
| Network Analyzer HP 8753E | US37390585   | 18-Oct-01 (SPEAG, in house check Nov-04) | In house check: Nov 05 |

|                |               |                       |                  |
|----------------|---------------|-----------------------|------------------|
|                | <b>Name</b>   | <b>Function</b>       | <b>Signature</b> |
| Calibrated by: | Nico Vetterli | Laboratory Technician |                  |
| Approved by:   | Katja Pokovic | Technical Manager     |                  |

Issued: April 25, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                             |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                            |
| ConF                     | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                           |
| DCP                      | diode compression point                                                                                                                              |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6R

## SN:1397

|                  |                  |
|------------------|------------------|
| Manufactured:    | October 24, 1999 |
| Last calibrated: | May 21, 2004     |
| Recalibrated:    | April 22, 2005   |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ET3DV6R SN:1397

### Sensitivity in Free Space<sup>A</sup>

### Diode Compression<sup>B</sup>

|       |              |                                     |       |       |
|-------|--------------|-------------------------------------|-------|-------|
| NormX | 1.81 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | 95 mV |
| NormY | 1.69 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | 95 mV |
| NormZ | 1.95 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | 95 mV |

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL                      900 MHz      Typical SAR gradient: 5 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 9.2           | 4.7           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.1           | 0.2           |

**TSL                      1810 MHz      Typical SAR gradient: 10 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 13.5          | 9.1           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.8           | 0.1           |

### Sensor Offset

Probe Tip to Sensor Center                      **2.7 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

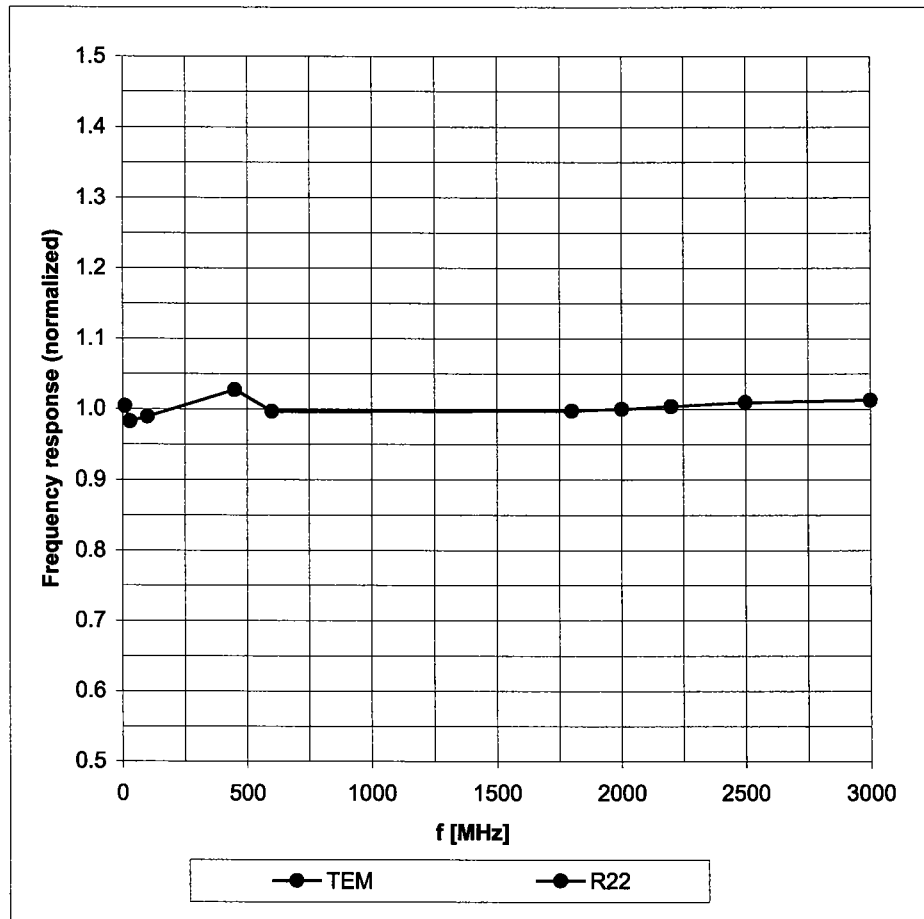


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

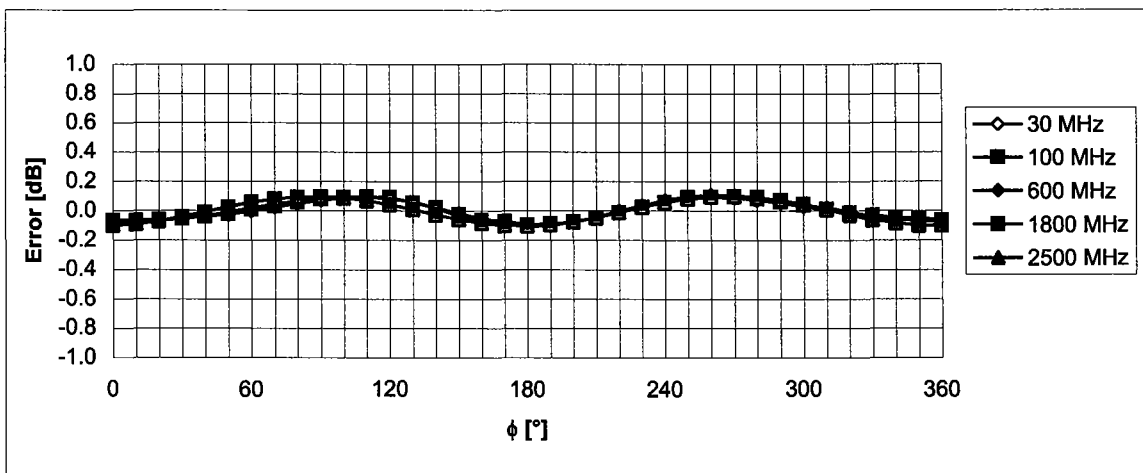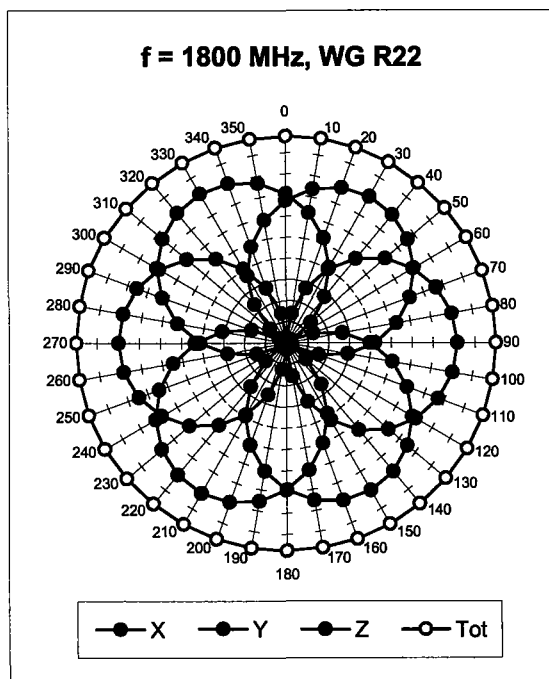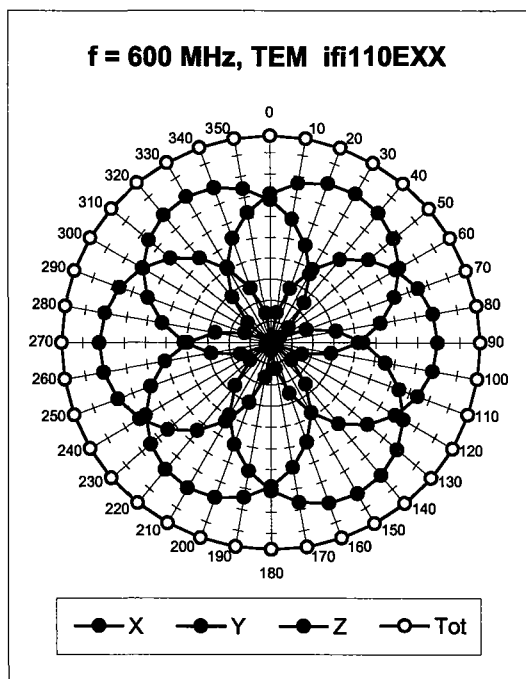



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

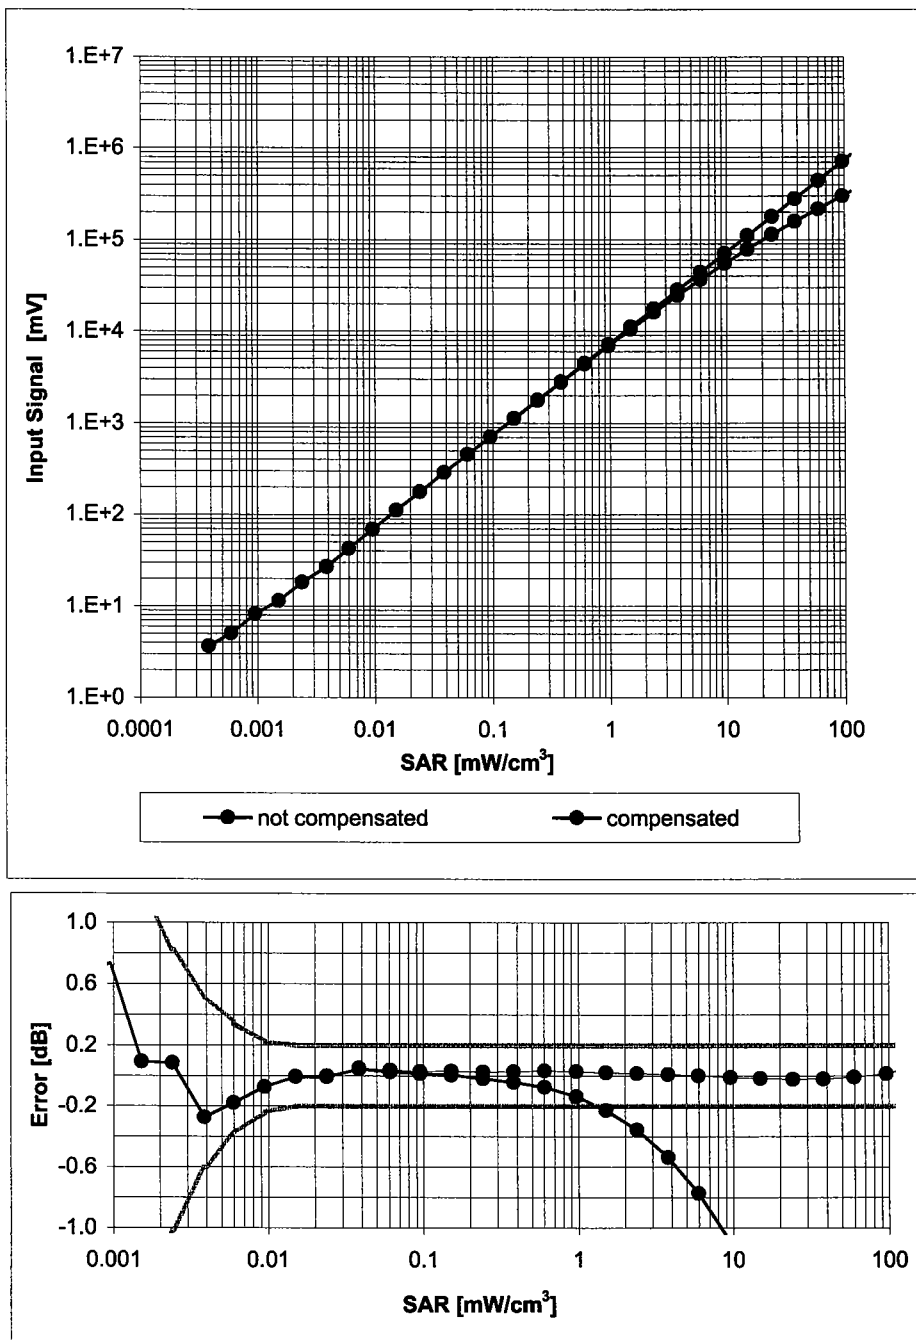

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

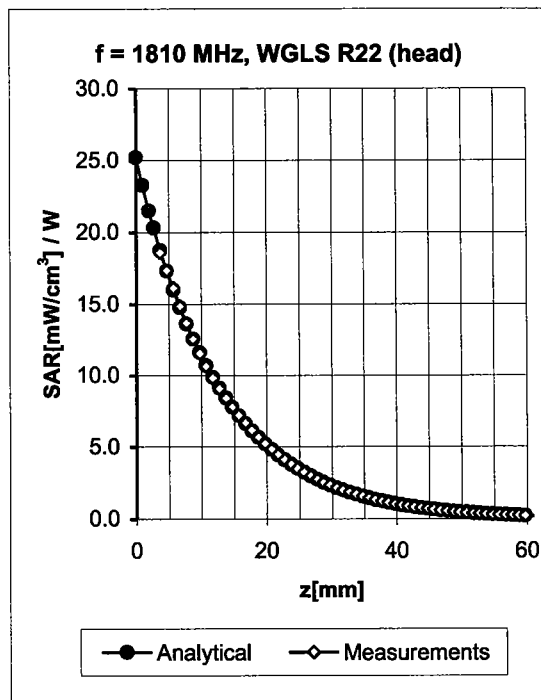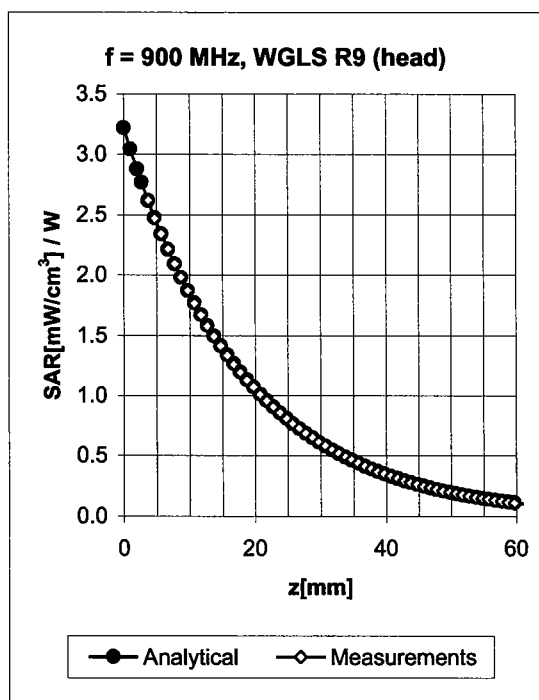


| f [MHz] | Validity [MHz] <sup>c</sup> | TSL  | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty  |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 900     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.97 ± 5%    | 0.71  | 1.73  | 6.38 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.60  | 2.37  | 5.17 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.59  | 2.49  | 4.90 ± 11.0% (k=2) |
| 900     | ± 50 / ± 100                | Body | 55.0 ± 5%    | 1.05 ± 5%    | 0.58  | 2.00  | 6.22 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.57  | 2.75  | 4.77 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.60  | 2.53  | 4.44 ± 11.0% (k=2) |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\theta$ ),  $f = 900$  MHz

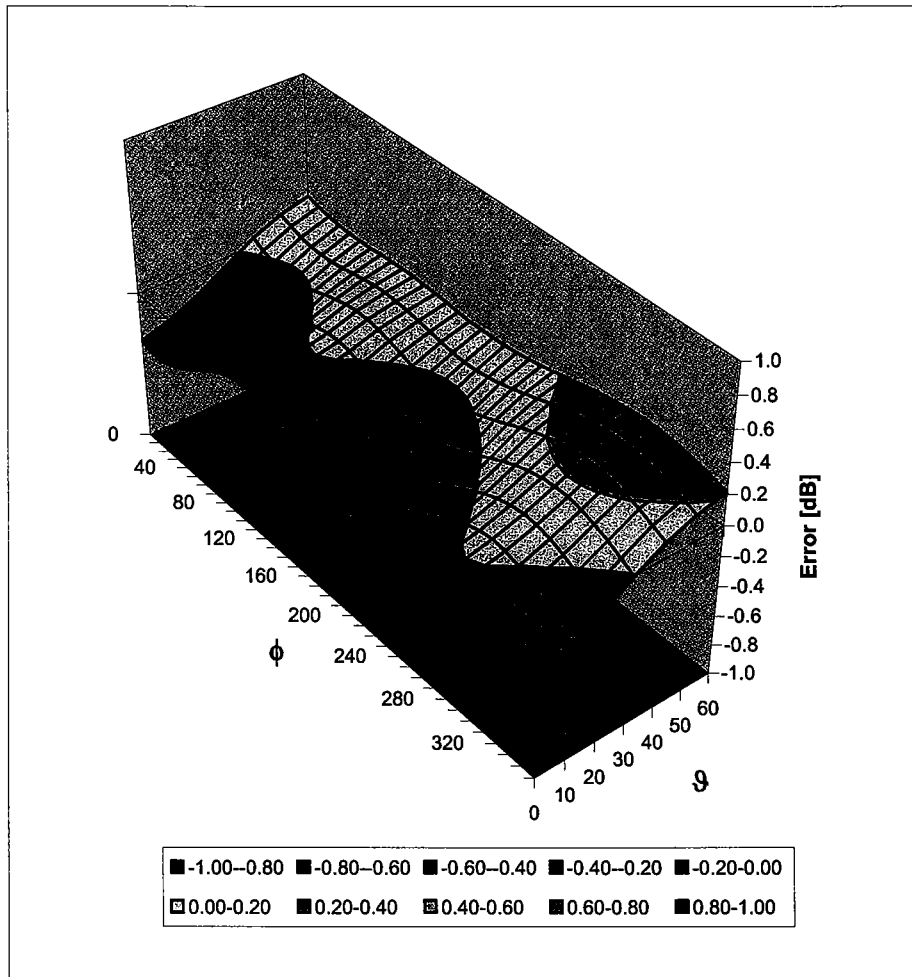

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No. **ET3-1506\_May05**

## CALIBRATION CERTIFICATE

Object **ET3DV6R - SN:1506**

Calibration procedure(s) **QA CAL-01 v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 26, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|----------------------------|-----------------|-------------------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 3-May-05 (METAS, No. 251-00466)           | May-06                 |
| Power sensor E4412A        | MY41495277      | 3-May-05 (METAS, No. 251-00466)           | May-06                 |
| Power sensor E4412A        | MY41498087      | 3-May-05 (METAS, No. 251-00466)           | May-06                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 10-Aug-04 (METAS, No. 251-00403)          | Aug-05                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 3-May-05 (METAS, No. 251-00467)           | May-06                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 10-Aug-04 (METAS, No. 251-00404)          | Aug-05                 |
| Reference Probe ES3DV2     | SN: 3013        | 7-Jan-05 (SPEAG, No. ES3-3013_Jan05)      | Jan-06                 |
| DAE4                       | SN: 617         | 19-Jan-05 (SPEAG, No. DAE4-617_Jan05)     | Jan-06                 |
| Secondary Standards        | ID #            | Check Date (in house)                     | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (SPEAG, in house check Dec-03)   | In house check: Dec-05 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (SPEAG, in house check Nov-04)  | In house check: Nov 05 |

Calibrated by: **Nico Vetterli** Laboratory Technician

Approved by: **Katja Pokovic** Technical Manager

Issued: May 26, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                             |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                            |
| ConF                     | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                           |
| DCP                      | diode compression point                                                                                                                              |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6R

## SN:1506

|                  |                  |
|------------------|------------------|
| Manufactured:    | October 24, 1999 |
| Last calibrated: | May 27, 2004     |
| Recalibrated:    | May 26, 2005     |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ET3DV6R SN:1506

### Sensitivity in Free Space<sup>A</sup>

|       |                     |                 |
|-------|---------------------|-----------------|
| NormX | <b>2.27</b> ± 10.1% | $\mu V/(V/m)^2$ |
| NormY | <b>2.08</b> ± 10.1% | $\mu V/(V/m)^2$ |
| NormZ | <b>1.27</b> ± 10.1% | $\mu V/(V/m)^2$ |

### Diode Compression<sup>B</sup>

|       |              |
|-------|--------------|
| DCP X | <b>97</b> mV |
| DCP Y | <b>97</b> mV |
| DCP Z | <b>97</b> mV |

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL                      900 MHz      Typical SAR gradient: 5 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 11.1          | 5.7           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.1           | 0.3           |

**TSL                      1810 MHz      Typical SAR gradient: 10 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 14.8          | 9.4           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.9           | 0.0           |

### Sensor Offset

Probe Tip to Sensor Center                      **2.7 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).




<sup>B</sup> Numerical linearization parameter: uncertainty not required.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

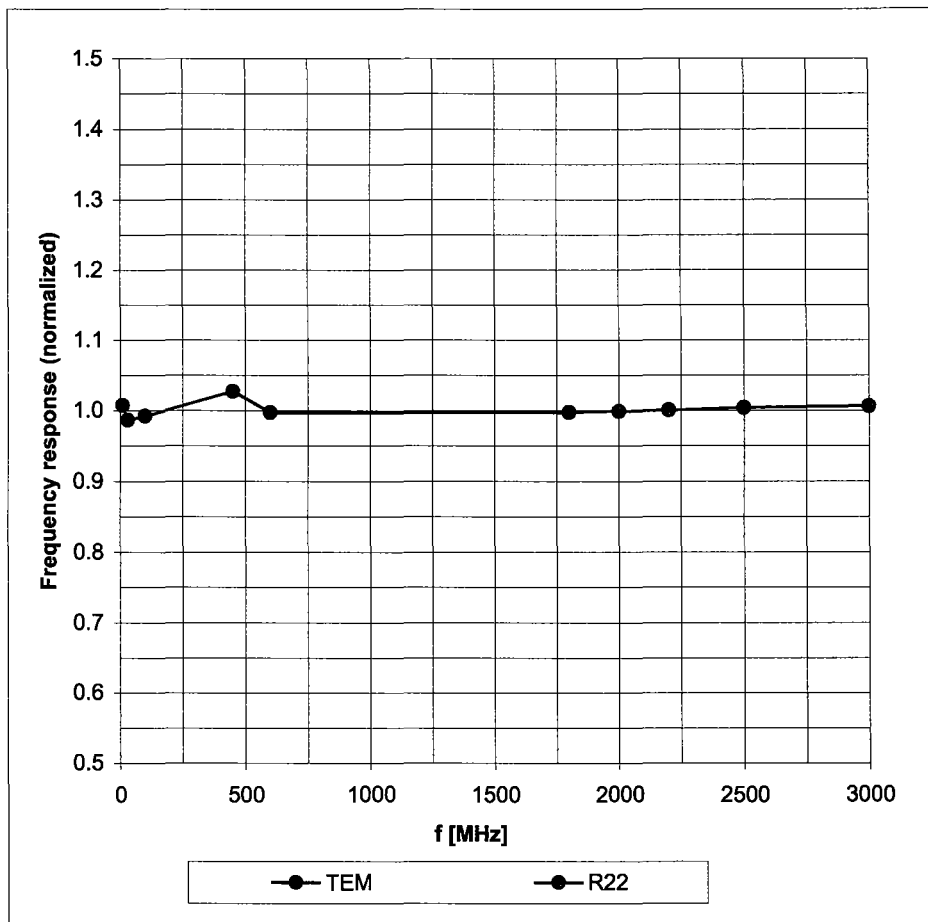

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

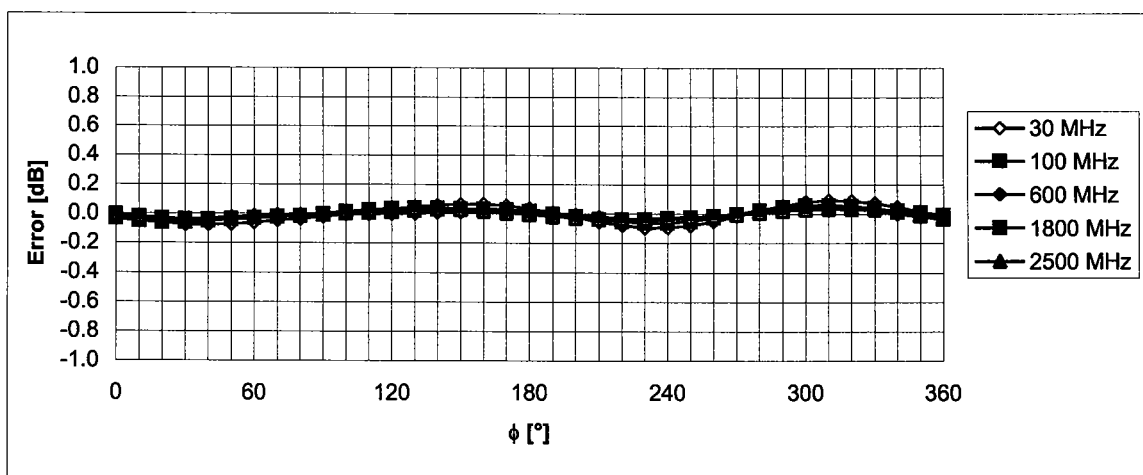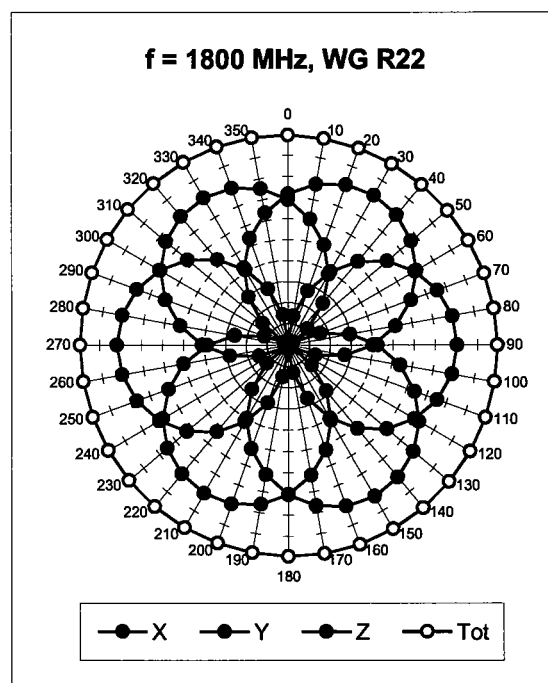
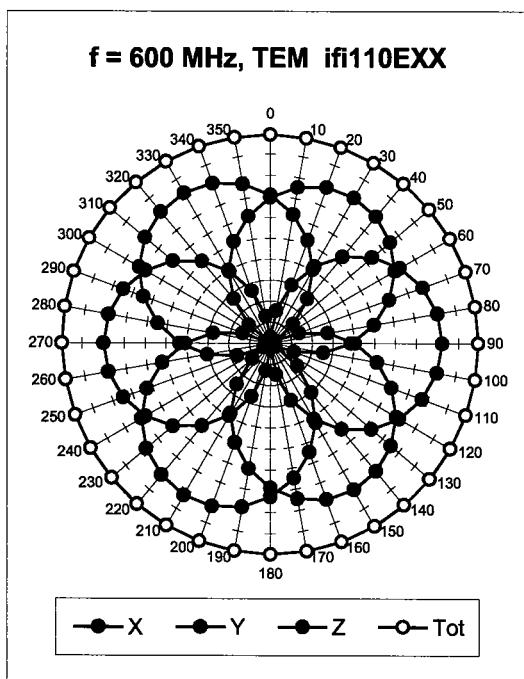
Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800$ MHz)

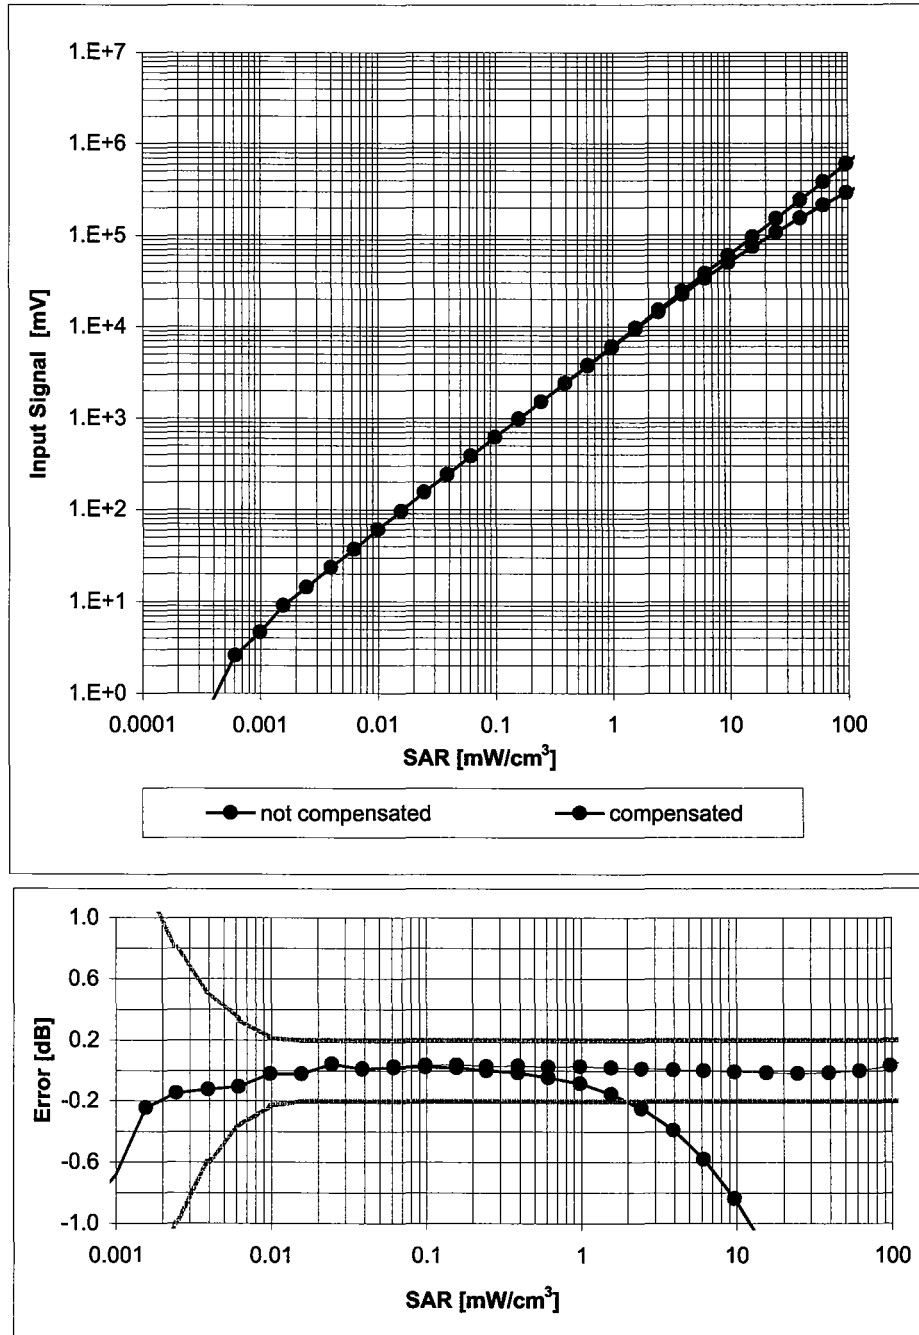

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

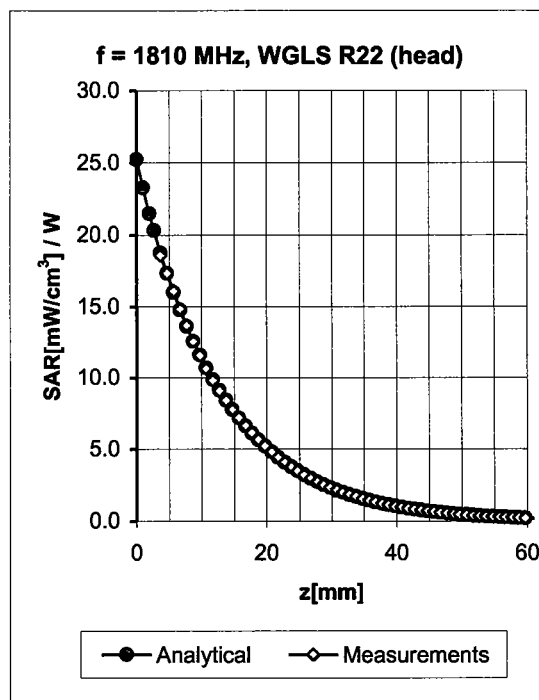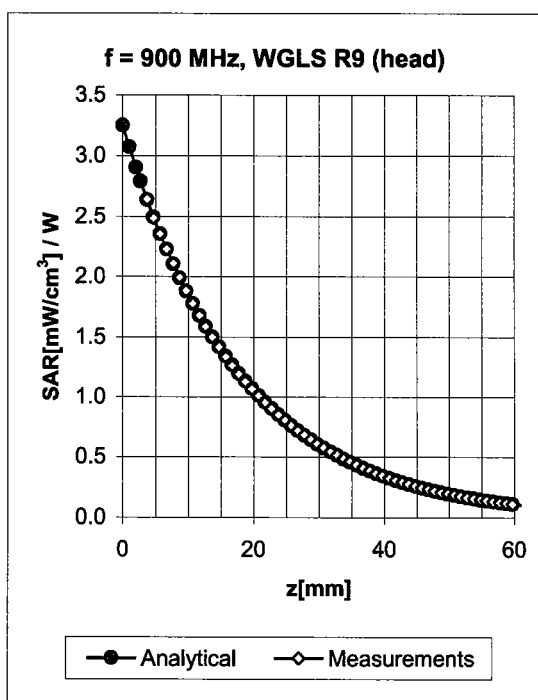


| f [MHz] | Validity [MHz] <sup>c</sup> | TSL  | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty  |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 900     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.97 ± 5%    | 0.79  | 1.78  | 5.89 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.77  | 2.15  | 4.83 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.71  | 2.29  | 4.53 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Head | 39.2 ± 5%    | 1.80 ± 5%    | 0.85  | 2.02  | 4.22 ± 11.8% (k=2) |
|         |                             |      |              |              |       |       |                    |
| 900     | ± 50 / ± 100                | Body | 55.0 ± 5%    | 1.05 ± 5%    | 0.68  | 1.91  | 5.55 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.70  | 2.51  | 4.30 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.76  | 2.28  | 4.08 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Body | 52.7 ± 5%    | 1.95 ± 5%    | 1.03  | 1.72  | 3.97 ± 11.8% (k=2) |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\vartheta$ ),  $f = 900$  MHz

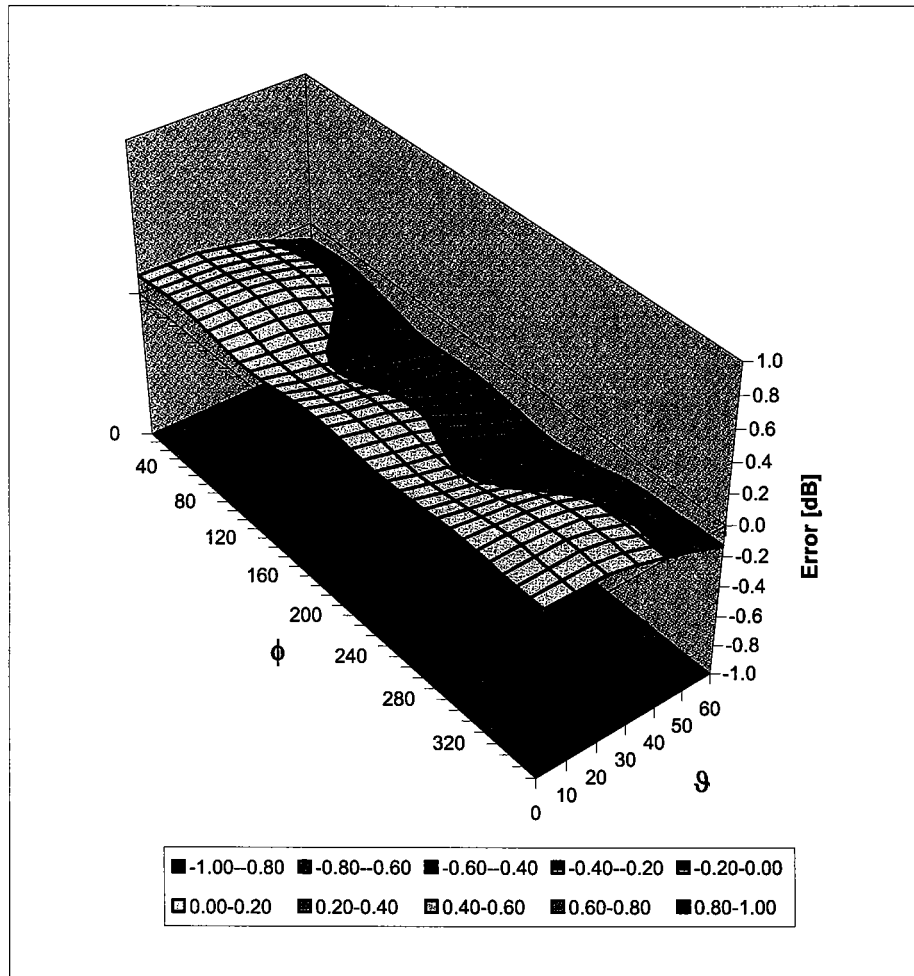

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**Appendix 5**  
**Measurement Uncertainty Budget**

**Uncertainty Budget for Device Under Test: 30 – 3000 MHz**

| <i>a</i>                                           | <i>b</i>                | <i>c</i>         | <i>d</i>         | <i>e =<br/>f(d,k)</i> | <i>f</i>                      | <i>g</i>                          | <i>h =<br/>c x f<br/>/ e</i>            | <i>i =<br/>c x g<br/>/ e</i>             | <i>k</i>             |
|----------------------------------------------------|-------------------------|------------------|------------------|-----------------------|-------------------------------|-----------------------------------|-----------------------------------------|------------------------------------------|----------------------|
| Uncertainty Component                              | IEEE<br>1528<br>section | Tol.<br>(±<br>%) | Prob<br><br>Dist | Div.                  | <i>c<sub>i</sub></i><br>(1 g) | <i>c<sub>i</sub></i><br>(10<br>g) | 1 g<br><br><i>u<sub>i</sub></i><br>(±%) | 10 g<br><br><i>u<sub>i</sub></i><br>(±%) | <i>v<sub>i</sub></i> |
| <b>Measurement System</b>                          |                         |                  |                  |                       |                               |                                   |                                         |                                          |                      |
| Probe Calibration                                  | E.2.1                   | 5.9              | N                | 1.00                  | 1                             | 1                                 | 5.9                                     | 5.9                                      | ∞                    |
| Axial Isotropy                                     | E.2.2                   | 4.7              | R                | 1.73                  | 0.707                         | 0.707                             | 1.9                                     | 1.9                                      | ∞                    |
| Hemispherical Isotropy                             | E.2.2                   | 9.6              | R                | 1.73                  | 0.707                         | 0.707                             | 3.9                                     | 3.9                                      | ∞                    |
| Boundary Effect                                    | E.2.3                   | 1.0              | R                | 1.73                  | 1                             | 1                                 | 0.6                                     | 0.6                                      | ∞                    |
| Linearity                                          | E.2.4                   | 4.7              | R                | 1.73                  | 1                             | 1                                 | 2.7                                     | 2.7                                      | ∞                    |
| System Detection Limits                            | E.2.5                   | 1.0              | R                | 1.73                  | 1                             | 1                                 | 0.6                                     | 0.6                                      | ∞                    |
| Readout Electronics                                | E.2.6                   | 0.3              | N                | 1.00                  | 1                             | 1                                 | 0.3                                     | 0.3                                      | ∞                    |
| Response Time                                      | E.2.7                   | 1.1              | R                | 1.73                  | 1                             | 1                                 | 0.6                                     | 0.6                                      | ∞                    |
| Integration Time                                   | E.2.8                   | 1.1              | R                | 1.73                  | 1                             | 1                                 | 0.6                                     | 0.6                                      | ∞                    |
| RF Ambient Conditions - Noise                      | E.6.1                   | 3.0              | R                | 1.73                  | 1                             | 1                                 | 1.7                                     | 1.7                                      | ∞                    |
| RF Ambient Conditions - Reflections                | E.6.1                   | 0.0              | R                | 1.73                  | 1                             | 1                                 | 0.0                                     | 0.0                                      | ∞                    |
| Probe Positioner Mech. Tolerance                   | E.6.2                   | 0.4              | R                | 1.73                  | 1                             | 1                                 | 0.2                                     | 0.2                                      | ∞                    |
| Probe Positioning w.r.t Phantom                    | E.6.3                   | 1.4              | R                | 1.73                  | 1                             | 1                                 | 0.8                                     | 0.8                                      | ∞                    |
| Max. SAR Evaluation (ext., int., avg.)             | E.5                     | 3.4              | R                | 1.73                  | 1                             | 1                                 | 2.0                                     | 2.0                                      | ∞                    |
| <b>Test sample Related</b>                         |                         |                  |                  |                       |                               |                                   |                                         |                                          |                      |
| Test Sample Positioning                            | E.4.2                   | 3.2              | N                | 1.00                  | 1                             | 1                                 | 3.2                                     | 3.2                                      | 29                   |
| Device Holder Uncertainty                          | E.4.1                   | 4.0              | N                | 1.00                  | 1                             | 1                                 | 4.0                                     | 4.0                                      | 8                    |
| SAR drift                                          | 6.6.2                   | 5.0              | R                | 1.73                  | 1                             | 1                                 | 2.9                                     | 2.9                                      | ∞                    |
| <b>Phantom and Tissue Parameters</b>               |                         |                  |                  |                       |                               |                                   |                                         |                                          |                      |
| Phantom Uncertainty                                | E.3.1                   | 4.0              | R                | 1.73                  | 1                             | 1                                 | 2.3                                     | 2.3                                      | ∞                    |
| Liquid Conductivity (target)                       | E.3.2                   | 5.0              | R                | 1.73                  | 0.64                          | 0.43                              | 1.8                                     | 1.2                                      | ∞                    |
| Liquid Conductivity (measurement)                  | E.3.3                   | 3.3              | N                | 1.00                  | 0.64                          | 0.43                              | 2.1                                     | 1.4                                      | ∞                    |
| Liquid Permittivity (target)                       | E.3.2                   | 5.0              | R                | 1.73                  | 0.6                           | 0.49                              | 1.7                                     | 1.4                                      | ∞                    |
| Liquid Permittivity (measurement)                  | E.3.3                   | 1.9              | N                | 1.00                  | 0.6                           | 0.49                              | 1.1                                     | 0.9                                      | ∞                    |
| <b>Combined Standard Uncertainty</b>               |                         |                  | RSS              |                       |                               |                                   | 11.1                                    | 10.8                                     | 411                  |
| <b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b> |                         |                  | k=2              |                       |                               |                                   | 22.2                                    | 21.6                                     |                      |

## Uncertainty Budget for System Check: 30 – 3000 MHz

| <i>a</i>                                              | <i>b</i>                | <i>c</i>         | <i>d</i>       | <i>e =<br/>f(d,k)</i> | <i>f</i>                         | <i>g</i>                          | <i>h =<br/>c x f /<br/>e</i>        | <i>i =<br/>c x g /<br/>e</i>         | <i>k</i>             |
|-------------------------------------------------------|-------------------------|------------------|----------------|-----------------------|----------------------------------|-----------------------------------|-------------------------------------|--------------------------------------|----------------------|
| Uncertainty Component                                 | IEEE<br>1528<br>section | Tol.<br>(±<br>%) | Prob.<br>Dist. | Div.                  | <i>c<sub>i</sub></i><br>(1<br>g) | <i>c<sub>i</sub></i><br>(10<br>g) | 1 g<br><i>u<sub>i</sub></i><br>(±%) | 10 g<br><i>u<sub>i</sub></i><br>(±%) | <i>v<sub>i</sub></i> |
| <b>Measurement System</b>                             |                         |                  |                |                       |                                  |                                   |                                     |                                      |                      |
| Probe Calibration                                     | E.2.1                   | 5.9              | N              | 1.00                  | 1                                | 1                                 | 5.9                                 | 5.9                                  | ∞                    |
| Axial Isotropy                                        | E.2.2                   | 4.7              | R              | 1.73                  | 1                                | 1                                 | 2.7                                 | 2.7                                  | ∞                    |
| Spherical Isotropy                                    | E.2.2                   | 9.6              | R              | 1.73                  | 0                                | 0                                 | 0.0                                 | 0.0                                  | ∞                    |
| Boundary Effect                                       | E.2.3                   | 1.0              | R              | 1.73                  | 1                                | 1                                 | 0.6                                 | 0.6                                  | ∞                    |
| Linearity                                             | E.2.4                   | 4.7              | R              | 1.73                  | 1                                | 1                                 | 2.7                                 | 2.7                                  | ∞                    |
| System Detection Limits                               | E.2.5                   | 1.0              | R              | 1.73                  | 1                                | 1                                 | 0.6                                 | 0.6                                  | ∞                    |
| Readout Electronics                                   | E.2.6                   | 0.3              | N              | 1.00                  | 1                                | 1                                 | 0.3                                 | 0.3                                  | ∞                    |
| Response Time                                         | E.2.7                   | 1.1              | R              | 1.73                  | 1                                | 1                                 | 0.6                                 | 0.6                                  | ∞                    |
| Integration Time                                      | E.2.8                   | 0.0              | R              | 1.73                  | 1                                | 1                                 | 0.0                                 | 0.0                                  | ∞                    |
| RF Ambient Conditions - Noise                         | E.6.1                   | 3.0              | R              | 1.73                  | 1                                | 1                                 | 1.7                                 | 1.7                                  | ∞                    |
| RF Ambient Conditions - Reflections                   | E.6.1                   | 0.0              | R              | 1.73                  | 1                                | 1                                 | 0.0                                 | 0.0                                  | ∞                    |
| Probe Positioner Mechanical Tolerance                 | E.6.2                   | 0.4              | R              | 1.73                  | 1                                | 1                                 | 0.2                                 | 0.2                                  | ∞                    |
| Probe Positioning w.r.t. Phantom                      | E.6.3                   | 1.4              | R              | 1.73                  | 1                                | 1                                 | 0.8                                 | 0.8                                  | ∞                    |
| Max. SAR Evaluation (ext., int., avg.)                | E.5                     | 3.4              | R              | 1.73                  | 1                                | 1                                 | 2.0                                 | 2.0                                  | ∞                    |
| <b>Dipole</b>                                         |                         |                  |                |                       |                                  |                                   |                                     |                                      |                      |
| Dipole Axis to Liquid Distance                        | <sup>8</sup> ,<br>E.4.2 | 2.0              | R              | 1.73                  | 1                                | 1                                 | 1.2                                 | 1.2                                  | ∞                    |
| Input Power and SAR Drift Measurement                 | <sup>8</sup> ,<br>6.6.2 | 5.0              | R              | 1.73                  | 1                                | 1                                 | 2.9                                 | 2.9                                  | ∞                    |
| <b>Phantom and Tissue Parameters</b>                  |                         |                  |                |                       |                                  |                                   |                                     |                                      |                      |
| Phantom Uncertainty                                   | E.3.1                   | 4.0              | R              | 1.73                  | 1                                | 1                                 | 2.3                                 | 2.3                                  | ∞                    |
| Liquid Conductivity (target)                          | E.3.2                   | 5.0              | R              | 1.73                  | 0.64                             | 0.43                              | 1.8                                 | 1.2                                  | ∞                    |
| Liquid Conductivity (measurement)                     | E.3.3                   | 3.3              | R              | 1.73                  | 0.64                             | 0.43                              | 1.2                                 | 0.8                                  | ∞                    |
| Liquid Permittivity (target)                          | E.3.2                   | 5.0              | R              | 1.73                  | 0.6                              | 0.49                              | 1.7                                 | 1.4                                  | ∞                    |
| Liquid Permittivity (measurement)                     | E.3.3                   | 1.9              | R              | 1.73                  | 0.6                              | 0.49                              | 0.6                                 | 0.5                                  | ∞                    |
| <b>Combined Standard Uncertainty</b>                  |                         |                  | RSS            |                       |                                  |                                   | 9.0                                 | 8.8                                  | 9999<br>9            |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL) |                         |                  | <i>k</i> =2    |                       |                                  |                                   | 17.7                                | 17.3                                 |                      |

**Appendix 6**

**Dipole Characterization Certificate**

# Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-

|                                                                      |                                                      |        |
|----------------------------------------------------------------------|------------------------------------------------------|--------|
|                                                                      | 900MHz                                               |        |
| IEEE1528 Target:                                                     | 10.8                                                 | (W/kg) |
| Measurement Uncertainty (k=1):                                       | 9.0%                                                 |        |
| Measurement Period:                                                  | 9-Nov-04 to 2-June-05                                |        |
| # of tests performed:                                                | 813                                                  |        |
| Grand Average:                                                       | 11.3                                                 | (W/kg) |
| % Delta (Average - IEEE1528 Target)                                  | 4.4%                                                 |        |
| Is % Delta <= Expanded Measurement Uncertainty (k=2)?                | Yes                                                  |        |
| Accept/Reject <u>Average</u> as new system performance check target? | ACCEPT                                               |        |
|                                                                      | Historic data included the following 900MHz Dipoles: |        |
|                                                                      | 69, 77                                               |        |
|                                                                      | 79, 80                                               |        |
|                                                                      | 91, 94                                               |        |
|                                                                      | 96, 97                                               |        |
|                                                                      |                                                      |        |
|                                                                      |                                                      |        |

-New System Performance Check Targets- per APP-0396  
(based on analysis of historical data)

| Frequency | SAR Target (W/kg) | Permittivity | Conductivity (S/m) |
|-----------|-------------------|--------------|--------------------|
| 900MHz    | 11.3              | 41.5 ± 5%    | 0.97 ± 5%          |

-Approvals-

Submitted by:

Marge Kaunas

Date:

2-Jun-05

Signed:



Comments:

Spreadsheet detailing referenced historical measurements is available upon request.

Approved by:

Mark Douglas

Date:

2-Jun-05

Signed:



Comments:

=====